



Preliminary Assessment of Using Gelled and Hybrid Propellant Propulsion for VTOL/SSTO Launch Systems

Dennis G. Pelaccio
Star Tech Research Corporation, Highlands Ranch, Colorado

Bryan Palaszewski
Lewis Research Center, Cleveland, Ohio

Robert O'Leary
W.J. Schafer Associates, Inc., Albuquerque, New Mexico

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized data bases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at (301) 621-0134
- Telephone the NASA Access Help Desk at (301) 621-0390
- Write to:
NASA Access Help Desk
NASA Center for AeroSpace Information
800 Elkridge Landing Road
Linthicum Heights, MD 21090-2934



Preliminary Assessment of Using Gelled and Hybrid Propellant Propulsion for VTOL/SSTO Launch Systems

Dennis G. Pelaccio
Star Tech Research Corporation, Highlands Ranch, Colorado

Bryan Palaszewski
Lewis Research Center, Cleveland, Ohio

Robert O'Leary
W.J. Schafer Associates, Inc., Albuquerque, New Mexico

Prepared for the
33rd Joint Propulsion Conference
cosponsored by AIAA, ASME, SAE, and ASEE
Seattle, Washington, July 7-9, 1997

National Aeronautics and
Space Administration

Lewis Research Center

Available from

NASA Center for Aerospace Information
800 Elkridge Landing Road
Linthicum Heights, MD 21090-2934
Price Code: A03

National Technical Information Service
5287 Port Royal Road
Springfield, VA 22100
Price Code: A03

PRELIMINARY ASSESSMENT OF USING GELLED AND HYBRID PROPELLANT PROPULSION FOR VTOL/SSTO LAUNCH SYSTEMS

Dennis G. Pelaccio*
Star Tech Research Corporation
9356 Desert Willow Road
Highlands Ranch, CO 80126
(303) 471-0881
strcspace@aol.com

Bryan Palaszewski**
NASA Lewis Research Center
21000 Brookpark Road; MS 60-4
Cleveland, OH 44135
(216) 977-7493
bryan.a.palaszewski@lerc.nasa.gov

Robert O'Leary†
W. J. Schafer Associates, Inc.
2000 Randolph Road SE, Suite 205
Albuquerque, NM 87106
(505) 242-9992
boleary@wjsa.com

Abstract

A novel, reusable, Vertical-Takeoff-and-Vertical-Takeoff-and-Landing, Single-Stage-to-Orbit (VTOL/SSTO) launch system concept, named AUGMENT-SSTO, is presented in this paper to help quantify the advantages of employing gelled and hybrid propellant propulsion system options for such applications. The launch vehicle system concept considered uses a highly coupled, main high performance liquid oxygen/liquid hydrogen (LO₂/LH₂) propulsion system, that is used only for launch, while a gelled or hybrid propellant propulsion system auxiliary propulsion system is used during final orbit insertion, major orbit maneuvering, and landing propulsive burn phases of flight. Using a gelled or hybrid propellant propulsion system for major orbit maneuver burns and landing has many advantages over conventional VTOL/SSTO concepts that use LO₂/LH₂ propulsion system(s) burns for all phases of flight. The applicability of three gelled propellant systems, O₂/H₂/Al, O₂/RP-1/Al, and NTO/MMH/Al, and a state-of-the-art (SOA) hybrid propulsion system are examined in this study. Additionally, this paper addresses the applicability of a high performance gelled O₂/H₂ propulsion system to perform the primary, as well as the auxiliary propulsion system functions of the vehicle.

I. Introduction

Almost all U.S. launch systems, except for the Space Shuttle, are descendants of first generation intercontinental ballistic missiles of the early 1960's.

They are costly and require weeks and even months of preparation for launch, and have little resilience to major subsystem operational failures. All of the modifications and upgrades incorporated since then are not able to overcome their limitations. None have an engine-out capability; that is, any engine failure occurring any time other than just before reaching orbit, even if not directly destructive, will cause loss of the payload, or place it in an unsuitable and probably useless orbit. All are expendable, except for the Space Shuttle, requiring not only replacement of all of the flight hardware and software for every mission, but also preventing any evolutionary improvement in reliability. Launch systems are unlike an aircraft, that can return and land with a bad engine, or faulty navigation system, and have a replacement installed. Additionally, all these launch systems require lengthy, labor-intensive, complex preparations for flight, involving many highly skilled workers, as well as needing extensive Ground Support Equipment (GSE). The limited margin associated with the Space Shuttle design requires that lengthy, pre-flight preparations be followed for each flight to ensure safe operation of the system. Present day launch systems require special efforts to accommodate all but the simplest payloads, and lengthy testing and checkout to assure proper cargo integration. This is in contrast to an air transport where operational availability and efficiency is inherently supported in its design.

Examining the air transport example can teach us what are the important characteristics of a truly economical space launch system. A launch vehicle should have an engine out survival capability with mission completion or safe return to the ground possible from anywhere in its flight trajectory, from launch to landing. It should be fully reusable, with turnaround between missions requiring a minimum of routine hardware and software servicing and checkout, followed by cargo loading, rapid refueling, crew checks (if manned) and launch. Such a system

* President and Chief Engineer; Senior Member AIAA

** Program Manager; Associate Fellow AIAA

† Senior Engineer, Member AIAA

will achieve cost reductions as a consequence of the absence of most of the procedures which are costly in our present launch systems, including the Space Shuttle. It must also be equipped with a generic cargo hold with standard hold down fixtures, and have fully characterized launch and recovery environments published for users. The cargo will have to be designed and built to accept these environments, thereby obviating the need for any special analysis or provisions to allow it to fly on the launch vehicle. The preparations should not be anymore extensive than such preparations used for an air transport freighter. A VTOL/SSTO launch vehicle offers the possibility of having all of the characteristics described above. By its nature, such a system does not throw anything away, requires no elaborate prelaunch system integration, can be designed to require a small launch crew (if required), and have no gantry. It should also have the capability to be launched out of minimal inland launch facilities and be recovered at almost any large air field, such as a military air base.

VTOL/SSTO launch systems have been under study for many years. Past VTOL/SSTO concepts studied include the German MBB BETA vehicle, General Dynamic's NEXUS, the Boeing Big Orion, and the Douglas Pegasus, Romulus and Hyperion vehicles.¹ Current activities in this area include the recent DC-X (also known as Delta Clipper, Clipper Graham or DC-XA) flight demonstration program and the current X-33 program, as well as advanced launch vehicle technology demonstration programs under NASA and/or Air Force sponsorship.^{2,3} Past studies characterized promising VTOL/SSTO vehicle concepts, which were all highly sensitive to propulsion performance and dry weight. Additionally, these vehicle concepts required designs that were highly integrated, when compared to present day launch systems that presented numerous engineering challenges. Recent technical advancements arising out of the National AeroSpace Plane (NASP), Air Force, Strategic Defense Initiative (SDI) and Ballistic Missile Defense Organization (BMDO) programs developments, the Advanced Launch System (ALS), the Space Shuttle and experimental aircraft programs such as the X-29 have addressed these technical issues and opened new opportunities.^{3,4} Application of this technology base makes a low cost, responsive, reliable VTOL/SSTO launch vehicle a more viable option.

A preliminary design assessment study was undertaken recently to investigate a novel, fully-

reusable VTOL/SSTO launch vehicle design and system approach with the potential to reduce payload to orbit costs, increase responsiveness through short turnaround time, and be economical to develop.⁵ This vehicle design concept combined the use of a highly coupled, high performance LO₂/LH₂ main propulsion system with a hybrid system for auxiliary propulsion. SOA hybrid propulsion system technology was considered in this assessment.⁵ In addition, high temperature, high strength-to-weight materials and thermal management techniques from the NASP program, and where possible, lightweight, highly robust, miniaturized subsystem technologies, such as for guidance, sensor, power, and computer subsystems, that were examined in past and present SDI/BMDO programs, were used in the design concept. It should be noted that this launch vehicle concept was originally conceived by Mr. William Haynes, and the authors wish to acknowledge him.⁶ This launch system, named HYbrid Propulsion-Single-Stage-to-Orbit (HYP-SSTO), successfully addressed many of the propulsion performance, structural weight, and design integration issues, typical of such systems, in a much different way than they have been considered in past and present design approaches.⁷

The work reported in this paper expands on the past HYP-SSTO concept assessment work.⁷ This work reassessed the applicability of employing a SOA hybrid propulsion as a VTOL/SSTO augmentation (or auxiliary) propulsion system (APS). Additionally, much of this study effort also focused on assessing the feasibility of candidate O₂/H₂/Al, O₂/RP-1/Al, and NTO/MMH/Al gelled propellant propulsion systems to perform the VTOL/SSTO APS function. This new VTOL/SSTO system concept, which can include a hybrid or gelled propellant APS, is named AUGMENTed- propulsion-Single-Stage-to-Orbit, AUGMENT-SSTO. Gelled propellant propulsion systems exhibit many of the system design and operational integration features that are typical of a hybrid-propellant VTOL/SSTO APS, while operating at a higher specific impulse (Isp). Thus, a gelled VTOL/SSTO APS has the potential to display payload vehicle system performance approaching that characteristic of classic VTOL/SSTO launch systems which use SOA LO₂/LH₂ propulsion systems to perform all the required major propulsion firing functions. Because gelled and hybrid propellant propulsion systems are inert by their nature, such launch system concepts also have the potential to support short turnaround times between launches and reduce (or provide a competitive) overall system life-

cycle cost. This work also examined the applicability of a high performance gelled O₂/H₂/Al propulsion system to perform the main propulsion system (MPS) function, as well as the auxiliary propulsion system functions of the vehicle. In addition to considering performance issues associated with a VTOL/SSTO that uses a gelled O₂/H₂/Al propulsion system for all of its propulsion functions, using such a system has the potential to address many of the propellant/tank management issues that are inherit with classic VTOL/SSTO launch systems (acquiring propellant in the large LO₂ and LH₂ propellant tanks during all phases of flight and the typical dry weight penalty, and design complexity to meet such a vehicle requirement, demanding vehicle control requirements, and boil-off). Gelled O₂/H₂/Al and NTO/MMH/Al, upper stage based systems are also examined in this work and compared in terms of payload performance to a SOA O₂/H₂ upper stage system to provide the demanding payload orbit insertion function for typical VTOL/SSTO type launch vehicles. High-performance gelled propellant upper stage systems have the potential to provide many ground processing and system safety advantages, with improved or equal payload performance, over current SOA upper stage options.

The following discussion first provides insight into the technology status of gelled propulsion and its potential to support future SSTO applications, and then summarizes the AUGMENT-SSTO launch system operational concept,. A top-level description of the AUGMENT-SSTO launch vehicle designs considered are then given, and highlights of their key attributes (novel features) are provided, Payload performance of these systems are also discussed in detail. Additionally, this discussion also addresses the gelled propellant upper stage design assessment analysis and its corresponding payload performance results. Major design and operational attributes associated with these systems are identified throughout the paper.

II. Gelled Propellant Propulsion Technology Status

Gelled rocket propellants have been considered for many different applications.⁸⁻²⁶ While operational usage has not yet come to fruition, there are many technology programs that are underway to eliminate the unknowns with gelled propellants and the propulsion systems that will use them. Numerous studies have shown the potential benefits of gelled fuels and oxidizers. Technology programs to prove

the combustion performance of gelled propellants have been conducted most recently by the U.S. Army Missile Command, with their industry and university partners, for tactical missile applications. The NASA Lewis Research Center and its partners have investigated O₂/H₂/Al and O₂/RP-1/Al for NASA missions and conducted experimental programs to validate elements of the combustion and fuel technology. Gelled and metallized gelled hydrogen and RP-1 have been emphasized because hydrogen and RP-1 are typical propellants for NASA launch vehicles and upper stages. Derivatives of these propellants are therefore preferred to minimize the incremental risk for a newly introduced propulsion concept.

The benefits of gelled hydrogen and other propellants have been known for many years and experimentally proven in the past.^{8-12,27-32} For gelled hydrogen there are five major benefits: safety increases, boil-off reductions, density increases with the attendant area and volume related mass reductions for related subsystems (thermal protection system, structure, insulation, etc.), slosh reductions, and Isp increases in some cases.

Safety can be significantly increased with gelled fuels. A higher viscosity reduces the spill radius of the gelled hydrogen and limits the potential damage and hazard from a fuel spill. Another important advantage is the potential for leak reduction or elimination. The leak paths from the feed systems would be minimized and the possible explosion potential would be reduced.

Boil-off reduction is another feature of gelled hydrogen. The boil-off reductions are up to a factor of 2 to 3 over ungelled liquid hydrogen.^{8,11,12} This feature will assist in long term storage of hydrogen for upper stages that must sustain on-orbit storage or long coast times. Additionally, lunar flight and interplanetary missions with large hydrogen fuel loads will derive a benefit.

Significant density increases are possible with gelled hydrogen. A 10% density increase is possible with 10% added ethane or methane. These gellants are introduced into the hydrogen as frozen particles that form a gel structure in the hydrogen.^{11,12}

Specific analyses of the performance gains for various missions are dependent on the vehicle and mission design.^{18, 19, 33} Systems analyses performed for higher density hydrogen vehicles have shown that the reductions of the gross lift off weight (GLOW) for

increased density hydrogen are very significant. In cases where another high density hydrogen, slush hydrogen was used, the density increased by 16%, the GLOW was reduced by 10.2%, or 102,000 lbm.^{25,26} For airbreathing vehicles, such as the NASP the estimated reduction in GLOW for slush hydrogen was from 20 to 50%. Thus, a gelled hydrogen with a 10% density increase may deliver a significant fraction of these GLOW reductions and other subsystem mass savings.^{25,26}

The Isp of a gelled hydrogen powered vehicle may also increase over a liquid hydrogen powered vehicle, in some cases. Figure 1 shows the Isp variations for gelled hydrogen over an methane (CH₄) percentage range of 0% to 70%. This range was selected to cover the typical values of added gellant percentages investigated in past experimental work. In addition, these gellant percentages many offer attractive density increases for future vehicles. Table 1 provides the mixture ratios for the different methane loadings. Oxygen is the oxidizer, the expansion ratio is 40:1 and the chamber pressure is 2250 psia. A 94% Isp efficiency is used to compute the delivered Isp. The maximum Isp occurs at a 5% CH₄ loading and this performance level is 4 seconds higher than ungelled O₂/H₂.

For rocket and/or airbreathing propulsion, the largest volume of the vehicle is the hydrogen tank. Therefore, the volume reductions enabled by gelled hydrogen may be significant and this effect cascades into other subsystems for significant further mass and volume reductions. The subsystems that are affected are the aerodynamic thermal protection systems, cryogenic insulation, structural masses, and all of the other subsystems influenced by the hydrogen fuel tankage. A higher viscosity for the gel will also reduce the slosh modes in a propellant tank. Slosh baffle size and mass reductions are therefore possible by using gelled propellants. These masses can be very significant for a launch vehicle application.

Another option with gelled propellants is adding metal particles. Metallized gelled propellants may have modestly higher specific impulses (Isp increases of 5 to 6 lbf-s/lbm for O₂/H₂/Al system, 60 wt % Al in the H₂/Al fuel) compared to nonmetallized hydrogen fuels. For proposed NASA Mars evolution and expedition missions, it has been estimated that metallized gelled O₂/H₂/Al propellants can result in a 20 to 33% improvement in surface payload delivery capability.¹⁸ More importantly for O₂/RP-1/Al and NTO/MMH/Al propellants, adding metal can deliver considerably higher propellant density, depending on

the application. Hence, both the tankage mass as well as the overall propulsion system dry mass can be substantially reduced. The propellant density increases and their attendant Isp changes with the aluminum additives allow a payload increase of 14 to 35% by replacing the Space Shuttle Solid Rocket Booster with a Liquid Rocket Booster using O₂/RP-1/Al and NTO/MMH/Al, respectively.¹⁹

In summary, the gelled propellant combinations, with their solid technology base, and the operational attributes associated with them, make them an attractive option to consider in any future SSTO launch system where operational cost and robust operations are critical system requirements.

Many of these attributes associated with gelled propellant propulsion systems are also true for hybrid propellant propulsions. Discussion associated with these attributes and the supporting technology base associated with hybrid propulsion systems is provided in the past HYP-SSTO concept study work.⁷

III. Launch System and Vehicle Description

The AUGMENT-SSTO launch system concept is portrayed in Figure 2, while Table 2 summarizes vehicle propulsion subsystem usage by mission phase. The initial launch phase requires a main propulsion LO₂/LH₂ burn to achieve a parking orbit. The gelled propellant or hybrid auxiliary propulsion system (APS) is then used during the final orbit insertion phase of flight. Once the proper orbital velocity and inclination is achieved, the vehicle then configures itself for payload delivery or retrieval. Major orbit maneuvering burns are performed with the APS. The APS is also used to perform the deorbit burn. On reentry, aerobraking (through nose forward reentry maneuvering) is the primary deceleration mode. During the terminal landing phase of flight, the APS is fired to steer the vehicle to a gentle landing on the pad. When the terminal launch phase is initiated, the extendible communications boom is deployed. The vehicle receives Global Positioning System (GPS) position updates and highly accurate rate information. Additionally, the position beacon transmitter, laser ranger, and television camera are activated. The highly accurate landing position concept is used to guide the vehicle with minimum hover time. After landing and completion of initial safing operations, the system's health monitoring data is retrieved and critical components are inspected. This is followed by on-pad maintenance and refurbishment as required. A minimum of launch base assets,

personnel and equipment, are required to support this launch system concept.

A representative AUGMENT-SSTO vehicle concept is shown in Figure 3. Table 3 highlights the design, technology, and operational features associated with this design concept. To determine dry mass of a particular AUGMENT-SSTO launch vehicle concept and its major subsystems, weight scaling relationships for many of the vehicle's major subsystems were derived from the baseline HYP-SSTO vehicle concept that was previously assessed.⁷ Table 4 displays the dry weight scaling relationships, as well as their supporting assumptions and limitations. It should be noted that the HYP-SSTO based vehicle subsystem dry weight scaling relationships used in the evaluation of the AUGMENT-SSTO concept are based on "first-principle" engineering knowledge and propulsion system design experience. Though some uncertainty in these weight estimates may be present, these uncertainties are considered well within the that shown in similar preliminary SSTO launch vehicle studies done in the past. To address uncertainties pertaining to estimating the dry weight of a particular launch vehicle concept design contingency margins of 10, 20 and 30% were examined in the assessment. Unless otherwise noted, the 20% design contingency margin is considered as the nominal value in the discussion of a particular launch vehicle concept's dry weight.

The major exception to the HYP-SSTO based dry mass scaling relationships are those pertaining to the liquid and gelled O₂/H₂, NTO/MMH, and O₂/RP-1 APSs. In determining the dry mass of these launch vehicle APSs, the following general mass-scaling equation was used:

$$M_{dry} = A + (B \cdot M_p), \quad (1)$$

where A and B are scale parameter coefficients, and M_p and M_{dry} are the propulsion system propellant and dry mass in kilograms, respectively. Table 4 list the propulsion mass-scaling parameters for all of the APS systems examined. These parameters include all of the masses that are required to store and deliver propellants to the main engines. They include tankage, engines, feed system, thermal control, and structure. Residuals and contingency factors are not included in these relations, but are incorporated into the design analysis after the zero contingency dry and propellant system weights are determined. Also included is the weight relationships are the interface

and component aerodynamic structure of the APS, and other intertank structures, as needed. It is assumed that power and other support systems are provided by the corresponding primary AUGMENT-SSTO vehicle systems. These mass scaling parameters were derived from the results of past studies and the results of propellant tank mass estimation codes. The parameter A of the scaling equations (see Equation 1 and Table 4) varies due to the different engine and propulsion system configuration layout, and subsystem masses of the differing APS options considered in the study. The B parameter is dependent upon the propellant mixture ratios, the gelled propellant metal loading and hence the propellant density. The specific mixture ratios and the metal loadings that were baselined are listed in Table 5.^{19,33} Engine performance considerations are discussed in detail in Appendix A.

All of the tankage configurations considered in the study were based on the ability to package the boosters within a current launch vehicle's length and diameter constraints. Typically, the main tankage is cylindrical with ellipsoidal dome ends. The smaller tankage for the pressurization systems was spherical.

The propellant tankage for all of the pump-fed systems is designed for a 50-psia maximal operating pressure. The propellant is stored at 30 psia. All of the tankage for O₂, H₂ and RP-1 is composed of aluminum alloy (2219-T87). APS tanks for the NTO and MMH propellants are made of titanium (Ti-6Al-4V). The flange factor and safety factor are 1.4 and 2.0, respectively, for the propellant tanks. The safety factor is based on the tank material ultimate stress. It is assumed that the APS will have propellant ground support up until liftoff, no large allowance was made for propellant losses due to ground hold boil-off.

Each cryogenic O₂/H₂ propulsion system uses autogenous pressurization. The O₂/RP-1/Al and NTO/MMH system used regulated pressurization. The pressurant is assumed to be helium. In the pressurant tank, the maximal operating pressure is 3722 psia. The storage pressure is 3444 psia. The flange factor and safety factor for the pressurant tanks are 1.1 and 2.0, respectively. For the autogenous systems, a small helium pressurization system is included. It can pressurize one-tenth of the total propellant tank volume. For thermal control, the cryogenic propellants (O₂ and H₂) use a high-performance multilayer insulation. The storable propellants only require a lower-performance multilayer insulation.

Two launch/orbit profiles were considered for the AUGMENT-SSTO vehicle performance assessment: 1. a 100 nautical mile, circular, 28.5° east-west (E-W), low Earth orbit (LEO), which was launched from Cape Canaveral, FL; and, 2. a 100 nautical mile, circular, 90.0° north-south (N-S), polar LEO which was launched from Vandenberg Air Force Base, CA. For both ascent trajectory profiles considered, the launch vehicle first is launched into an appropriate 50 x 100 nautical mile elliptic parking orbit using a MPS burn, see Figure 2 and Table 2. The AUGMENT-SSTO's APS is then used to place it into its circular, 100 nautical orbit. A typical AUGMENT-SSTO reentry profile assumes a nose forward aerodynamic flight reentry profile where the vehicle is rotated to an aft-end forward position at approximately 35,000 feet. The vehicle has over a 10 second loiter capability to assist in landing. Table 6 summarizes the flight profile delta-velocity (ΔV) energy required for both E-W and polar vehicle flight profiles considered. Vehicle GLOWs assumed in the assessment, as a function MPS and orbit type, are shown in Table 7.

System ascent performance was estimated by performing POST (Program to Optimize Simulated Trajectories) analyses of boost trajectories. The POST model resulted in a "first-order" estimate of system performance. Trajectory pitch rates were optimized to place maximum weight into a 50 x 100 nm parking orbit. Launches from Cape Canaveral, FL (east) and Vandenberg Air Force Base, CA (polar) were simulated, as previously mentioned. In Figure 4, altitude and Mach number are shown for a typical launch profile. Time to achieve orbit is about 5.5 minutes. Vehicle weight and thrust histories are shown in Figure 5. Note that the rocket engines are throttled beginning about 110 seconds after launch due to a 3g constraint imposed during boost. A number of POST cases were run for different propellant combinations and different launch sites. These results were used as a basis for the vehicle sizing studies.

The propellant mass for each of the other flight profile regimes listed in Table 3 were estimated by evaluating the ideal rocket equation.³⁴ By knowing the initial mass (m_i) of the vehicle at each flight regime, the vehicle's final mass (m_f) can be estimated by

$$m_f = m_i / \text{EXP}(\Delta V / (g_c \cdot I_{sp})) \quad (2)$$

In the AUGMENT-SSTO analysis, the appropriate propulsion systems I_{sp} is adjusted accordingly by:

$$I_{sp} = \eta_{\text{back-pressure}} \cdot I_{sp_{\text{vacuum}}} \quad (3)$$

to account for atmospheric back pressure variations for each flight regimes. The I_{sp} back-pressure adjustment factor's ($\eta_{\text{back-pressure}}$) assumed in the assessment are shown in Table 8. The propellant mass used for each flight regime is then determined by:

$$M_p = m_i - m_f \quad (4)$$

The total propellant mass required for each AUGMENT-SSTO design concept considered by is found by summing the propellant mass need to perform each flight profile function. It should also be noted that a 1% propellant residual weight was included in determining propellant mass requirements. Subtracting the vehicle's total dry and propellant masses from its initial GLOW defines the payload weight into orbit.

IV. Upper Stage System Description

Advanced, high-performance liquid and gelled O₂/H₂ and NTO/MMH propellant upper stage system options were also examined in this study. High specific impulse upper stage systems are a critical element in any SSTO launch vehicle concept because these systems can help off-set payload performance limitations, which are typical of such launch systems. These upper stage options considered were examined in a past study.³³ Upper stage dry scaling relationships and major design assumptions are summarized in Table 9.

The upper stage mass scaling parameters were derived from past study results and analyses using propellant tank mass estimation codes. Like the launch vehicle APS dry weight scaling relationships (see Equation 1), the parameter A of the scaling equations varies due to the different engine and subsystem masses of the differing propulsion system types and upper stage designs. The B parameter is dependent upon the propellant mixture ratios, the propellant metal loading and hence the propellant density. The specific mixture ratios for the upper stage propulsion system options considered, and their metal loadings are listed in Table 10. The metallized

gelled O₂/H₂/Al upper stage mass scaling equation also used the most of the same design assumptions as that for the O₂/H₂/Al MPS. One major difference is that a small helium pressurant system is added to the upper stage system design. This design difference is representative of the using autogenous pressurization with the larger propellant load and larger volume of the O₂/H₂ MPS and APS versus the non-autogenous pressurization used in the non-cryogenic upper stage designs.

All of the tankage configurations considered in the study were based on the ability to package the upper stage within a reasonable VTOL/SSTO launch vehicle's length and diameter constraints. Most of the upper stage tankage was spherical, except for the H₂ and H₂/Al tanks, which were cylindrical with ellipsoidal dome ends. The pressurization systems also used spherical tankage.

The propellant tankage for the high-pressure pump-fed systems are designed for a 50-psia maximal operating pressure. The propellant is stored at 30 psia. All of the tankage for O₂ and H₂ are composed of aluminum alloy (2219-T87). The upper stage tanks for NTO and MMH are made of titanium (Ti-6Al-4V). The flange factor and safety factor are 1.4 and 2.0, respectively, for the propellant tanks. The safety factor is based on the tank material ultimate stress. Because the stages have propellant ground support up until liftoff, no large allowance was made for propellant losses due to ground boil-off in the analysis. Each cryogenic O₂/H₂ propulsion system uses autogenous pressurization. The NTO/MMH system used regulated pressurization, with helium as the pressurant. In the pressurant tank, the maximum operating pressure is 3722 psia. The storage pressure is 3444 psia. The flange factor and safety factor for the pressurant tanks are 1.1 and 2.0, respectively. For the autogenous systems, a small helium pressurization system is included. It can pressurize one-tenth of the total propellant tank volume. For thermal control, the cryogenic propellants (O₂ and H₂) assumes a high-performance multilayer insulation, while the storable propellants only use a lower-performance multilayer insulation. Upper stage engine performance is addressed in detail in Appendix A.

In addition, much of the assessment methodology applied to launch vehicle MPS and APS study were applied to this comparison analysis. To address design weight estimate uncertainties, dry weight design contingencies of 10, 20, and 30% were examined, with the 20% case considered as nominal, unless otherwise noted. Additionally, a 1%

propellant residual mass was included and payload performance was determined by applying the ideal rocket equation, see Equation 3.

Upper stage options were considered that are capable of providing Delta-V (ΔV) values of 5000 and 22000 ft/sec. Such ΔV values are currently of interest to the military to conduct a number of space operation missions that employ SSTO type systems. These values represent requirements for a typical 'pop-up' launch option wherein the launch vehicle deploys the upper stage (subsequent to vehicle main engine cut-off (MECO)) at a suborbital velocity. The launch vehicle then makes an unpowered return to earth and lands downrange of the launch site. The upper stage would provide the additional 5000 ft/sec to inject the payload into a LEO orbit. A Geosynchronous-Earth-Orbit (GEO) mission would require a total of about 22000 ft/sec from the upper stage. The advantage of the 'pop-up' option is that the payload to orbit is significantly greater than that can be provided by current SSTO launch vehicle system options.

V. Launch System Results

Using the analysis methodology previously discussed in Section III, a number AUGMENT-SSTO concept approaches were quantified, as well as SOA, conventional, LO₂/LH₂ and gelled O₂/H₂ VTOL/SSTO launch systems (no APS) for comparison. The launch vehicle masses that are put into an E-W or polar initial parking orbit are given in Table 11. These mass estimates were determined from the POST modeling analysis effort. Applying these results with ideal rocket equation to determine propellant mass required to all the propulsive maneuvers for the other phases of the flight and the vehicle dry weight mass scaling equations the payload performance of the launch vehicle is determined. Table 12 through 17 show representative weight and performance characteristics for representative launch vehicles to perform E-W orbit missions, which are of interest to this study. Conventional LO₂/LH₂ and gelled O₂/H₂ launch systems are shown in Tables 12 and 13, respectively, while representative AUGMENT-SSTO design concepts are displayed in Tables 14 through 17. Additionally, polar orbit launch vehicle design were characterized in similar manner.

The results of the payload mass delivered to LEO for the launch vehicle configurations considered are presented in Table 18, as well as in Figures 6 and 7.

Ten different options were analyzed, and these combinations are listed in the figures. Figure 6 shows the payloads in LEO for the easterly launches. A 20% dry mass contingency for the MPS/APS combinations is the nominal case presented. The baseline case was the O2/H2 MPS with no APS and its payload delivered to LEO was 18,051 lbm, while the gelled O2/H2 MPS case (no APS) had a 17,762 lbm capability. These are the two highest payload cases of all of the options considered.

The second highest payload cases were the O2/H2 MPS and gelled O2/H2 MPS/APS combinations. Both options used a gelled O2/H2 APS. Their payload performances were 15,326 and 15,021 lbm, respectively. Though the use of the APS does reduce the payload performance by over 2,000 lbm, the use of the APS will place lower requirements on the throttling of the MPS engines, as well as the propellant acquisition of liquid or gelled cryogenics for long orbital stays. The other 6 combinations all have similar payload performance, in the 12,000 lbm range. The best of these are the baseline O2/H2 MPS, with the O2/RP-1/AI APS, delivering a payload of 12,433 lbm.

Figure 7 compares the payload capabilities for the ten polar launch options. The trends seen in the easterly launch payloads are followed by the polar flights. The highest payload cases are the MPS options (no APS), with a payload of 10,607 lbm. As with the easterly launches, the O2/H2 MPS/APS and the gelled O2/H2 MPS/APS are the second highest payload capacity options.

The dry mass contingency assumptions can be very important to the success of the SSTO vehicle. The mass contingency is a percentage of the dry mass of the vehicle that is added over and above the dry mass resulting from designs analyses and estimates. The 20% contingency was considered the nominal value for this study. This assumption is reasonable based on the complexity of the preliminary design of the overall vehicle and the maturity of the technologies considered for use. Vehicles with flight hardware mass estimates are typically afforded a 1-5% mass contingency, detailed designs are given a 10% contingency, and preliminary designs, with some detailed analysis are allowed a larger 20% contingency. Other less complete designs with little or no detailed analyses would be considered acceptable with a 30 to 50% contingency.

Figure 8 and 9 show a range of contingency from 10 to 30%. In the easterly and polar launches, the

contingency has a powerful effect. The all of the vehicles lose over 9,000 lbm of payload going from a 10 to a 30% contingency. This is particularly critical for the polar launches, as with many of the options, the payload mass drops to a very low value. With the polar launches, at a 30% contingency, only the 4 highest payload performance MPS/APS combinations have a positive payload mass in LEO. The vehicles using other MPS/APS technologies with 30% contingency have essentially no payload.

By using a gelled or hybrid propulsion system for major orbit maneuver burns and landing, this launch system concept has many advantages over conventional VTOL/SSTO concepts that use LO2/LH2 propulsion system(s) burns for all major phases of flight. One advantage is that vehicle insulation requirements can be relaxed, since little or no hydrogen boil-off is present after lift-off, thus reducing the tank structural mass (on-orbit cryogenic propellant storage is eliminated) for the gelled or hybrid APS options. For the hybrid APS it will consume oxygen from the same tank which feeds the main propulsion system, but will require separate turbopumps. These pumps will be much smaller than those required for the main propulsion system, and will constitute an added fallback propulsion source in the event of main engine failure. This is also true for the liquid/gelled APS options which are envisioned to an independent propulsion feed system. The reduced thrust of the vehicle's APS will still provide adequate thrust-to-weight (after jettison of the hydrogen fuel and part of the oxygen) to enable a safe abort from any altitude. An abort would only be necessary if more than one hydrogen/oxygen engine failure occurred before the critical mass of propellants had been consumed. Thus, there will be a sequence of flight envelope intervals as main propulsion system propellants are consumed, where more and more main engine subsystems (engine modules) can be shut down without compromising a safe abort. Finally, there will be a time after which a safe abort is possible using the hybrid APS alone, even with total shutdown of the main propulsion system. Of course, after the vehicle is at orbital altitude, the APS is more than adequate to provide full thrust for all subsequent operations, including deorbit and vertical landing.

Preliminary analysis has shown that even with the lower specific impulse associated with a hybrid propulsion, when compared to a that of a typical LO2/LH2 propulsion system, the vehicle's propellant mass fraction can be comparable to conventional VTOL/SSTO launch system concepts. This is also true if a higher performance gelled O2/H2 APS is

considered. Additionally, by employing an APS propulsion system for major orbit maneuver and landing propulsive burns, the major technical issue of restarting large, dormant, LO₂/LH₂ propulsion systems is avoided, as well as relaxing the throttling demands of such a system. Even for a conventional type VTOL/SSTO launch vehicle design, using a gelled O₂/H₂ MPS can provide comparable payload performance to LO₂/LH₂, as well as address many of the demanding propellant management issues associated with such systems.

Another advantage of the AUGMENT-SSTO hybrid APS concept, is if one only uses the vehicle's hybrid propulsion system (no hydrogen onboard), the vehicle can easily function as a suborbital demonstration test bed and/or can also perform cross-country ferry flights for launch repositioning at various sites within the country. The same can also be said for the AUGMENT-SSTO gelled APS concept if preloaded/package gelled APSs are supplied to the vehicle. This capability greatly increases basing flexibility and helps reduce system development risk and cost. Because gelled and hybrid propulsion systems are relatively simple, and inert (and relatively safe) by their nature, the AUGMENT-SSTO launch system concept has the potential to support short turnaround times between launch, be economical to develop, and reduce (or offer a competitive) overall system life-cycle cost. Support personnel should be able to freely work around the launch vehicle, while new refurbished hybrid propellant grain motor modules or preloaded /package gelled APSs are inserted in the vehicle.

VI. Upper Stage System Results

A series of analyses were completed to compare the upper stage options when used with the different MPS options. Tables 19 and 20, as well as Figures 10 through 13 compare the payload in LEO for all 8 options of upper stages with the MPS/APS options, with two different upper stage velocity changes being delivered: 5,000 ft/s and 22,000 ft/s. Easterly and polar orbit launches were assessed. Figures 10 and 11 are for 5,000 ft/s velocity change stages, and Figures 12 and 13 depict the stages delivering 22,000 ft/s. Within each figure, there are also two distinct upper stage masses that were considered. The stage masses were 15,326 and 18,051 lbm for the easterly flights. With the polar flights, the upper stage masses were 7,970 lbm and 10,607 lbm. In both the easterly and polar launches, the lighter upper stage was used with the AUGMENT-SSTO (MPS/APS combination)

launch vehicles, and the heavier upper stage was combined with the conventional VTOL/SSTO (MPS only options (no APS)). The payload masses presented here were for the nominal 20% dry mass contingency cases.

Figure 10 shows the results for the easterly launches with all 8 MPS upper stages combinations. The most attractive overall combination, with the second highest delivered payload of 11,070 lbm, was the O₂/H₂ MPS, with no APS, and O₂/H₂ upper stage. Virtually the same performance is delivered by the baseline O₂/H₂ MPS (no APS), with the gelled O₂/H₂/Al upper stage (60-wt% Al). The gelled upper stage can deliver a payload of 11,127 lbm, which is higher than the O₂/H₂ stage, but must include the higher uncertainty of the metallized gelled H₂/Al performance. The 60-wt% aluminum loading in the H₂/Al will experience some degree of two-phase flow losses, and ultimately reduce the overall predicted payload performance of the stage. If these performance losses can be minimized, then certainly, the O₂/H₂/Al upper stage delivers a more attractive higher payload performance.

One of the most interesting results from this analysis was that the O₂/H₂ MPS /gelled NTO/MMH/Al upper stage option has a comparable performance to the O₂/H₂ MPS/APS - O₂/H₂ upper stage options. This may be a more complex system to employ from an operational standpoint. With the gelled NTO/MMH/Al upper stages, the launch team may have to deal with different fluids, and hence increase the operational complexity. This complexity, however, will be significantly reduced if the gelled upper stage were prepackaged, with little or no processing conducted at the launch site. Because the gelled NTO/MMH/Al stage uses storable propellants, its integration into the launch vehicle may be handled as with a solid rocket motor. Additional sensors to detect storable propellant leakage will be required, but the prepackaged stage transfers the complexity of a storable upper stage fueling and processing away from the launch site crew, and enables nearly the same payload mass performance as an all O₂/H₂ system.

Figure 11 illustrates the polar launch upper stage results. The overall trends and results for the polar launches follows those of the easterly flights. Again, with the conventional VTOL/SSTO launch vehicle with an O₂/H₂ upper stage performs the best, with the gelled O₂/H₂/Al stage option delivering essentially the same payload. The payloads were 6,226 lbm (with the O₂/H₂ stage) and 6,259 lbm (for the gelled

O2/H2/Al stage). As with the easterly flights, the baseline MPS (no APS) /gelled storable NTO/MMH/Al upper stage option provided comparable or higher payloads to LEO than the all O2/H2 MPS/APS - upper stage vehicles.

Figure 12 and 13 provide the results for the 22,000 ft/s velocity change upper stages. In most cases, the designs considered had very small or no payload performance compared to the 5,000 ft/s upper stages. In Figure 12, there were only four of the eight cases that delivered any payload on the easterly launch. All other cases delivered “negative” payloads. A negative or zero payload represents a case where the vehicle design must be reassessed. As a vehicle cannot deliver a positive payload, these results imply that the vehicle option is inappropriate for the assigned mission profile. A different staging method, perhaps with two upper stages, might allow a positive payload to be delivered, or a different higher energy propulsion option might be considered for the upper stage and/or the MPS/APS.

The Figure 12 results show that the positive payloads were delivered with only the combinations of O2/H2 MPS (with or without an APS) and O2/H2 or gelled O2/H2/Al upper stages. The MPS/APS combinations delivered between 374 and 440 lbm to the easterly orbit. The baseline MPS cases delivered 616 to 694 lbm. The gelled O2/H2/Al upper stage was in both cases able to deliver the highest payloads of these ranges. With the MPS/APS/upper stage combination, the gelled O2/H2/Al upper stage could deliver 17.6% more payload than the O2/H2 upper stage, and with the MPS/upper stage alone (no APS), the gelled upper stage delivered 12.7% added payload.

In Figure 13, the polar flight results for the 22,000 ft/s upper stages are presented. In all cases, the payloads for these options were zero or negative, requiring reassessment of these vehicle options for this very high energy mission.

Figures 14 through 17, as well as Tables 19 and 20, present the influence of the dry mass contingency on the mass payload in LEO. The overall influence of the dry mass contingency was small in the 5,000 ft/s upper stage cases, as shown in Figure 14. Over the range of 10 to 30% contingency, the payload performance for the easterly launches dropped by only 300 to 400 lbm. The polar launch payload mass reduction going from a 10% to a 30% contingency, depicted in Figure 15, was in the range of 200 to 300 lbm.

With the data in Figures 16 and 17 for the 22,000 ft/s upper stages, the mass reduction for the easterly launches have a sensitivity to the contingency of 500 to 600 lbm, and for the polar flights, the payload reduction is 400 to 450 lbm. Thus the options using staging are much less sensitive to the dry mass contingency than the SSTO MPS/APS options. Additional staging studies would identify the “best” options for using upper stages for conventional VTOL/SSTO and AUGMENT-SSTO launch systems.

VII. Concluding Remarks

A preliminary design study was performed that examined the propulsion augmented, AUGMENT-SSTO launch system. Results from this study showed that this concept has improved (or at least competitive) payload performance when compared to conventional VTOL/SSTO launch vehicle designs currently under study. Simplified operational characteristics are enabled with the AUGMENT-SSTO design, and may outweigh the potential payload reductions for the MPS/APS-only cases. On the other hand, the concept has superior performance to conventional VTOL/SSTO designs for cases when the AUGMENT-SSTO vehicle designs carry a high energy upper stage.

The performance of a VTOL/SSTO vehicle for Earth-to-orbit payload delivery was analyzed. Ten options were considered for the MPS/APS combinations alone and 8 options using upper stages with the MPS/APS were reviewed. Both polar and easterly launches were assessed, and two different upper stage velocity changes were investigated. Using the O2/H2 MPS (no APS) combination (a conventional VTOL/SSTO launch vehicle design), a maximal payload mass of 18,051 lbm was achieved. The gelled O2/H2 MPS (no APS), the payload delivered was nearly the same at 17,762 lbm. The second highest performance options were those using O2/H2 MPS/APS and the gelled O2/H2 MPS/APS combinations, with payloads to LEO of over 15,000 lbm. Both easterly and polar flights have similar trends in the relative payload performance of the different options.

All of the 5,000 ft/s upper stage options were able to deliver significant easterly and polar payloads with the current MPS/APS vehicle designs. The highest payload options were the baseline O2/H2 MPS with and O2/H2/Al upper stage (60-wt% Al, with a payload of 11,127 lbm) and the O2/H2 MPS, with no APS, and O2/H2 upper stage (with a 11,070

lbm payload). Essentially the same performance is delivered by the baseline O₂/H₂ MPS (no APS), with the gelled O₂/H₂/Al upper stage (60-wt% Al). The gelled upper stage can deliver a higher payload than the O₂/H₂ stage, but must include the higher uncertainty of the metallized gelled H₂/Al performance. The 60% aluminum loading in the H₂/Al will experience some degree of two-phase flow losses, and ultimately reduce the overall predicted payload performance of the stage. The 22,000 ft/s upper stages had 4 of 8 easterly launch options where payloads were able to reach LEO. None of the 22,000 ft/s upper stage options were able to deliver payloads to polar orbits. Using such a high energy stage will require a redesign of the launch vehicle system, with a higher gross lift-off weight, or higher energy propellants.

The sensitivity of the payload performance to the dry mass contingency was very strong with the launch vehicle system cases. The payload mass losses over a 10% to 30% contingency are 9,000 lbm for the MPS/APS options alone, whereas the payload mass loss for the upper stage cases was much less sensitive, and was a value of only several hundred pounds over the same 10% to 30% contingency. Careful effort must be made to assure the design is well defined and that the mission planner can have control and knowledge of the mass and its contingency. Payload performance will suffer greatly without this ability to know and affect the vehicle mass.

Like its counterparts, from the analysis, the AUGMENT-SSTO launch vehicle concept is also sensitive to propulsion system performance and vehicle structural (dry) weight, but it also exhibits numerous favorable design and operational features that are not typical of conventional VTOL/SSTO launch vehicle designs that use LO₂/LH₂ propulsion for all phases of flight. One major advantage is that vehicle insulation requirements can be relaxed, because, in many cases, little or no hydrogen is present after parking orbit velocity is achieved. Reducing the insulation mass, can lead to reduced propellant and tankage mass, and also consequently reduce the structural mass of the vehicle. Additionally, by employing independent gelled or hybrid propulsion system for major orbit maneuver and landing propulsive burns, the major technical issue of restarting large, dormant LO₂/LH₂ propulsion systems is avoided. Even for a conventional type VTOL/SSTO launch vehicle design, use of a gelled O₂/H₂ MPS has potential to provide comparable payload performance, as well as address many of the demanding propellant

management issues associated with such systems: reduced boiloff, increased density, and reduced H₂ slosh and reduced leakage. Another advantage of this concept is if one only uses the vehicle's APS, the vehicle can function as a suborbital demonstration test bed and/or perform cross-country ferry flights for launch repositioning at various sites within the country. Because gelled and hybrid propulsion systems are relatively simple and inert by their nature, this concept has the potential to support short turnaround times between launch, be economical to develop, and reduce (or provide a competitive) overall system life-cycle cost.

Like other VTOL/SSTO concepts, this concept also has some unique technology/development issue drivers that must be addressed, such as developing and space qualifying a gelled or hybrid propulsion system. Technology/development challenges for this concept are believed to be well within the realm of difficulty being considered for conventional VTOL/SSTO concepts. Planned work in the future on this VTOL/SSTO concept is to perform additional engineering design assessment studies. This study showed that a gelled propellant APS exhibits many of the design and operability features of that which is typical of a hybrid system, and significantly improves overall vehicle system performance.

The results from this initial feasibility study show that the AUGMENT-SSTO concept has the potential to meet future spacelift and that further study is recommended. The AUGMENT-SSTO concept would make a logical fall back design approach if the current SSTO launch system designs being pursued are unable to meet their goals.

Acknowledgments

We'd like to thank Star Tech Research Corporation, NASA Lewis Research Center, NASA Headquarters (Code R) and W. J. Schafer Associates, Incorporated for their support of this work and their assistance in preparation of this paper

References

¹Hoeser, S. J., "Technology Readiness Review of the SpaceShip Experimental (SSX), A Single-Stage-to-Orbit (SSTO) Vertical Take Off and Landing (VTOL) Launch Concept," Journal of Practical Applications in Space, 1(2): 37-49.

²Dornheim, M. A., "DC-X Holds Promise; Big Questions Remain," *Aviation Week and Space Technology*, August 28, 1995, 143(9): 56-59.

³Austin, R. E. and S. A. Cook, "SSTO Rockets: Streamlining Access to Space," *Aerospace America*, November 1994, 32(11): 34-39.

⁴Sponable, J. M., "Assessing Single Stage To Orbit Feasibility," AIAA-95-3004, 31st AIAA/ASME/SAE/ASEE Joint Propulsion Conference, San Diego, CA, July 10-12, 1995.

⁵Kniffen, R. J., B. McKinley and P. Estey, "Hybrid Rocket Development at the American Rocket Company," AIAA-90-2762, 26th AIAA/ASME/SAE/ASEE Joint Propulsion Conference, Orlando, FL, July 16-18, 1990.

⁶Haynes, W., Personal Communication, Science Applications International Corporation, Torrance, CA (retired), May-July 1990.

⁷Pelaccio, D. G., "Preliminary Assessment of a Responsive, Hybrid Propulsion Augmented, VTOL/SSTO Launch System," AIAA-96-2840, 31st AIAA/ASME/SAE/ASEE Joint Propulsion Conference, Lake Buena Vista, FL, July 1-3, 1996.

⁸McKinney, C.D., and Tarpley, W., "Gelling of Liquid Hydrogen," Technidyne, Inc., Contract Number NAS3-4186, NASA CR-54967, RR 66-49, June 1, 1966.

⁹Keller, C.W., "A Study of Hydrogen Slush and/or Hydrogen Gel Utilization - Vol. 1: Saturn S-4C Manned Mars Flyby Vehicle Application Study", NASA CR-98936, NAS8-20342, Lockheed Missiles and Space Co., K-11-67-1K- Vol. 1, October 31, 1968.

¹⁰Keller, C.W., "A Study of Hydrogen Slush and/or Hydrogen Gel Utilization -Vol. II: Test Program 41.5-inch Diameter Tank", NASA CR-98935, NAS8-20342, Lockheed Missiles and Space Co., K-11-67-1K-Vol. 2, October 31, 1968.

¹¹Van der Wall, E., "Carbon Compounds /Liquid Hydrogen Fuels", Aerojet Liquid Rocket Company Final Report, Technical Report FR02-W396, October 1970, Contract SNP-1.

¹²"Characteristics of a Gelled Liquid Hydrogen Polyphenylene Oxide (PPO) Foam Open-Cell

Insulation System," General Dynamics, Report Number GDCA 632-3-169, Contract NAS8-27203, February 15, 1973.

¹³Wong, W., "Advanced Gellant Materials for Metallized Cryogenic Propellants," TRW Final Report, NAS3-25793, September 1993.

¹⁴Wong, W., J. Starkovich, S. Adams, and B. Palaszewski, "Cryogenic Gellant and Fuel Formulation for Metallized Gelled Propellants: Hydrocarbons and Hydrogen with Aluminum," AIAA 94-3175, presented at the 30th AIAA/ASME/SAE/ASEE Joint Propulsion Conference, June 1994.

¹⁵Wiswell, R., and M. Huggins, "Launch Vehicle and Upper Stage Liquid Propulsion at the Astronautics Laboratory (AFSC) - A History Summary", AIAA 90-1839

¹⁶Palaszewski, B., "Metallized Gelled Propellant Experiences and Lessons Learned: Oxygen/RP-1/Aluminum Rocket Engine Testing," in CPIA Publication 627, 1995 Gel Propulsion Technology Symposium, Huntsville, AL, September 1995.

¹⁷Palaszewski, B. and J. Zakany, "Metallized Gelled Propellants: Oxygen/RP-1/Aluminum Rocket Combustion Experiments," AIAA 95-2435, presented at the 31st AIAA/ASME/SAE Joint Propulsion Conference, San Diego, CA, July 1995.

¹⁸Palaszewski, B. A., "Metallized Propellants for the Human Exploration of Mars", Case for Mars IV Conference, Boulder, CO, June 4-8, 1990.

¹⁹Palaszewski, B. and R. Powell, "Launch Vehicle Propulsion Using Metallized Propellants," NASA-Lewis Research Center, AIAA 91-2050, presented at the 27th AIAA/ASME/SAE Joint Propulsion Conference, Sacramento, CA, June 24-27, 1991, also in AIAA Journal of Propulsion and Power, Vol. 10, No. 6, Nov.-Dec. 1994, pp. 828-833.

²⁰Giola, G., W. Chew, and D. Ryder, "Propulsion Systems Hazards Evaluation and Liquid/Gel Propulsion Component Development Program", Volume IV - Executive Summary, TRW, Inc., Final Report, Contract Number DAAH-01086-C-0114, Technical Report CR-RD-PR-90-1, December 1989.

²¹Munjal, N., B. Gupta, and M. Varma, "Preparative and Mechanistic Studies on

Unsymmetrical Dimethyl Hydrazine-Red Fuming Nitric Acid Liquid Propellant Gels," in *Propellants, Explosives, and Pyrotechnics*, 10, 4, 111, 1985.

²²Escher, W., E. Hyde, and D. Anderson, "A User's Primer for Comparative Assessments of All-Rocket and Rocket based Combined Cycle Propulsion Systems for Advanced Earth-to-Orbit Space Transport Applications," AIAA 95-2474, presented at the 31st AIAA/ASME/SAE Joint Propulsion Conference, San Diego, CA, July 1995.

²¹Escher, W., "Motive Power for Next Generation Space Transports: Combined Airbreathing and Rocket Propulsion," AIAA 95-6076, AIAA 6th International Aerospace Planes and Hypersonics Technologies Conference, Chattanooga, TN, April 1995.

²²Siebenhaar, A., and M. Bulman, "The Strutjet Engine: The Overlooked Option for Space Launch," AIAA 95-3124, 31st AIAA/ASME/SAE Joint Propulsion Conference, San Diego, CA, July 1995.

²³Elwart, R., and R. Dergance, "Cryogenic Propellant Densification Study," Martin Marietta Corp., NASA CR-159483, MCR-78-586, November 1978.

²⁴Wilhite, A., et al., "Advanced Technologies for Rocket Single Stage to Orbit Vehicles," AIAA Journal of Spacecraft and Rockets, Volume 28, Number 6, November-December 1991, pp. 646-651.

²⁵Hardy, T., and M. Whalen, "Technology Issues Associated with Using Densified Hydrogen for Space Vehicles," AIAA 92-3079, AIAA 28th Joint Propulsion Conference, Nashville, TN, July 1992.

²⁶Friedlander, A., R. Zubrin, R., and T. Hardy, "Benefits of Slush Hydrogen for Space Missions," NASA Technical Memorandum 104503, October 1991.

²⁷Brinker, C. J., and G. W. Scherer, *Sol-Gel Science*, Academic Press, 1990.

²⁸Mills, C. C., *Rheology of Disperse Systems*, Pergamon Press, New York, 1959.

²⁹Diller, D. E., "Measurement of the Viscosity of Para-Hydrogen", *J. of Chem. Phys.*, 42 (6), 2089, 1965.

³⁰Johns, H. E., "The Viscosity of Liquid Hydrogen," *Can. J. Res.* 17A, 221, 1939.

³¹Van Itterbeek, A., H. Zink, and O. Van Paemel, "Viscosity Measurement in Liquefied Gases", *Cryogenics*, 2, 210, 1962.

³²Rudenko, N. S., and V. G. Konareva, *Zh. Fiz. Khim.*, 37, 2761, 1963.

³³Palaszewski, B., "Advanced Launch Vehicle Upper Stages Using Metallized Propellants," NASA-Lewis Research Center, NASA TP-3191, presented at the JANNAF Propulsion Meeting, Anaheim, CA, October 3-5, 1990.

³⁴Sutton, G. P. and D. M. Ross, *Rocket Propulsion Elements*, John Wiley and Sons, Inc., 1976.

³⁵Hannum, N., et al., "NASA's Chemical Transfer Propulsion Program for Pathfinder," NASA Technical Memorandum 102298, AIAA Paper 89-2298, presented at the 25th AIAA/ASME/SAE/ASEE Joint Propulsion Conference, July 10-12, 1989.

³⁶"Liquid Rocket Booster (LRB) for the Space Transportation System (STS) Systems Study - Performance Review," Martin Marietta, Document DR-2, Contract Number NAS8-37136, March 1988.

³⁷Tamura, H., et al., "High Pressure LOX/Heavy Hydrocarbon Fuel Rocket Combustor Investigation," *Proceedings of the Sixteenth International Symposium on Space Technology and Science*, Volume I, Sapporo, Japan, 1988.

³⁸McMillion, R., "Component Evaluations for the XLR-132 Advanced Storable Spacecraft Engine," Rockwell International/ Rocketdyne Division, AIAA Paper 85-1228, presented at the 21st AIAA/ASME/SAE/ASEE Joint Propulsion Conference, July 8-10, 1985.

³⁹Wells, W., "Metallized Liquid Propellants," *Space/Aeronautics*, Volume 45, June 1966, pp. 76-82.

⁴⁰Mueller, D. and S. Turns, "Some Aspects of Secondary Atomization of Aluminum/ Hydrocarbon Slurry Propellants," *AIAA Journal of Propulsion and Power*, Volume 9, Number 3, May-June 1993.

⁴¹Allan, B. and W. Chew, "A Review of Thixotropic Gels for Advanced Propulsion Systems," JANNAF Propulsion Meeting, CPIA Publication 602. Volume III, November 1993.

⁴²Gordon, S., and McBride, B. J., "Computer Program for Calculations of Complex Chemical Equilibrium Compositions, Rocket Performance, Incident and Reflected Shocks, and Chapman-Jouguet Detonations," NASA SP-273, Interim Revision, March 1976.

APPENDIX A. Metallized Gelled Propellant Engine Performance

Using a computer simulation code⁴², the engine performance of the metallized gelled propellant combinations was estimated. The propellants were provided to the combustion chamber in the liquid state and are pump fed. The expansion ratio for the O2/H2 and O2/H2/Al (0-wt% Al) MPS engines was 40:1 and was selected based on the Space Transportation Main Engine design. The engine chamber pressure was 2,250 psia. The other APS designs used a 1000-psia chamber pressure and an expansion ratio of 30:1. The upper stage engines were designed with an engine chamber pressure of 1,000 psia, and an expansion ratio of 500:1. The chamber pressures and expansion ratios were selected based upon the designs of the various engines under consideration for future launch and Space Exploration Initiative vehicles.

Table A-1 contrasts the predicted performance of several propulsion systems with and without metallized gelled fuel. The increases in Isp are typically several seconds. An engine Isp efficiency was used to modify the code-predicted Isp. The Isp efficiency is the ratio of the engine performance shown in Table II and the code-predicted Isp. This reduction reflects the losses incurred due to the nozzle boundary layer, engine cycle inefficiencies and other propulsion system losses. The engine efficiencies were derived using the performance estimates from References 35 through 38 and comparisons with the vacuum Isp predicted by the engine code. In this analysis, metallized gelled propellants have the same engine efficiency as the non-metallized systems. There are additional losses that have not been included in this analysis that may potentially penalize the metallized gelled propellant cases, such as two-phase flow losses in the exhaust and the nozzle boundary layer, and nozzle erosion. Numerical modeling, propellant rheology experiments and hot-fire engine testing have been

conducted to determine the potential engine efficiency of metallized gelled propellants.^{14,16,17,20,35-}

⁴¹ Without the predicted increases in Isp, the advantages of these propellants are significantly reduced. Testing has shown that the traditional liquid fuels and gelled fuels with small loadings of metal additives perform with comparable Isp efficiencies.¹⁷ At high metal loadings, additional technology to ensure complete metal combustion is needed, and investigations are continuing in this area.

The mixture ratios and the metal loading for these designs are given in Tables 5 and 10. The metal loading represents the fraction (by mass) of aluminum in the total mass of the fuel. The mixture ratio is defined as it is for traditional chemical propulsion: the ratio of the total oxidizer mass to the total fuel mass. In selecting the "best" metallized gelled system design, the propellant metal loading, its effects on the engine Isp and the propulsion system dry mass must be analyzed. Some of the issues that are important in determining the appropriate design

Table A-1. Traditional and Metallized Gelled Engine Performance.

Vehicle and Propellant	Isp (s) (No Metal)	Isp (s) (Metal)	Isp Eff.	Mixture Ratio
<u>MPS Options -</u>				
O2/H2	439.2	--	0.940	6.0
O2/H2/Al	--	439.9	0.940	4.2
<u>APS Options -</u>				
O2/RP-1	324.5	--	0.920	2.7
O2/RP-1/Al	--	317.3	0.920	1.1
NTO/MMH	307.7	--	0.920	0.9
NTO/MMH/Al	--	318.9	0.920	2.0
O2/H2	439.2	--	0.940	6.0
O2/H2/Al	--	439.9	0.940	1.6
<u>Upper Stage Options -</u>				
NTO/MMH	321.2	--	0.938	2.0
NTO/MMH/Al	--	366.4	0.938	0.9
O2/H2	479.5	--	0.984	6.0
O2/H2/Al	--	485.4	0.984	1.6

for a metallized propulsion system are the propellant density, the performance and the system dry mass. In this preliminary analysis, the "best" design points were selected based on the results of past gelled propellant studies.^{19,33} A more detailed analyses may reveal a better "best" design point.

Using the Al loadings considered in the engine performance calculations, the propellant density for

the RP-1 can increase from 773 kg/m³ to 1281 kg/m³ (55 % Al loading in the fuel). For H2 fuel, the density can increase from 70 kg/m³ to 168.6 kg/m³ (H2 with a 60% Al loading). The density increase is computed using:

$$\begin{aligned} \text{Metallized gelled propellant density} = & \\ & 1 / ([1 - \text{ML} - \text{GL}] / \text{liquid propellant density} \\ & + \text{ML} / \text{metal density} \\ & + \text{GL} / \text{gellant density}) \end{aligned} \quad (\text{A-1})$$

where: ML is the metal loading (60-wt% Al = 0.60), GL is the gellant loading (10-wt% CH4 = 0.10), with

the Al metal density equal to 2768 kg/m³, and the methane (CH4) gellant density (solid CH4) is equal to 520 kg/m³.

In these preliminary analyses based on past studies, gellants were not used in the density calculations for MMH/Al, RP-1/Al or 60-wt% H2/Al. Gellants were only considered in the 0-wt% H2/Al (or gelled H2).

Table 1. Gelled H2/CH4 Mixture Ratios and Densities.

CH4 Loading (wt%)	Mixture Ratio	Density (kg/m ³)
0.0	6.0	70.00
5.0	4.2	73.17
10.0	4.2	76.63
15.0	4.2	80.44
20.0	4.3	84.65
25.0	4.3	89.33
30.0	4.3	94.55
35.0	4.2	100.41
40.0	4.3	107.06
45.0	4.2	114.65
50.0	4.2	123.39
55.0	4.1	133.58
60.0	4.1	145.60
65.0	4.0	160.00
70.0	4.0	177.56

Table 2. AUGMENT-SSTO Vehicle Propulsion Subsystem Usage by Mission Phase.

Mission Phase	Launch	Orbit Circularization Burn(s)	Major On-Orbit Maneuvers	On-Orbit Adjustment Maneuvers	Deorbit Burn(s)	Reentry/Landing
Propulsion System						
LO2/LH2	P*	---	---	---	---	---
Gelled or Hybrid	S, B/A**	P	P	B/A	P	P
Reaction Control	S	B/A	B/A	P	S	S

* P = Primary Function; S = Support Function (if/as required); B/A = Backup/Abort Function (if required)

** Baseline concept approach does not use the APS during the launch phase of flight

Table 3. Key Design, Technology and Operational Features Associated with the AUGMENT-SSTO Concept.

<u>Design/Technology Features</u>
<ul style="list-style-type: none"> • NASP Structures Technology (primary Structure/Tanks) • NASP/SDI/BMDO High Heat-Flux Thermal Management/Materials Technology • Modified RL-10 Engine System Technology <ul style="list-style-type: none"> - 26 Engines Paired Into 13 Modules - Integrated Into an Aft-Base Spike Nozzle Configuration - Highly Integrated Propellant Management feed System Employed - Demonstrated Aerospike Propulsion Technology is Considered a Backup Technology • Conservative Gelled-Propellant Technology Extrapolation(s) Incorporated for the Gelled APS Version • Proven Hybrid Propulsion Technology Used for Hybrid APS Version <ul style="list-style-type: none"> - 6 - 16,000 lbf Motors Located About the Aft-Base Region → Takes Advantage of Spike Nozzle Configuration - Demonstrated Restart/Stop Operation; Deep Throttling (20:1); Millisecond Response - Integrated LO2 Feed System with LO2/LH2 Propulsion Feed System • SDI/BMDO Technology Derived High Performance Storable Reaction Control System Employed • Uses SDI/BMDO Guidance, Navigation, Control, Power, Sensor, Communications Technology • Supported by GPS • Incorporates a Robust Health Management System • Unpressurized Crew Compartment • Modular Subsystem Designs/Interfaces • Incorporates Modularized/Standardized Payload/Cargo Interfaces

<u>Operational Features</u>
<ul style="list-style-type: none"> • Minimal Amount of Ground Facility Assets Required <ul style="list-style-type: none"> - Simple Launch/Landing Pad - Mobile Launch Control and Propellant Storage/Feed Stations • On-Site APS Refurbishment Operation(s) • On-Site Payload Integration/Checkout Operation(s) • Incorporates an Efficient Maintenance Support Program/Operation • Maximum Use of Parallel Processing Operations

Table 4. AUGMENT-SSTO Launch Vehicle Subsystem Dry Weight Scaling Relationships Summary.

SUBSYSTEM	DRY WEIGHT SCALING RELATIONSHIP [@]	COMMENT(S)/RATIONALE
Primary Vehicle Structure	$0.03173689 \times \text{GLOW}^*$	[1], Likely good for vehicles with GLOWs ranging from 500,000 to 1,500,000 lbm.
Heat Shield/Spike Nozzle Structure	$0.011553193 \times \text{GLOW}$	[1], Likely good for vehicles with GLOWs ranging from 500,000 to 1,500,000 lbm.
LO2/LH2 Main Propulsion System	$0.009444879 \times \text{GLOW} \times \text{TW}^{**}$	[1], Stripped RL-10 engine type assembly with highly integrated feed system (from past P&W input). Vehicle provides many subsystem functions, Assumes $I_{sp} = 439.2 \text{ s (vac)}$ at $\epsilon = 40:1$.
Gelled O2/H2 Main Propulsion System	$(0.009444879 \times \text{GLOW} \times \text{TW}) \times 1.05$	Assumes gelled main propulsion assembly will likely weigh 5 percent more than a conventional - type O2/H2 main propulsion system; 0-wt% H2/O2, or gelled H2 with CH4 gellant; $I_{sp} = 439.9 \text{ s (vac)}$ at $\epsilon = 40:1$.
Hybrid Auxiliary Propulsion System	$0.20479663 \times \text{APSPW}^+$	[1], Scaled from past AMROC input. Assumes $I_{sp} = 315.0 \text{ s (vac)}$.
Gelled O2/H2 Auxiliary Propulsion System	$700 + (0.08408 \times \text{APSPW(kg)})$	Assumes 0-wt% O2/H2, or gelled H2 with CH4 gellant; $I_{sp} = 439.9 \text{ s (vac)}$ at $\epsilon = 40:1$. Based on past gelled propulsion analysis systems work. Stripped down auxiliary propulsion system assumed (vehicle provides many subsystem functions).
NTO/MMH Auxiliary Propulsion System	$840 + (0.0650 \times \text{APSPW(kg)})$	Assumes $I_{sp} = 307.7 \text{ s (vac)}$ at $\epsilon = 30:1$. Based on past propulsion analysis systems work. Stripped down auxiliary propulsion system assumed (vehicle provides many subsystem functions).
Gelled NTO/MMH/Al Auxiliary Propulsion System	$700 + (0.05417 \times \text{APSPW(kg)})$	Assumes 40-wt% MMH/Al; $I_{sp} = 318.9 \text{ s (vac)}$ at $\epsilon = 30:1$. Based on past gelled propulsion analysis systems work. Stripped down auxiliary propulsion system assumed (vehicle provides many subsystem functions).
O2/RP-1 Auxiliary Propulsion System	$700 + (0.06225 \times \text{APSPW(kg)})$	Assumes $I_{sp} = 324.5 \text{ s (vac)}$ at $\epsilon = 30:1$. Based on past propulsion analysis systems work. Stripped down auxiliary propulsion system assumed (vehicle provides many subsystem functions).
Gelled O2/RP-1/Al Auxiliary Propulsion System	$700 + (0.05958 \times \text{APSPW(kg)})$	Assumes 55-wt% RP-1/Al; $I_{sp} = 317.3 \text{ s (vac)}$ at $\epsilon = 30:1$. Based on past gelled propulsion analysis systems work. Stripped down auxiliary propulsion system assumed (vehicle provides many subsystem functions).
Reaction Control System	$0.001630805 \times \text{GLOW}$	[1], Likely good for vehicles with GLOWs ranging from 500,000 to 1,500,000 lbm.
Tank Servicing Equipment	Constant - 300 lbm	[1], Independent of vehicle size.
Thermal Control	$0.002081759 \times \text{GLOW}$	[1], Likely good for vehicles with GLOWs ranging from 500,000 to 1,500,000 lbm.
Avionics/Electric Power	Constant - 500 lbm	[1], Independent of vehicle size.
Crew Provisions (2 crew members)	Constant - 1600 lbm	[1], Independent of vehicle size.
Landing Struts	$0.015443167 \times \text{VWIO}^{++}$	[1], Likely good for vehicles with GLOWs ranging from 500,000 to 1,500,000 lbm.

[@] Weights expressed in lbm unless noted
^{*} GLOW = Vehicle Gross Liftoff Weight
^{**} TW = Vehicle Initial Liftoff Thrust-to-Weight
⁺ APSPW = Auxiliary Propulsion System Propellant Weight
⁺⁺ VWIO = Vehicle Weight In Orbit
 [1] Past HYP-SSTO study work, AIAA Paper 96-2840⁷

Table 5. MPS, APS Rocket Engine Metal Loadings and Mixture Ratio Options - Pump-Fed.

PROPELLANT COMBINATION	METAL LOADING (%)	MIXTURE RATIO	
		Gelled	Traditional
O2/RP-1	--	--	2.7
O2/RP-1/AI	55	1.1	--
NTO/MMH	--	--	2.0
NTO/MMH/AI	40	0.9	--
O2/H2	--	--	6.0
Gelled O2/H2	0 (gelled H2)	4.2	--
O2/H2/AI	60	1.6	--

Table 6. Flight Profile Delta-Velocity (ΔV) Budget Summary.

Flight Profile Regime	ΔV (ft/s) - 28 degree E-W Orbit	ΔV (ft/s) - 90 degree N-S Orbit
Ascent Trajectory Burn	29,422/29,423*	30,732/30,730
Orbit Circularization Burn(s)	92	92
Initial Reentry Deorbit Burn	92	92
Major Reentry Deceleration Burn (High Altitude)	155	155
Major Reentry Deceleration Burn (Low Altitude)	372	372
Landing/Hover	514	514

* LO2/LH2 MPS/Gelled O2/H2 MPS

Table 7. Launch Vehicle GLOW as a Function of Main Propulsion System and Orbit Type.

Main Propulsion System	28 degree E-W Orbit	90 degree N-S Orbit
LO2/LH2	722,452*	713,460
Gelled O2/H2	722,788	713,787

* in lbm

Table 8. Propulsion System Performance Back-Pressure Influence Adjustment Factor ($\eta_{\text{back-pressure}}$) Values as a Function of Flight Profile Regime.*

Flight Profile Regime	$\eta_{\text{back-pressure}}$
Ascent Trajectory Burn	Adjusted accordingly by POST analysis calculation
Orbit Circularization Burn(s)	1.000
Initial Reentry Deorbit Burn	1.000
Major Reentry Deceleration Burn (High Altitude)	0.889
Major Reentry Deceleration Burn (Low Altitude)	0.825
Landing/Hover	0.825

* $I_{sp} = \eta_{\text{back-pressure}} \bullet I_{sp_{\text{vacuum}}}$

Table 9. Upper Stage Dry Weight Scaling Relationships and Design Assumptions Summary.*

SYSTEM	DRY WEIGHT SCALING RELATIONSHIP**	DESIGN ASSUMPTIONS
O2/H2 Upper Stage	$373.8 + (0.1576 \times \text{USPW}^+)$	High-pressure, pump-fed system; Isp = 479.5 s (vac) at $\epsilon = 500:1$.
Gelled O2/H2/Al Upper Stage	$373.8 + (0.1584 \times \text{USPW}^+)$	High-pressure, pump-fed system; Isp = 485.4 s (vac) at $\epsilon = 500:1$.
NTO/MMH Upper Stage	$440.0 + (0.1358 \times \text{USPW}^+)$	High-pressure, pump-fed system; Isp = 341.2 s (vac) at $\epsilon = 500:1$.
Gelled NTO/MMH/Al Upper Stage	$440.0 + (0.1345 \times \text{USPW}^+)$	High-pressure, pump-fed system; Isp = 366.4 s (vac) at $\epsilon = 500:1$.

* Based on Past Upper Stage Study Work³³

** Weights expressed in kg unless noted

+ USPW = Upper Stage System Propellant Weight

Table 10. Upper Stage Rocket Engine Metal Loadings and Mixture Ratios - Pump-Fed.

PROPELLANT COMBINATION	METAL LOADING (%)	MIXTURE RATIO	
		Gelled	Traditional
NTO/MMH	--	--	2.0
NTO/MMH/Al	50	0.9	2.0
O2/H2	--	--	6.0
O2/H2/Al	60	1.6	--

Table 11. Launch Vehicle Mass into the Initial Parking Orbit (50 x 100 nm) as a Function of Main Propulsion System and Orbit Type.

Main Propulsion System	28 degree E-W Orbit	90 degree N-S Orbit
LO2/LH2	90,062*	81,070
Gelled O2/H2	90,399	81,397

* in lbm

Table 12. Conventional LO2/LH2 VTOL/SSTO Launch Vehicle Performance and Mass Estimate - No APS/E-W Orbit Profile.

<u>Launch to Parking Orbit^a</u>		Launch/Landing	Cape Canaveral, FL
Lift-off Weight - GLOW (lbm)	722,452	Parking Orbit (nautical mile)	50 x 100 - E-W
Weight after Initial Ascent (lbm)	90,062	Final Orbit (nautical mile)	100 x 100 - E-W
ΔV (ft/sec)	29,442	-----	
Specific Impulse (s)	439.2	Ignition Thrust/Weight	1.42
Required Propellant (lbm)	632,390	Required Ignition Thrust (lbf)	1,026,400
<u>Orbit Circularization Maneuver^b</u>		-----	
ΔV (ft/sec)	92.0	<u>Dry Weight (lbm)</u>	
Specific Impulse (s)	439.2	Primary Vehicle Structure	22,928
Required Propellant (lbm)	585.0	Heat Shield/Spike Nozzle Structure	8,347
<u>Initial Reentry Deorbit Maneuver^b</u>		LO2/LH2 Main Propulsion System	9,694
ΔV (ft/sec)	92.0	Augmentation Propulsion System	0
Specific Impulse (s)	439.2	Reaction Control System	1,178
Required Propellant (lbm)	580.7	Tank Servicing Equipment	300
<u>Major Reentry Deceleration Maneuvers^b</u>		Thermal Control	1,504
ΔV (ft/sec)	155.0	Avionics/Electric Power	500
Specific Impulse (sec)	391.0	Crew Provisions (2 Crew Members - 450 lbm)	1,600
Required Propellant (lbm)	1,088.7	Landing Struts	<u>1,390</u>
<u>Landing/Hover Maneuver(s)^b</u>		Subtotal	47,442
ΔV (ft/sec)	372.0	Dry Weight Margin (20%)	<u>9,488</u>
Specific Impulse (sec)	363.0	Total	56,930
Required Propellant (lbm)	2,753.1	-----	
<u>Landing/Hover Maneuver(s)^b</u>		Propellant Residuals (1%)	6,411
ΔV (ft/sec)	514.0	-----	
Specific Impulse (sec)	363.0	Payload (lbm)	18,051
Required Propellant (lbm)	3662.5	-----	
		Propellant Mass Fraction	0.896

a = LO2/LH2 MPS Used; b = LO2/LH2 MPS Used

Table 13. Gelled O2/H2 VTOL/SSTO Launch Vehicle Performance and Mass Estimate -
No APS/E-W Orbit Profile.

<u>Launch to Parking Orbit^a</u>		Launch/Landing	Cape Canaveral, FL
Lift-off Weight - GLOW (lbm)	722,788	Parking Orbit (nautical mile)	50 x 100 - E-W
Weight after Initial Ascent (lbm)	90,399	Final Orbit (nautical mile)	100 x 100 - E-W
ΔV (ft/sec)	29,423	-----	
Specific Impulse (s)	439.9	Ignition Thrust/Weight	1.42
Required Propellant (lbm)	632,389	Required Ignition Thrust (lbf)	1,026,400
<u>Orbit Circularization Maneuver^b</u>		<u>Dry Weight (lbm)</u>	
ΔV (ft/sec)	92.0	Primary Vehicle Structure	22,939
Specific Impulse (s)	439.2	Heat Shield/Spike Nozzle Structure	8,351
Required Propellant (lbm)	586.0	LO2/LH2 Main Propulsion System	10,179
<u>Initial Reentry Deorbit Maneuver^b</u>		Augmentation Propulsion System	0
ΔV (ft/sec)	92.0	Reaction Control System	1,179
Specific Impulse (s)	439.9	Tank Servicing Equipment	300
Required Propellant (lbm)	582.0	Thermal Control	1,505
<u>Major Reentry Deceleration Maneuvers^b</u>		Avionics/Electric Power	500
ΔV (ft/sec)	155.0	Crew Provisions (2 Crew Members - 450 lbm)	1,600
Specific Impulse (sec)	391.6	Landing Struts	<u>1,396</u>
Required Propellant (lbm)	1,091.2		
		Subtotal	47,948
ΔV (ft/sec)	372.0	Dry Weight Margin (20%)	<u>9,587</u>
Specific Impulse (sec)	363.6		
Required Propellant (lbm)	2,759.0	Total	57,535
<u>Landing/Hover Maneuver(s)^b</u>		-----	
ΔV (ft/sec)	514.0	Propellant Residuals (1%)	6,411
Specific Impulse (sec)	363.6	-----	
Required Propellant (lbm)	3670.6	Payload (lbm)	17,762

		Propellant Mass Fraction	0.895

a = Gelled O2/H2 MPS Used; b = Gelled O2/H2 MPS Used

Table 14. AUGMENT-SSTO Launch Vehicle Performance and Mass Estimate - Hybrid APS/E-W Orbit Profile.

<u>Launch to Parking Orbit^a</u>		Launch/Landing	Cape Canaveral, FL
Lift-off Weight - GLOW (lbm)	722,452	Parking Orbit (nautical mile)	50 x 100 - E-W
Weight after Initial Ascent (lbm)	90,062	Final Orbit (nautical mile)	100 x100 - E-W
ΔV (ft/sec)	29,422	-----	
Specific Impulse (s)	439.2	Ignition Thrust/Weight	1.42
Required Propellant (lbm)	632,390	Required Ignition Thrust (lbf)	1,026,400
<u>Orbit Circularization Maneuver^b</u>		<u>Dry Weight (lbm)</u>	
ΔV (ft/sec)	92.0	Primary Vehicle Structure	22,928
Specific Impulse (s)	315.0	Heat Shield/Spike Nozzle Structure	8,347
Required Propellant (lbm)	814.0	LO2/LH2 Main Propulsion System	9,694
<u>Initial Reentry Deorbit Maneuver^b</u>		Augmentation Propulsion System	2,430
ΔV (ft/sec)	92.0	Reaction Control System	1,178
Specific Impulse (s)	315.0	Tank Servicing Equipment	300
Required Propellant (lbm)	806.6	Thermal Control	1,504
<u>Major Reentry Deceleration Maneuvers^b</u>		Avionics/Electric Power	500
ΔV (ft/sec)	155.0	Crew Provisions (2 Crew Members - 450 lbm)	1,600
Specific Impulse (sec)	280.0	Landing Struts	<u>1,391</u>
Required Propellant (lbm)	1,508.9		
		Subtotal	49,873
ΔV (ft/sec)	372.0	Dry Weight Margin (20%)	<u>9,975</u>
Specific Impulse (sec)	260.0		
Required Propellant (lbm)	3,781.6	Total	59,848
<u>Landing/Hover Maneuver(s)^b</u>		-----	
ΔV (ft/sec)	514.0	Propellant Residuals (1%)	6,443
Specific Impulse (sec)	260.0	-----	
Required Propellant (lbm)	4,956.0	Payload (lbm)	11,905

		Propellant Mass Fraction	0.901

a = LO2/LH2 MPS Used; b = Hybrid APS Used

Table 15. AUGMENT-SSTO Launch Vehicle Performance and Mass Estimate -
Gelled O2/H2 APS/E-W Orbit Profile.

<u>Launch to Parking Orbit^a</u>		Launch/Landing	Cape Canaveral, FL
Lift-off Weight -GLOW (lbm)	722,452	Parking Orbit (nautical mile)	50 x 100 - E-W
Weight after Initial Ascent (lbm)	90,062	Final Orbit (nautical mile)	100 x100 - E-W
ΔV (ft/sec)	29,422	-----	
Specific Impulse (s)	439.2	Ignition Thrust/Weight	1.42
Required Propellant (lbm)	632,390	Required Ignition Thrust (lbf)	1,026,400
<u>Orbit Circularization Maneuver^b</u>		<u>Dry Weight (lbm)</u>	
ΔV (ft/sec)	92.0	Primary Vehicle Structure	22,928
Specific Impulse (s)	439.9	Heat Shield/Spike Nozzle Structure	8,347
Required Propellant (lbm)	584.0	LO2/LH2 Main Propulsion System	9,694
<u>Initial Reentry Deorbit Maneuver^b</u>		Augmentation Propulsion System	2,272
ΔV (ft/sec)	92.0	Reaction Control System	1,178
Specific Impulse (s)	439.9	Tank Servicing Equipment	300
Required Propellant (lbm)	579.8	Thermal Control	1,504
<u>Major Reentry Deceleration Maneuvers^b</u>		Avionics/Electric Power	500
ΔV (ft/sec)	155.0	Crew Provisions (2 Crew Members - 450 lbm)	1,600
Specific Impulse (sec)	391.0	Landing Struts	<u>1,391</u>
Required Propellant (lbm)	1,088.7		
		Subtotal	49,714
ΔV (ft/sec)	372.0	Dry Weight Margin (20%)	<u>9,943</u>
Specific Impulse (sec)	363.0		
Required Propellant (lbm)	2,753.1	Total	59,657
<u>Landing/Hover Maneuver(s)^b</u>		-----	
ΔV (ft/sec)	514.0	Propellant Residuals (1%)	6,411
Specific Impulse (sec)	363.0	-----	
Required Propellant (lbm)	3,662.6	Payload (lbm)	15,326

		Propellant Mass Fraction	0.896

a = LO2/LH2 MPS Used; b = Gelled O2/H2 APS Used

Table 16. AUGMENT-SSTO Launch Vehicle Performance and Mass Estimate -
Gelled NTO/MMH/AI APS/E-W Orbit Profile.

<u>Launch to Parking Orbit^a</u>		Launch/Landing	Cape Canaveral, FL
Lift-off Weight - GLOW (lbm)	722,452	Parking Orbit (nautical mile)	50 x 100 - E-W
Weight after Initial Ascent (lbm)	90,062	Final Orbit (nautical mile)	100 x100 - E-W
ΔV (ft/sec)	29,422	-----	
Specific Impulse (s)	439.2	Ignition Thrust/Weight	1.42
Required Propellant (lbm)	632,390	Required Ignition Thrust (lbf)	1,026,400
<u>Orbit Circularization Maneuver^b</u>		<u>Dry Weight (lbm)</u>	
ΔV (ft/sec)	92.0	Primary Vehicle Structure	22,928
Specific Impulse (s)	307.7	Heat Shield/Spike Nozzle Structure	8,347
Required Propellant (lbm)	833.0	LO2/LH2 Main Propulsion System	9,694
<u>Initial Reentry Deorbit Maneuver^b</u>		Augmentation Propulsion System	2,200
ΔV (ft/sec)	92.0	Reaction Control System	1,178
Specific Impulse (s)	307.7	Tank Servicing Equipment	300
Required Propellant (lbm)	825.5	Thermal Control	1,504
<u>Major Reentry Deceleration Maneuvers^b</u>		Avionics/Electric Power	500
ΔV (ft/sec)	155.0	Crew Provisions (2 Crew Members - 450 lbm)	1,600
Specific Impulse (sec)	273.5	Landing Struts	<u>1,391</u>
Required Propellant (lbm)	1,543.7		
ΔV (ft/sec)	372.0	Subtotal	49,643
Specific Impulse (sec)	253.9	Dry Weight Margin (20%)	<u>9,929</u>
Required Propellant (lbm)	3,867.2	Total	59,572
<u>Landing/Hover Maneuver(s)^b</u>		-----	
ΔV (ft/sec)	514.0	Propellant Residuals (1%)	6,445
Specific Impulse (sec)	253.9	-----	
Required Propellant (lbm)	5,061.7	Payload (lbm)	11,914

		Propellant Mass Fraction	0.901

a = LO2/LH2 MPS Used; b = Gelled NTO/MMH APS Used

Table 17. AUGMENT-SSTO Launch Vehicle Performance and Mass Estimate -
Gelled O2/RP-1/AI APS/E-W Orbit Profile.

<u>Launch to Parking Orbit^a</u>		Launch/Landing	Cape Canaveral, FL
Lift-off Weight - GLOW (lbm)	722,452	Parking Orbit (nautical mile)	50 x 100 - E-W
Weight after Initial Ascent (lbm)	90,062	Final Orbit (nautical mile)	100 x 100 - E-W
ΔV (ft/sec)	29,422	-----	
Specific Impulse (s)	439.2	Ignition Thrust/Weight	1.42
Required Propellant (lbm)	632,390	Required Ignition Thrust (lbf)	1,026,400
<u>Orbit Circularization Maneuver^b</u>		<u>Dry Weight (lbm)</u>	
ΔV (ft/sec)	92.0	Primary Vehicle Structure	22,928
Specific Impulse (s)	324.5	Heat Shield/Spike Nozzle Structure	8,347
Required Propellant (lbm)	790.0	LO2/LH2 Main Propulsion System	9,694
<u>Initial Reentry Deorbit Maneuver^b</u>		Augmentation Propulsion System	2,262
ΔV (ft/sec)	92.0	Reaction Control System	1,178
Specific Impulse (s)	324.5	Tank Servicing Equipment	300
Required Propellant (lbm)	783.3	Thermal Control	1,504
<u>Major Reentry Deceleration Maneuvers^b</u>		Avionics/Electric Power	500
ΔV (ft/sec)	155.0	Crew Provisions (2 Crew Members - 450 lbm)	1,600
Specific Impulse (sec)	288.4	Landing Struts	<u>1,391</u>
Required Propellant (lbm)	1,466.1		
		Subtotal	49,704
ΔV (ft/sec)	372.0	Dry Weight Margin (20%)	<u>9,941</u>
Specific Impulse (sec)	267.8		
Required Propellant (lbm)	3,677.6	Total	59,645
<u>Landing/Hover Maneuver(s)^b</u>		-----	
ΔV (ft/sec)	514.0	Propellant Residuals (1%)	6,439
Specific Impulse (sec)	267.8	-----	
Required Propellant (lbm)	4,827.1	Payload (lbm)	12,433

		Propellant Mass Fraction	0.900

a = LO2/LH2 MPS Used; b = Gelled O2/RP-1 APS Used

Table 18. Launch Vehicle Payload Performance Results Summary.

System Type	Percent Contingency	10	20	30
	LEO Orbit Type			
Baseline O2/H2 MPS*/ No APS**	28 degree E-W	22,795 ⁺	18,051	13,307
	Polar N-S	15,295	10,607	5,919
Gelled O2/H2 MPS/ No APS	28 degree E-W	22,557	17,762	12,967
	Polar N-S	15,047	10,308	5,570
O2/H2 MPS/ Hybrid APS	28 degree E-W	16,893	11,905	6,918
	Polar N-S	9,982	5,075	168
O2/H2 MPS/ Gelled O2/H2 APS	28 degree E-W	20,298	15,326	10,355
	Polar N-S	12,878	7,970	3,062
Gelled O2/H2 MPS/ Hybrid APS	28 degree E-W	16,618	11,580	6,541
	Polar N-S	9,700	4,742	NPC ⁺⁺
Gelled O2/H2 MPS/ Gelled O2/H2 APS	28 degree E-W	20,043	15,021	9,998
	Polar N-S	12,614	7,656	2,697
Baseline O2/H2 MPS/ Gelled NTO/MMH/AI APS	28 degree E-W	16,879 ⁺	11,914	6,950
	Polar N-S	9,800	4,898	NPC
Gelled O2/H2 MPS/ Gelled NTO/MMH/AI APS	28 degree E-W	17,314	12,353	7,392
	Polar N-S	10,192	5,293	394
Baseline O2/H2 MPS/ O2/RP-1 APS	28 degree E-W	17,404	12,433	7,463
	Polar N-S	10,273	5,365	458
Gelled O2/H2 MPS/ O2/RP-1 APS	28 degree E-W	17,173	12,205	7,236
	Polar N-S	10,065	5,159	254

- * Main Propulsion System
- ** Augmentation Propulsion System
- ⁺ Payload weight into orbit (lbm)
- ⁺⁺ NPC = No Payload Capability

Table 19. Conventional LO2/LH2 Launch Vehicle Payload Performance with Upper Stage Insertion - Results Summary.

System Type	Percent Contingency/ Upper Stage ΔV (ft/s)	10/ 5,000	20/ 5,000	30/ 5,000	10/ 22,000	20/ 22,000	30/ 22,000
	LEO Orbit Type/Initial Stage Weight (lbm) ⁺						
Baseline LO2/LH2 MPS*-O2/H2 Upper Stage ^a	28 degree E-W/ 18,051	11,231 ⁺⁺	11,070	10,909	915	616	318
	Polar N-S/10,607	6,226	6,097	5,968	164	NPO	NPO
Baseline LO2/LH2 MPS-Gelled O2/H2/AI Upper Stage ^a	28 degree E-W/ 18,051	11,287	11,127	10,966	993	694	396
	Polar N-S/10,607	6,259	6,130	6,002	209	NPO	-209
Baseline LO2/LH2 MPS-NTO/MMH Upper Stage ^b	28 degree E-W/ 18,051	9,326	9,139	8,952	NPO ^c	NPO	NPO
	Polar N-S/10,607	5,040	4,890	4,740	NPO	NPO	NPO
Baseline LO2/LH2 MPS-Gelled NTO/MMH/AI Upper Stage ^b	28 degree E-W/ 18,051	9,758	9,577	9,396	NPO	NPO	NPO
	Polar N-S/10,607	5,294	5,148	5,001	NPO	NPO	NPO

* Main Propulsion System

⁺ Includes Upper Stage System plus Payload

⁺⁺ Payload weight into orbit (lbm)

^a Spherical O2 Tank, Cylindrical H2 Tank

^b Spherical Tanks

^c NPO = No Payload into Orbit

Table 20. AUGMENT-SSTO Launch Vehicle Payload Performance with Upper Stage Insertion - Results Summary.

System Type	Percent Contingency/ Upper Stage ΔV (ft/s)	10/ 5,000	20/ 5,000	30/ 5,000	10/ 22,000	20/ 22,000	30/ 22,000
	LEO Orbit Type/Initial Stage Weight (lbm) ⁺						
LO2/LH2 MPS*/Gelled O2/H2 APS**-O2/H2 Upper Stage ^a	28 degree E-W/ 15,326	9,399 ⁺⁺	9,250	9,100	640	374	108
	Polar N-S/7,970	4,452	4,335	4,218	NPO ^c	NPO	NPO
LO2/LH2 MPS/ Gelled O2/H2 APS- Gelled O2/H2/AI Upper Stage ^a	28 degree E-W/ 15,326	9,447	9,298	9,148	706	440	174
	Polar N-S/7,970	4,477	4,360	4,243	NPO	NPO	NPO
LO2/LH2 MPS/Gelled O2/H2 APS-NTO/MMH Upper Stage ^b	28 degree E-W/ 15,326	7,757	7,584	7,410	NPO	NPO	NPO
	Polar N-S/7,970	3,521	3,384	3,248	NPO	NPO	NPO
LO2/LH2 MPS/ Gelled O2/H2 APS- Gelled NTO/MMH/AI Upper Stage ^b	28 degree E-W/ 15,326	8,124	7,956	7,788	NPO	NPO	NPO
	Polar N-S/7,970	3,712	3,578	3,444	NPO	NPO	NPO

* Main Propulsion System

** Augmentation Propulsion System

+ Includes Upper Stage System plus Payload

++ Payload weight into orbit (lbm)

^a Spherical O2 Tank, Cylindrical H2 Tank

^b Spherical Tanks

^c NPO = No Payload into Orbit

Gelled Hydrogen Rocket Performance

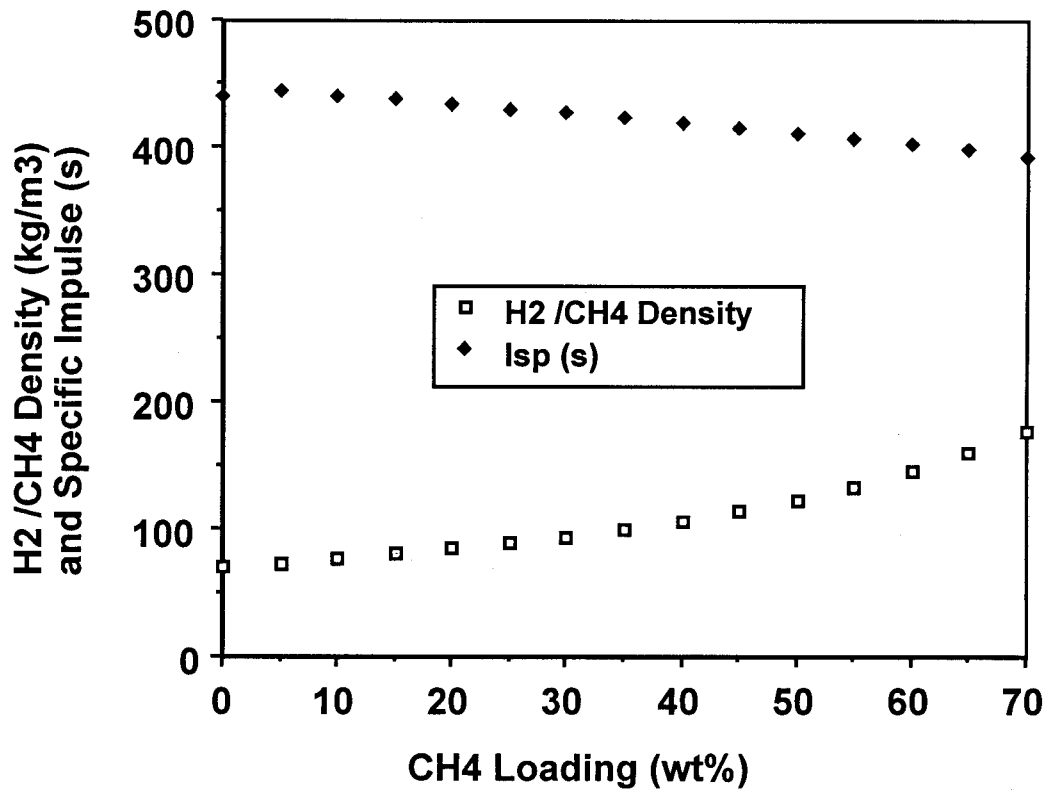


Figure 1. Gelled Hydrogen Rocket Engine Specific Impulse (Oxygen as oxidizer, 2250 psia chamber pressure, expansion ratio = 40:1).

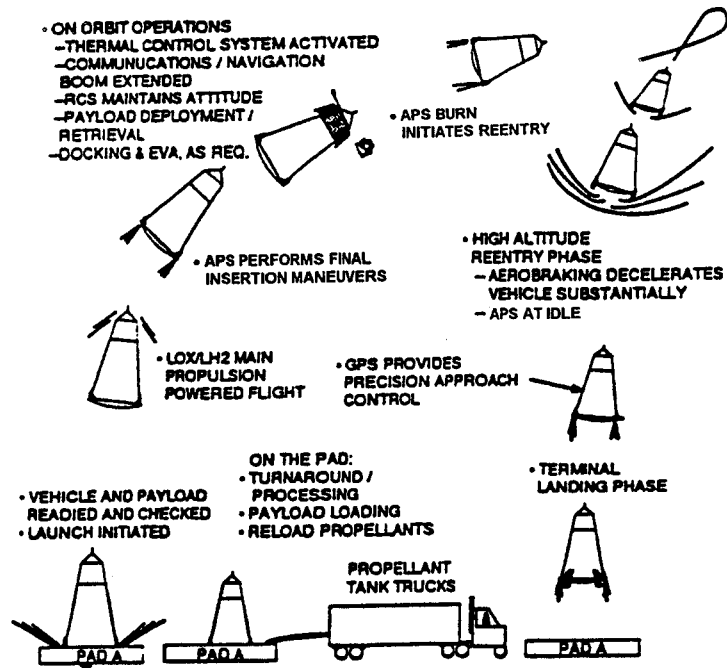


Figure 2. AUGMENT-SSTO System Concept Architecture.

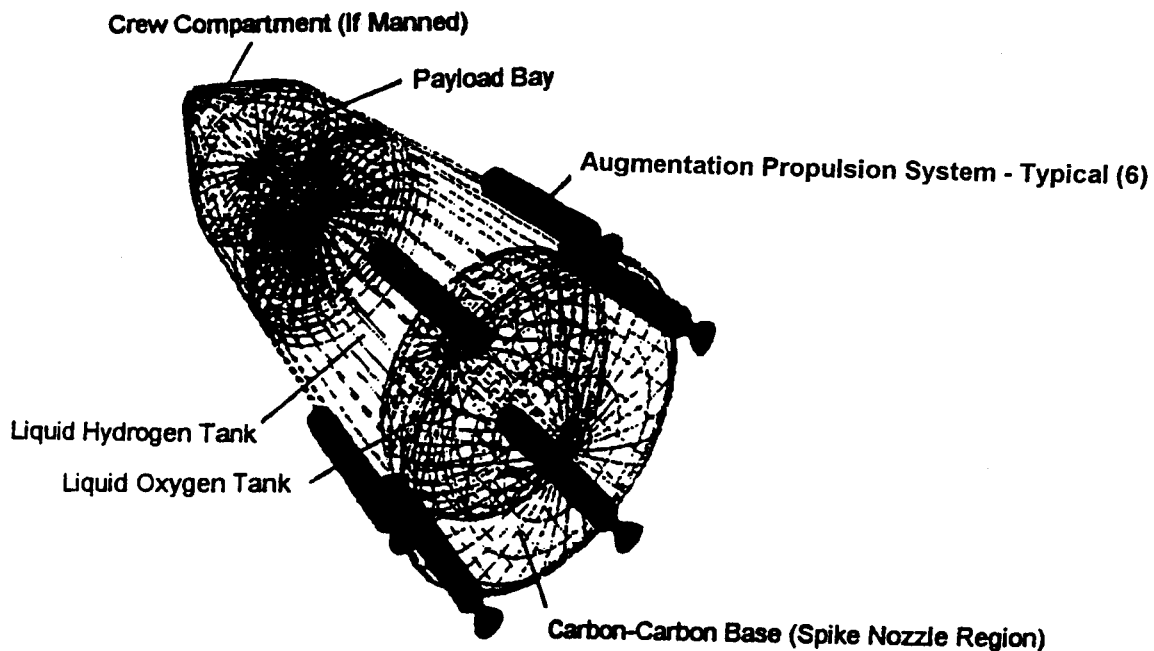


Figure 3. Representative AUGMENT-SSTO Launch Vehicle Concept (not to scale).

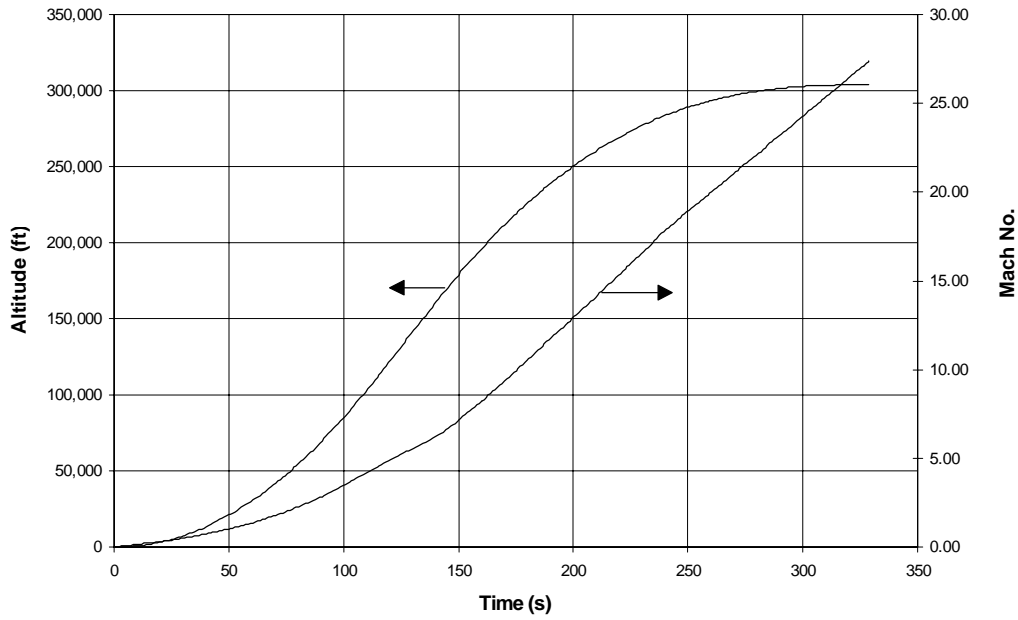


Figure 4. Typical AUGMENT-SSTO E-W Orbit Ascent Flight Parameters as a Function of Time - Mach Number and Altitude
NASA/TM—1998-206306

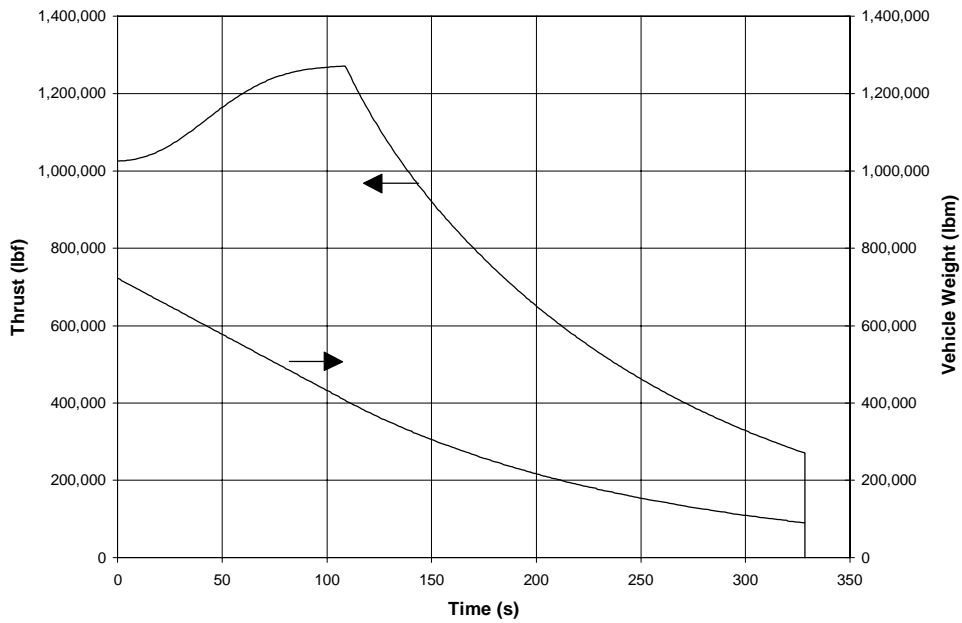


Figure 5. Typical AUGMENT-SSTO E-W Orbit Ascent Flight Parameters as a Function of Time - Thrust and Weight

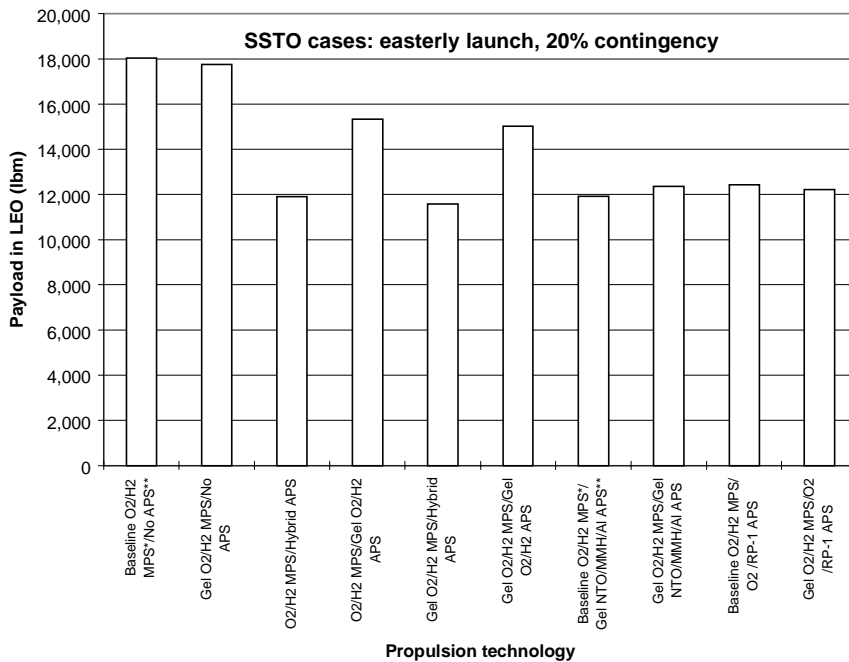


Figure 6. Payload Mass in LEO for Various VTOL/SSTO Launch Vehicle Propulsion System Combination Options - E-W Orbit Profile /20% Dry Weight Contingency.

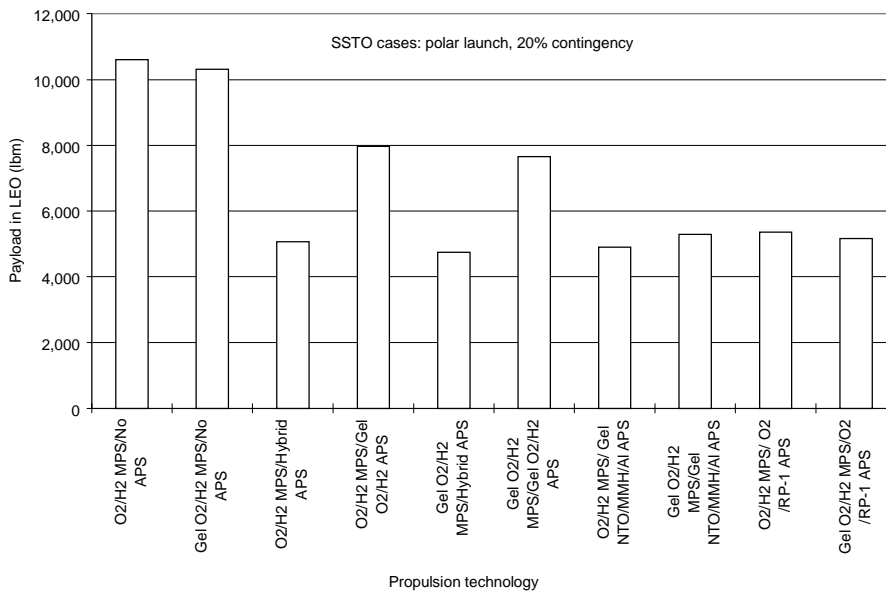


Figure 7. Payload Mass in LEO for Various VTOL/SSTO Launch Vehicle Propulsion System Combination Options - Polar Orbit Profile /20% Dry Weight Contingency.

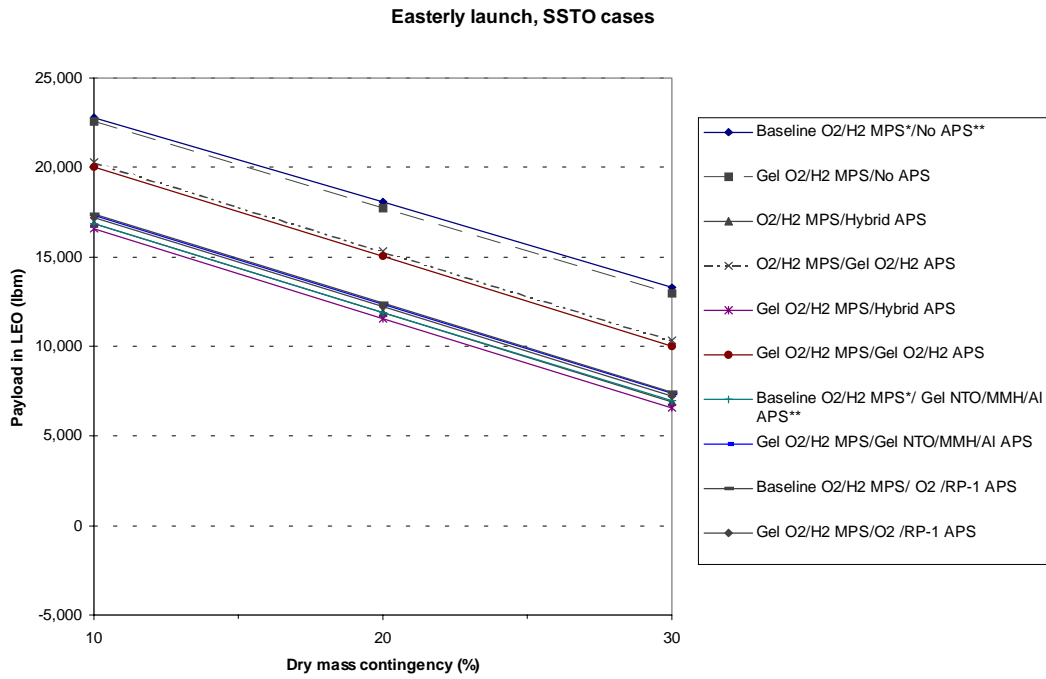


Figure 8. Effect of Dry Mass Contingency on Payload Mass in LEO - E-W Orbit Profile.

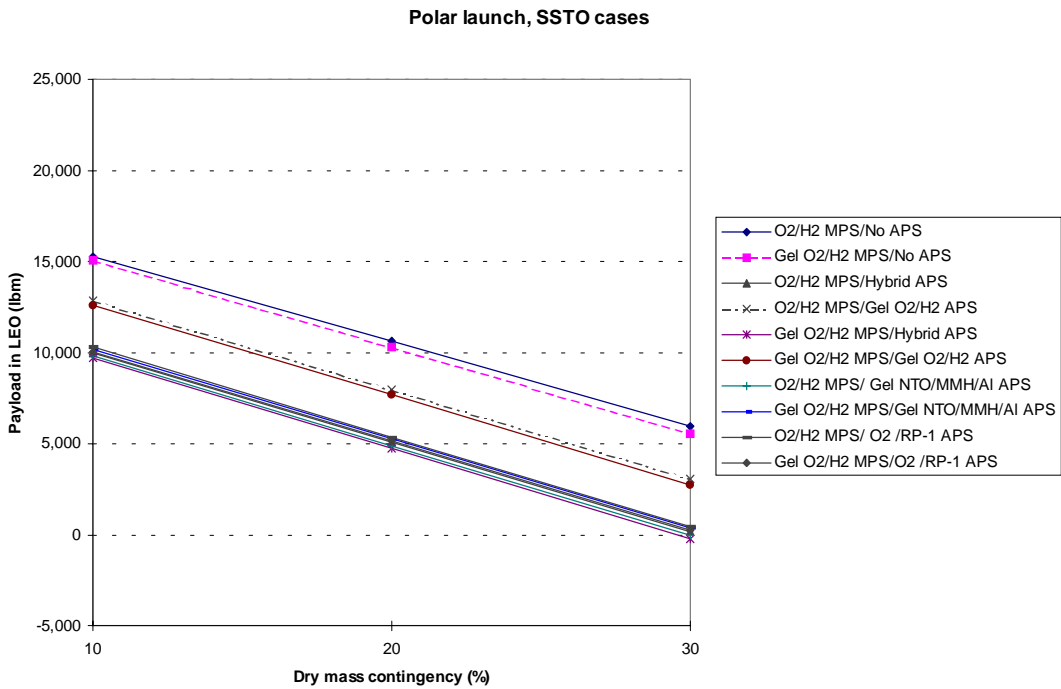


Figure 9. Effect of Dry Mass Contingency on Payload Mass in LEO - Polar Orbit Profile.

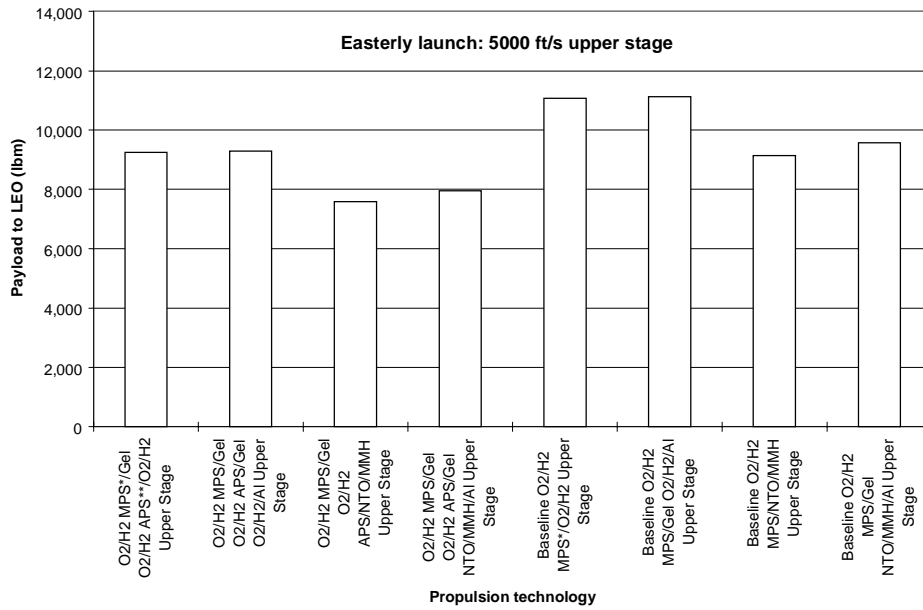


Figure 10. Payload Mass in LEO for Various VTOL/SSTO Launch Vehicle /Upper Stage Propulsion System Combination Options - 5,000 ft/s Capability /E-W Orbit Profile.

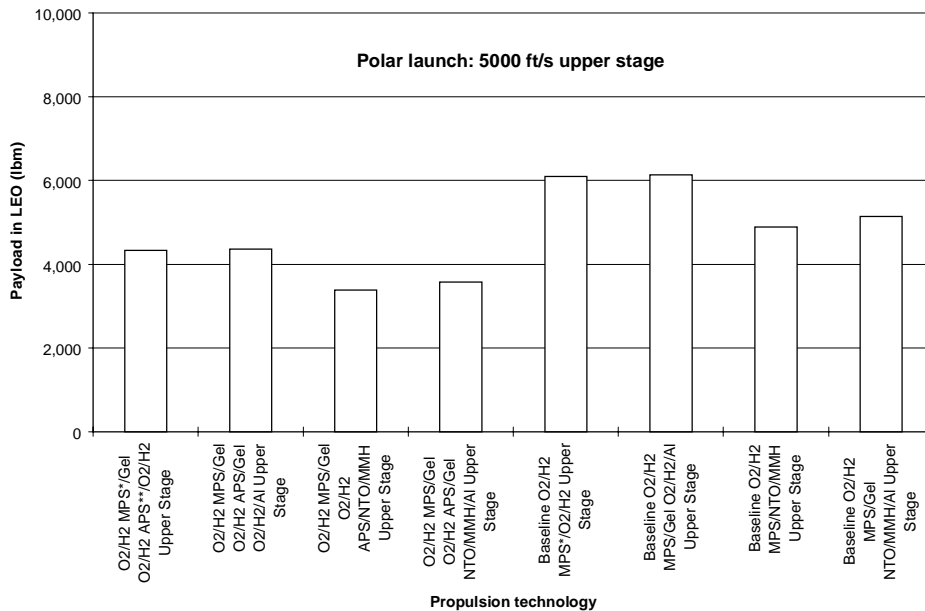


Figure 11. Payload Mass in LEO for Various VTOL/SSTO Launch Vehicle /Upper Stage Propulsion System Combination Options - 5,000 ft/s Capability /Polar Orbit Profile.

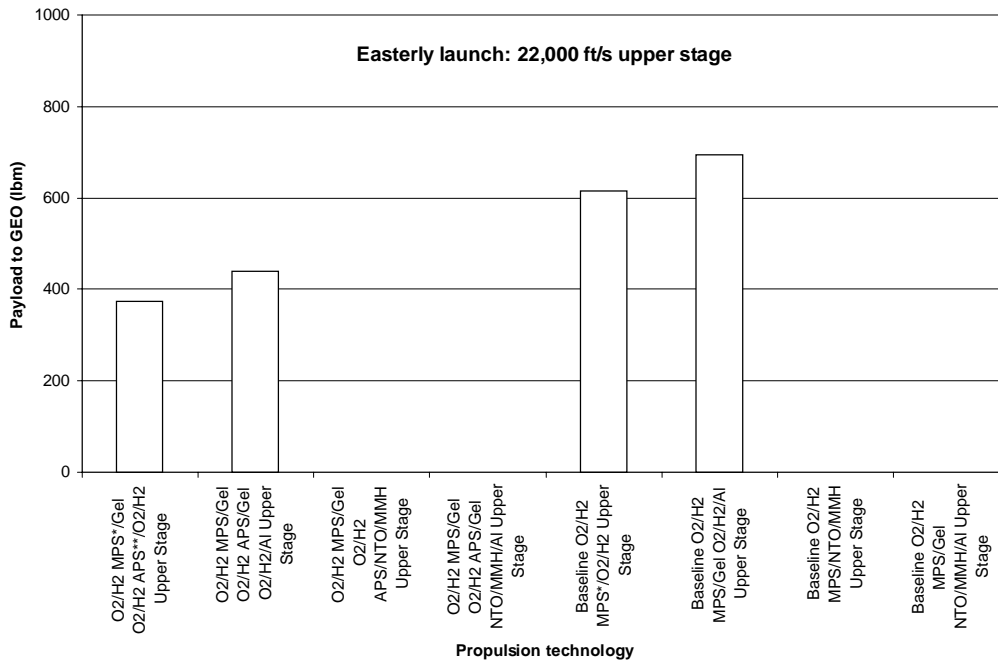


Figure 12. Payload Mass in GEO for Various VTOL/SSTO Launch Vehicle /Upper Stage Propulsion System Combination Options - 22,000 ft/s Capability /E-W Orbit Profile.

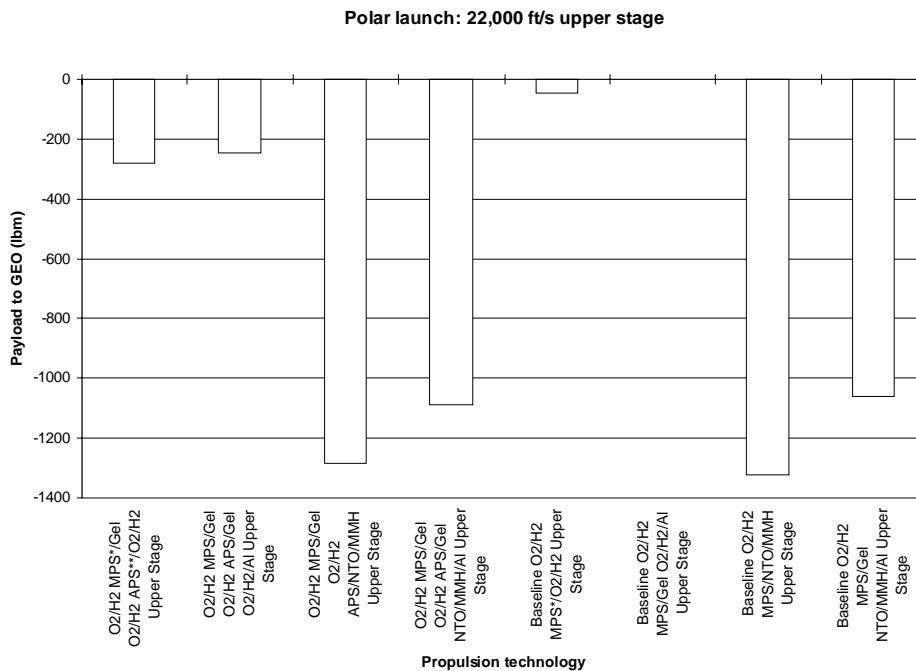


Figure 13. Payload Mass in GEO for Various VTOL/SSTO Launch Vehicle /Upper Stage Propulsion System Combination Options - 22,000 ft/s Capability /Polar Orbit Profile.

Easterly launch, 5,000 ft/s upper stage

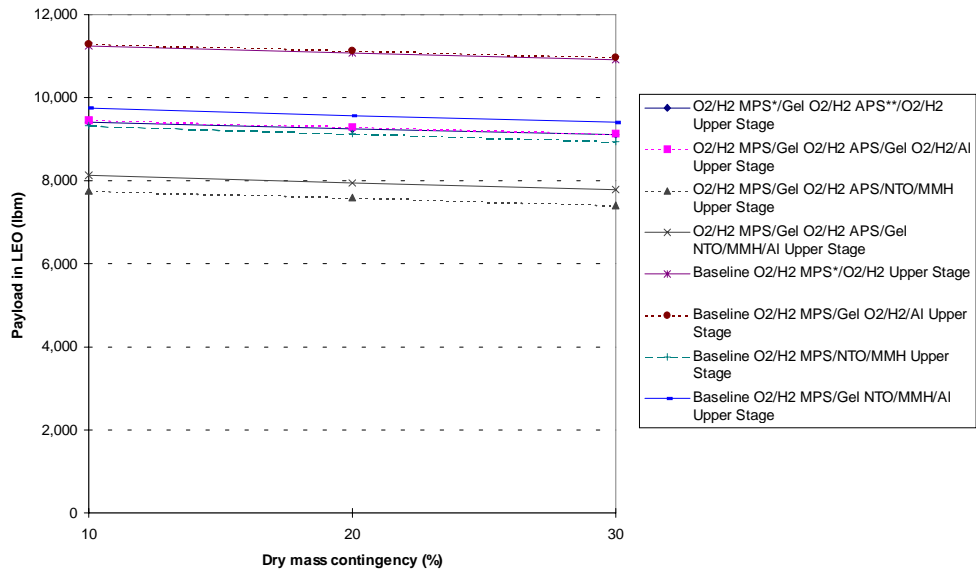


Figure 14. Effect of Dry Mass Contingency on Payload Mass in LEO - 5,000 ft/s Upper Stage /E-W Orbit Profile.

Polar launch, 5,000 ft/s upper stage

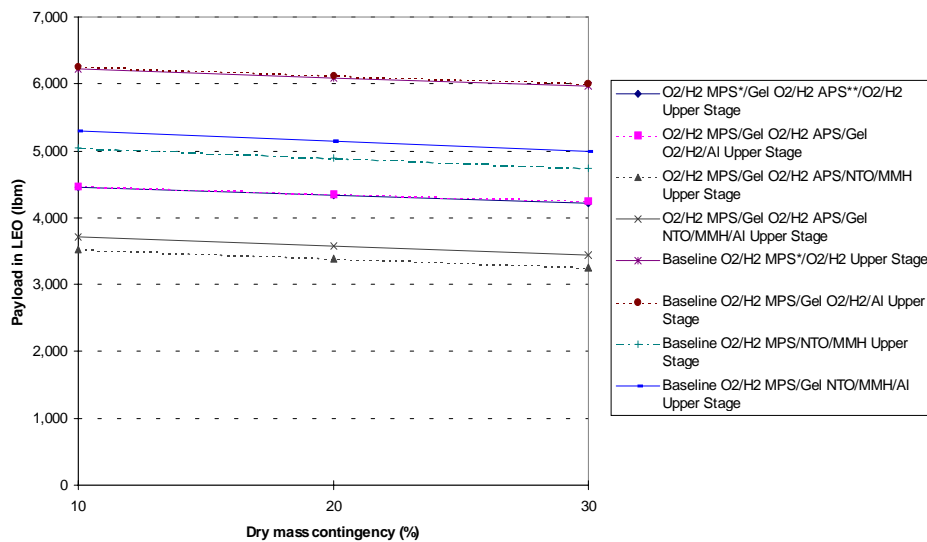


Figure 15. Effect of Dry Mass Contingency on Payload Mass in LEO - 5,000 ft/s Upper Stage /Polar Orbit Profile.

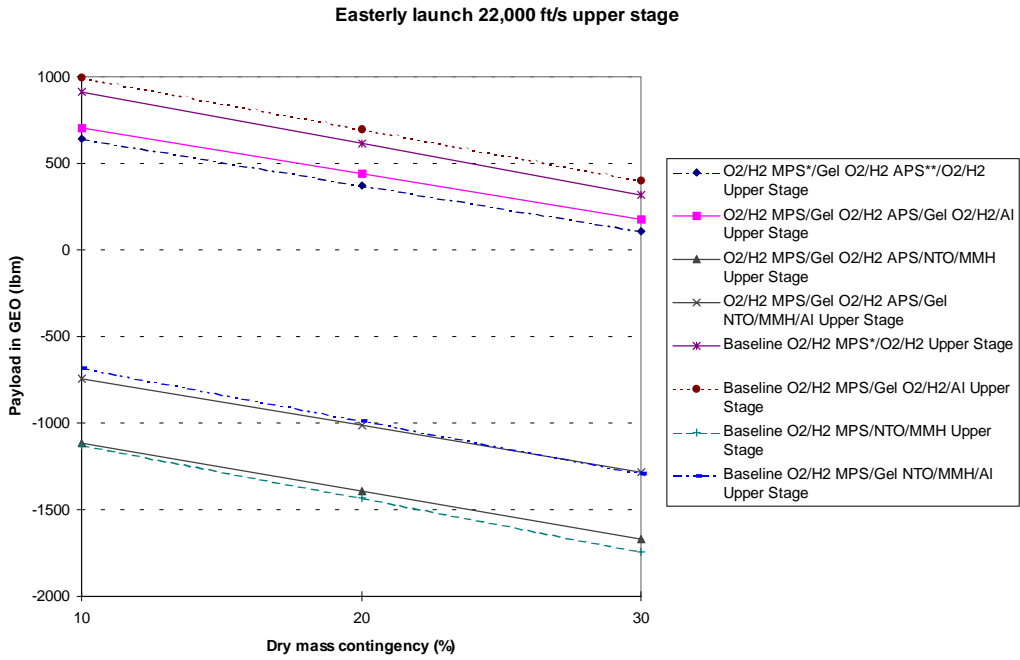


Figure 16. Effect of Dry Mass Contingency on Payload Mass in GEO - 22,000 ft/s Upper Stage /E-W Orbit Profile.

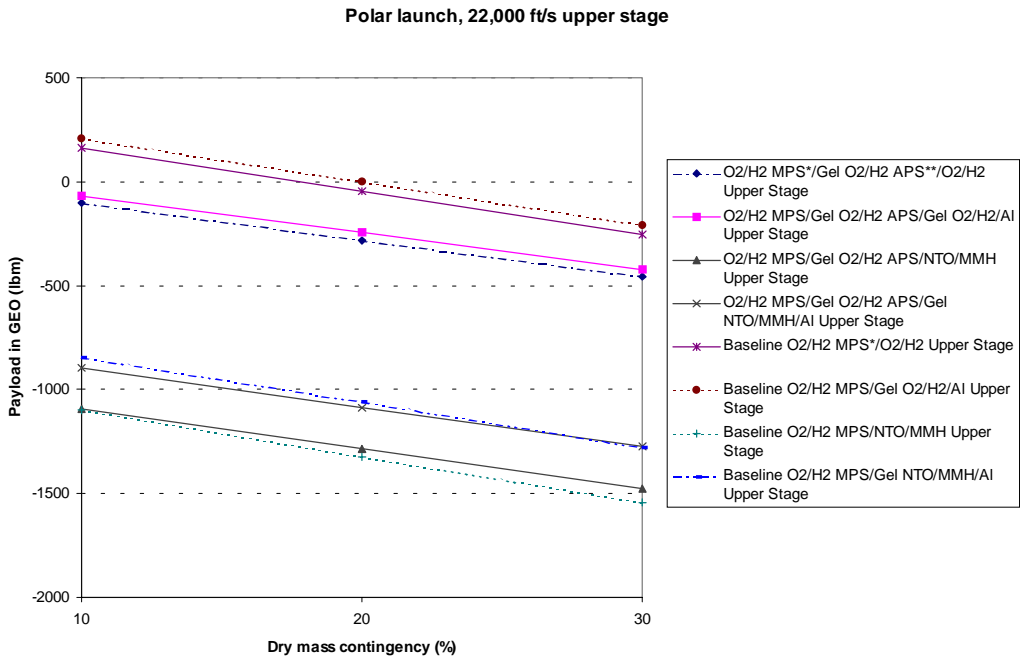


Figure 17. Effect of Dry Mass Contingency on Payload Mass in GEO - 22,000 ft/s Upper Stage /Polar Orbit Profile.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (<i>Leave blank</i>)	2. REPORT DATE February 1998	3. REPORT TYPE AND DATES COVERED Technical Memorandum	
4. TITLE AND SUBTITLE Preliminary Assessment of Using Gelled and Hybrid Propellant Propulsion for VTOL/SSTO Launch Systems		5. FUNDING NUMBERS WU-260-98-09-00	
6. AUTHOR(S) Dennis G. Pelaccio, Bryan Palaszewski, and Robert O'Leary			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Lewis Research Center Cleveland, Ohio 44135-3191		8. PERFORMING ORGANIZATION REPORT NUMBER E-11004	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001		10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA TM-1998-206306 AIAA-97-3216	
11. SUPPLEMENTARY NOTES Prepared for the 33rd Joint Propulsion Conference cosponsored by AIAA, ASME, SAE, and ASEE, Seattle, Washington, July 7-9, 1997. Dennis G. Pelaccio, Star Tech Research Corporation, 9356 Desert Willow Road, Highlands Ranch, Colorado 80126; Bryan Palaszewski, NASA Lewis Research Center; Robert O'Leary, W.J. Schafer Associates, Inc., 2000 Randolph Road SE, Suite 205, Albuquerque, New Mexico 87106. Responsible person, Bryan Palaszewski, organization code 5830, (216) 977-7493.			
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Categories: 28, 20, 16, and 15 This publication is available from the NASA Center for AeroSpace Information, (301) 621-0390.		12b. DISTRIBUTION CODE	
13. ABSTRACT (<i>Maximum 200 words</i>) A novel, reusable, Vertical-Takeoff-and-Vertical-Takeoff-and-Landing, Single-Stage-to-Orbit (VTOL/SSTO) launch system concept, named AUGMENT-SSTO, is presented in this paper to help quantify the advantages of employing gelled and hybrid propellant propulsion system options for such applications. The launch vehicle system concept considered uses a highly coupled, main high performance liquid oxygen/liquid hydrogen (LO2/LH2) propulsion system, that is used only for launch, while a gelled or hybrid propellant propulsion system auxiliary propulsion system is used during final orbit insertion, major orbit maneuvering, and landing propulsive burn phases of flight. Using a gelled or hybrid propellant propulsion system for major orbit maneuver burns and landing has many advantages over conventional VTOL/SSTO concepts that use LO2/LH2 propulsion system(s) burns for all phases of flight. The applicability of three gelled propellant systems, O2/H2/Al, O2/RP-1/Al, and NTO/MMH/Al, and a state-of-the-art (SOA) hybrid propulsion system are examined in this study. Additionally, this paper addresses the applicability of a high performance gelled O2/H2 propulsion system to perform the primary, as well as the auxiliary propulsion system functions of the vehicle.			
14. SUBJECT TERMS Gel propellants; Launch vehicles; Upper stages; Systems analysis; Hybrid rockets		15. NUMBER OF PAGES 43	
		16. PRICE CODE A03	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT