

NAVAL

ENGINEERING

MANUAL



COMDTINST M9000.6D September 20, 2000



2100 Second Street SW Washington, DC 20593-0001 Staff Symbol: G-SEN-1 Phone: (202) 267-1809

COMDTINST M9000.6D September 20, 2000

COMMANDANT INSTRUCTION M9000.6D

Subj: NAVAL ENGINEERING MANUAL

- 1. <u>PURPOSE</u>. This Manual promulgates Coast Guard Naval Engineering policy and selected procedures.
- 2. <u>ACTION</u>. Area and district commanders, commanders of maintenance and logistics commands, commanding officers of headquarters units, assistant commandants for directorates, Chief Counsel, and special staff offices at Headquarters shall comply with the provisions of this Manual.
- 3. DIRECTIVES AFFECTED. Naval Engineering Manual, COMDTINST M9000.6C is canceled
- 4. <u>SUMMARY OF CHANGES</u>. This revision incorporates all changes to previous editions of the Naval Engineering Manual and the following significant new changes:
 - a. Chapter 041:

Describes the new process for alterations to cutters and standard boats. ShipAlt and BoatAlts are now Engineering Changes. This wording has been revised throughout the manual.

b. Chapter 042:

Defined hierarchy of guidance for Naval Engineering publications and directives. Provided guidance for use of referenced specifications.

c. Chapter 044:

Revised the list of unattended Main Propulsion Machinery Spaces to include 87' WPB and 420' WAGB.

DISTRIBUTION - SDL No. 138

	Delitabetion oblition																									
	а	b	С	d	е	f	g	h	i	j	k	-	m	n	0	р	q	r	S	t	u	٧	W	Х	У	Z
Α	3	3	3		4	3	1	3	1	1		1	2	1	1	1	1	1	1		1	1				
В		11*	20*		5	10		1	5	1		1		6	4	1		1	1						3	
С	1	1	1	3	1	1	1		1		1				1	1		1	1			1	1	5		
D	1	1	1	1								1*	1		1			1	1			1				
Ε														1												
F																										
G			1																							
Н																										

d. Chapter 077:

Revised the Gas Free Engineering and Confined Space Entry certification requirements for E-6 and E-7 Afloat Engineering Petty Officers. Deleted requirement to conduct periodic inspections of personally owned electrical/electronic equipment.

e. Chapter 079:

Chapter revised to include 283' WMEC and 420' WAGB. Added requirement for ELC to forward corrected DC books and DC diagrams to PCO/PXO and DCA schools.

f. Chapter 080:

Added Cutter Support Review description, function and deliverables.

g. Chapter 081:

Added boat program requirements. Updated Cutter maintenance standards and published policy regarding Operational Logistics Support Plans, Cutter Class Maintenance Plans and Boat Class Maintenance Plans.

h. Chapter 085:

Revised to reflect NE-TIMS and changes to drawing signature authority and drawing processes/practices.

i. Chapter 088:

Adds description of Group Engineer and Shore Unit Engineering Petty Officer responsibilities.

i. Chapter 090:

Changed submission date of Cutter Engineering Report to 31 JAN covering 12 month period ending 31 DEC. Changed submission date of MLC Top 10 to 31 MAR. Changes incorporated to align reporting periods with budget process.

k. Chapter 091:

Adds service life explanation and SSMEB schedules table.

1. Chapter 233:

Revised coolant requirements, clarified PAR testing requirements and added Condition Based Maintenance initiatives. Revised Engine Application Table to include 87' W

m. Chapter 262:

Revised chapter to reflect requirement to use recycled oil in some applications and added 420' WAGB, 283' WMEC, 87' WPB, and 49' BUSL equipment to oil sampling list.

n. Chapter 300:

Revised electrical shore power connection requirements.

o. Chapter 505:

Revised hose classification to standard (8 yr), nonstandard (variable), and condition based maintenance (no defined service life). Changed and expanded on inspection and replacement criteria. Added section on expansion joints from old chapter 500.

p. Chapter 517:

Old chapter 220. Renumbered to be consistent with SWBS.

q. Chapter 530:

Old chapter 531. Retitled and revised to include Potable Water Systems from chapter 533.

r. Chapter 555:

Revised to include SCBA usage guidance and EEBD allowance determination policy.

s. Chapter 556:

Revised chapter to include reference for international standards for cleanliness.

t. Chapter 571:

Revised testing requirements for RAS fittings and components.

u. Chapter 572:

New Chapter covering tests and maintenance requirements for elevators and hoists. Incorporated information from old chapter 589.

v. Chapter 573:

Changed title to Cargo Handling Systems. Revised chapter to address only booms, frames, chain stoppers, padeyes, chocks, cleats and bitts. Added testing requirements for hydraulic chain stoppers. added specific guidance for testing padeyes and other equipment. Moved testing requirements for cranes to chapter 589.

COMDTINST M9000.6D

w. Chapter 589:

New chapter covering inspection and testing requirements for all cranes. Tables revised to include 225' WLB and 175' WLM.

x. Chapter 588:

Clarified pull testing requirements for helicopter deck tie-down fittings.

y. Chapter 593:

Revised chapter to include policy on shipboard incinerators.

z. Chapter 613:

New chapter. Addresses wire rope issues, inspection and testing.

aa. Chapter 634:

Added table listing authorized shipboard deck covering material.

bb. Chapter 700:

Revised chapter to incorporate Module Testing and Repair policy and NESU held Navy Ordnance Support Equipment procedures from old chapter 597.

5. <u>CHANGES</u>. Recommendations for improvements to this Manual should be submitted via the chain of command to Commandant (G-SEN).

R. F. SILVA Assistant Commandant For Systems

Naval Engineering Manual

COMDTINST M9000.6D

Table of Contents

Chapter	Section	<u>Title</u>	Page
001		INTRODUCTION	
	A	Purpose	001-1
	В	Change Process	001-1
	C	Distribution	001-2
	D	Ordering	001-2
	E	Forms and Reports	001-2
041		ENGINEERING CHANGES	
	A	General	041-1
	В	Definitions	041-2
	C	Engineering Change Process	041-2
	D	Engineering Change Administration	041-7
	E	Testing of Commercial Products	041-9
042		SPECIFICATIONS AND STANDARDS	
	A	Hierarchy of Guidance	042-1
	В	Referenced Specifications	042-1
	C	Applicability of U.S. Navy GENSPECS	042-1
	D	Exceptions	042-2
	E	Naval Ships Technical Manuals (NSTM)	042-2
	F	Limited Rights Information	042-3
044		MACHINERY SPACE WATCH REQUIREMENTS	
	A	General	044-1
	В	Inspections of Operating Machinery	044-1
	C	Unattended Main Propulsion Machinery	044-1
		Spaces	
074		WELDING	
	A	Grounding of Welding Machines	074-1
	В	Welding on Board Cutters and Boats	074-1
	C	Deployment Repairs	074-1
	C	Deployment Repairs	07

077		SAFETY	
	A	General	077-1
	В	Gas Free Engineering/Confined Space Entry	077-1
	C	Walk in Refrigerator Alarm and Safety Systems	077-2
	D	Installed and Portable Eductors	077-3
	E	Mandatory Safety and Occupational Health Briefing	077-3
	F	Electrical Safety Program	077-3
	G	Equipment Tag-Out Procedures	077-4
	Н	Use Of Diesel Fuel As A Solvent	077-4
	I	Gasoline	077-5
	J	Hydraulic Fluid	077-5
	K	Spray Shields and Protective Covers	077-5
	L	Self Contained Ionization Smoke Detectors	077-6
	M	Safety Precautions and Operating Instructions	077-6
	N	Safety Precautions for Gasoline Powered Boats	077-7
	O	Heat Stress	077-8
	P	Hearing Conservation	077-9
	Q	Repairing And Removing Asbestos	077-9
	R	Spray Painting Inside Ships	077-9
	S	Ordnance and Ammunition	077-9
079		STABILITY AND DAMAGE CONTROL	
	A	Stability Information	079-1
	В	Flooding Casualty Control Software (FCCS)	079-1
	C	Stability Requirements	079-2
	D	Weight	079-3
	E	Damage Control Organization	079-3
	F	DC Books, DC Diagrams and Compartment Check Off Lists (CCOL's)	079-5
	G	Material Conditions Of Readiness and Damage Control Classifications	079-16
	Н	Compartmentation and Deck Numbering System	079-16
	Ι	Watertight Integrity Tests and Inspections	079-21
	J	Engineering Casualty Control Manual	079-21

080		INTEGRATED LOGISTICS AND SUPPORT REQUIREMENTS	
	A	Integrated Logistics Support (ILS)	080-1
	В	Integrated Logistic Support Plan (ILSP)	080-1
	C	Operational Logistics Support Plan	080-1
	D	Logistics Support Analysis (LSA)	080-1
	Е	Long Range Logistics Support (Cutters)	080-1
	F	Cutter Support Review (CSR)	080-1
081		MAINTENANCE OF CUTTERS AND BOATS	
	A	Maintenance and Financial Program	081-1
	В	Cutter Maintenance Standards	081-1
	C	Preventive Maintenance System (PMS)	081-2
	D	Cutter and Boat Maintenance Philosophy	081-7
	E	Maintenance and Preservation of Boats in Service	081-10
	F	Maintenance and Preservation of Boats in Storage	081-11
083		SUPPLY SUPPORT	
	A	General	083-1
	В	Responsibility	083-1
	C	Appropriations	083-1
085		COAST GUARD NAVAL ENGINEERING DRAV	VINGS
	A	Introduction	085-1
	В	Definitions	085-1
	C	General	085-4
	D	Management of Master Engineering	085-4
		Drawings for Coast Guard Platforms	
	E	Drawing Distribution	085-6
	F	Selected Record and Non-selected	085-6
		Record Master Engineering Drawings	
	G	Drawing Title Blocks and Numbering System	085-8
	Н	Electronic (AutoCad) File Labeling	085-10
	I	New Drawing Preparation Convention	085-11
	J	Drawing Revisions	085-11
	K	Revision Procedures for Special Situations	085-13
	L	Superceding a Drawing	085-15
	M	Canceling a Drawing	085-15
	N	Technical Publication Drawings	085-15

086		TECHNICAL PUBLICATIONS	
	A	Naval Engineering Technical	086-1
		Publications	
	В	NE-TIMS	086-2
088		PERSONNEL	
	A	Naval Engineering Shore-Based Support Teams	088-1
	В	Force Management	088-2
	С	Engineer Officer In Training (EOIT) Program	088-3
	D	Naval Engineering Postgraduate (PG) and Advanced Training (NET) Programs	088-3
	Е	Duties of Shore Unit Engineering Personnel	088-3
090		INSPECTIONS, RECORDS, REPORTS, AND TES	TS
	A	General	090-1
	В	General Inspections and Tests	090-1
	C	Hull History, Machinery History,	090-2
		Resistance Test Records, And Current	
		Ship's Maintenance Projects (CSMP)	
	D	Engineering Department Records and Accounts	090-4
	E	Reports	090-9
	F	Naval Engineering Cutter Materiel Assessment	090-12
	G	Additional Records	090-12
	Н	Relief of the Engineer Officer or Engineer Petty Officer	090-13
	I	Maintenance of Boat Record Files	090-13
	J	Procedures For Lists of Top Ten	090-14
	J	Maintenance Problems	070-14
091		SURVEYS OF CUTTERS AND BOATS	
	A	Service Life	091-1
	В	Ship Structure and Machinery Evaluation Board (SSMEB)	091-1
	C	Boards of Survey for Boats	091-5

094		FULL POWER TRIALS	
	A	Full Power Trials for Cutters	094-1
	В	Full Power Trial for Standard Boats	094-1
097		STABILITY TESTS	
	A	General	097-1
	В	Stability Test Frequency And Schedule	097-1
	C	Test Personnel	097-1
	D	Stability Test Reports; Review and Approval	097-2
	E	Stability Test Procedures	097-2
110		BOAT STRUCTURE	
	A	General	110-1
233		INTERNAL COMBUSTION ENGINES	
	A	Jacket Water Treatment Program	233-1
	В	Diesel Engine Maintenance Program	233-8
	C	Diesel Engine Crankweb Deflection Requirement	233-21
	D	Performance Tests of Shipboard and	233-22
		Shore-Based Gasoline and Diesel Boat Engines	
	E	Marking Boat Instrument Panel Gauges	233-23
235		ELECTRIC PROPULSION	
	A	Propulsion Dielectric Absorption Tests	235-1
	В	In-Place Cleaning of Direct Current	235-1
		Propulsion Motors and Generators	
	C	High-Potential Test	235-2
243		PROPULSION SHAFTING	
	A	General	243-1
244		PROPULSION BEARINGS	
	A	Bearing Stave Material	244-1
	В	Bearing Sleeves	244-1
	C	Cutless Bearings	244-1
	D	Bearing Clearance Criteria	244-1

245		PROPELLERS	
	A	Propellers for Boats	245-1
254		CONDENSERS AND HEAT EXCHANGERS	
	A	Zinc Anodes in Condensers and Heat Exchangers	254-1
	В	Installation and Maintenance Requirements	254-2
262		LUBRICATING OILS	
	A	General	262-1
	В	Diesel Engine Lubricating Oil Policy	262-1
	C	Lubricating Oil Testing and Analysis	262-4
		Procedures	
	D	Two-Stroke Cycle Gasoline Engine	262-29
		Lubricating Oil	
300		ELECTRIC PLANT (GENERAL)	
	A	Shore Electric Power Facilities	300-1
475		DEGAUSSING	
	A	Degaussing Installations	475-1
505		FLEXIBLE HOSE PROGRAM	
	A	General	505-1
	В	Hose Classification	505-1
	C	Hose Log	505-2
	D	Hose Tags	505-3
	E	Hose Replacement Schedule	505-4
	F	Flexible Hose Shelf Life	505-4
	G	Flexible Hose Service Life	505-5
	Н	Hose Inspection Schedule and	505-5
		Maintenance Inspections	
	I	Hydrostatic Testing	505-6
	J	Hose Selection	505-7
	K	Expansion Joints (Flex Joints)	505-8

517		AUXILIARY BOILERS AND FORCED CIRC STEAM GENERATORS	ULATION
	A	Feedwater Treatment	517-1
	В	Feedwater Testing	517-2
	С	Supplemental Requirements for All Boilers and Steam Generators	517-4
530		POTABLE WATER SYSTEMS	
	A	Potable Water Systems	530-1
	В	Treatment of Evaporator Feedwater	530-1
	C	Chemical Cleaning of Evaporators	530-1
	D	Joint Sealing Compounds	530-1
540		GASOLINE, HANDLING AND STOWAGE	
	A	Gasoline, Gasoline Equipment, and Stowage	540-1
541		FUEL SYSTEM, CUTTERS AND BOATS	
	A	Fueling Evolutions	541-1
	В	Authorized Fuels for Cutters and Boats	541-1
	C	Onboard Fuel Management	541-3
	D	Fuel Request/Logreqs	541-7
	E	Reporting Fuel Problems	541-8
	F	General Questions	541-8
542		FUEL SYSTEM, SHIPBOARD AVIATION	
	A	Shipboard JP-5 Aviation Fuel Handling	542-1
	В	Maintenance of Equipment	542-1
550		COMPRESSED GAS CYLINDERS	
	A	General	550-1
	В	Hydrostatic Testing Intervals	550-1
	C	Identification Marks	550-2
	D	Test Facilities	550-2
	E	Use of Non-shatterable Cylinders	550-2

551		COMPRESSED AIR SYSTEMS	
	A	Compressed Air Plants and Systems	551-1
	В	Moisture Separators and Air Oilers	551-1
555		FIREFIGHTING	
	A	Firefighting Equipment and Procedures	555-1
	В	Firefighting Organization	555-1
	C	Maintenance	555-1
	D	Authorized Equipment	555-1
	E	Firefighting Agents	555-1
	F	Firefighting Equipment and Installation	555-2
	G	Protective Equipment	555-5
	Н	Flexible Hose in Firefighting Service	555-8
556		HYDRAULIC EQUIPMENT	
	A	General	556-1
	В	Inspection and Maintenance	556-1
	C	Hydraulic Hose Renewal	556-1
	D	General Requirements for Cleaning and Flushing Hydraulic Systems	556-1
571		REPLENISHMENT-AT-SEA (RAS) SYSTEMS	
	A	Testing and Inspection of RAS Fittings	571-1
	В	Frequency	571-1
	C	Method of Inspection	571-1
	D	Load Test Records	571-1
572		ELEVATORS AND HOISTS	
	A	General	572-1
	В	Ammunition Handling Equipment	572-2
573		CARGO HANDLING SYSTEMS	
	A	Booms and Frames	573-1
	В	Chain Stoppers	573-8
	\mathbf{C}	Padeves, Chocks, Cleats and Bitts	573-10

581		ANCHOR(S) AND ANCHOR CHAIN MAINTENANG	CE
	A	General	581-1
	В	Periodicity	581-1
583		LIFE RAFTS, LIFE FLOATS, AND BOAT HOISTING EQUIPMENT	G
	A B	Inflatable Life Rafts and Life Floats Tests and Inspection of Boat Hoisting Equipment	583-1 583-1
588		HELICOPTER HANDLING	
	A	Helicopter Deck Tie-Down-Fitting Testing	588-1
589		CRANES	
	A	General	589-1
	В	Crane Inspections	589-2
	C	Crane Tests	589-5
	D	Safety	589-8
591		OCEANOGRAPHIC RESEARCH EQUIPMENT	
	A	General	591-1
	В	Standard Loads	591-1
	С	Weight Handling System Structural Design and Test Policy	591-1
	D	Dynamic Test Loading	591-2
	Ē	Science Wires	591-2
593		ENVIRONMENTAL POLLUTION CONTROL SYST	EMS
	A	General	593-1
	В	Shipboard Regulations	593-1
	C	Contract Provisions	593-1
	D	Polychlorinated Biphenyls (PCBs)	593-1
	Ē	Incinerators	593-2

613		RIGGING	
	A	Wire Rope	613-1
	В	Wire Rope Fittings	613-10
	C	Sheaves	613-11
630		PRESERVATIVES AND COVERINGS	
	A	Paint	630-1
	В	Cathodic Protection	630-1
634		DECK COVERINGS	
	A	General	634-1
	В	Authorized Materials	634-1
635		THERMAL INSULATION	
	A	General	635-1
	В	Asbestos Policy	635-1
640		LIVING AND BERTHING SPACES	
	A	Habitability Improvement of Cutters	640-1
	В	Habitability Improvements That Require Engineering Changes	640-1
670		STOWAGE, HANDLING, AND DISPOSAL OF HAZARDOUS MATERIALS	
	A	General Policy	670-1
	В	Inventory	670-1
	C	Stowage	670-1
	D	Handling	670-1
	E	Disposal	670-1
	F	Electronic Records	670-1
700		ORDNANCE, GENERAL	
	A	General	700-1
	В	Coast Guard Module Test and Repair (MTR) Program	700-1
	C	NESU Held Navy Ordnance Support Equipment	700-1

834	COMPUTER PROGRAMS	
A B C	Computer Programs For Engineering Use Installation & Utilization Requirements Distribution of Software	834-1 834-1 834-1
997	DOCKING INSTRUCTIONS FOR CUTTERS AN	ND BOATS
A B	Cutters Boats	997-1 997-2
	TABLES	
Table	<u>Title</u>	<u>Page</u>
TABLE 041-1 TABLE 079-1 TABLE 079-2 TABLE 079-3 TABLE 081-1 TABLE 085-1 TABLE 091-1 TABLE 091-2 TABLE 233-1 TABLE 233-2 TABLE 233-3 TABLE 245-1 TABLE 262-1 TABLE 262-2 TABLE 475-1 TABLE 573-1	List of Standard Boats Table of DC Organization CCOL Format Table of Required Bills Cutter Maintenance Standards Signature Authority Sheets of Form CG-3496 SSMEB Schedule & Remaining Service Life Engine Application Table Available Center Section Kits Engine Pressure & Temperature Chart Table of Propellers for Boats Approved Engine Oil Exceptions Table Wear Metal Threshold Limits Degaussing Coils Inspection & Overhaul Frequency for	041-1 079-5 079-11 079-29 081-4 085-5 091-3 091-11 233-13 233-23 245-2 262-1 262-20 475-2 573-10
TABLE 573-2 TABLE 573-3 TABLE 583-1 TABLE 589-1 TABLE 589-2 TABLE 589-3	Booms & Frames SWL/Dynamic Test Weights Booms & Frames Science Frame Ratings & Test Requirements Weights for Testing Davits/Lifting Gear Inspection & Overhaul Frequency for Cranes SWL/Dynamic Test Weights for Cranes SWL/Dynamic Test Weights for 225' WLB & 175' WLM Cranes	573-11 573-12 583-4 589-10 589-11 589-13
Table TABLE 041-1 TABLE 079-1 TABLE 079-2 TABLE 079-3 TABLE 081-1 TABLE 085-1 TABLE 091-1 TABLE 233-1 TABLE 233-2 TABLE 233-2 TABLE 233-3 TABLE 245-1 TABLE 262-1 TABLE 262-2 TABLE 475-1 TABLE 573-1 TABLE 573-3 TABLE 573-3 TABLE 589-1 TABLE 589-1 TABLE 589-2	Title List of Standard Boats Table of DC Organization CCOL Format Table of Required Bills Cutter Maintenance Standards Signature Authority Sheets of Form CG-3496 SSMEB Schedule & Remaining Service Life Engine Application Table Available Center Section Kits Engine Pressure & Temperature Chart Table of Propellers for Boats Approved Engine Oil Exceptions Table Wear Metal Threshold Limits Degaussing Coils Inspection & Overhaul Frequency for Booms & Frames SWL/Dynamic Test Weights Booms & Frames Science Frame Ratings & Test Requirements Weights for Testing Davits/Lifting Gear Inspection & Overhaul Frequency for Cranes SWL/Dynamic Test Weights for Cranes SWL/Dynamic Test Weights for Cranes SWL/Dynamic Test Weights for Cranes	P 000000000000000000000000000000000000

FIGURES

<u>Figure</u>	<u>Title</u>	<u>Page</u>		
FIGURE 041-1		Platform Engineering Change Process	041-10	
FIGURE 041-2		System Engineering Change Process (HM&E)	041-11	
FIGURE 041-3		System Engineering Change Process (ELEX)	041-12	
FIGURE 041-4		Engineering Change Request (page 1)	041-13	
FIGURE 041-5		Engineering Change Request (page 2)	041-14	
FIGURE 090-1		Sample EO/EPO Relieving Letter	090-16	
FIGURE 090-2		Sample CO/OINC Forwarding Letter	090-18	
FIGURE 090-3		Top Ten List	090-19	
FIGURE 090-4		New Item Support Form	090-20	
FIGURE 090-5		EO/EPO Relief Checklist (Afloat)	090-21	
FIGURE 090-6		EO/EPO Relief Checklist (Ashore)	090-26	
FIGURE 262-1		DD Form 2026	262-15	
FIGURE 262-2		Wear Metal Concentration Vs Constant Oil Replenishment	262-18	
FIGURE 262-3		Wear Metal Concentration Vs Periodic	262-18	
		Oil Addition and Oil Change		
FIGURE 262-4		Example of Equipment History	262-21	
FIGURE 555-1		EEBD Allowance Determination Guidance	555-9	
		APPENDICES		
Appendix		<u>Title</u>		
APPENDIX A		Coast Guard Cutter Stability Test Procedures		
Se	ection	<u>Title</u>	<u>Page</u>	
A	A	Stability Test Procedure	1	
F	3	Preparation for Testing	1	
(Conduct of Test	8	
Ι)	Test Results	15	
APPENDIX FIGURES				
<u>Figure</u>		<u>Title</u>	<u>Page</u>	
1		Double Bottom Tank Sounding	4	
2		Sketch of Mooring	6	
3		Line Arrangement	7	
1				
4 5		Satisfactory Pendulum Arrangement Tangent Plot	11 14	

CHAPTER 001. INTRODUCTION

- **A. PURPOSE.** The Naval Engineering Manual (NEM), COMDTINST M9000.6 (series), is published to promulgate Coast Guard Naval Engineering policy and selected procedures. Area commanders, unit commanding officers, and officers-in-charge responsible for the operation, maintenance, repair, and alteration of HM&E systems on cutters and standard boats shall comply with the guidance provided in this manual. In addition, Weapons officers and Weapons petty officers responsible to their respective commands for maintenance, repair, and alteration of Navy-owned ordnance systems shall also comply with the guidance provided in this manual.
 - 1. The NEM includes certain technical information not readily available in other reference documents. When adequate information is available from another source, this manual references the appropriate source. Such information will not be duplicated in this manual. Where information in the NEM and other reference documents conflict, the NEM shall take precedence.
 - 2. The NEM contains detail only to the extent necessary to clearly establish information reporting requirements and/or define testing, maintenance, repair, and engineering change procedures not sufficiently explained elsewhere. It shall be the responsibility of the Area Commander/Maintenance and Logistics Commander to develop and promulgate the detailed procedures necessary to execute this policy.
 - 3. The indexing format for the NEM generally conforms with the Ship Work Breakdown Structure (SWBS), NAVSEA 0900-LP-039-9010, as used in the Naval Ships Technical Manual (NSTM).
- **B.** <u>CHANGE PROCESS</u>. To ensure this Manual remains up-to-date, coincides with current practices, and continues to meet program needs, future change proposals shall be forwarded as specified in the following paragraphs.
 - 1. Change proposals may be originated at any organizational level. Proposals shall be submitted by letter to Commandant (G-SEN-1) via the cognizant MLC. Headquarter units and program managers may submit their proposals directly to G-SEN-1.
 - 2. MLCs shall review, endorse, and forward approved proposals to G-SEN-1. Disapproved requests shall be returned to the originator with an explanation for disapproval.
 - 3. Upon receipt, G-SEN-1 will initiate the following action:
 - a. Conduct a thorough investigation of each proposal to justify the need, identify possible conflicts with other directives and publications, and assess the affects of implementation.
 - b. Forward the proposal to the Engineering Logistics Center (ELC) technical point of contact for a technical review

- **B.** 4. The ELC responsibilities include:
 - a. Conduct a technical review of all change proposals.
 - b. Return any disapproved change request to the originator with an explanation for the disapproval. Maintain custody of all approved change requests for inclusion into the next change to the Manual.
 - c. When directed by G-SEN, the ELC shall collate all change proposals and supporting documentation into a package and forward to G-SEN for concurrent clearance routing and approval.
 - d. Make final corrections resulting from the concurrent clearance process, printing and distribution of changes will be an ELC function.
 - 5. G-SEN is the final approving authority and has overall responsibility for the Naval Engineering Manual.
 - a. All approved changes will be promulgated by future change notices to this Manual.
 - b. Changes that require immediate action shall be submitted directly to G-SEN-1 via message, information copy to the ELC and MLCs.
- **C. <u>DISTRIBUTION.</u>** Commandant (G-SEN) shall determine distribution of this Manual. Requests for changes to the distribution should be submitted on "Request for Allowance Change" (Form CG-5323), addressed to Commandant (G-CIM), via the chain of command.
- **D.** ORDERING. The Directives Publication and Reports Index (DPRI), COMDTNOTE 5600 provides guidance for ordering M9000.6 (series) and its associated changes. Form CG-4428, Request For Directives, shall be completed and forwarded to the appropriate stockpoint.
- **E. FORMS AND REPORTS.** Forms mentioned throughout this manual may be obtained as indicated in the Catalog of Forms, COMDTINST M5213.6 (series) or electronically in Jet Form Filler, for those currently on SWIII and Forms Plus for those on SWII.

CHAPTER 041. ENGINEERING CHANGES

A. GENERAL.

- 1. Scope. Engineering Changes are used by the Coast Guard to administer the configuration management process. This chapter defines and promulgates processes to request, develop, and implement Engineering Changes. Engineering Changes to electronic equipment under the authority of the Command, Control, Communications, and Computers Directorate (G-SC) shall follow the procedures outlined in the Electronics Manual, COMDTINST M10550.25 (series). Engineering Changes to Navy-owned ordnance equipment (ORDALTs) are promulgated by the Naval Sea System Command and are not within the scope of this chapter. Ordnance Manual, COMDTINST M8000.2 (series), Chapter 4, contains policy and procedures regarding ORDALTs.
- 2. <u>Intent of Engineering Changes</u>. Changes to cutters and boats which initially seem to be minor and simple, often accumulate to negatively impact and undermine existing configuration management and logistics support efforts. Due to the high cost of modifying platforms (e.g., material, design, drawings, logistic revisions, documentation, staff and production man hours, etc.), only Engineering Changes necessary to meet operational commitments, to correct crucial safety problems, or which result in significant cost savings are likely to be approved. Additionally, it must be realized that the resources used to accomplish Engineering Changes typically reduce funding available for maintenance. Many change requests have merit, but limited funding and lack of a clear, positive benefit to cost ratio across a cutter or boat class may prevent approval.
- 3. <u>Applicability</u>. The procedures set forth in this section apply to all cutters, standard boats, and Port Security Units. Standard boats are listed in Table 041-1. Changes to nonstandard boats must be approved by the respective District Commander. The authority to change barges is delegated to the MLCs who shall administer Barge Engineering Changes.

Table 041-1 List of Standard Boats

14' CBS	Cutter Boat, Small
18' CBM	Cutter Boat, Medium
22' CBL	Cutter Boat, Large
25' TPSB	Transportable Port Security Boat
26' MSB	Motor Surf Boat, MK V
30' SRB	Surf Rescue Boat
38' DPB	Deployable Pursuit Boat
41' UTB	Utility Boat
44' MLB	Motor Lifeboat
47' MLB	Motor Lifeboat
49' BUSL	Buoy Boat, Stern Loading
55' ANB	Aids to Navigation Boat

B. DEFINITIONS.

- 1. <u>Platform Engineering Change</u>. A modification to a cutter or standard boat that meets one of the following criteria:
 - a. Changes in weight or moment which significantly affect intact or damaged stability. Although each case is unique due to different limiting factors (e.g., hull strength, damaged stability, etc.), changes which create more than a 0.001 foot change in KG or add/delete more than 1/20 of 1% of the full load displacement (i.e. 112 lbs. per 100 tons of displacement), require a Platform Engineering Change. If in doubt about the effect of the intended weight change, request technical advice from the ELC platform manager or MLC Type Desk.
 - b. Changes to the hull structure, space allocations, watertight integrity, or compartmentation.
 - c. Changes to cutter or standard boat class mission characteristics/capability.
 - d. For standard boats, changes to outfitting requirements specified on approved Allowance Equipage Lists (AEL) and additions of new outfitting items that would be required to be placed on an AEL.
- 2. <u>System Engineering Change</u>. An Engineering Change that does not meet the criteria of a Platform Engineering Change and meets one of the following criteria:
 - a. A change to any system, part, component, or subassembly that is documented on an Allowance Parts List (APL).
 - b. A change to an approved system software, fluid, or paint system. Such changes will usually be to improve reliability, maintainability, or operational efficiency of the system or equipment.
 - c. A form, fit or functional change to a closure or fitting.
 - d. Damage control classification change.
- 3. <u>Prototype</u>. A full scale installation to evaluate the usefulness and effectiveness of an Engineering Change and/or to develop or modify installation specifications.
- C. ENGINEERING CHANGE PROCESS. All Engineering Changes shall be initiated through the submission of an Engineering Change Request (ECR). ECRs may originate at any organizational level. Figures 041-1, 041-2, and 041-3 are process flow chart depictions of the Engineering Change process. The process is completed in four phases: Concept, Validation, Development, and Deployment. These phases are described in detail below.

- **C. NOTE:** Configuration Change Forms (4790/CK) shall not be used as a tool to request Engineering Changes, but should only be used to notify the ELC of the completion of an authorized Engineering Change that affects the cutter/boat's configuration.
 - 1. <u>Concept Phase</u>. All ECRs must be submitted using ELC Form 9041, ENGINEERING CHANGE REQUEST (see Figure 041-4). Instructions are included with the form (see Figure 041-5). The form may be submitted electronically or on paper. The originator is encouraged to provide as much amplifying detail as possible to assist with the proper evaluation of the request.
 - a. Field Units and Area/District Staffs. Group units shall submit ECRs to the servicing MLC (v or t) via the Group and District Commander. Other field units shall submit ECRs to the servicing MLC (v or t) with an information copy to the operational commander. In either case, the originator shall send an information copy to the ELC (01) to ensure proper tracking of the request.
 - b. <u>MLCs</u>. MLCs shall evaluate each ECR from the perspective of requirements and impact on current operations. The MLC shall identify the recommended source of funding, recommend a category and classification, and complete a cost benefit analysis and weight estimate. The MLC shall endorse the request on the ECR form and forward to the ELC (01).
 - c. Headquarters Unit/Level Organizations. Although most ECRs are generated through the MLCs, the G-O facility managers, G-A, G-SC, ELC, Systems Maintenance Engineering Facilities (SMEF), Boat Standardization Teams, and other Headquarters unit/level organizations may also submit ECRs. These units/organizations shall complete the appropriate sections of the ECR Form. All ECRs shall be forwarded to the ELC(01).
 - d. Engineering Logistics Center. The ELC shall review and categorize all ECRs to determine the appropriate development and approval process. ECRs categorized as Platform Engineering Changes shall be forwarded to G-SEN for Headquarters Configuration Control Board (CCB) review and approval. ECRs categorized as System Engineering Changes to electronic equipment managed by a SMEF shall be forwarded to the appropriate SMEF for review, development, and approval. All other ECRs shall be retained at the ELC for review, development, and approval.
 - 2. <u>Validation, Development, and Deployment Phases</u>. The process used for these phases is dependent upon the category assigned to the ECR. These phases are described below for each category of ECR.
 - a. Platform Engineering Change. (Figure 041-1)

- C. 2. a. (1) Validation Phase. G-SEN manages the validation of Platform Engineering Changes at Headquarters and shall coordinate as needed with the G-O facility manager and G-SC from the perspective of requirements and impact on future operations. Resource funding requirements shall be determined and approved during this phase of the process. The Commandant CCB shall document the results of the CCB on the ECR form and forward as appropriate. Both concept and funding approval must be obtained. Although concept approval can be determined from the CCB, funding approval may be delayed for POP, RP, OPSTAGE determinations. Disapproved Platform Engineering Change requests shall be returned to the originator (copy to ELC) with an explanation of the reason for the disapproval. NOTE: ECRs without funding support shall not be approved.
 - (2) Development Phase. During this phase, the Platform Engineering Change request is prepared for implementation from the perspective of configuration management, life cycle logistics support and installation. The ELC or Systems Maintenance Engineering Facility (SMEF) is primarily responsible for this phase.
 - (a) Platform Engineering Change requests for electronic systems under the G-SCE program shall be forwarded from G-SEN to the appropriate SMEF for technical development. Upon completion of the technical package, the SMEF shall forward the package to the ELC for final development. The technical package shall be forwarded to the ELC in the standard Engineering Change format (see paragraph (d) below).
 - (b) Platform Engineering Change requests for all other systems shall be forwarded from G-SEN to the ELC for development.
 - (c) Prototypes: See paragraph C.3.
 - (d) A fully developed Platform Engineering Change (CGHQ 3379) is comprised of a cover sheet and sufficient information to directly accomplish the Engineering Change, or to support development of a contract specification. This information shall be formatted into the following eighteen areas, which reflect the general Engineering Change description, installation specifications, and the ILS elements.

Purpose

Background

References

C. 2. a. (2) (d) Material Required

Equipment Removals/Relocation/Disposal

Equipment Installations

Quality Control/Quality Assurance

Safety

Stability Impact

Funding Requirements and Sources

Parts Support

Special Tools/Test Equipment

Technical Information

Manuals

Drawings

Preventive Maintenance

Training

Documentation

Reprocurement Data

Repair Program

- (e) The final Platform Engineering Change package shall be reviewed for concurrent clearance by the MLCs, G-SEN and associated G-O facility managers. G-SCE and SMEFs are included for electronic system Engineering Changes.
- (f) Proposed Platform Engineering Changes shall be returned to the Headquarters CCB if the development leads to changes in cost or scope beyond the funding limitation and concept approved by the CCB.
- (3) Deployment Phase. Once concurrent clearance feedback issues are resolved, the ELC shall sign the Platform Engineering Change and distribute it to appropriate commands.
- b. System Engineering Change. (Figure 041-2, 041-3)
 - (1) Validation Phase. The ELC or SMEF manages this phase of the process. If funding is required from headquarters, the ELC/SMEF shall consult with Headquarters to determine the availability of funding. System Engineering Change requests shall be reviewed from the perspective of technical feasibility, life cycle costs, and availability of funding.

- C. 2. b. (1) Disapproved System Engineering Change requests shall be returned to the originator with an explanation of the reason for the disapproval. SMEFs shall send the ELC(01) an info copy of all ECR disapproval notices. **NOTE: ECRs without funding support shall not be approved for development.**
 - (2) Development Phase. The ELC or SMEF shall develop all approved System Engineering Change requests. These shall be developed, formatted, and approved in the same way as Platform Engineering Changes. System Engineering Changes developed by a SMEF will have a concurrent clearance review limited to the MLCs (v/t) and the ELC. System Engineering Changes developed by the ELC shall have a concurrent clearance review limited to the MLCs (v). See paragraph C.3. regarding prototypes.
 - (3) Deployment Phase. Once concurrent clearance feedback issues are resolved, the ELC or SMEF shall sign the System Engineering Change and distribute it to appropriate commands.
 - 3. Prototypes. The Engineering Logistics Center (ELC) shall be the sole Engineering Change prototype approving authority. Figures 041-1, 041-2, and 041-3 depicts where prototypes fit into the Engineering Change process. Requests for prototypes should be incorporated into the Engineering Change request. Upon receipt of the prototype request, the ELC shall evaluate the technical impact of the request and, if appropriate and after consultation with the originator, issue a prototype authorization letter. Prototype authorization letters shall typically be issued to the UTB Systems Center for UTBs and to the National Motor Lifeboat School (NMLBS) for MLBs. Prototype authorization letters for other boat and cutter classes will typically be issued to the MLC or SMEF. The letter shall include a Prototype Evaluation Plan (PEP). The PEP shall be completed by the unit on which the prototype was installed and returned to the ELC with a copy to other activities involved in the prototype (i.e. SMEF, MLC, etc.). Because prototypes are often an integral part of the Engineering Change development process, it is critical that the PEP be completed and returned. Unsuccessful prototypes shall be removed after completion of the evaluation period. The removal shall be funded by the organization that funded the installation.
 - 4. <u>Emergency Procedures</u>. Circumstances requiring immediate action to meet emergency operational commitments or recently discovered safety hazards may preclude use of the normal ECR process. In these cases, the MLC or HQ unit shall submit the ECR (ELC Form 9041) and Configuration Change Form (4790/CK) by message, e-mail or express mail to ELC (01). Cost data shall be provided to the extent that it is available without holding up the resolution of the emergency situation. The approval decision shall be made within five working days of receipt. This abbreviated procedure shall only be used to meet vital operation commitments or resolve immediate safety or health threats. Regardless of the urgency of the Engineering Change, the full development of the ECR must eventually be accomplished as outlined above.

D. ENGINEERING CHANGE ADMINISTRATION.

1. <u>Funding</u>. Funding for engineering changes will be determined through the ECR process as outlined in this chapter. It is anticipated that funding will come from one of three major sources as outlined below:

Funding Source	<u>Low Cost</u>	Medium Cost	High Cost
Unit AFC 30	X		
MLC AFC 4X		X	
Program Manager (3X/4X/AC&I)			X

- **NOTE 1:** Low cost engineering changes are those changes which have a total cost (including design, material, and installation) less than or equal to the MLC established AFC 30 CSMP funding threshold for the particular cutter class.
- **NOTE 2:** Medium cost engineering changes are those changes which have a total cost (including design, material, and installation) greater than the MLC established AFC 30 CSMP funding threshold but not to exceed 5% of the affected cutter class annual AFC 45 standard support level (SSL).
- NOTE 3: High cost engineering changes are those changes which have a total cost (including design, material, and installation) greater than 5% of the affected cutter class annual AFC 45 standard support level (SSL). AC&I threshold levels are listed in the Financial Resource Management Manual (FRMM), COMDTINST M7100.3 (Series).
- 2. <u>Tracking</u>. The ELC shall maintain an ECR database that tracks the status of all ECRs. In order for the ELC to keep this database complete and accurate, ECR status information shall be submitted to the ELC as noted in Figure 041-1. The database shall be maintained and be available on the ELC's intranet site (http://cgweb.elcbalt.uscg.mil). Until all units have intranet access, specific unit queries shall be forwarded to the cognizant MLC. The database shall include the following information:
 - a. ELC Case File Number/Tracking Number
 - b. Originator
 - c. Title
 - d. Date Submitted by Originator
 - e. Prototype Status (as applicable): Unit/date installed, due & receipt dates for prototype evaluation results.
 - f. Engineering Change Development Plan (HM&E only)
 - g. Comments

- D. 3. Engineering Change Numbering. Engineering Changes shall be numbered using three groups of letters and numbers. The first group defines the cutter or boat class to which the Engineering Change is applicable. The second group defines the classification of the Engineering Change. The third group is the serial number of the Engineering Change for the particular cutter or boat class (e.g., 110A-B-010, 41UTB-A-005). The ELC shall issue all Engineering Change numbers. NOTE: This is the same system used for the old Ship and Boat Alteration system and serial numbers will carry forward from that system.
 - 4. <u>Engineering Change Classification</u>. Platform Engineering Changes shall be classified by G-SEN. System Engineering Changes shall be classified by the ELC or SMEF.
 - a. Class A. Class A Engineering Changes are of the utmost importance for correcting conditions that impair the service characteristics of a cutter, its safety, or the health of its personnel. Class A Engineering Changes shall be considered to be equivalent to urgent repairs and shall be accomplished at the first opportunity, but in no case later than one full availability cycle after the Engineering Change is issued.
 - b. <u>Class B.</u> Class B Engineering Changes are less urgent than Class A Engineering Changes, but are of importance by reason of the resultant improvement in the service characteristics of the cutter, the health and comfort of its personnel, or notable improvements in efficiency and economy of operations and upkeep. Class B Engineering Changes shall be accomplished within two availability cycles from the time the Engineering Change is issued.
 - c. Class C. Class C Engineering Changes are to be accomplished upon the occurrence of a specific event (e.g., contingent upon receipt of Commandant funding or upon the need to renew a specific item). This class of change describes a future configuration such as the use of an improved joiner bulkhead panel or renewal of a reliable but obsolete pump. These changes are either impossible or undesirable to accomplish quickly on all vessels of a class. Delay in accomplishing this class of Engineering Change will not impact operational capability. The Engineering Change will identify the contingency. Once the contingent aspect of the Engineering Change has occurred, the Engineering Change becomes mandatory and must be completed within two years.

5. Reports and Records.

a. Report of Completion. Upon completion of an Engineering Change, the unit shall fill in the completion section of the Engineering Change authorization form (CGHQ 3379) and forward two signed copies, one to the ELC and one to the servicing MLC. The unit will also retain a copy in their files. If the Engineering Change pertains to an electronic system, a copy shall also be D. 5. a. forwarded to G-SCE. Cutters which are MICA/CALMS supported shall also submit a Configuration Change Form (Form 4790/CK) when directed to do so by the Engineering Change. A unit that receives a class related Engineering Change that does not apply to their particular boat/cutter shall note the same in the completion section of the form and send the signed copies as noted above.

b. Records.

- (1) <u>Units</u>. Each unit shall maintain a file of pending and completed Engineering Changes as part of the general engineering files, IAW Chapter 090 of this manual. Appropriate entries shall be made in the Machinery History, Hull History, etc. Vessels with CMPlus will update the database IAW the CMPlus user's guide to reflect completion of Engineering Changes.
- (2) <u>ELC</u>. The ELC shall maintain the master Engineering Change file for all cutter and boat classes. This file will contain the original signed copies of each Engineering Change issued. The ELC shall also maintain a case file for each Engineering Change proposal. This file shall be a historical repository of all relevant documents associated with the Engineering Change issue.

E. TESTING OF COMMERCIAL PRODUCTS.

- 1. <u>Unsolicited Proposals</u>. Manufacturer's agents often approach field commands to propose tests and trials of new products or equipment. While Coast Guard policy is to continually seek improvements, cutters and boats shall not be used indiscriminately by vendors to field test unproven products or to generate product endorsements. Coast Guard Acquisition Procedures (CGAP), COMDTINST M4200.19 (series) provides guidance for processing and handling unsolicited proposals.
- 2. New Products or Equipment. Coast Guard initiated proposals for testing proprietary products or materials shall be processed using the same procedures detailed under the Engineering Change Process paragraph of this chapter.

Platform Engineering Change Process

NOTE: BOLD BLOCKS ARE THE ENTRY POINTS INTO THE PROCESS

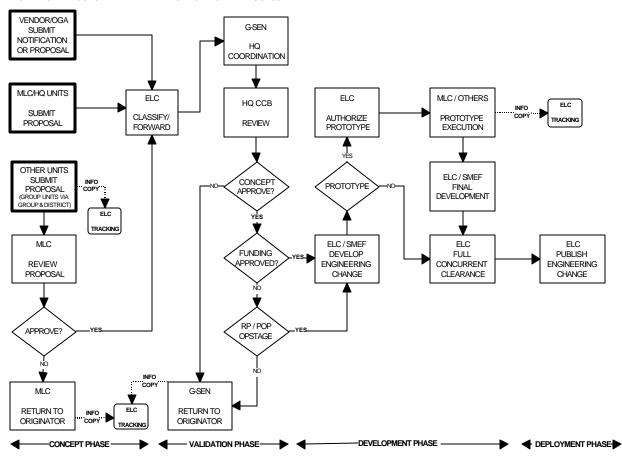


Figure 041-1

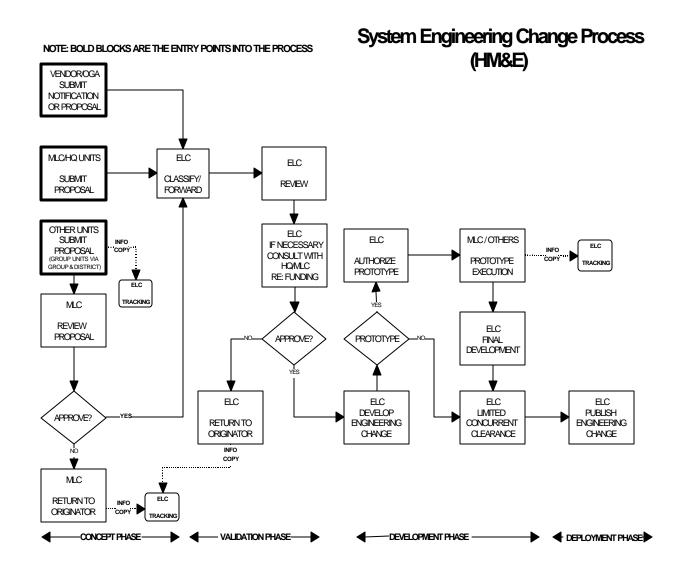


Figure 041-2

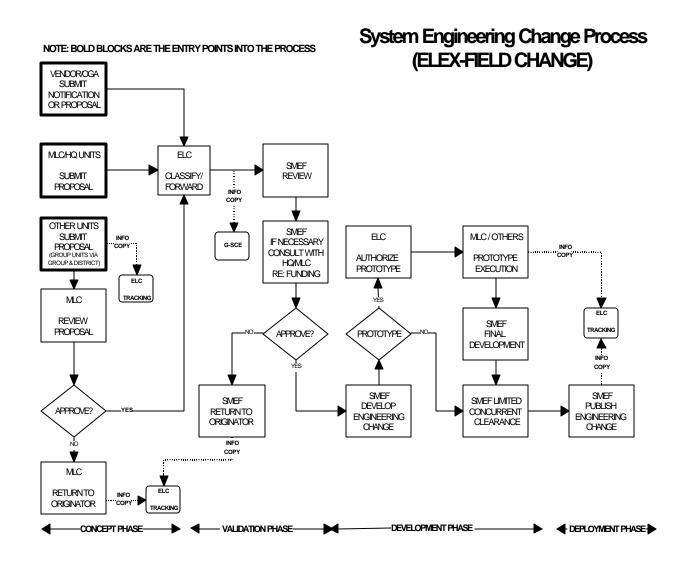


Figure 041-3

DEPARTMENT OF TRANSPORTATION U.S. COAST GUARD ELC 9041 (Rev 06/99)

ENGINEERING CHANGE REQUEST

(Instructions on page 2)

ELC CASE FILE NUMBER
DATE ENTERED:

ELC USE ONLY

ORIGINA	ATING UNIT			
UNIT NAME:	UNIT POC/TE	L#:		
UNIT SIGNATURE/DATE:	E-MAIL:			
TITLE:	1			
BACKGROUND/PURPOSE:				
IMPACT ON CUTTER/BOAT MISSION CHARACTERISTICS/CA	APABILITIES (IF A	ANY):		
ATTACHMENTS/REFERENCES:				
Route to servicing MLC, with copy to ELC (01). Group units route	to servicing MLC	with copy to ELC(0	1) via Group ar	nd District
HO UNIT	S AND MLCs			
SIGNATURE:	2111,2111100			
APPROVE DISAPPROVE (comments required) TITLE:			DATE SI	GNED:
Weight Estimate LBS LT CENTE	R OF GRAVITY I	LOCATION		
		ERPENDICLAR:		
	ABOVE BASELI			
	PORT/STBD OF			
PROTOTYPE RECOMMENDED? YES NO			NO	
RECOMMENDED ECR CATEGORY PLATFORM		SYSTEM _		
RECOMMENDED ECR CLASSIFICATION A LIST HIJL I. S. A FEE COTED (i. a. all 210 a. a. 722, 725)	1	3∐	C	
LIST HULLS AFFECTED (i.e. all 210s, or 723-725)	ED FUNDING SO	IIDCE		
AFC: 30 (unit) 30 (program) 42			45 (MLC)	OTHER
ESTIMATED ONE-TIME COST	30		45 (MLC) <u> </u>	OTHER
ESTIMATED ANNUAL RECURRING COST(SAVING)	30		45	OTHER
COMMENTS		l.		
Route approved ECRs to ELC (01). Route disapproved ECRs back to	to originator with a	a copy to the ELC (0	1).	
ENGINEERING I	OGISTICS CENT	ER		
CATEGORY: PLATFORM		SYSTEM		
DISAPPROVE (comments required) SIGNATURE:				
FORWARDED TO: TITLE:			DATE SI	GNED:
COMMENTS:			•	

Route all Platform ECRs to G-SEN. Route all System ECRs for SMEF –managed systems to appropriate SMEF (copy to G-SCE). If disapproved, route back to originator.

Figure 041-4

DEPARTMENT OF TRANSPORTATION U.S. COAST GUARD ELC 9041 (Rev 06/99)

ENGINEERING CHANGE REQUEST

Page 2

G-SEN (PLATFORM ENGINEERING CHANGES ONLY)

APPROVED FOR DEVELOPMENT	SIGNATURE:			
DISAPPROVE (comments required)	TITLE:		DATE SIGNED:	
ENGINEERING CHANGE CLASS	A 🗌	В	\Box	
FUNDING SOURCE:				
AFC: 30 (unit) 30 (program	m)	45 (POP) 45	(MLC) OTHER	
COMMENTS (include comments that address scope and funding boundaries):				

Routing: APPROVED: For HM&E Forward to ELC (01); ELECTRONICS, forward to SMEF w/copy to ELC (01). DISAPPROVED: Return to originator, with copy to ELC (01)

INSTRUCTIONS

Much of this form is self explanatory, but the following is provided to further describe selected sections of the form. Continue on blank sheet and indicate appropriate block headings.

Originating Unit: Fill in section titled "Originating Unit" and if known, the weight and cost data in the sect

Background/Purpose: Provide a brief description of the problem and a recommendation of how you feel it should be corrected. You are encouraged to attach sketches, photos, etc that support your explanation. Digital photos compatible with SWIII are acceptable. A proper evaluation of the request is dependent on the accuracy and detail of the information provided here.

Impact on Cutter/Boat Mission Characteristics/Capabilities: Describe how the recommended change will impact the cutter or boats mission characteristics. Examples of mission characteristics include fuel consumption, speed, range, crew size, etc.

Attachments/References: List any attachments you have included and list any references that you feel apply to this change. References may include manufacturer's technical publications, Maintenance Procedure Cards, drawings, etc.

Headquarters Units & MLCs: Fill in the section titled "HQ Units and MLCs". Forward all ECRs to the ELC (01).

Recommended Engineering Change Class: Check A, B, or C to match definition provided in the COMDTINST M9000.6 (series), chapter 041.

List Hulls Effected: Provide a list of applicable hull numbers. If it applies to an entire class, then just the class designation.

Estimated One-Time Costs (Savings): Provide a total development/installation cost estimate.

Estimated Annual Recurring Costs(Savings): Provide an estimate of the change in recurring costs associated with this change. If the change results in a savings, indicate so by using parenthesis around the estimate.

G-SEN: Comments shall provide scope and funding boundaries beyond which the ELC or SMEF would be required to resubmit to the ECR to the HQ CCB.

Figure 041-5

CHAPTER 042. SPECIFICATIONS AND STANDARDS

- **A. <u>HIERARCHY OF GUIDANCE.</u>** In general, Naval Engineering design and maintenance decisions shall be based on the following guidance, in descending order of priority:
 - 1. Naval Engineering Manual (NEM), COMDTINST M9000.6 (series), and any reference cited by NEM as mandatory.
 - 2. Other compulsory COMDTINST, generally related to safety, such as Asbestos Exposure Control Manual, COMDTINST M6260.16 (series).
 - 3. Compulsory Federal Law and regulation, generally related to safety, such as Occupational Safety and Health Administration (OSHA) standards.
 - 4. Naval Ship's Technical Manuals (NSTM). NEM references NSTM as a compulsory reference, with certain exceptions, listed later in this chapter.
 - 5. "General Specifications for Overhaul of Surface Ships of the US Navy" (GSO). GSO is the non-compulsory reference of choice for cutter repair and modification.
 - 6. DoD adopted Non-governmental standardization documents
 - 7. DODISS standardization documents
 - 8. New construction specifications for Coast Guard Cutters. These archival documents are often a rich source of guidance for modifications and maintenance. There are advantages to using the specifications for the cutter in question, and to using later specifications for the Coast Guard's most recent acquisitions.
 - 9. Various non-compulsory titles of the Code of Federal Regulations. In particular 46 CFR, Chapter I, subchapters F and J. Subchapters C, D, H, I, S and T are of lesser applicability.
 - 10. Other Non-governmental standardization documents, such as American Bureau of Shipping Rules for Building and Classing Steel Ships.
- **REFERENCED SPECIFICATIONS.** MILSPECS, MILSTDS, MLC Standard Specs, and other documents are frequently used as references in construction and repair specifications. The details of referenced specifications shall be closely scrutinized by specification authors to ensure compatibility with the parent document and that no conflicting requirements are generated, and to minimize "layering". In addition to their title, referenced specifications shall be described by revision date.
- **C. APPLICABILITY OF U.S. NAVY GENSPECS.** There are three types of U.S. Navy GENSPECS:
 - 1. "General Specifications for Ships of the U.S. Navy". These specifications are not intended for maintenance, but contain important design criteria which may be used as a guide in the preparation of cutter construction specifications. Last revision is MAY 94.

- **C.** 2. "General Specifications for Overhaul of Surface Ships". These specifications may be used as a guide in researching proposed engineering changes and solutions to existing design difficulties.
 - 3. "Commercial General Specifications for T-Ships of the U.S. Navy". These Specifications do not apply to construction, alteration or maintenance of Coast Guard cutters.
- **D. EXCEPTIONS.** These specifications are by no means the sole criteria upon which Coast Guard cutters are designed. The cost of making changes to existing cutters in order to comply with the latest edition of GENSPECS must be weighed against the advantages that may result. In some cases, the cost may far outweigh the gain. Therefore, no cutter shall be required to effect changes, additions, or alterations to existing condition solely as a result of the updating of the GENSPECS. Changes deemed important by the Commandant will be published as Engineering Changes or changes to technical publications.

E. NAVAL SHIPS TECHNICAL MANUALS (NSTM).

- 1. <u>Applicability</u>. The NSTM contains, in general, the best engineering and damage control practices known today; however, it is not intended as authority to perform engineering changes, nor shall it be used as a guide for submission of engineering or hull reports. The instructions and information it contains shall be used with the following exceptions:
 - a. When information in the NSTM conflicts with information in a manufacturer's instruction book for a certain item of equipment, the manufacturer's instruction book shall apply.
 - b. When information in the NSTM conflicts with information in the Naval Engineering Manual or Commandant-issued directives, the Naval Engineering Manual or directive shall apply.
 - c. When information in the NSTM conflicts with information published in various Naval Engineering Technical Publications, the Technical Publication shall apply.
- 2. <u>Distribution</u>. Direct distribution of selected chapters of the NSTM is performed by the Naval Weapon System Engineering Station, Port Hueneme, CA. Commandant (G-SEN) determines initial distribution for new units. Requests for changes to the distribution should be submitted on a "Request for Allowance Change" form, CG-5323.
- 3. Ordering. A complete set of NSTM (Hardcopy or CD-ROM) or individual NSTM chapters (Hardcopy only) can be ordered from the Aviation Supply Office (ASO), Naval Publications & Forms Directorate Code 10363, 5801 Tabor Ave., Philadelphia, PA 19120-5099. Stock numbers for ordering a complete set or individual chapters of NSTM are outlined in NAVSUP 2002, Navy Stock List of Publications & Forms or NSTM Chapter 001, General NSTM Publications Index and User Guide.

- **F.** <u>LIMITED RIGHTS INFORMATION</u>. Technical data such as engineering drawings, cutter information book, and vendor's manuals pertaining to certain Coast Guard cutters and boats contain some proprietary information. The Coast Guard has only limited rights to disseminate that information to the general public.
 - 1. Each piece or page of data that is considered proprietary is marked with a Limited Rights Legend. This legend lists the contract number and contractor's name and explains which parts of the data are protected by Limited Rights.
 - 2. Commands maintaining Limited Rights material shall not release, disclose, or allow the use of this material in whole or in part outside the government. Exceptions are normally granted for emergency, repair, modification, or overhaul work related to the affected cutter or boat. Units should consult with their MLC contracting/legal staff prior to releasing material.

Page Intentionally Left Blank

CHAPTER 044. MACHINERY SPACE WATCH REQUIREMENTS

- **A. GENERAL.** Engineer Officers and Engineer Petty Officers (EO/EPO) are responsible for developing watch standing policies and procedures which establish and maintain the integrity and safe operation of the cutter's or boat's mechanical plant.
- B. <u>INSPECTIONS OF OPERATING MACHINERY.</u> All cutter and boat operating machinery shall be inspected every hour, and readings shall be recorded. Cutters equipped with video and electronic control and monitoring systems that in addition to monitoring spaces for fire and flooding, can alert the watchstander of abnormal system parameters prior to failure, can reduce inspection requirements on operating machinery to at least once every four hours. Cutters 110 feet and below can reduce inspection requirements while in port. Operating machinery must be checked at least once every four hours when in port, on electrical shore-tie between the hours of 0600 and 2200. Between the hours of 2200 and 0600, in port inspection requirements can be further reduced if all berthing areas are equipped with adequate installed flooding and fire sensor alarms to alert a sleeping watchstander, provided the watchstander is on board at all times.
- C. <u>UNATTENDED MAIN PROPULSION MACHINERY SPACES</u>. Due to crew size or level of automation, propulsion machinery on the following classes of cutters and standard boats may run unattended:

Class	<u>Type</u>
26' MSB	Motor Surfboat, MK V
30' SRB	Surf Rescue Boat
41' UTB	Utility Boat
44' MLB	Motor Lifeboat
47' MLB	Motor Lifeboat
49' BUSL	Buoy Boat, Stern Loading
55' ANB	Aids to Navigation Boat
65' WLR	Buoy Tender, River
65' WLI	Buoy Tender, Inland
65' WYTL	Harbor Tug, Small
75' WLR	Buoy Tender, River
75' WLIC	Construction Tender, Inland
82' WPB	Patrol Boat, Medium
87' WPB	Patrol Boat, Medium
100' WLI	Buoy Tender, Inland
110' WPB	Patrol Boat, Medium
140' WTGB	Harbor Tug, Icebreaking (ECC is attended)
175' WLM	Buoy Tender, Coastal
225' WLB	Buoy Tender, Seagoing (ECC is attended)
400' WAGB	Icebreaker(ECC is attended)
420' WAGB	Icebreaker(ECC is attended)

NOTE: ALL propulsion machinery shall be attended during main engine start, warm-up/securing, and during unusual operating conditions.

Page Intentionally Left Blank

CHAPTER 074. WELDING

A. GROUNDING OF WELDING MACHINES. For information on grounding of welding machines when welding on or from waterborne cutters, see NSTM 074, Volume 1.

B. WELDING ON BOARD CUTTERS AND BOATS.

- 1. Welding by Coast Guard Personnel. All welding and allied processes on cutters and boats performed by Coast Guard personnel shall be conducted in accordance with NSTM Chapter 074, Volume 1. Prior to welding, cutting, or burning in voids, tanks, closed compartments, or poorly ventilated spaces, the spaces shall be determined to be Gas Free, Safe for Personnel and Safe for Hot Work per NSTM Chapter 074, Volume 3 and Technical Guide for Respiratory Protection, COMDTINST M6260.2 (series).
- 2. <u>Welding by Contractor Personnel</u>. All welding and allied processes performed by commercial contractors on cutters and boats shall be conducted in accordance with the MLC specifications that describe those processes.
- C. <u>DEPLOYMENT REPAIRS</u>. When structural welding repairs are made during underway periods, the commanding officer/officer-in-charge must notify and have the repair procedure approved by Maintenance and Logistics Command (v) and inspected upon return to port.

Page Intentionally Left Blank

CHAPTER 077. SAFETY

- **A. GENERAL.** Safety must and shall be considered an integral part of all Coast Guard evolutions. This chapter provides general guidelines in certain areas, but is not intended to be all-inclusive. Commanding Officers and Officers-in-Charge (CO/OIC) shall ensure that safety requirements and programs are established for the protection of personnel and property under their command. Additional guidance concerning safety related subjects may be found by referring to applicable Naval Ship's Technical Manuals (NSTM) and the following publications:
 - 1. Technical Guide: Practices for Respiratory Protection, COMDTINST M6260.2 (series).
 - 2. Safety and Environmental Health Manual, COMDTINST M5100.47 (series).
 - 3. Cutter Heat Stress Program, COMDTINST M6260.17 (series).
 - 4. Hazard Communication for Workplace Materials, COMDTINST 6260.21 (series).
 - 5. Operational Risk Management, COMDTINST 3500.3 (series)

B. GAS FREE ENGINEERING/CONFINED SPACE ENTRY.

- NSTM Chapter 074 Volume 3, Gas Free Engineering, provides detailed guidance on the testing, inspection, evaluation, and certification of entry into or work in a confined or enclosed space.
 All Coast Guard cutters and boats shall comply with the information and procedures outlined in NSTM Chapter 074 Volume 3.
- 2. All confined spaces shall be considered hazardous. Entry or work in confined spaces is prohibited until such spaces have been inspected, tested, and issued a Navy gas free certification and test log by a certified gas free engineer or gas free engineer petty officer. Navy gas free certification and test log forms are available through the National Stock System.
- 3. Coast Guard gas free engineers /gas free engineer petty officers may certify compartments gas free on commercial vessels only when Coast Guard military personnel must perform in operations on that vessel and a marine chemist is not available. In accordance with Maritime Law Enforcement Manual, COMDTINST M16247.1 (series), which states, "Boarding personnel shall not enter any confined spaces that are suspected of hazardous material contamination or oxygen depletion until a qualified person has tested the space and certified it safe to enter". Coast Guard gas free engineers/gas free engineer petty officers may, by the direction of the CO/OIC, certify spaces safe for entry on non Coast Guard vessels.
- 4. For commercial contract work that requires entry into and/or work in a confined or enclosed space, contractors shall provide a National Fire Protection Association (NFPA) certified marine chemist, industrial hygienist, or other qualified or competent person, as specified under the provisions of 29 Code of Federal Regulations (CFR) 1915.
 - **NOTE 1:** Coast Guard gas free engineers/gas free engineer petty officers are not authorized to certify spaces as gas free (hot work or cold work) for commercial contract work.

- **B.** 4. **NOTE 2:** Coast Guard gas free engineers/gas free engineer petty officers are authorized to certify spaces for cold work only for Coast Guard civilian/DOD civilian personnel.
 - NOTE 3: Entry into any space suspected of or determined to be Immediately Dangerous to Life and Health (IDLH) is STRICTLY PROHIBITED, EXCEPT when authorized by the CO/OIC during EXTREME EMERGENCY (i.e. rescue efforts, emergency repairs, damage control, and firefighting). Prior to entry, personnel shall be outfitted with the proper respiratory protection as defined by NSTM Chapter 074 Volume 3.
 - 5. Requirements for the education and certification of Coast guard gas free engineers/gas free engineer petty officers as listed in NSTM Chapter 074 Volume 3, shall be adhered to. CO/OICs are responsible for written certification and re-certification of their units' gas free engineer/gas free engineer petty officer. The following waivers are only applicable to afloat Engineer Petty Officers (EPO) (E-6 thru E-9);
 - a. E-6 EPOs assigned to a cutter and meeting the educational requirements set forth in NSTM Chapter 074 Volume 3 are authorized to be certified as Gas Free Engineers.
 - b. All EPOs assigned to cutters are eligible for certification immediately upon satisfactory completion of GFE school. The 40-hour OJT requirement is waived.
 - c. EPOs assigned to cutters must issue at least 1 gas free engineer/gas free engineer petty officer certificate per quarter to keep certifications current, vice 10 per year as stated in NSTM Chapter 074 Volume 3.
 - d. EPOs must be re-certified as gas free engineer/gas free engineer petty officers when assigned to a different cutter. For re-certification purposes, one gas free engineer/gas free engineer petty officer certificate must be issued in the presence of a certified gas free engineer/gas free engineer petty officer.

C. WALK IN REFRIGERATOR ALARM AND SAFETY SYSTEMS.

- 1. Policy. All walk-in reefer boxes, lockers, freezers and chill spaces on cutters shall have door latches and locks that can be opened by a release mechanism located inside the space. This requirement is made to allow a person who is accidentally locked inside to open the door and escape. Additionally, all reefer spaces shall be outfitted with an electrical alarm system that can be manually actuated by an individual locked inside. This electrical alarm system shall not relax the requirement for maintaining a completely functional reefer door lock, latch, manual alarm, and mechanical release mechanism.
- 2. <u>Requirements</u>. All walk-in reefer boxes, lockers, freezers and chill spaces on cutters shall have an electrical alarm system installed. The alarm system shall consist of an electrical switch in each reefer space and two alarm bells with red lens lamp indicators. One alarm bell with lamp indicator shall be located on the mess deck; the other shall be located outside the entrances to

- C. 2. the reefer spaces. The manual operation of any switch shall sound the alarm, to indicate that someone is locked in a reefer space. Each switch shall be mounted on the bulkhead just inside the door to each reefer space. A sign shall be mounted adjacent to each alarm switch, reading "ALARM SWITCH PERSON LOCKED IN REEFER." The alarm bells with lamp indicators shall be bulkhead-mounted, with a sign mounted adjacent to each, reading "PERSON LOCKED IN REEFER."
- **D.** <u>INSTALLED AND PORTABLE EDUCTORS</u>. To prevent asphyxiation to personnel and/or inadvertent flooding of a compartment, extreme caution must be taken when operating both installed and portable eductors.
 - 1. <u>Asphyxiation</u>. In addition to removing water and oily waste from a compartment, the suction created by an eductor can also remove the air supply to a compartment. Therefore, prior to using an eductor to take suction from a space, ensure that there is adequate ventilation in the compartment being dewatered. Using an eductor to take suction on a space that does not have adequate ventilation (air supply), can cause asphyxiation (death) of persons in the compartment. Prior to using a P-250 to dewater a space, extreme caution must be exercised to ensure that the exhaust hose is properly sealed and that carbon monoxide gas is carried into the open atmosphere.
 - 2. <u>Inadvertent Flooding</u>. Installed eductors are operated by water pressure from the firemain. Improper valve alignment and insufficient firemain pressure may cause an eductor to operate in reverse and flood (not dewater) the compartment. CO/OICs shall ensure that their personnel are properly trained in the operation and securing of installed eductor systems. In addition, the following label plate shall be installed on or immediately adjacent to each eductor overboard discharge valve:

BILGE EDUCTOR SKIN VALVE - KEEP CLOSED EXCEPT WHEN BILGES ARE BEING PUMPED

MAINTAIN WATCH IN COMPARTMENT UNTIL COMPARTMENT IS DEWATERED AND THE EDUCTOR IS PROPERLY SECURED

- E. MANDATORY SAFETY AND OCCUPATIONAL HEALTH BRIEFING. CO/OICs shall ensure that all personnel on board cutters entering a shipyard or commercial dockside availability are instructed in industrial safety requirements. Prior to the commencement of work in an availability, cutter personnel, NESU representatives, industrial activity safety managers and key supervisors shall conduct a safety and occupational health briefing to ensure that safety standards and procedures are consistent and satisfactory to all parties. MLC (kse) staffs have established standard pre-shipyard or commercial dockside availability briefings and are available to assist the unit meet this requirement upon request. It is highly recommended that this be documented in locally maintained individual training records.
- **F. ELECTRICAL SAFETY PROGRAM.** Each command shall develop a comprehensive electrical safety program As a minimum, the program shall contain the following elements:
 - 1. Written designation of a command Electrical Safety Officer (ESO).

- **F.** 2. Comprehensive training for all hands in hazards and safety precautions pertaining to shipboard electrical systems, equipment, and personal electrical/electronic equipment.
 - 3. The Electrical Safety Program is also a required program within the Cutter Organizational Manual, Section 430, as described in Cutter Organization Manual, COMDTINST M5400.16 (Series).
 - 4. Periodic inspection and testing of electrical equipment, tools, and electrical safety equipment to detect and correct potentially unsafe conditions. Accurate inventories of all such equipment must be maintained. CMplus units shall create and schedule local PMS actions for periodic inspections and testing of electrical and electronic equipment that does not have formal maintenance procedures. The inventory module, may be utilized to maintain the inventory. NOTE: Electrical safety checks of personal electrical and electronic equipment are not required.
 - 5. A 25,000 volt safety shorting probe shall be conspicuously located in all engineering spaces containing switchboards or other installed high voltage electrical equipment. Shorting probes are used to electrically discharge secured equipment prior to performing maintenance or repairs. NSTM Chapter 300, Table 300-1, provides procurement information on the 25,000 volt shorting probe.
 - 6. Electronics Manual, COMDTINST M10550.25 (series) shall be used to assess the electrical integrity of workshops. Workbench equipment, insulation sheets, and electric insulating matting shall comply with the materials listed in Electronics Manual, COMDTINST M10550.25 (series) and Chapter 634 of this manual.
- **G.** EQUIPMENT TAG-OUT PROCEDURES. Equipment Tag-Out Procedures, COMDTINST 9077.1 (series) shall be used to implement an equipment tag-out procedure aboard all Coast Guard cutters and boats. The instruction describes a standardized tag-out procedure for Coast Guard cutters and boats. This procedure shall be used to ensure the safety of personnel and to prevent improper operation of systems or equipment when the system or equipment is isolated or in an abnormal condition because of preventive maintenance or a casualty. The procedure is also used to prevent improper operation of systems or equipment when safety devices such as locking devices, seals, or blank flanges are installed for testing, maintenance, or casualty isolation.
 - 1. The equipment tag-out procedure also provides for the operation of systems, or equipment, when instrumentation is unreliable or is not in normal operating condition. It is similar in nature to the usual tag out procedure except that labels in lieu of tags are used to indicate instrument status.
 - 2. The procedures described in the instruction may be applicable for shore units. However, when conflict occurs OSHA requirements shall take precedence, (e.g., lock out procedures).

H. USE OF DIESEL FUEL AS A SOLVENT.

- 1. Diesel fuel may be used as a solvent on board cutters if the following precautions are observed.
 - a. Keep away from heat or open flame.

- **H.** 1. b. Provide adequate ventilation in enclosed spaces.
 - c. When skin contact is possible, wear impervious chemical or nitrile rubber gloves.
 - d. Goggles shall be worn at all times.
 - e. Skin that becomes contaminated with diesel fuel should be promptly washed with soap or a mild detergent and water.
 - f. Don't atomize fuel when using it as a solvent.
 - 2. There are a number of solvents available which may be considered as alternatives to diesel fuel for cleaning and degreasing operations if the precautions listed for diesel fuel are not feasible. Among these are PD-680, Type II (flashpoint 140 deg F) and Biotect "Hi-Solv" (flashpoint 200 deg F). These products are available from the National Stock System.

I. GASOLINE.

- 1. Gasoline is not authorized to be used as a cleaning solvent or as a substitute for lighter fluid.
- 2. No open flames, smoking, or hot work shall be permitted when handling gasoline or in the vicinity of Gasoline Hazard Areas.
- 3. Chapter 540 of this manual discusses general requirements for gasoline stowage and safety precautions. NSTM Chapters 542 and 670 contain guidance on the handling and stowage of gasoline.
- **J. HYDRAULIC FLUID.** Personnel shall avoid direct skin contact with hydraulic fluid. Protective clothing (goggles, gloves, etc.) shall be worn when handling hydraulic fluid or working on hydraulic equipment.

K. SPRAY SHIELDS AND PROTECTIVE COVERS.

- 1. <u>Installation of Protective Covers</u>. Protective covers are installed to deflect any leakage caused by failure of a gasket or joint or through personnel error. Oil spray must be prevented from hitting a hot surface or from harming personnel at their normal operating stations.
 - a. A hot surface is defined as 400 degrees F (205 C) and higher, if the piped liquid is fuel oil.
 - b. A hot surface is defined as 650 degrees F (343 C) and higher, if the piped liquid is lubricating or hydraulic oil.
 - c. For insulated surfaces, the temperature under the insulation is the reference temperature.
 - d. A normal operating station is defined as that place where the watchstander stands or the position from which he/she shifts a duplex strainer.
 - e. NSTM Chapter 635 provides additional guidance on piping insulation and protective covers.

K. 2. Requirements for Protective Covers. To prevent fire and personnel injury, protective covers and shields shall be placed on piping flanges, filters, and strainers that contain flammable fluids. Protective shields are used to direct fluid spray away from watchstanders, hot surfaces and running equipment.

3. <u>Design of Protective Covers.</u>

- a. Guidelines for the design of proper covers for duplex filters and strainers are available in NAVSHIPS 0948-102-2010, "Fuel and Lube Oil Strainer Safety Shield Design Guidance." Copies of this publication are held by Maintenance and Logistics Commands. The only acceptable material for duplex strainer covers is sheet metal.
- Guidelines for the design of a proper shield for simplex strainers or filters have not been published. However, the shield must direct spray away from personnel and hot surfaces.
 The shield may be sheet metal held in place by the cover bolts, or it may be a cap of three layers of aluminized glass cloth secured with a drawstring.
- c. The Naval Ships Technical Manual (NSTM), Chapter 505, provides guidelines for the design of a proper shield for flanged joints. Metal and aluminum glass cloth are acceptable materials.

L. SELF CONTAINED IONIZATION SMOKE DETECTORS.

- 1. <u>Policy</u>. Where fixed fire and smoke alarm systems are not provided, self-contained smoke detectors shall be installed in living and berthing compartments and passageways. Underwriter Laboratory (UL) approved smoke detectors, that operate on a 9 volt battery and have a 30 day audible low-voltage alarm, are authorized for shipboard use.
 - a. At minimum, one detector shall be mounted to the overhead of living and berthing spaces that have a capacity of 1 to 10 people. Spaces, having a capacity of 11 to 20 people, shall have no less than two detectors; 21 to 30 people, no less than three detectors.
 - b. At minimum, one smoke detector shall be located in each passageway that serves a living or berthing space.
- 2. <u>Installation and Maintenance</u>. Smoke detectors shall be installed and maintained in accordance with cutter PMS or manufacturers' instructions if no PMS exists.

NOTE: Special care must be observed when removing fixed system detectors when isolating specific failures so that protection "down the line" is not lost.

M. SAFETY PRECAUTIONS AND OPERATING INSTRUCTIONS.

1. <u>Safety Precautions</u>. Permanent safety precautions shall be posted in a visible location next to all machinery that could cause damage to personnel, systems or equipment, including any rotating machinery, electrically operated equipment, installed eductor systems, and internal combustion

- M. 1. engines. Preprinted plastic plates are acceptable if the precautions listed are completely applicable to the particular installation. Safety precautions may be added to the bottom of posted operating instructions. Safety precautions shall be prominently marked as "Safety Precautions". The use of a red border around posted safety precautions is encouraged.
 - 2. Operating Instructions. Permanent operating instructions shall be posted in a visible location next to any piece of equipment that requires more than the pressing of a button or the turning of a switch to operate properly. Operating instructions shall be complete and detailed enough to permit the operator to start, operate, and stop equipment without reference to anything but the posted operating instructions. Preprinted plastic plates are acceptable if the instructions are totally applicable to the equipment.

N. SAFETY PRECAUTIONS FOR GASOLINE-POWERED BOATS.

- 1. <u>General</u>. Since gasoline is very flammable and highly volatile, extreme caution shall be taken when operating or performing maintenance on gasoline-powered boats. To minimize the hazardous operating conditions, perform the recommended inspections and maintenance that are provided within manufacturer instructions and PMS. Chapter 540 of this manual discusses general requirements for gasoline stowage and safety precautions. NSTM Chapters 542 and 670 contain guidance on the handling and stowage of gasoline.
- 2. <u>Specific Maintenance Requirements</u>. Units that use gasoline-powered boats shall exercise extreme caution:
 - a. Fuel systems shall be adequately bonded to a common ground on the engine bed. To prevent premature loosening, bonding connections shall be firm and secured. Bond straps or wires shall be braided, of a size not less than No. 6 AWG or equivalent cross-sectional area. Where electrical continuity in fuel lines is broken, bonding shall be used to provide such continuity. This applies to fill connections that must be bonded to tanks.
 - b. Fuel lines shall meet SAE J1527 and 33 CFR 183 specifications. These hoses are prominently marked as "USCG TYPE A2", "USCG TYPE B1" or "USCG TYPE B2". Fuel lines shall be properly secured to prevent chafing. The number of fuel system fittings shall be kept to an absolute minimum. Fuel lines for portable fuel systems shall be flexible so that they don't crack, check, or break. Quick disconnect fittings may be used between engine and fuel line and fuel line and fuel tank. When disconnected, they shall automatically shut off fuel flow.
 - c. Fuel system components, such as filters, shall be independently supported.
 - d. Plug cock or diaphragm fuel shut-off valves shall be installed at the fuel tank outlet. These valves shall be secured when the tank is not in use.
 - e. To prevent siphoning, which occurs when fuel tank levels are above the fuel system itself, anti-siphoning check valves shall be installed at the tank outlet close to the shut-off valve.
 - f. Battery storage compartments shall be ventilated to reduce the buildup of gases.

- N. 2. g. Electrical wiring shall contain no splices. It shall be properly secured and protected to prevent heat damage and chafing and shall be run at as high a level as practical. Terminal connections shall be made with lugs or eyelets and secured tightly to prevent arcing.
 - h. Hex nuts and lock washers shall be used to secure battery cables to battery terminals and lugs. Wing nuts shall not be used.
 - i. High tension leads in the ignition system must be carefully checked for proper insulation to prevent external arcing.
 - j. Vent blowers should take suction as low in the machinery space bilge as possible. They must be vented to the atmosphere to minimize the chance of recirculating fumes throughout the boat interior. Only explosion proof blowers shall be used. Suction hoses shall be wire-reinforced and arranged so they do not become crimped. Blower motors are subject to failure caused by electrical overload resulting from seizing of the blower or the attached bilge pump. Therefore, blower motor power leads shall be fused in accordance with manufacturer instruction books, furnished plans, or the National Fire Protection Association (NFPA) Manual No. 302. The possibility of blower failure while underway must be considered. Engine noise will preclude hearing the blower. Therefore, periodic checks of the blower discharge must be made. Blowers shall be run at least 5 minutes before starting the engine, continuously during operation, and whenever fuel vapors are suspected or known to be pocketed in the bilges.
 - k. Required firefighting equipment shall be in the boat at all times.
 - l. Smoking shall not be permitted in gasoline-powered boats. "NO SMOKING" signs shall be posted.
 - m. Boat compartments shall be kept free of foreign matter, particularly combustibles. Bilges shall be inspected at least daily and prior to operation to ensure no fuel, water, oil, or other foreign matter is present. Whenever gasoline fumes are detected in the boat, corrective action shall be taken to eliminate the fumes and their source.
 - n. When fueling boats, ground the fill nozzle to the fill connection to eliminate the possibility of electric spark as a result of electrostatic charge buildup.
 - o. Personnel shall continuously review safety and operating procedures to remain proficient in boat operations and maintenance.
 - p. Portable fuel oil tanks/containers shall be visually inspected semi-annually. If the structural integrity of a tank is in question, the tank shall be replaced. Fuel tanks located in the bilges shall be preserved to minimize corrosion. Every 2 years, installed fuel tanks shall be cleaned, flushed, and inspected in accordance with MLC Standard Specifications.
- **O. HEAT STRESS.** Refer to Cutter Heat Stress Program, COMDTINST M6260.17 (Series)

- **P.** <u>HEARING CONSERVATION</u>. Refer to Safety And Environmental Health Manual, COMDTINST M5100.47 (Series) and Medical Manual, COMDTINST M6000.1 (series).
- **Q.** REPAIRING AND REMOVING ASBESTOS. Refer to Technical guide: Practices For Respirator Protection, COMDTINST M6260.2 (series) and Asbestos Exposure Control Manual, M6260.16 (series).
- **R.** SPRAY PAINTING INSIDE SHIPS. Refer to Coating And Color Manual, COMDTINST M10360.3 (series) and: Practices For Respirator Protection, COMDTINST M6260.2 (series).
- S. ORDNANCE AND AMMUNITION. Refer to Ordnance Manual, COMDTINST M8000.2 (series) and NAVSEA OP 4 (series).

Page Intentionally Left Blank

CHAPTER 079. STABILITY AND DAMAGE CONTROL

- Α. **STABILITY INFORMATION.** Knowledge of the stability and buoyancy characteristics of a cutter is essential for its safe operation. Two areas are of concern: (1) intact stability resistance to capsizing and sinkage without damage, and (2) damage stability resistance to capsizing and sinkage after damage. For each cutter the following stability information shall be prepared: (1) Stability Test Data Report, and (2) either a Stability and Loading Data Booklet or, for cutters which have a Damage Control Book (DC Book), a section "Part II(a) - Stability and Loading". The Stability Test Data Report provides information and data about a cutter's displacement and centers of gravity. It is used primarily by ELC naval architects to analyze a cutter's stability and to prepare safe operating guidance. The Stability and Loading Data Booklets and Part II(a) of the DC Book are designed for cutter operators. These documents provide information pertaining to stability and buoyancy, and safe operating guidance necessary to: (1) permit proper control of loading, (2) avoid danger of capsizing or foundering due to storms, high speed turning, etc., (3) maintain an adequate margin of stability and reserve buoyancy to permit survival of damage within the limits imposed by the cutter's design, (4) determine action to be taken after damage, or (5) evaluate probability of survival after damage. Use of the information in the above publications requires background knowledge in the fundamentals of stability and buoyancy.
 - 1. <u>Stability Test Data reports</u>. This section describes requirements for obtaining, preparing and distributing Stability Test Data Reports. Cutters shall receive a stability test as determined by ELC (02). Each stability test shall be conducted and a report of the results prepared in accordance with Chapter 097. Each stability test data report approved by ELC (02) shall be assigned a Coast Guard drawing number. ELC (02) shall distribute copies to the cutter via the MLC. Based on the results of the test, cutter stability status and safe operating guidance shall be updated as needed by ELC (02).
 - 2. <u>Stability and Loading Data Booklets (SLDBs)</u>. This section describes the requirements for the preparation and distribution of SLDBs. SLDBs are required on all cutters 65 feet in length and greater that are not required to maintain DC Books. ELC (02T) assigns drawings numbers to, and ELC (02) prepares and distributes the SLDBS. Cutter personnel shall correct shipboard copies to comply with the stability and loading changes issued by ELC (02). Letters of transmittal make the booklet effective for each cutter or class of cutters.
 - 3. Part II(a) of the Damage Control Book. This section describes the requirements for the preparation and distribution of "Part II(a) Stability and Loading" of the DC Book. ELC (02) shall prepare Part II(a) of the DC Book. Part II(a) shall be updated as needed, to reflect current stability information.

B. FLOODING CASUALTY CONTROL SOFTWARE (FCCS).

1. <u>Purpose</u>. A computer program named Flooding Casualty Control Software (FCCS), was developed to provide ship and shore-based personnel with the ability to quickly evaluate a ship's intact, damaged and grounded stability; to review the results; to print hard copies of stability evaluation results, expended liquids reports and stability diagrams; and to save the data for later

- **B.** 1. use. Additionally, FCCS performs load management functions; calculates, displays, and prints the ship's current hydrostatic situations; and offers recommendations to improve the current condition of loading. The stand-alone notebook computer aboard cutters will simplify the day to day process of monitoring the vessel's current condition of loading and also provide instantaneous evaluations during emergency conditions.
 - 2. <u>Database</u>. FCCS is the only computer program approved for stability evaluation of CG cutters (a computer spreadsheet supplied as an attachment to SLDBs is an authorized part of the SLDB). The FCCS program, along with the associated validated databases, will be distributed to all cutters 110 feet and longer. Part II(a) of DC Books and the SLDBs as applicable remain the approved stability documents aboard cutters. FCCS with a *validated* database shall be considered to be supplement to Part II(a) or the SLDB, not a replacement for them.
 - 3. <u>Technical Support</u> ELC (02) prepares, approves, updates, distributes, and provides technical support for the FCCS program, the data bases, and FCCS manuals to the cutters and on request, to other interested CG offices. Problems with the database should be reported to ELC (02).

C. STABILITY REQUIREMENTS.

- 1. Standards. Unless otherwise approved by ELC (02):
 - a. The stability and reserve buoyancy of Coast Guard cutters 120 feet in length and over shall meet the requirements of U.S. Navy Design Data Sheet, DDS 079-1.
 - Buoy tenders and cutters that lift heavy weight over the side shall also meet the following additional requirement: The maximum angle of heel shall not exceed the angle of buoy deck edge immersion.
 - c. The stability, reserve buoyancy and watertight integrity of Coast Guard boats and cutters under 120 feet in length shall meet the requirements NAVSEACOMBATSYSENGSTA REPORT NO. 6600-99 REV. A May 1988. Boats shall meet wind velocity requirements that develop equivalent pressures to 46 CFR 170.170 based on area of service. Cutters under 120 feet in length in other than open ocean service may be required to meet appropriate requirements of 46 CFR 170 through 46 CFR 174 as determined by ELC in addition to or as an alternative to the requirements of NAVSEACOMBATSYSENGSTA REPORT NO. 6600-99 REV. A May 1988. The governing criteria shall be promulgated in the governing stability documents for the cutter.
 - d. Surf capable boats shall be self-righting and shall meet a two compartment standard of subdivision throughout their service life.
 - e. Watertight integrity of cutters 120 feet in length and over shall meet the requirements of DDS 079-1, U.S. Navy General Specifications (see 070, 071, 120, and 512) and the NEM.

2.	Operation. Cutter operators shall follow the safe operating guidance provided in their Stability and Loading Data Booklet or Damage Control Book Part II(a) -Stability and Loading or the				

- C. 2. equivalent document. For cutters with the FCCS program, it shall be used for calculations required to maintain safe operating condition, and to assess the stability in case of casualty or unusual load condition (flooding, grounding, icing, towing, etc.).
 - 3. <u>Maintenance</u> The stability and reserve buoyancy of cutters shall be maintained by: (1) managing Engineering Changes which change cutter displacement and/or center of gravity; and (2) periodic testing to assure watertight integrity is maintained. ELC (02) shall determine what restrictions are needed to weight and moment changes to cutters and shall advise operators when modifications to cutters and boats are needed to correct weight and/or moment deficiencies. Watertight integrity shall be tested in accordance with the requirements of paragraph I.
- **D.** <u>WEIGHT</u>. The displacement of cutters and boats shall not exceed their limiting displacements as promulgated by ELC in the boat or cutter's stability instruction documents. The limiting displacement may be based on reserve bouyancy, hull strength, speed, hoist lift or other appropriate criteria as determined by ELC. This information is contained in Part II(a) of the cutter's DC Book and SLDB or in equivalent documents or instructions for boats and cutters under 120 feet in length. ELC (02) shall be notified in writing whenever a cutter or boat's speed requirement is changed.
- **E. DAMAGE CONTROL ORGANIZATION.** Based on mission tasking, size, compartmentation and manning capacities, Table 079-1 lists the repair parties and teams required to provide damage control per cutter class.
 - Cutters With a Designated Damage Control Central (DCC). DCC serves as the central control point
 that receives reports from all damage control parties, and evaluates and initiates any orders necessary
 for corrective action from a ship wide point of view. DCC allows the Damage Control Assistant
 (DCA) to assess damage, inform the Commanding Officer, and provide recommendations of
 corrective action to and receive orders for corrective actions from the Commanding Officer.
 - a. Provisions must be made for accurate, rapid communications among all damage control parties, fire fighting parties or other survivability groups, so an overall coordination of effort and direction can be readily accomplished.
 - b. Provisions must be made for a repair party located remotely from DCC to assume the DCC functions in the event incapacitating battle damage is sustained by DCC. This is to ensure that the damage control organization is under positive control at all times during emergencies. The order of succession must be firmly established before hand. All status boards and information required to be collected or displayed by DCC shall also be available, collected and displayed at the secondary DCC. The duties and responsibilities of DCC personnel are specified in NWP 3-20.31 (series), Surface Ship Survivability.
 - c. DCC shall maintain the damage control status boards:
 - (1) "Casualty Board" which visually shows structural damage sustained by the cutter as determined by reports from the repair party(ies).

- E. 1. c. (2) "Stability Board" which visually shows the liquid loading as prescribed by current directives, location of flooding boundaries, the effect on list and trim due to flooded compartments and the corrective action taken to maintain the cutter's offensive capabilities.
 - (3) Graphic display of damage sustained and corrective action taken for all damage control systems.
 - (4) Graphic display of damage sustained and corrective action taken for all electrical and casualty power circuits..
 - (5) Plans showing the location and operation of all magazine flooding and sprinkling systems.
 - (6) "Engineering Casualty Control Status Board" showing the condition of readiness of main propulsion and principal auxiliary machinery and permitting graphic display of engineering casualties and other pertinent information.
 - Cutters With a Modified Damage Control Central (DCC). Due to compartmentation restraints and limited crew size, the WIX, 225' WLB, 180' WLB, and 175' WLM may establish a modified DCC. A modified DCC shall carry out the same functions as a fully outfitted DCC.
 - a. DCC functions may be performed "at" a cutter's command and control station/bridge or may be co-located with the primary repair locker.

NOTE: Lines of communication between the repair party and DCC, and DCC and the Commanding Officers or Officers-in-Charge (CO/OIC) shall not be compromised.

- b. Provisions shall be made for a repair party or designated area to assume the DCC functions in the event DCC becomes incapacitated.
- 3. <u>Repair Parties.</u> Repair lockers are physically located to combat shipboard damage and casualties, and to serve as DCC in the event that DCC becomes incapacitated. Repair parties shall be self sufficient, capable of communicating with the entire cutter, and outfitted with the necessary equipment to control any type of damage likely to be encountered. The duties and responsibilities of repair party personnel are specified in NWP 3-20.31 (series), Surface Ship Survivability.
- 4. <u>Main Repair Station</u>. For cutters that are not outfitted with or do not have a fully equipped repair locker or DCC, CO/OIC shall designate a central location as the Main Repair Station. Main Repair Stations shall perform the same functions as a repair locker and modified DCC. The organizational structure of certain cutters may require personnel to become proficient in more than one repair party function.

TABLE 079-1. TABLE OF DAMAGE CONTROL ORGANIZATION

Cutter Class	WAGB	213	WTGB
	WHEC	WMEC	WYTL
	WMEC*	175 WLM	133 WLM
	WIX**	180 WLB	WLIC/WLI
	225 WLB***	WPB	WLR
Damage Control Central	X	X	N/A
Repair II (Forward Locker)	X	X	N/A
Repair III (Aft Locker)	X	N/A	N/A
Main Repair Station	N/A	N/A	X
Engineering Assist Team	X****	N/A	N/A

- * 210' WMECs have two repair lockers but only one repair party. The repair party normally operates out of Repair II. CGC STORIS has two repair lockers, but normally operates out of Repair III.
- ** Repair III is fully outfitted, but only used when trainees are embarked.
- *** 225' WLBs Repair II (forward locker) is partially outfitted and used only if Repair III (aft locker) is inaccessible due to casualty.
- ****WHECs and 400' WAGBs only.
 - 5. Engineering Assist (Or Machinery Assist) Team Locker (378 WHECs and 400' WAGBs only) The purpose of this team is to provide main engineering spaces with additional fire fighting resources outside the existing repair locker and engine room GQ organization. The team is not a fully outfitted Repair Five (as defined by NWP 3-20.31(series)) and is manned by a small group of personnel. Subsequently, their equipment allowances are adjusted to include only that equipment required to accomplish their duties as outlined in the cutter's Battle Organization Manual and Machinery Space Fire Fighting Doctrine.
- F. DC BOOKS, DC DIAGRAMS AND COMPARTMENT CHECK-OFF LISTS (CCOLS). When DC Books are changed, it causes changes to CCOLS and DC Diagrams. All three must have the same information. One DC Book, complete in all respects shall be designated the "Master Copy". All shipboard copies of DC Books, DC Diagrams and CCOLs shall be continuously maintained and reflect current shipboard conditions. They will be maintained by shipboard personnel following the procedures given in later sections of this chapter. Minor changes may be submitted at any time to ELC (02), with a copy of the transmittal letter forwarded to Commander, Maintenance and Logistics Command (MLC (vr)). Five copies of the corrected DC Book will be returned to the cutter and one copy to the appropriate MLC. An up-to-date copy of each DC Book shall be maintained at the MLC for cutters under its cognizance. ELC (02) prepares and distributes computerized DC Books and CCOLS for each cutter of the following classes:

F. 420' WAGB 400' WAGB 290' WAGB 270' WMEC 296' WIX 378' WHEC 210' WMEC 230' WMEC

283' WMEC

CCOLS ONLY: 225' WLB 175' WLM 140' WTGB

213' WMEC

- 1. <u>Correction and Maintenance of Computerized DC Books and CCOLS</u>. So that DC Books and CCOLS can serve their purpose effectively, they must be the principal source of information on cutter characteristics and data vital to the prevention and control of damage and casualties. It is essential that they be kept up-to-date to correctly reflect conditions as they exist.
 - a. DC Books and CCOLS are now computerized for cutters listed in paragraph F. The information contained in the texts, tables, and CCOLS is produced, stored, and maintained using the Automated Damage Control System (AUTODAM). Under this system, the CCOL sheets are produced by using the information contained in the DC Book tables. The Miscellaneous Unclassified Fittings List is formulated based on data supplied by the ship's force. When updating the DC Book tables, the ship's force must ensure that the Miscellaneous Unclassified Fittings are entered into the CCOL sheets. CCOLS are produced from updated data contained in the DC Book tables. Accordingly, there is no need to duplicate the same information on CCOLS submitted for update. DC Books and CCOLS that are not correct or do not agree with each other are of no value to the cutter and may lead to serious mistakes by shipboard personnel. Therefore, it is imperative that the DC Books and vessel's copy of CCOLS be updated simultaneously to reflect changes, whenever such changes are made.
- 2. <u>Basic Procedures</u>. The following sections define the procedures for keeping DC Books, DC Diagrams and CCOLS up-to-date with existing material conditions.
 - a. Initial Check. Upon receipt, the DC Books, DC Diagrams and CCOLS shall be thoroughly checked by comparing them with existing conditions. The DC Books, DC Diagrams and CCOLS, as issued, indicate conditions on board at the time of the cutter check. Every effort has been made to ensure that the DC Book, DC Diagrams and CCOLS are as correct as possible. However, some discrepancies are inevitable. All closure classifications must be made to conform with the DC Book, and no change in these items shall be made without the approval of ELC per chapter 041. Where conditions regarding closure classifications differ from those indicated in the Book, they shall be reported to ELC (02), who will decide what action is to be taken. If ELC (02) changes the classification, the Branch making the change shall inform CMplus units. CMplus units shall ensure that the configuration data in CMplus is updated.
 - b. Correction of DC Book, DC Diagrams and CCOLS at Shipyard Overhauls. At each scheduled drydocking availability it shall be the responsibility of the CO/OICs to ensure that revisions to the master and spare copies of DC Book, DC Diagram and CCOLs are accomplished. A corrected copy of the DC Book, DC Diagram and CCOLs

- F. 2. b. shall then be delivered to ELC (02) and CMplus Units. CMplus units shall also ensure that appropriate configuration, classification, etc. changes are made in CMplus. Following receipt by ELC (02) of corrected DC Books and CCOL's spare copies, five copies of the corrected DC Book and three corrected and reprinted CCOL sets will be returned to the cutter and one copy of each to the appropriate MLC. A copy of the transmittal letter shall be forwarded to Commander, Maintenance and Logistics Command (MLC (vr)). Following receipt by ELC (02) of corrected DC Diagram spare copies, corrected DC Diagram standard distribution sets will be returned to the cutter and one copy of each to the appropriate MLC, Leadership Development Center (PCO/PXO school) and SWOSCOLCOM (DCA School).
 - (1) Upon receipt and validation, by cutter personnel of the updated DC Books, Damage Control Diagrams and CCOL, all prior editions shall be destroyed.
 - (2) The CO/OICs shall ensure all copies of the DC Book, Damage Control Diagram and CCOL are revised and kept up-to-date to include all engineering changes. Engineering changes should be entered in the DC Book text, tables, and diagrams and on the CCOLS as soon as the engineering changes are completed.
 - (3) DC Book Text and CCOL Sheet Revisions. The marked-up master copy of the DC Book (Text and Tabular Sections) and CCOL (miscellaneous unclassified fittings only) shall be submitted with a letter of transmittal directly to ELC (02) with info copies to the respective chain of command. The changes incorporated into the DC Book and CCOL do not have to be itemized in this letter, but the authorization to change any classifications must be assigned a chapter number. Revisions to the master copy and all other copies of the DC Book and CCOL shall be made as follows:
 - (a) The manuscript of the text and tables shall be typed using a format similar to that of the original text.
 - (b) If the revision involves adding items that would congest the original sheet, the surplus items shall be typed on a new sheet bearing the same page number with a letter subscript.
 - (c) Deletions shall be indicated by drawing a single red ink line through the material to be deleted.
 - (d) Minor insertions or changes shall be made by neatly printing the change in red ink.
 - (e) Enter all fittings to be modified, added, or deleted in the tabular sections of the DC Book. Only the changed miscellaneous unclassified fittings shall be entered on the CCOL. Unlimited legible pen-and-ink corrections to the computer generated DC Book and CCOL are permissible for submission to ELC (02) as long as the corrections are made with a different colored ink so that they are easily detected.

- F. 2. b. (3) (f) CCOLS. There shall be a CCOL for every compartment and weather deck area except tanks. The CCOL shall be permanently posted in the compartment near each access opening or in the area concerned. It shall provide an itemized list indicating the location of all classified fittings and other facilities useful for damage control. The CCOL is intended for ready use by personnel responsible for setting of material conditions of readiness.
 - c. CCOL Requirements. Three sets of CCOL sheets are supplied to each cutter. The first set shall be designated the master CCOL and stored in an appropriate binder. The ship's force shall keep the master CCOL tables, miscellaneous unclassified items, and the division responsible columns up-to-date to reflect the CCOL sheets in each compartment.

NOTE: The ship's force is responsible for ensuring that the information in the master CCOL agrees with the information in the DC Book tables.

- (1) The second CCOL set is to be retained as a "spare copy." This set is to be updated to reflect the master CCOL, for cutters listed in paragraph F, and returned to ELC (02) each time the DC Book is to be updated.
- (2) The third CCOL set sheets are to be posted in the holder provided in each compartment and weather deck areas.
- d. CCOL Contents CCOL content shall be as required by NSTM Chapter 079, Vol. 2 with the following additions:
 - (1) Access. Include weather tight, and non-tight doors. Non-tight doors are not classified but will be numbered and listed in "ACCESS".
 - (2) Drainage. Include classification sewage collection and retention discharge valves.
 - (3) Firemain, Sprinkling and Washdown. Fireplugs are not classified, but will be numbered and listed in "Firemain, Sprinkling and Washdown" so they can be readily identified.
 - (4) Lubrication and Hydraulic Systems. Include all classified valves within these systems.
 - (5) Miscellaneous Unclassified. Only the following unclassified Damage Control related equipment is required to be listed in this section of the CCOL:
 - (a) Portable fire extinguishers
 - (b) Foam cans, generators, and proportioners
 - (c) Dial and sound powered telephones listed in the directory
 - (d) Casualty communication cables and terminals
 - (e) Casualty power panels, terminals, and supply cables
 - (f) Electric submersible pumps

- **F.** 2. d. (5) (g) Multipurpose outlets (440 V for submersible pumps and welders)
 - (h) Shoring
 - (i) Damage Control equipment not located in the repair locker

NOTE: All non-damage control equipment including EEBDs, smoke detectors, air escapes, vents, and deck drains not outfitted with closure fittings or unclassified valves may be deleted from the listing.

- e. Duplicate or Partial Lists. For compartments having two or more entrances over 10 feet apart, duplicate check off lists shall be posted at each entrance. These lists shall be clearly labeled as duplicate. For compartments having alcoves or areas where fittings are located, it may be desirable to have partial check off lists posted in these alcoves or areas. However, these partial lists shall be clearly labeled as partial, and the item numbers on these lists must correspond with the numbers on the main list. Check off lists shall be kept within practical size limits. It may be necessary to divide weather decks and some other decks into sections, such as main deck Frames 90 to 120 port side, and so forth.
- f. Basic CCOL Format. There are two authorized formats for CCOLS. The first is AUTODAM, a computer generated Damage Control Book and CCOL, developed by ELC (02). The second is the CG Standard Workstation produced CCOL, which is authorized for Non-AUTODAM
- g. Cutters. These CCOLs shall be prepared using the same format as AUTODAM on plain white (8½x 11") sheet of paper. Coast Guard Form CG -2786 is no longer required. For the purpose of continuity, the word fitting shall include all classified items (i.e. doors, valves, closures, mechanical and electrical actuating devices, etc.) As a standard AUTODAM and Non-AUTODAM CCOLs shall be formatted as follows (See example provided in Figure 079-2):
 - (1) Compartment Numbers (12 Characters. 1 Line). Are identification numbers assigned to help locate each compartment within the ship and indicates the function of the compartment. The function of the compartment, designated by an alphabetical letter, shall be in accordance with Naval Engineering Manual, COMDTINST M9000.6 (series).
 - (2) Compartment Name (25 Characters. 2 Lines). Are compartments aboard the ship assigned noun names according to their actual use such as; Sickbay, Wardroom, Dry Stores, Deck Berthing, etc.
 - (3) Item Numbers (Automatically applied for AUTODAM Cutters Only). All damage control items on a CCOL require an item number. The first item on the CCOL shall be number 1. All other fittings and equipment are numbered sequentially to the last item on the CCOL.

- **F.** 2. g. (3) (a) When an addition is required for the purpose of correcting CCOLs, new items shall be entered as; 1a, 1b, 2a, or 2b and so on. When an item is deleted, a single line should be drawn through the item in red ink.
 - (b) The item numbers are not required to be renumbered sequentially until all corrections have been made. Units are authorized 45 days from the completion of a Yard availability, Command Assessment of Readiness to Train (CART) or Tailored Ship Training Availability (TSTA)to effect changes. AUTODAM cutters shall submit corrections to their CCOLs and/or DC Books to ELC (02) for correction. Non-AUTODAM cutters shall correct and update their respective CCOLs.
 - (4) Fitting Abbreviation (10 Characters. 2 Lines) Standard abbreviations are developed by ELC (02). These standard abbreviations are developed to be easily understood, with minimal training, by cutter personnel. These abbreviations are a shortened variation of the system and function of damage control closures and fittings. Current listings of standard abbreviations may be obtained from ELC (02).
 - (5) Basic Location Number (9 Characters. 1 Line). All classified damage control closures and fittings are assigned a basic location number. Fire plugs and non-tight doors are also assigned a basic location number even though they are not classified. **NOTE: This number is the actual location of a fitting in the compartment listed on the CCOL.** The number along with the approved abbreviation helps to identify and locate the fitting or damage control closure within that compartment.
 - (a) Remote Operation. All items under this heading shall contain the actual location of the fitting operator in the compartment where the CCOL is posted.
 - (b) Damage control items under the "Miscellaneous Unclassified" heading do not require a typical location number, only a frame number and port/starboard location which will provide the location of these items (i.e. FR 30 Port or FR 30 Stbd).
 - (6) Location and Purpose (25 Characters. 4 Lines for each item listed). Provides a brief description of items listed on a CCOL. Each description must be clear, concise, and easily understood by ship's personnel. List special information such as: restricted access, locked fittings, location of system cutout valves, or compartment affected if the system is secured.
 - (7) Classification (1 Character 1 Line). Damage control fittings shall be classified in accordance with NSTM Chapter 079, Volume 2.
 - (a) AUTODAM CCOL cutters Cutters SHALL NOT change the assigned Commandant classification of a fitting. If differences appear follow the procedures within this Chapter. This is to ensure consistency throughout the fleet.

TABLE 079-2 – CCOL FORMAT

COMPARTMENT: 1-134-2-L		PASSAGEWAY				
<u>ITEM</u>	<u>FITTING</u>	<u>NUMBER</u>	LOCATION AND PURPOSE	<u>CL</u>	<u>DR</u>	
<u>ACCESS</u>						
1.	QAWTD	1-136-2	TO WEATHER	Z	R2	
2.	QAWTD	1-140-1	1-140-1-L DECK BERTHING	Z	R2	
	<u>M</u>	ISCELLANEOUS	S CLOSURES			
3.	ATC	1-140-1	1-140-1-L DECK BERTHING	X	Е	
4.	AMMO HD	1-142-2	1-142-2-A AMMO HOIST ELEVATOR	X	D	
5.	FWCOV	1-148-3	EVAP POTABLE WATER OUTLET COV	Z	Е	
6.	FW	1-148-1	HYDRO-PNEUMATIC TANK BY-PASS	W	E	
<u>DRAINAGE</u>						
7.	DDV	1-144-1	SECONDARY DRAINAGE	Z	R3	
DAMAGE CONTROL AND BALLASTING						
8.	SWCOV	1-150-1	BALLAST FILL TO 3-152-1-F	X	R3	
9.	BLSTDV	1-150-3	BALLAST DRAIN TO 3-152-1-F	X	R2	
FIREMAIN. SPRINKLING AND WASHDOWN						
10.	FMV	1-155-1	FIRE PUMP #2 DISCHARGE	(X)	R3	
11.	MAGSPR	1-156-2	TO SMALL ARMS MAG 2-158-2-M	X	R3	
12.	FMCOV	1-154-1	TO FPL 1-160-1	W	R3	
13.	FPL	1-160-1	FIRE STATION			

TABLE 079-2 – CCOL FORMAT (CONT.)

COMPARTN	MENT: 1-134-2-L	PASSAGEWAY	(cont'd)				
<u>ITEM</u>	<u>FITTING</u>	<u>NUMBER</u>	LOCATION AND PURPOSE	<u>CL</u>	<u>DR</u>		
		CHEMICAL FIRE	<u>E SYSTEM</u>				
14.	AFFFCOV	1-155-3	AFFF COV TO FLT DK SPRINKLER SYS	X	R3		
		FUEL O	<u>IL</u>				
1.5	FOCOV	1 157 1		37	D		
15.	FOCOV	1-157-1	FO FILL TO TANK 3-159-1-F 3½ BFVL	X	В		
		<u>JP-5</u>					
16.	JP-5 V 1-144-3	FILL VALVE T	O JP-5 TANK 2-145-1-J	W	Е		
	<u>LUBRICA</u>	ATION AND HYD	PRAULIC SYSTEMS				
17.	LUBOV	1-138-1	FILL FOR LO TANK 3-123-1-F	X	Е		
VENTILATION							
18.	FAN	1-149-2	SERVICING COMPT# 2-207-O-L	(W)	R3		
	EXHAUST		PASSAGEWAY				
			2-214-2-M				
			SMALL ARMS MAGAZINE				
REMOTE OPERATION							
19.	RCV(FO)	1-136-2	3-96-0-E AUX MACHINERY ROOM	(X)	E		
			FOCOV 3-98-2				
20.	PUSH BTN	1-137-2	01-98-2 FAN EXHAUST	(W)	R2		
			1-101-0-L DECK BERTHING				
			1-99-1-L				
			DECK HEAD				

(W)

R3

TABLE 079-2 - CCOL FORMAT (CONT.)

COMPARTMENT: 1-134-2-L		PASSAGEWAY (cont'd)					
<u>ITEM</u>	<u>FITTING</u>	<u>NUMBER</u>	LOCATION AND PURPOSE	<u>CL</u>	<u>DR</u>		
<u>COMPRESSED AIR</u>							
22.	LPACOV	1-150-0	BHD STOP VALVE 1½ GLOBE	Z	R3		
MISCELLANEOUS UNCLASSIFIED							
23.	CO2		PORTABLE 15 LB C02 FR 150 PORT				
24.	PKP		PORTABLE 27LB PKP FR 151 STBD				

- F. 2. f. (7) (b) Non-AUTODAM cutters. Shall change their classification of fittings to meet the requirements in NSTM Chapter 079, Volume 2, upon receipt of ELC approval. Proposed changes shall be submitted to ELC (02). If questions arise or the cutter cannot determine the proper classification of a fitting the cutter should contact the proper Maintenance Logistics Command type desk. Also, cutters shall ensure not to over classify fittings. Not all fittings require a classification and doing so creates excessive maintenance for the cutter.
 - (8) Division Responsible (7 Characters. 1 Line). The Division responsible column identifies the division or GQ station assigned the primary responsibility to SET classified damage control fittings in the compartment listed on the CCOL. The CO/OIC is responsible for specifying what fittings each division or repair station is required to set.
 - (a) A dual responsibility is assigned for setting a material condition, which may require fittings to be opened or closed during either non-emergency or emergency situations. Examples are classified darken ship fittings and ventilation fittings which may be set during non-emergency situations.
 - (b) Dual responsibility is assigned in the following order, non-emergency to emergency, i.e., D/R2 or OPS/R3. Compartments which are manned during GQ shall only have the division listed which is responsible for setting the material condition in that space. Repair stations shall only be listed for a dual responsibility if the repair station has the primary responsibility for setting that fitting during an emergency.
 - (9) Material Condition Status. The material condition status is required to be applied at the bottom of each CCOL. This section informs DCPOs and emergency personnel which fittings are opened or closed during material conditions. The material condition status is automatically applied on AUTODAM CCOLs and must be manually applied on Non-AUTODAM CCOLs as indicated in the following example:

Condition XRAY - 'X' ITEMS CLOSED (STOPPED), 'Y', 'Z', AND 'W' OPEN (RUNNING)

Condition YOKE - 'X' AND 'Y' ITEMS CLOSED (STOPPED), 'Z' AND 'W' OPEN (RUNNING)

Condition ZEBRA - 'X', 'Y', AND 'Z' ITEMS CLOSED (STOPPED), 'W' OPEN (RUNNING)

- **F.** 2. f. (10) Date. The date shall be applied to the lower left corner of the CCOL to indicate it was prepared by the AUTODAM program. Dates are not required for Non-AUTODAM produced CCOLs.
 - Page Numbers Page numbers will be automatically applied for AUTODAM CCOLs only. The page number shall be centered at the bottom of each page, an example is: 1 of 3, 2 of 3, and 3 of 3, etc. Non-AUTODAM cutters shall number each page manually as per the previous example.
 - (12) Cutter Identifier Code. Is automatically applied on AUTODAM CCOLs to the lower right hand corner. The code identifies the cutter class and hull number of the cutter. Non-AUTODAM cutters are not required to list the cutter identifier code.
 - (13) Data Groupings. The following CCOL Groups are the Coast Guard's requirements for ALL CCOLs. These groups shall be listed in the following order of precedence on the CCOL:

ACCESS

MISCELLANEOUS CLOSURES

DRAINAGE

DAMAGE CONTROL AND BALLASTING

FIREMAIN, SPRINKLING AND WASHDOWN

CHEMICAL FIRE SYSTEM

FUEL OIL

JP-5

LUBRICATION AND HYDRAULIC SYSTEM

VENTILATION

REMOTE OPERATIONS

COMPRESSED AIR

UNCONTAMINATED SEA WATER SYSTEM (for WAGB 10 & 11 only)

SPILL OIL RECOVERY SYSTEM (for WLB & WLM only)

MISCELLANEOUS UNCLASSIFIED.

- (14) Tank Drains. The tank drain heading is not used by the Coast Guard. All fittings which were previously under this heading SHALL be placed under their proper system heading (i.e. fuel oil, JP-5, potable water, etc.)
- (15) Aviation and Automotive Gasoline System. This heading is not used by the Coast Guard.
- Oxygen, Nitrogen and Inert Gas Valves. This heading is not used by the Coast Guard. The Coast Guard does not have fixed or producing systems for oxygen, nitrogen or inert gasses.

- F. 2. NOTE: If there is insufficient bulkhead space to mount CCOLS, they will be placed on bound metal plates and stored in a permanently mounted, metal container. The container will be marked "CCOL" with 3-inch high letters. When a group of two or more accesses are within 10 feet of each other, only one set of CCOLS is required for that group of accesses. When two accesses on one side of a space lead from one adjacent space, only one set of CCOLS is required at a location between them.
 - g. DC Diagram Revisions. "Pen and ink" revisions of the unlaminated diagrams of the master copy and all other copies of the DC Diagrams shall be made as follows:
 - (1) Compartment and access changes shall be made on the subdivision diagrams only. All other diagrams shall have a note added that states: "REFER TO SUBDIVISION DIAGRAMS FOR COMPARTMENT CHANGES."
 - (2) Deletions shall be made by crosshatching the material to be deleted with red ink. No erasures shall be made, nor is it necessary to note on the diagram that the material is to be deleted.
 - (3) Additions and changes shall be shown in the required color to suit the system. They shall be indicated in the correct position. No indicator lines, circling, or marginal notes are to be inserted unless they are absolutely necessary for clarification.
 - (4) Obvious adjustments needed on the diagram, such as the relocation of lettering to make room for additions, do not require specific instructions.
 - (5) Changes or corrections that are too complicated to be shown by the "out and add" method shall be indicated on tracing paper marked in the proper color and exact size. The overlay tracings shall cover as small an area as is consistent with clarity. The overlay shall be taped in the proper place on the diagram; permanent fastening to the diagram is not desired.

G. MATERIAL CONDITIONS OF READINESS AND DAMAGE CONTROL

<u>CLASSIFICATIONS</u>. All OPFAC cutters shall comply with NSTM Chapter 079, Volume 2 for material conditions of readiness and damage control closure classifications. Existing damage control classifications shall not be changed to comply with NSTM without permission of ELC (02) as differences may exist to allow special systems to function properly or to allow for an enhanced material condition of readiness arising from stability concerns.

H. <u>COMPARTMENTATION AND DECK NUMBERING SYSTEM</u>. All cutters will be considered as divided horizontally by decks, platforms, levels, and bottoms. Such divisions will apply to the entire cutter, both in the main hull and the superstructure.

- **H.** 1. Coast Guard cutters built since 1949 and the EAGLE shall use the compartment numbering system described in NSTM Chapter 079, Volume 2, Compartment Numbering and Subdivision.
 - 2. Subdivision and Compartment Numbering. Old Numbering System. Cutters built before 1949 use the numbering system described in this section. It includes the following categories:
 - a. Subdivision Old Numbering System. Subdivision shall be considered as extending from the keel to the highest deck in the line of the bulkheads, or the bulkheads prolonged. If the bulkheads do not extend to the highest deck, any space between decks that passes through two of the principal divisions shall be numbered as if it were situated entirely in the forward division of the two in which it is placed and shall have this number only. Main compartments with permanent openings to the top side, such as boiler and engine rooms, shall be considered as completely bounded by tight structure for numbering purpose.
 - (1) The ship shall be considered as divided into three principal divisions, lettered A, B, and C, from forward to aft.
 - (a) Division A. This shall comprise all the space between the bow and the forward transverse bulkhead of the forward machinery compartment.
 - (b) Division B. This shall comprise all the space between the forward transverse bulkhead of the forward machinery compartment and the after transverse bulkhead of the after machinery compartment.
 - (c) Division C. This shall comprise all the space aft of the after transverse bulkhead of the after machinery compartment.
 - (2) The term "Machinery Compartment" shall be construed as meaning engine rooms, main motor rooms, and compartments in which auxiliaries of the main propelling machinery are located.
 - b. Compartment Numbering. Old Numbering System.
 - (1) All numbers in each division shall begin at the forward end of that division. Compartments on the starboard side of the ship shall have odd numbers; those on the port side, even numbers.
 - (2) All compartments and spaces that are completely bounded by watertight, oiltight, airtight, or fume-tight bulkheads shall be numbered.
 - (3) When a watertight compartment located below the weather deck is divided into two or more airtight or fume-tight spaces by airtight or fume-tight bulkheads, the appropriate number shall be assigned. The watertight compartment and each airtight or fume-tight subdivision in the

- H. 2. b. (3) compartment shall be designated by the addition of a suffix to this number. Thus, if watertight compartment A-312-L contains a fumetight or airtight bulkhead, the space to starboard of this bulkhead will be designated A-312-1L.
 - (4) Airtight and fume-tight spaces located above the weather decks and outside of the hull proper, such as those in deckhouses, shall each be given their own individual number without a suffix number, as though each airtight or fume-tight space were a separate watertight compartment. Thus, the number of an airtight or fume-tight space on the superstructure deck may be A-0204-L, even though this space may be one of several airtight or fume-tight spaces located in a deckhouse with a watertight boundary.
 - (5) Oiltight and watertight compartments on the main deck shall be numbered from 101 to 199. Those on each successive deck or platform below the main deck shall be numbered in the next higher hundred series; consequently, those on the second deck shall be numbered from 201 to 299; on the third, from 301 to 399; and so on.
 - (6) Watertight, airtight and fume-tight compartments on the next level above the main deck shall be numbered 0101 to 0199. Those on each successive level above the main deck shall be numbered in the next higher hundred series, prefixed with a zero.
 - (7) To further define the contents or main use of the compartment, the compartment number shall be followed by a designated letter as follows:

"A" - Storage area such as:

Store rooms

Issue rooms

Refrigerated stores

Repair lockers

Ordnance related stowage, Non-hazardous

Clothing and cleaning gear lockers

"AA" - Cargo holds (not used by Coast Guard

"C" - Cutter and fire control operating spaces which are normally manned, such as:

CIC

IC Rooms

Communication office

Control booth

Pilot House

H. 2. b. (7) Plotting rooms

Radio rooms

Electronic operating spaces, manned

"E" - Machinery compartments spaces which are normally manned, such as:

Main machinery spaces

Auxiliary machinery spaces

Evaporator rooms

Pump rooms

Refrigerating machinery rooms

Steering gear rooms

Windlass rooms

"F" - Fuel compartment including:

Fuel oil tanks

Lubricating oil tanks

Hydraulic oil tanks

Oily water holding tanks

Spill oil recovery tanks

"G" - Gasoline tanks, including gasoline cofferdams (not used by Coast Guard)

"J" - JP-5 tanks

"K" - Storage of chemical, semi-safe dangerous material, except oil and gasoline.

"L" - Living compartments, medical and dental spaces, and horizontal passageways, including:

Officers' quarters

Crew's quarters

Water closets and washrooms

Medical and dental spaces

Passages

"M" - Ammunition spaces including:

Magazines

Small arms magazine

Ammunition handling room

Ammunition hoist and ordnance elevators

H. 2. b. (7) "Q" - All spaces not otherwise covered, such as:

Engineering, electrical, and electronics

Spaces that are not normally manned

Galley

Pantries

Scullery

Laundry

Offices

Shops

Wiring and service trunks

Fan rooms

Signalman's shelter

Helo fueling pit

Uptakes

Bow thruster

Chain locker

Shaft alley

Waste handling/incinerator space

"T" - Vertical access trunks

"V" - Voids compartments, such as voids and cofferdams, other than gasoline tank cofferdams

"W" - Water tanks including:

Fresh water tanks

Reserve feed water tank

Peak tanks

Ballast tanks

Bilge tanks

Sump tanks

Built-in sewage holding tanks.

3. Painting of Compartment Numbers. The compartment number shall be painted in characters 2 inches high on a bulkhead in each compartment to which a number is assigned, except in tanks, voids and spaces finished with decorative bulkhead sheathing. The characters shall be painted in a color contrasting to that of the bulkhead. Compartments finished with decorative bulkhead sheathing shall have a label plate of aluminum listing the compartment number in black letters 2 inches high. The location of the number shall be conspicuous on entrance to the compartment. If there is more than one entrance to an individual compartment and the compartment number cannot be viewed readily, additional label plates shall be provided. For information concerning application of photoluminescent markings, refer to Coatings and Color Manual, COMDTINST M10360.3 (series).

- I. <u>WATERTIGHT INTEGRITY TESTS AND INSPECTIONS</u>. In lieu of NSTM, Chapter 9880, Section IV, cutters shall conduct a visual inspection of all watertight boundaries as per DC PMS. The DCA, or equivalent, should pay particular attention to the inspection results to ensure the timely correction of watertight discrepancies.
- **ENGINEERING CASUALTY CONTROL MANUAL.** All cutters 65 feet in length and greater are required to prepare and maintain an Engineering Casualty Control Manual (ECCM). The purpose of this manual is to establish methods of operating all vital systems and corrective actions to be taken if casualties occur. The ECCM shall consist of the four chapters listed in this section for the following types of cutters; WHEC, WMEC, WIX, WAGB, WLB, WLM, WTGB and WPB. For the WLI, WLIC, WLR, and WYTLs cutters the ECCM shall consist of three chapters listed in this section; chapter one, chapter two, and chapter four. Copies of the ECCM shall be maintained in Main Control, Engineering Assist location, all repair lockers, DCC and the Pilot House.
 - 1. <u>General Outline of the Casualty Control Manual</u>. This section furnishes guidance necessary to assist in the preparation of the ECCM. It describes what each chapter is to address and contain. Further specifics for each chapter are provided in the subsequent paragraphs of this section and NSTM Chapter 079, Volume 3. The four chapters are:

Chapter 1 - Machinery Readiness

Part A: Engineering Plant Information and Set-up

Part B: General Engineering Bills

Part C: Restricted Maneuvering Doctrine

Chapter 2 - Engineering Casualties (BECCEs)

Chapter 3 - General Emergency Casualties

Chapter 4 - Damage Control Organization

Part A: Damage Control Organization and Duties

Part B: Main Space Firefighting Doctrine

The ECCM will have an appropriate Table of Contents developed for the entire manual. In addition a Table of Contents will be set up for each chapter to enable quick reference of material within the manual.

- 2. <u>Chapter 1 Machinery Readiness.</u>
 - a. Part A Engineering Plant Information and Set-up. This part will include the following items:

- J. 2. a. (1) Propulsion Plant Description This item describes the engineering plant configuration for the cutter. It should contain information on all major propulsion and auxiliary equipment. Information to be included as a minimum: name, description, model, rpm, capacity, and any other specifics deemed necessary by the Engineer Office/Engineer Petty Officer (EO/EPO).
 - (2) Engineering Plant Conditions of Readiness. This item will indicate proper set up for the main propulsion plant under the normal and emergency conditions of readiness maintained by the cutter. It shall also indicate the proper set up for all vital systems that are integral to the propulsion readiness of the cutter.
 - b. Part B General Engineering Bills. The CO or OIC shall require that the bills listed in Table 079-3 be prepared. Those listed under Part (A) shall be prepared by the Executive Officer/Executive Petty Officer (XO/XPO) and those listed under Part (B) shall be prepared by the EO/EPO. Bills listed under Part (A) should be included in the Cutter Organization Manual and need not be included in the Casualty Control Manual. The CO/OIC may require preparation of additional bills deemed necessary for the proper and safe operation of the command.
 - (1) General Requirements for All Bills. The following items shall be included in all bills:
 - (a) Object of the bill.
 - (b) Manner of reporting, if applicable.
 - (c) Call signal, if applicable.
 - (d) Secure signal, if applicable.
 - (e) General plan or procedure.
 - (f) Equipment or material to be provided, if applicable.
 - (g) Assignment and duty or duties of personnel.
 - (h) Brief description of the system, outlining methods and procedures for operating the system, if applicable.
 - (i) Simplified drawings or diagrams illustrating important parts and functions of the systems, if applicable.
 - (j) For each valve or fitting, the bill should indicate its function, casualty control number, location, and setting, if applicable.
 - (2) Outline of Required Bills. The following section outlines the contents of the bills required under Table 079-3.

J. 2. b. (2) (a) Fuel Oil Service Bill. This bill shall describe the procedure for filling and drawing down service tanks to ensure a continuous supply of clean, burnable fuel. The procedure shall have adequate provisions to avoid:

Interruption of supply due to pump failure.

Interruption of supply due to low oil level in service tanks.

Unnecessary hazard to watertight integrity through lack of segregation.

- (b) Evaporator Plant Bill. This bill shall describe the procedure for the control and accounting of make-up feed, replenishment of ship's potable water, the operation and securing of the evaporator plant, the sounding of tanks, and to obtain the optimum degree of segregation, both for watertight integrity and prevention of contamination.
- (c) Ships Service Generator Bill. This bill shall indicate the correct condition of fuel supply, return, cooling, and lubricating systems for optimum damage resistance and continuity of power supply under various engineering conditions of readiness.
- (d) Fuel Transfer and Ballast Bill. This bill describes the method of maintaining the optimum degree of damage readiness and resistance in the fuel transfer and ballast system commensurate with operating flexibility for various evolutions. Specifically, it must show the following:

Sequence of emptying, recirculating, filtering, and refilling tanks.

Instructions for ballasting, deballasting, and stripping of fuel storage and fuel and ballast tanks.

Special provisions for the redistribution of fuel for maximum availability for transfer to other cutters.

Special provisions required prior to fueling to obtain optimum receiving rates.

Instructions for sampling fuel storage tanks for water.

Instructions as to fuel soundings, accounting for fuel, and fuel reports.

Instructions for the maintenance of proper displacement and removal of list through use of fuel transfer system and ballast system. J. 2. b. (2) (e) Drainage Bill. This bill describes the method of segregation to obtain optimum damage resistance, while permitting prompt use of the drainage system pumps and eductors for pumping out voids, ballast tanks, and flooded compartments, or for deballasting fuel tanks, with a minimum modification of the set-up. Lists of valves and fittings should show location, casualty control number, use, setting for each condition of readiness, and cognizant repair party or watch personnel. This list should include the following parts of the drainage system:

Pumps

Eductors

Sea chests

Cut-out valves

Remote control devices

Sounding tube closures

Oil Content Monitors

- (f) Fire Main and Salt Water Circulation Bill. This bill describes the principles of operation of the fire main, auxiliary sea water, and salt water circulating systems with respect to pressure, segregation, recirculation, pumps to be used under various conditions, limitations of the systems, and maintenance responsibilities of various divisions. It also identifies commendations for the coordination of system control and procedures to be followed if battle damage occurs to the fire main. Lists of valves and fittings should show location, casualty control number, use, setting for each condition of readiness, and cognizant repair party or watch personnel.
- (g) Auxiliary Plant Bill. This bill provides instructions covering the segregation, operation, or securing of auxiliary plants, and services not specifically covered elsewhere. This includes the heating system, refrigeration system, cutter's fresh water supply, emergency generator plant, and CHT system.
- (h) Main Propulsion Repair Bill. This bill contains detailed instructions for the main propulsion repair party. It includes stationing, communication techniques, assignment of equipment, and primary duties if major damage occurs.

- **J.** 2. b. (2) (i) Casualty Power Bill. This bill defines locations and technique of employing the casualty power system.
 - (j) Interior Communications Bill. This bill identifies all sound powered, voice tube, and ships power operated communication circuits. The bill will identify each circuit, where receptacle, cut out switches, patch panels, etc., are located (Compartment, frame #, and transverse location) and its purpose (Lookout circuit, control and maneuvering, damage control, etc.).
 - (k) De-Energizing of Electrical Circuits Bill. This bill establishes policy and procedures for the de-energizing of electrical circuits. It will contain the list of the circuits and their breaker locations. It will also set forth procedures for the securing of electrical power for normal servicing and emergency operations.
 - (1) Air Conditioning Heating and Ventilation Bill. This bill provides a list of the air conditioning systems, blowers, heating units, and closure devices, so that they may be expeditiously controlled. Control is necessary to:

Prevent the spread of water from flooded to undamaged compartments through the ventilation ducts.

Prevent the spread of fire.

Reduce the entry of radiological, biological and chemical agents from possible enemy attack.

Facilitate removal of smoke resulting from a fire in below-deck spaces.

Facilitate the ventilation of interior spaces when authorized during general quarters.

Avoid supplying oxygen to fires or establishing a draft.

(m) Compressed Air Bill. This bill describes the compressed air system in the cutter. The bill shall include:

Instructions for taking action to maintain pressure on:

Gun gas ejecting system.

Rammer systems of guns so equipped.

Pneumatic operated main propulsion control system.

J. 2. b. (2) (m) Diesel starting air.

Clutch air

MGT air assist

Instructions to ensure that air service is secured to those systems not necessary under combat conditions.

Information regarding:

Compressors and accumulators

Storage bottles

Outlets

Cross connections

Other component parts as required

(n) Aviation Fuel Handling Bill. For those cutters having such equipment, this bill includes:

Brief description of the system.

Procedures for receiving, maintaining, and delivering fuel to an aircraft.

Instructions for testing and recording fuel condition.

- c. Part C Restricted Maneuvering Doctrine. The restricted maneuvering doctrine is a written agreement between the CO/OIC and the EO/EPO regarding the level of casualty control initial action to be taken during periods of restricted maneuverability. It shall cover the circumstances when a watchstander may secure equipment as part of initial actions to effect casualty control, when securing of this equipment may place the vessel in jeopardy. Restricted maneuvering may be considered to be all those times when the vessel is at Special Sea Detail, Unrep, Flight Operations, or other times as the CO/OIC directs.
- 3. Chapter 2 Engineering Casualties (BECCES).
 - a. This chapter shall address engineering plant casualty control. It will contain all the Basic Engineering Casualty Control Exercises (BECCE) required for the cutter. The chapter will be developed and regulated by the requirements set forth in the Cutter Training and Qualification Manual, COMDTINST M3502.4

- J. 3. (series) and the Naval Fleet Mobility Exercises Manual (FXP series). Both manuals contain information pertaining to the exercises a cutter is to perform. Cutter Training And Qualification Manual, COMDTINST M3502.4 (series) states which exercises are required for a given cutter while the FXP establishes the proper numbering of each exercise. This chapter will be organized using the "MOB-E-" numbers from the manuals with a table of contents established for quick reference. The exercises will be set up in the following format for each casualty:
 - (1) Type of Casualty
 - (2) Symptoms
 - (3) Initial Action
 - (4) Follow up Action
 - (5) Possible Additional Casualties
 - b. Additional information on casualty control and the format of these exercises are contained in NSTM Chapter 079 Volume 3.
 - 4. Chapter 3 General Emergency Casualties.
 - a. This chapter will address general shipboard casualty and damage control. It will establish the procedures for general casualty and damage control for watchstanders and general emergency personnel stationed in the engine room. The casualties will be formatted in the same manner as above. The general casualties to be included in this chapter are listed below and may be expanded as deemed necessary or desirable by the CO/OIC:
 - (1) Flooding of engine room
 - (2) Flooding of any compartment
 - (3) Collision
 - (4) Fire
 - (5) Underwater Hull Damage
 - 5. Chapter 4 Damage Control Organization.
 - a. This chapter will contain the organization necessary for proper shipboard damage control. It will include the duties and responsibilities for all stations and personnel and how the damage control structure is setup. The following shall be included in this chapter:

- **J.** 5. a. (1) Damage Control Organization
 - (2) DC Central location and responsibilities
 - (3) Repair Party locations and responsibilities
 - (4) Machinery Space Firefighting Doctrine, COMDTINST M9555.1 (series)
 - b. Cutter Standard Repair Locker Inventory, COMDTINST M9664.1 (series), requires all cutters, 65 feet and larger, to develop and maintain a Repair Party Manual. COMNAVSURFLANT INST 3541.1 (series) or Standard Repair Party Manual For Naval Surface Force, COMNAVSURFPAC INST 3541.4 (series), shall be used by those cutters who have been required to do so by their respective Area commanders. Units, not required to use the Standard Repair Party Manual For Naval Surface Force, can satisfy the Repair Party Manual requirements of Cutter Standard Repair Locker Inventory, COMDTINST M9664.1 (series) by completing the requirements of paragraph J.5.a. above.

TABLE 079-3. TABLE OF REQUIRED BILLS

						WLIC WLM WLI Over		WYTL
	WHEC	WAGE	<u>WMEC</u>	WLB	<u>WPB</u>	<u>100</u> '	WLR Y	WTGB
Part (a)								
Steering Casualty	X	X	X	X	X	X	X	X
Replenishment at Sea	X		X	X	X			
Degaussing			th Degau					
Fire	X	X	X	X	X	X	X	X
Rescue and Assistance	X	X	X	X	X	X	X	X
Strip Ship and Clear Ship	X	X	X	X	X	X		
Jettison Ship	X	X	X	11	21	71		
Ship Salvage	X	X	X	X				
Scuttle Ship	X	X	X	3 7	X	3 7	37	***
Collision	X X	X	X X	X	X	X	X	X
Darken Ship CBR Defense	X		X					
Part (b)								
Fuel Oil Service	X	X	X	X	X	X	X	X
Evaporator Plant		All	Units Wi	th Evap	orators			
Ships Service								
Generator	X	X	X	X				
Fuel Oil Transfer and								
Ballast	X	X	X	X				
Drainage	X	X	X	X	X	X	X	X
Fire Main and Salt								
Water Circulating	X	X	X	X	X	X	X	X
Auxiliary Plant	X	X	X	X				
Main Propulsion Repair	X	X	X	X	X			
Casualty Power	X		X	X				
Interior Communication	X	X	X	X	X			
De-energizing Electric								
Circuits	X	X	X	X	X			
Air Conditioning,								
Heat & Ventilation	X	X		X	X	X		
Compressed Air	X	X	X	X				
Aviation Fuel	X	X (2	10/270/2	283)				

Page Intentionally Left Blank

CHAPTER 080. INTEGRATED LOGISTICS SUPPORT REQUIREMENTS

- A. <u>INTEGRATED LOGISTICS SUPPORT (ILS)</u>. ILS identifies and defines requirements and assigns logistics responsibilities throughout the life cycle of platforms, systems, and equipments. Refer to Acquisition And Management Of Integrated Logistics Support (ILS) For Coast Guard Systems And Equipment, COMDTINST 4105.2 (series), for further guidance.
- **B.** <u>INTEGRATED LOGISTICS SUPPORT PLAN (ILSP)</u>. The ILSP establishes policy, procedures, and identifies management responsibilities for the development of the logistics program during the acquisition process. Refer to Integrated Logistics Support Plan (ILSP) Development And Management Responsibility, COMDTINST 4105.1 (series), for further guidance.
- C. <u>OPERATIONAL LOGISTICS SUPPORT PLAN (OLSP)</u>. The OLSP establishes policy, procedures and identifies operational logistics requirements and responsibilities of the platform manager and facilities manager down to the using activity.
- D. LOGISTICS SUPPORT ANALYSIS (LSA). Acquisition and Management Of Integrated Logistics Support For Coast Guard Systems and Equipment, COMDTINST 4105.3 (series), requires project managers to consider LSA for major Coast Guard acquisition projects and provides guidance on LSA application for major and non-major acquisition projects.
- E. LONG RANGE LOGISTICS SUPPORT FOR CUTTERS. Long Range Logistics Support for Operational U. S. Coast Guard Cutters, COMDTINST 4105.4 (series), sets forth the planning process for maintenance efforts to maximize cutter availability for operational use. It also implements the concepts of Cutter Support Reviews (CSR) Cutter Class Maintenance Plans (CCMP), and Long Range Maintenance Plans (LRMP).

F. CUTTER SUPPORT REVIEW (CSR).

- 1. <u>Description</u>. The CSR is conducted by a Natural Working Group (NWG) responsible for integrating maintenance philosophy, actual field repair practices, and allowance documents into the Commodity Management Plan (CMP) and Cutter Class Maintenance Plan (CCMP). The working group ensures that logistics and maintenance needs of the cutter class are merged so that both scheduled and casualty maintenance actions are fully supported. Specific support responsibilities by the ELC, MLCs, NESUs and cutters are clearly delineated in the completed CMPs. The CSR NWG is managed and Chaired by the ELC.
- 2. Members. The CSR NWG consists of members from the following organizations:
 - a. The regular members are:
 - (1) Representative and team leader, ELC.
 - (2) Representatives from the MLC(s).
 - (3) Representatives from the applicable NESU(s).
 - (4) A cutter class facility manager representative from Headquarters.

- **F.** 2. b. Representatives from the cutter class. For example, a cutter Engineer Officer/Engineer Petty Officer (EO/EPO).
 - c. Ad hoc members of this working group may consist of various division/branches within the ELC and various external Coast Guard organizations as needed.
 - 3. <u>CSR Functions and Deliverables</u>. The following general functional tasks and deliverables direct and define the scope of the CSR NWG.
 - a. The working group shall identify the most operationally critical/repair components with support problems for the cutter class. When applicable, a CMP will be developed for each item to ensure support actions required by the CCMP are implemented. The CMP shall include, but not be limited to priorities, organizational responsibilities, quantities required annually, and methods of procurement/repair.
 - b. Provide input to the headquarters facility manager to ensure OLSP information is correct and up-to-date.
 - c. Update allowance documents. Modify all Allowance Parts Lists (APLs) to ensure compatibility with the applicable maintenance philosophy and actual field support practices.
 - d. Update FLS and CMplus.
 - e. Along with the above evaluations, ensure appropriate definitions and practices involving repairable equipment, insurance spares, rotatable spares, and drydock consumables are consistent in the development of CMPs.
 - f. Review available technical and logistics documents as they apply to a cutter class and identify the need for additional documentation. Assign tasking as required.
 - g. Review the need for the assignments of Quality Action Teams (QAT), Tiger Teams (T/T), or Natural Working Groups (NWG) to assess problems involved with the cutter class. Develop and submit to G-SEN-1, as appropriate POP requests.
 - h. Solicit additional ad hoc members as appropriate.

CHAPTER 081. MAINTENANCE OF CUTTERS AND BOATS

- **MAINTENANCE AND FINANCIAL PROGRAM.** The Commanding Officer/Officer-in-Charge (CO/OIC) is responsible for the readiness of the cutter to perform its assigned missions. The most effective way to meet this responsibility is to have a well planned and aggressively pursued maintenance program with a financial program established that supports it. Units outfitted with CMplus shall use the automated functionality within CMplus to create, track and execute maintenance schedules, create work lists and identify and report problems with Preventive Maintenance System (PMS).
 - 1. <u>Cutter Program Requirements</u>. All OPFAC cutters 65 feet or longer are required to prepare and maintain maintenance and financial programs. The maintenance and financial programs must ensure that adequate maintenance and repair is accomplished to ensure all operational commitments can be met.
 - a. Preparation of Work Lists. As part of the overall maintenance program, each department shall prepare periodic work lists showing each item scheduled for accomplishment during a specific period. The individual work lists should be prepared enough in advance to permit timely review, prioritizing, and execution by the command.
 - b. Cutter Financial Program. The financial program (AFC-30 budget) is a portion of the units AFC-30 funding, set aside for the accomplishment of PMS, repairs and planned improvements. Each department shall prepare an AFC-30 budget to provide for effective utilization of the cutter's AFC-30 funding. The AFC-30 budget is also an effective tool to assist in justifying the requested AFC-30 funding level for follow-on years. AFC-45 funds are administered by the respective MLC for major maintenance and repairs as defined in the Naval Engineering Annex of the MLC Standard Operating Procedures.

2. Boat Program Requirements.

- a. Preparation of Work Lists. As part of the overall maintenance program, each unit shall prepare periodic work lists showing each item scheduled for accomplishment during a specific period. The individual work lists should be prepared enough in advance to permit timely review, prioritizing, and execution by the command.
- b. Boat Financial Program. Funding for boat operation falls under AFC-30, 42, and 45. AFC-30 provides for fuel, outfit replenishment, maintenance, engine overhaul, annual availabilities, boat replacement and boat allowance changes. AFC-42 provides for electronic equipment maintenance. AFC-45 funds major Engineering Change Requests (ECR) and casualty repairs resulting from fire, grounding, or collisions.
- **B.** <u>CUTTER MAINTENANCE STANDARDS</u>. Table 081-1, Cutter Maintenance Standards, shall serve as a guide for the MLCs and operational commanders in planning cutter maintenance. The table is divided into 7 columns: Cutter Class, Proposed Frequency and Duration of Drydocks and Docksides Availabilities, Annual M&R Required and Required Maintenance Days Per Year.

- **B.** 1. Required Maintenance Days Per Year reflect the average number of days historically required in a year to accomplish preventive maintenance PMS, corrective maintenance (CASREPs), and facilities maintenance (CSMPs & Engineering Changes). MLC's and operational commanders should schedule the specified number of maintenance days throughout a cutter's yearly operational schedule. When operational necessity requires that fewer maintenance days be scheduled, the maintenance days scheduled in the succeeding year should be increased so that the 2 year average of maintenance days for that particular cutter adheres to the required average.
 - 2. The proposed frequency and duration intervals shall be used as a guide for providing operational scheduling flexibility between maintenance and repair, dockside availabilities, and drydock availabilities. The detailed implementation of operations/maintenance schedules shall be the responsibility of the MLCs and operational commander. Area/District operations planners are responsible for ensuring that sufficient maintenance time is scheduled between deployments. There must be frequent, free-flowing information between Areas/Districts and MLCs to ensure operational and maintenance needs are met. Operational commanders and MLCs may increase or decrease the intervals between drydockings and annual availabilities as may be dictated by operational or maintenance needs. MLCs shall ensure all ship yard availability schedules are posted and maintained on their respective web site.
 - 3. To aid in detailed implementation of this maintenance philosophy, the ELC shall develop Cutter Class Maintenance Plans (CCMPs) for all classes of cutters. Using these CCMPs, MLCs shall develop long-range maintenance plans for each cutter for which it is responsible. These plans shall forecast and include, in addition to drydock and dockside availabilities, all major/special maintenance requirements, such as diesel engine center section overhauls, SSMEBs, cyclic inspection/maintenance of major equipment/machinery e.g., gas turbine hot section inspections, Engineering Changes, etc. Each plan shall be updated and published periodically. The long-range maintenance plan shall serve as a maintenance requirements base line for operation planners.

C. PREVENTIVE MAINTENANCE SYSTEM (PMS).

- General Description. PMS outlines minimum maintenance requirements and procedures for HM&E, damage control, electronic and ordnance equipment aboard cutters and standard boats. Procedures are prescribed for inspecting, cleaning, and reconditioning machinery and equipment, to counter the effects of the hostile seagoing environment and operating wear and tear. Accomplishment of PMS will increase machinery dependability, reliability and maintainability and ensure operational readiness. Generation and promulgation of PMS for non-standard boats is the responsibility of the parent unit.
 - a. HM&E Equipment. Naval Engineering PMS Technical Publications for HM&E equipment have been developed for all classes of cutters and standard boats. A listing of effective PMS Technical Publications can be found in the Engineering Information Data Base (EIDB) and in Naval Engineering Technical Information Management System (NETIMS) as described in Chapters 086 and 834.

- C. 1. b. Damage Control Equipment. All damage control equipment PMS can be found in the Damage Control PMS Manual, TP2006 (series). It is applicable to all cutter classes 65 feet and longer.
 - c. Ordnance Equipment. All ordnance equipment is to be maintained according to the PMS as described in the Ordnance Manual, COMDTINST M8000.2 (series).
 - d. Electronic Equipment. All electronic equipment is to be maintained according to the CGPMS as described in the Electronics Manual, COMDTINST 10550.25 (series).
 - 2. <u>Participation</u>. Use of PMS is mandatory. CO/OICs shall ensure personnel stay thoroughly briefed in PMS procedures and ensure that the procedures are carried out.
 - 3. <u>Completions.</u> G-SEN has sponsored, and ELC is executing, PMS2000; a review and modernization of the PMS program based on the latest proven methodologies and technologies. This program has eliminated nonessential, and in some cases counter productive, maintenance items and should provide increased system availability. Cutter and standard boat classes which have undergone PMS2000 modernization will have a system with two distinct advantages; 1) Maintenance Procedure Cards (MPCs) that are based on the need to keep critical systems operational as opposed to just keeping equipment running and: 2) PMS requirements that are realistic and capable of being completely accomplished. Because of this, units with PMS issued subsequent to PMS2000 review are expected to complete 100% of the prescribed requirements.
 - 4. Because PMS represents only one facet of the complete maintenance and operational picture of a cutter, the fact that PMS requirements are not 100 percent completed at any given time does not necessarily mean the cutter is unsafe or not being adequately maintained. However, it is important and incumbent on all CO/OICs, operational commanders, and support managers to ensure accomplishment of the most important items first. Depending on the circumstances, there may be instances where a particular PMS item should be completed before the cutter is used or before a particular casualty is corrected. This means value judgments and prioritization of tasks and missions must be made under the conditions at the time. When individual PMS items scheduled for one period are deferred, every effort should be made to complete those items during the next period, consistent with all other maintenance and mission requirements.
 - 5. Reporting Procedures. In addition to specific maintenance procedure changes, technical or logistically oriented trends in failure to complete PMS should be reported to the cognizant MLC via letter. Examples include: Inability to obtain necessary parts, availability of special tools, lack of necessary training or extensive task effort requiring contractor or shipyard completion. Specific reporting procedures for PMS completion for cutters and standard boats are as follows:
 - a. Cutters: PMS scheduling and completion feedback shall be tracked via SCAMP/CMplus. PMS completion data shall be reported in the cutter engineering report. Cutters with standard boats attached shall include standard boat PMS with auxiliary PMS.

TABLE 081-1. CUTTER MAINTENANCE STANDARDS

Cutter Class	DD Interval (yrs)	DS within DD (ea)	DD Period (wks)	DS Period (wks)	M&R Annual (wks)	Total Maint/Yr
WAGB 420	3	1	12	12	15.9	(days) 172
WAGB 420 WAGB 400	3	1	12	8	17.2	172
WAGB 290	4	2	8	8	13.6	142
WAGD 290	4	2	0	0	13.0	142
WHEC 378	4	2	8	8	13.7	143
WIX 295	4	1	8	8	10.9	109
TID FE C 202	4	4	0	0	17.0	150
WMEC 283	4	1	8	8	17.9	158
WMEC 270	4	2	8	8	13.7	143
WMEC 230	4	1	8	8	17.9	158
WMEC 213	4	1	8	8	17.9	158
WMEC 210	4	2	8	8	13.7	143
WLB 225*	4	3	10	8	10.2	126
WLB 180	4	2	8	6	16.3	154
WLM 175*	4	3	10	6	11.7	126
WLM 133	2	1	6	4	9.3	105
WLI 100	4	1	6	6	9.3	91
WLI 65	4	1	5	5	8.8	84
WLI 100 (Pac)	2	0	7	0	8.8	91
WLI 65	2	0	7	0	7.8	84
(Pac) WYTL 65	3	0	6	0	6.6	65
WLIC	4		6 7	0	6.6 7.5	77
	4	2	7	4	6.8	79
WLR	4	<u> </u>	/	4	0.8	19
WTGB 140	4	1	7	5	14.3	126
WTGB 140 (w/Barge)	4	1	8	5	14.0	126
W/DD 110	2	2	6	1	12 6	122
WPB 110	3	2 2	6	4	13.6	133
WPB 87	3	2	6		13.6	133
WPB 82	3	2	D	4	13.6	133

TABLE 081-1. CUTTER MAINTENANCE STANDARDS

NOTES:

Total maintenance days/yr = DD Days/yr + DS Days/yr + MR Days/yr minus 5 days (Federal Holidays).

DD Days/yr = DD Period (wks)x7/DD Interval
DS Days/yr = ((DS Period (wks)x7)x # DS/DD Interval)/DD Interval
M&R Days/yr = M&R Annual (wks)x7

For WAGBs: The inport maintenance days listed must include, at a minimum, one period of 120 consecutive days over the course of one drydock cycle to ensure major maintenance projects can be completed outside a scheduled drydock availability.

For WLB 225 and WLM 175; The maintenance days per year have been increased above the numbers published in the ORD. This is to allow for the accomplishment of the post delivery retrofit work. After the retrofit is accomplished, these numbers may be adjusted downward.

Definitions:

M&R Maintenance and Repair – Days dedicated to cutter maintenance and repair that are not part of a scheduled drydock or dockside and that is not interrupted by operational sorties. M&R Days listed are the average days per year required for cutter maintenance (not including a drydock or dockside) over the drydock cycle for that cutter class. During this period, it is assumed that 90 percent of qualified maintenance personnel are on board. Weekend days are included, but major holidays such as Christmas, New Year's Day, and Easter are not.

DS - Dockside Availability - A dedicated contracted maintenance and repair availability, not including drydocking. Preference is for a dockside availability in the cutter's home port scheduled annually in a year when a Drydocking Availability is not planned.

DD - Drydocking Availability - A contracted shipyard availability at time intervals as specified.

C. 5. b. Standard Boat PMS.

(1) Action by the Station. Report the completion status of PMS for standard boats by division (i.e. main machinery, auxiliary, electrical, etc.) in percent complete per boat for the reporting period. (The servicing ESU/ESD is responsible for reporting electronics equipment PMS completion status to the Group.) Percent complete is defined as the number of monthly, quarterly, semiannual and annual MPC completed, divided by the number of MPC scheduled for the reporting period. If scheduled PMS cannot be completed, or items are deferred two or more times, indicate the item and reason. Send the PMS completion information in the following format via message to the Group by the end of the first week in January, April, July and October:

C.	5.	b.	(1) BOAT NUMBER	R MACHINERY	ELECTRICAL	AUX	DC
			41XXX 44XXX				
		division for indi	vidual boat class wi District program m	completion status of thin the group in the anager and MLC ty	following f	format via	
			BOAT CLASS	MACHINERY	ELECTRICAL	AUX	DC
			UTB MLB BUSL				

- (3) Action by the District and MLC Commander. Review the group reports. These reports are intended to provide the District MLC Commander with the current maintenance status of operational platforms. The report should provide a sense of whether required maintenance is being accomplished.
- 6. <u>Change Procedures</u>. Success of PMS depends on the diligence of individual cutters and standard boats in executing the program and the cooperation of cutter, standard boat, group, NESU, MLC, and ELC personnel in improving maintenance procedures through prompt, timely feedback and MPC revision. When the information on any MPC needs to be corrected, changed, or deleted based on experience or a new requirement, a recommended change shall be submitted. ELC (017) will review all PMS change requests. Recommendations shall be forwarded to ELC (017) as follows:
 - a. Cutters. Via the cognizant NESU and MLC.
 - b. Shore based standard boats. Via the Group, District and MLC.
- 7. If in concurrence with the MLC(v) recommendation, ELC will update the applicable PMS manual and distribute the amendments. Recommendations should include the exact wording of the change recommended, a brief explanation of why the change is necessary, and a new MPC in its revised form. Be complete and specific. Do not send recommendations to delete an MPC unless the deletion is applicable to all cutters of the class, that is, all 210-foot WMEC's or all 378-foot WHEC's. Do not send recommendations to change an MPC from one division to another. Units are authorized to assign "work groups responsible" as required. Reviewers of PMS change recommendations must keep in mind that implementation of new PMS procedures affect the entire cutter class; therefore, a recommendation to adopt a particular change should not be based upon "a trend of one". The review process for new MPCs should always include a thorough search for others which can be deleted.

- **D.** CUTTER AND BOAT MAINTENANCE PHILOSOPHY. This section briefly describes the Coast Guard's maintenance philosophy and how this philosophy is intended to be applied in the development of programs and facilities for the support of Coast Guard cutters and boats.
 - 1. <u>Tri-Level Maintenance</u>. All Coast Guard equipment requires some form of preventive, corrective, and facility maintenance. Ideally, it would be desirable for each unit to be given the full facilities and resources necessary for maintenance of all equipment assigned. From a practical viewpoint, this approach is not feasible, and such an approach would lead to an under utilization of facilities and waste of resources. To maintain Coast Guard equipment in the highest state of readiness, consistent with program goals, and to ensure maximum effective use of resources, a tri-level system of maintenance support has been devised; Organizational, Intermediate, and Depot. The complexity and magnitude of the maintenance event determines at what level within the tri-level system the event is performed.
 - a. Organizational Level Maintenance. Maintenance which is the responsibility of and performed by the unit's assigned crew, Maintenance Augmentation Teams (MATs), or directly under their auspices (i.e., cutter-funded commercial contract). Stations are responsible for completing all organizational level preventive and corrective maintenance for all assigned boats including those boats assigned to subordinate stations (small). Typical maintenance items falling under this category involve:
 - (1) All preventive maintenance except that requiring tools or other resources not held on board or that requiring technical skills of personnel beyond those available in the crew. Stations small shall not normally maintain the tools or materials required for preventive maintenance beyond daily check-off.
 - (2) All facility maintenance except that requiring resources or skills beyond that normally available to the unit.
 - (3) All corrective maintenance except that requiring tools, parts, or other resources not held on board or that requiring technical skills of personnel beyond those available in the crew.
 - b. Intermediate Level Maintenance. Maintenance which is performed by designated maintenance activities in direct support of the unit and its assigned crew that is not organizational, nor depot level. In practice, only a small percentage of maintenance falls in this category. Typical maintenance items falling under this category involve:
 - (1) All preventive maintenance not falling under the organizational level.
 - (2) Facility or corrective maintenance requiring resources or skills beyond that normally available to the unit.

- D. 1. c. Depot Level Maintenance. Maintenance performed on equipment or material requiring major overhaul or a complete rebuild of parts, assemblies, subassemblies, and end-items, including the manufacture of parts, modifications, testing, and reclamation. Typically, maintenance items in this category can be performed only during a drydock or dockside availability with commercial assistance, or they involve the removal of the affected equipment from the cutter for repair in an industrial facility ashore. For cutters, depot level maintenance represents the vast majority of conventional maintenance, repair, and alterations beyond the organizational level capability. Typical maintenance items falling under this category involve:
 - (1) All maintenance (both routine and emergency) requiring cutters to be drydocked, major hull repairs to boats, and periodic major system overhauls done off the unit (other than boats with engine/reduction gear sets covered by Central Engine Overhaul (CEO) program.)
 - (2) Facility maintenance requiring action by a shipyard such as major recoating of bilges, tanks, or voids; extensive tile or deck covering renewal; abrasive blasting/coating of the underwater body up to and including boot top.
 - (3) Corrective maintenance requiring overhaul or replacement of major cutter components (main engines, boilers, deck machinery, etc.).
 - 2. Operational Logistics Support Plan. Certain classes of cutters and boats have Operational Logistics Support Plans (OLSP) established which describe the maintenance program that has been specifically tailored to that class. When an OLSP is promulgated for a cutter class, the information contained in the OLSP shall supersede this section. Those classes of cutters and boats with an OLSP are:

420 WAGB / 378 WHEC / 270 WMEC / 225 WLB / 210 WMEC / 175 WLM / 110 WPB / 87 WPB / 25' TPSB./.47' MLB

- 3. <u>Cutter/Boat Class Maintenance Plan (CCMP/BCMP)</u> Under development to ensure compatibility with FLS.
- 4. Long Range Maintenance Plan (LRMP). Under development to ensure compatibility with FLS.
- 5. <u>Boat Maintenance Facilities</u>. Generally, cutters and MATs for cutters are equipped with facilities sufficient to perform the majority of maintenance except for that done by commercial resources. Boats on the other hand do not have maintenance facilities aboard, but depend upon the shops and capabilities of the station or group to which the boat is assigned. To assist in planning the facilities necessary to support the maintenance philosophy for boats, the following guidelines are established. The type and number of boats assigned, the geographical location, and capabilities of the succeeding level support activity must be considered when establishing the boat support facilities.

- **D.** 5. a. Organizational Level Facility Requirements.
 - (1) This is typically a station (excluding stations small) performing organizational-level boat maintenance. The minimum facility requirements are:
 - (a) Tools and equipment to accomplish PMS.
 - (b) Part storage for PMS requirements.
 - (c) Adequate mooring with electrical connections for maintenance and boat engine heaters.
 - (d) Fresh and oily water connections.
 - (e) Sewage disposal facilities.
 - (f) Hazardous materials disposal facilities.
 - (g) Shop space.
 - (2) The following facilities may be required for some organizational-level boat maintenance facilities, for the reasons indicated below:
 - (a) Covered moorings, boat house, or other shelters may be required to protect boats and provide an environment suitable to ensure timely accomplishment of PMS procedures.
 - (b) Boat haulout facilities may be required to accomplish emergency underwater body repair as a result of geographic isolation, distance to intermediate-level facility, lack of commercial capability available, economic basis, or operational requirements.
 - b. Intermediate Level Facility Requirements.
 - (1) Within each group, at least one boat maintenance facility shall be given the capability to provide intermediate-level support for all boats assigned in the group. Maintenance facilities shall be sufficient to perform the following repairs:
 - (a) Fiberglass repair (minor patchwork).
 - (b) Minor sand blasting for surface preparation for the application of protective coatings (nonstructural, that is, valves, fittings).
 - (c) Application of paint and coating systems.
 - (d) Steel and aluminum welding.
 - (e) Woodwork, joiner work.

- **D.** 5. b. (1) (f) Routine and emergency underwater body maintenance.
 - (g) Shaft and shaft bearing replacement.
 - (h) Propeller and rudder replacement.
 - (i) Engine removal and reinstallation.
 - (j) Major electrical work.
 - c. Depot Level Maintenance.
 - (1) Commercial depot-level boat maintenance capability is preferred except when inhouse facilities are indicated because:
 - (a) Economic analysis shows cost benefit favoring in-house capabilities.
 - (b) Required capabilities are not reasonably available in an MLC area.
 - (2) When in-house depot level maintenance is justified, the maintenance facilities shall be capable of performing the following.
 - (a) Major hull repairs.
 - (b) Major electrical repairs.
 - (c) Overhauls, other than engine/reduction gears for standard boats.
 - (d) Renovations.
 - (e) Restorations.
 - 6. Central Engine Overhaul (CEO). The CEO program, managed by ELC, provides replacement engines of standard configuration to certain cutters (for example 378' Gas Turbines, 110' and 87' MDEs) and standard boats (for example 41', 47', 49'). This is accomplished through remanufacture to standard specifications and centralized supply management. A detailed description of this program, including funding, policy, responsibilities, and available engines can be found in the Supply Policy and Procedures Manual, COMDTINST M4400.19 (series).

E. MAINTENANCE AND PRESERVATION OF BOATS IN SERVICE.

1. <u>General</u>. The provisions of this section apply to all boats in an active status, whether aboard a cutter or ashore. The procedures for boats in an inactive status are given in paragraph G of this chapter. In addition to manufacturers' technical guidance and related PMS, boats shall be maintained as follows:

- E. 1. a. Action Requirements. Boats in active status shall be inspected for proper preservation of hull interiors and structural members at least every 6 months. Particular attention should be paid to the relatively inaccessible bilge areas, engine compartment bilge locations, and through-hull fittings. Results shall be documented within the Annual Boat Inspection Report (CG-3022), and deficiencies shall be corrected. In addition to normal maintenance and preservation procedures, the following actions outlined in the proceeding sections shall be accomplished.
 - b. Steel Hulls. Steel hulls shall be preserved according to procedures stated in Coatings and Color Manual, COMDTINST M10360.3 (series), and other current information pertaining to authorized coatings. In all cases, proper surface preparation before application of the various coatings is of extreme importance. Bilge areas shall be kept free of trash and oil and frequently cleaned.
 - c. Fiberglass/Plastic Hulls. Exterior surfaces of most fiberglass and plastic boats are constructed of a pigmented gel coat that doesn't require a special preservative coating. Unless exterior surfaces become permanently stained or chipped, frequent washing and waxing (marine type fiberglass wax) is sufficient. Coatings and Color Manual, COMDTINST M10360.3 (series), shall be followed when plastic boats require painting. In addition, plastic hulled boats, fitted with wooden transoms, should be inspected for wood decay.
 - d. Aluminum hulls shall be preserved according to the procedures given in Coatings and Color Manual, COMDTINST M10360.3 (series). It is extremely important to avoid the attachment of more noble dissimilar metals directly to aluminum.
- **F.** MAINTENANCE AND PRESERVATION OF BOATS IN STORAGE. To ensure the reliability of boats in storage, certain maintenance procedures must be followed. The instructions contained in this chapter apply to all boats that are in an inactive status. Boats in an inactive status are defined as ones for which no immediate operational need exists, which include certain Headquarters-controlled boats in storage, district spares, and boats laid up for seasonal storage.
 - 1. <u>General Hull Preservation</u>. In addition to manufacturers' technical guidance and related PMS, hulls shall be maintained as follows.
 - a. Steel and Aluminum Hulls. Steel and aluminum hulls shall be made free of water, oil, grease, and dirt prior to storage. All surfaces shall be thoroughly prepared, painted, and maintained in accordance with the Coatings and Color Manual, COMDTINST M10360.3 (series). Outside storage is acceptable as long as adequate shelter is available to protect engines and bilges from water.
 - b. Fiberglass/Plastic Hulls. Fiberglass and plastic hulls require no special preparation or maintenance, but should be properly cleaned, drained, and adequately supported. Keel supports should be placed under bulkheads only, unless support is provided for the entire length of the keel. Boats stored outside shall be protected by applying one coat of a good grade marine type fiberglass wax annually and covered, if possible. Covers should be vented to allow for air circulation.

- **F.** 1. c. Rigid Hull Inflatable Boats. Rubber sponsons require frequent washing to prevent decay and mildew. Boat covers should be used to protect rubber hulls from the negative effects of ultra-violet rays. However, covers shall be removed periodically to prevent mildew and facilitate ventilation.
 - d. Tanks. Diesel oil tanks shall be maintained in accordance with MLC Specifications for tank cleaning and flushing.
 - 2. <u>General Machinery Preservation</u>. Diesel engines shall be preserved in accordance with current manufacturer guidelines and instructions. NSTM Chapter 233 may be used for general guidance.
 - 3. <u>Shipping</u>. Boats ordered to be shipped shall first be preserved as specified in the preceding paragraph, to ensure that the boat will arrive at its destination without damage. If boats have been in storage, the state of preservation shall be checked and necessary steps taken to minimize deterioration and damage during shipment. All machinery and equipment shipped with the boat must be adequately protected from the weather.
 - 4. <u>Records</u>. Adequate records of the steps taken during deactivation, including the inventory of equipment, shall be maintained within the Annual Boat Inspection Report (CG-3022).
 - 5. <u>Reactivation of Diesel Engines</u>. Diesel engines shall be reactivated in accordance with current manufacturer guidelines and instructions. NSTM Chapter 233 may be used for general guidance.

CHAPTER 083. SUPPLY SUPPORT

- A. GENERAL. The following supply support documents; Combined Allowances for Logistics, Maintenance and Support (CALMS), Boat Outfit and System Support (BOSS) and Electronics Repair Parts Allowance Lists (ERPAL) are being replaced by Management Information for Configuration and Allowances (MICA). MICA covers the Hull, Mechanical, Electrical, and Electronic systems for cutters, boats and shore side support units. The Coordinated Shipboard Allowance List (COSAL) will continue to be the ordnance systems allowance document for cutters. MICA and COSAL are both technical and supply documents prepared for an individual cutter/unit. They define an equipment's nomenclature and operating characteristics and list technical manuals and drawings. Also, they identify spare parts, special tools and quantities recommended to operate and maintain the cutter/unit for a specified period of time. All of these supply support documents will be electronically provided with a unit's specific Configuration Management Plus (CMplus) database.
- **RESPONSIBILITY.** Administration and maintenance of the supply support programs are under the cognizance of Commandant (G-S), and the Engineering Logistics Center (ELC). Refer to the Supply Policy and Procedures Manual, COMDTINST M4400.19 (series) for directions and responsibilities within the programs.
- C. <u>APPROPRIATIONS</u>. Operating Material and Supplies (OM&S) and inventory items managed and stocked by the ELC are procured with Supply Fund (SF) or Appropriations Purchase Account (APA) funds. SF items are issued and charged to the requisitioning unit; however, APA items are free issue. APA items are characterized by relatively high cost consumables, long lead production/delivery time, subject to design or configuration controls, mission critical, and repairables. Refer to the Supply Policy and Procedures Manual, COMDTINST M4400.19 (series) for further guidance.

Page Intentionally Left Blank

CHAPTER 085. COAST GUARD NAVAL ENGINEERING DRAWINGS

A. INTRODUCTION.

- 1. The community of drawings is presently composed of four, somewhat overlapping, types of drawings.
 - a. Engineering Drawings (naval, ordnance and electronic engineering).
 - b. Technical Publication & Manual Drawings (naval, ordnance & electronic engineering).
 - c. Provisioning Drawings (logistics and procurement).
 - d. Diagrammatic Drawings and Sketches (unofficial)
- 2. While the content of this chapter will focus on engineering drawings, it is important to recognize that a large amount of technical information can be obtained from the drawings provided as part of the provisioning process and drawings associated with the configuration review and engineering change prototype process.

B. DEFINITIONS.

- 1. <u>Platform.</u> As used in this chapter, platform means cutter, vessel and/or standard boat.
- 2. <u>Platform Class</u>. Platform class refers to a group of cutters, vessels and/or standard boats belonging to a specific class (i.e. 110' "C" Class WPB {110C-WPB}, 225' "B" Class Ocean Going Buoy Tender {225B-WLB}, 41' UTB {41-UTB}, etc.).
- 3. <u>Engineering Drawings</u>. Engineering drawings describe hull, mechanical, electrical (HM&E), ordnance and electronic systems and equipment installed on Coast Guard platforms. In general, the drawings were prepared by the Coast Guard or a shipbuilder as part of the platform design and construction process and then delivered to the Coast Guard. Once delivered, they are retained for purposes such as reference documentation, design alterations and maintenance. When appropriate, the drawings are revised throughout the platform's life cycle to reflect configuration changes. As used in this chapter, engineering drawings include both selected record drawings and non-selected record drawings (see paragraphs 085-B.10 and 085-B.11). Engineering drawings can be further broken down into four types:
 - a. Platform class drawings. Platform class drawing are official engineering drawings that contain information on hull, mechanical, electrical, ordnance and electronic systems and equipment installed on a specific platform class. Generally speaking, platform class drawings will reflect "class" configuration. However, certain drawings may reflect individual platform variations when the configuration varies from the platform class standard configuration. Drawings that reflect individual platform variations shall be annotated to reflect the specific hull(s) the drawing applies to.

- B. 3. b. Fleet Drawings. These are official Coast Guard drawings that apply to more than one platform class. To avoid the high costs and labor intense practice of updating multiple platform class drawings, fleet drawings should be used when the drawing applies to more than one platform class unless local circumstances or other factors make their use impractical or specific class drawings exist.
 - c. Contract and Contract Guidance Drawing. Contract and contract guidance drawings are used in contract packages for new construction and major modifications to guide the contractor in developing the detail design. Once the detail design is completed and the platform constructed a new set of "as-built" engineering drawings becomes the accurate reflection of the details of the platform class.
 - d. Procurement, Equipment, Parts and Materials Lists. Under certain conditions, independent lists are generated separately from a drawing. Examples of these lists include:
 - (1) Bill of Materials (BMs): A list of materials associated with a drawing.
 - (2) Equipment List (EL): A list of equipment associated with a platform.
 - (3) Parts List (PL): A list of parts associated with an equipment and/or system on a platform.
 - (4) Procurement List (PR): Contains a list of item to be procured associated with the construction of or modification to a platform.
 - 4. <u>Technical Publication and Manual Drawings</u>. These are drawings contained in technical publications and manuals and are generally constructed to a different, less stringent requirement than those for engineering drawings. However, in some cases a drawing in a manual or technical publication may be a part of or a reduced version of an engineering drawing. While this chapter will address updates to the drawings contained in technical publications and manuals, it is important to note that these drawings and sketches are not considered part of the engineering drawing set. However, if someone feels that a drawing provided in a technical publication or manual should be an engineering drawing, they should suggest this to ELC (02T).
 - 5. Provisioning Drawings (Logistics and Procurement). The Coast Guard receives a large body of information in many different forms to aid them in making provisioning determinations. This information is sometimes in the form of drawings, which must meet the requirements of MILT-31000. The Coast Guard then uses the information to provision a platform and build allowance documents. The drawing information provided as part of this process will sometimes be the same as or similar to the information contained in the engineering, technical publication and manual drawings. However, in some cases these drawings will contain data not duplicated in other places. The requirements for this type of drawing are spelled out in Provisioning Manual For Major Systems Acquisitions, COMDTINST M4423.2 (series).

- B. 6. <u>Diagrammatic Drawings and Sketches</u>. Diagrammatic drawings and sketches are associated with the configuration review and engineering change prototype process. The drawings are "unofficial" drawings used to provide guidance only and are generally converted to "official" engineering drawings after the configuration review and change prototype process has been completed and the engineering change approved. This type of drawing will usually become part of the engineering drawing set or revise an existing engineering drawing, and should be developed in AutoCAD format IAW Naval Engineering, Automated Computer Aided Drawing Standards Manual, COMDTINST 9085.1 (series).
 - 7. Original Drawing. As used in this chapter, an original drawing is a drawing printed on Mylar or Velum. The drawing serves as the "official" drawing of record. An authorized approving official must sign all original drawings. All original drawings will be managed by and stored at the ELC (02T), unless checked out for authorized revision.
 - 8. Reproducible Copy. As used in this chapter, a reproducible drawing is a drawing contained on a reproducible media such as sepia or paper. Reproducible drawings shall not be printed on mylar or velum, only original drawings shall be printed on this material. Revision. A formal change to an existing engineering drawing. All revisions to an engineering drawing must be documented in the revision block of the drawing.
 - 10. <u>Selected Record Drawings</u>. Certain engineering drawings contain important life cycle and configuration management information. These drawings are classified as selected record drawings (SRDs) and are required to be maintained up-to-date (revised) throughout the platform's service life. Drawing users are warned that even selected record drawings may not be 100 percent accurate. Accordingly, users should verify the accuracy of referenced drawings, especially if a drawing is used for contractual purposes, to avoid claims for faulty government furnished information (GFI).
 - 11. <u>Non-selected Record Drawings</u>. All remaining drawings, which generally depict details of platform construction, but are not necessarily required to be kept up-to-date. The drawings are retained on file for informational purposes.
 - 12. <u>Dual Title Drawings</u>. Vendor or other third party drawings that are converted to Coast Guard drawings and given a Coast Guard title block, effectively becoming a dual title drawing. However, the drawing shall be marked IAW paragraph 085-G.1.d to indicate that the Coast Guard is the current owner of record.
 - 13. <u>As-Built Drawings</u>. Engineering drawings that reflect the as-built condition of a platform or group of platforms belonging to the same class (platform class drawings) or to several classes of platforms (fleet drawings).
 - 14. <u>Plan-Set (Number)</u>. All platform class drawings are assigned a specific plan-set number (i.e. 110-WPB, 110B-WPB, 400-WAGL, etc.). The plan-set number is incorporated into the drawing number (see paragraph 085-G.2) and identifies the platform class that the drawing pertains to. All fleet drawings are assigned to the plan-set number "FL."

C. GENERAL.

- 1. Drawing preparation and maintenance is very time consuming and expensive. Whenever possible, the number of engineering drawings should be kept to a minimum. This can be accomplished by applying one drawing to several platforms in the same class versus developing a drawing for each platform, or using fleet drawings when the same system or equipment is used across several platform classes.
- 2. To avoid the high cost of multiple drawing production, a drawing can apply to several classes or sub-classes of platforms. If a drawing applies to more than one "class" of platforms, it shall be assigned a fleet drawing number. If a drawings is created that applies to more than one "sub-class" (i.e. 110 A, B and C class WPBs), a drawing number from the first plan-set issued within the platform sub-class (i.e. 110A WPB) shall be assigned. A drawing applicable to more than one platform class or sub-class shall clearly indicate to which classes, sub-classes, or specific platforms the drawing applies to on sheet 1 of the drawing. If necessary, consult with ELC (02T) for additional guidance.
- 4. All drafting work on drawings, whether done by AutoCAD or hand, shall be of such quality that reproduction/blow-backs can be made with suitable results.

D. MANAGEMENT OF ENGINEERING DRAWINGS FOR COAST GUARD PLATFORMS. ELC (02T) is the sole authority for managing engineering drawings.

- 1. All original engineering drawings (both hard copy and AutoCAD) shall be retained on file at the ELC (02T) unless officially checked-out for revision.
- 2. Engineering drawings shall only be released to those commands with revision and signature authority as listed in Table 085-1. Original engineering drawings shall not be released to other parties unless specifically authorized by ELC (02T).
- 3. All engineering drawings will be checked out for revision through the Naval Engineering Technical Information Management System (NE-TIMS). Those drawings that exist in electronic format (i.e., AutoCAD) may be downloaded directly from NE-TIMS. For drawings that exist only in hard copy format, the original sheets must be requested from ELC (02T) after being checked out through NE-TIMS
- 4. The responsibility for revising or creating new engineering drawings rests with the program or command sponsoring the engineering change, modification, structural change, material upgrade or installation of a new system or equipment.
- 5. All affected selected record drawings shall be updated to reflect the current configuration.
- 6. All new drawings or existing drawings requiring extensive revision shall be completed IAW Naval Engineering, Automated Computer Aided Drafting Standards, COMDTINST M9085.1 (series).

- **D.** 7. All engineering drawings shall contain a number assigned by ELC (02T) in the appropriate section of the title block.
 - 8. All requests for drawing numbers shall be directed to ELC (02T). When requesting a drawing number, the requester should include the complete drawing title, drawing plan-set, SWBS number, number and size of sheets and the name/organization of the requester in the request.
 - 9. Indexes of all engineering drawings are maintained in an electronic database by ELC (02T). Copies of applicable indexes may be requested from ELC (02T).
 - 10. Newly created drawings and revisions to existing drawings require the signature of a designated authority to become part of the official record. Signature authorities for new and revised drawings are listed in Table 085-1.
 - 11. For new drawings, signature approval on sheet 1 of a multi-sheet drawing constitutes approval of all sheets of that drawing. Approval signatures are not required on subsequent sheets of the same drawing.
 - 12. When a drawing revision is approved, the approval authority shall initial and date the revision block. The approval signature in the revision block on sheet 1 constitutes approval of all portions of that revision. In addition, the name and activity of the approving official shall be printed below the initials.
 - 13. Unsigned drawings and revisions will not be accepted by ELC (02T).
 - 14. For AutoCAD produced new and revised drawings, printed names (i.e. text) with the suffix designator "/s/" shall be substituted for drawing approval signatures.
 - 15. Once approved, all new and revised drawings shall be submitted to ELC (02T) for format review and inclusion in the Naval Engineering Technical Information Management System. All revised drawings shall be checked in through NE-TIMS. Revised electronic drawing files can be uploaded directly to NE-TIMS, while revised original sheets of hard copy drawings must be sent to ELC (02T) after being checked in through NE-TIMS. Because electronic drawings require strict inventory management to prevent unauthorized revision, once an electronic drawing file has been submitted to ELC (02T) it shall be removed from all local hard drives.

TABLE 085-1 DRAWING REVISION AND SIGNATURE AUTHORITY

DRAWING TYPE	Original Issue Authority	Revision Issue		
		Authority		
Contract & Contract	Chief, Office Of Naval	Chief, Office Of Naval		
Guidance Drawings	Engineering (G-SEN)	Engineering (G-SEN)		
All Others	Engineering Logistics Center,	Engineering Logistics Center,		
	MLCs (v/t), Commanding Officer	MLCs (v/t), Commanding Officer		
	CG Yard, TISCOM, C2CEN or	CG Yard, TISCOM, C2CEN or		
	Project Resident Office.	Project Resident Office.		
	See Note 1.	See Note 1.		

NOTE: 1. For the ELC, signature authority is the Branch Chief of the cognizant Equipment Management Branch. For operational and support units, signature authority is the cognizant MLC (v/t), Commanding Officer CG YARD, TISCOM, C2CEN or Project Resident Office.

E. DRAWING DISTRIBUTION.

- 1. <u>Original Drawings</u>. All original engineering drawings (hard copy and AutoCAD files) shall be retained on file at ELC (02T) unless officially checked-out for revision.
- 2. <u>Reproducible Drawings</u>. The ELC will provide each MLC with a reproducible copy of all new and revised drawings.
- 3. <u>Aperture Cards</u>. The Coast Guard is in the process of phasing out aperture cards and will be distributing drawings on CD-ROM. Until such time as operational platforms and support units receive CD-ROMs, aperture card sets should be maintained.
- 4. <u>CD-ROMs</u>. In the future, engineering drawings will be distributed by ELC (02T) in electronic form on CD-ROMs for viewing on SWS-III. ELC (02T) will provide each platform, 65' or greater in length, MLCs, CG YARD and NESUs with CD-ROMs. In addition, MLCs will be provided with sufficient CD-ROMs for further distribution to industrial support facilities, groups and stations for vessels less than 65' in length. Once received, all units shall be responsible for maintaining the appropriate CD-ROM set(s).
- 5. Naval Engineering Technical Information Management System (NE-TIMS). All units with SWS-III and access to the Coast Guard Intranet (CGDN+) will be provided with access to the NE-TIMS database via the Intranet. Access to the database will provide operational and support units real-time access to engineering drawings.

F. SELECTED RECORD AND NON-SELECTED RECORD ENGINEERING DRAWINGS.

Some engineering drawings depict general features of the platform which remain important over the platform's service life while other drawings show particular areas in the large amount of detail needed only for design, construction and fabrication purposes. Accordingly, only a relatively small part of the design and construction produced engineering drawings need to be kept up-to-date to satisfy engineering program functional needs throughout the platform's life-cycle.

- 1. <u>Non-Selected Record Drawings</u>. Non-selected record drawings (NSRDs) normally do not serve an important function; therefore, no attempt should be made to keep them current. In some cases, NSRDs are consulted for certain data and thus are retained on file. If for any reason, it becomes necessary to revise a non-selected record drawing, the drawing shall be revised in accordance with the standard drawing revision practices outlined in this chapter.
- 2. <u>Selected Record Drawings</u>. Selected record drawings (SRDs) are needed for normal engineering program execution purposes and thus must be kept current. As a minimum, the following types of selected record drawings shall be maintained current:

- **F.** 2. a. All Standard Boat Drawings. Due to stringent configuration control requirements, all drawings for standard small boats are considered selected record drawings and shall be kept up-to-date.
 - b. Booklet of General Plans. This is a collection of especially useful drawings, bound together for user convenience and assigned a separate USCG drawing number. The booklet of general plans usually includes: 1) Outboard profile, 2) Inboard profile, 3) Deck, platform and level arrangements, and 4) Typical structural sections. To avoid duplication of effort, if a plan-set contains a booklet of general plans and the same drawings are duplicated but carrying separate drawing numbers, only the booklet of general plans will be kept up-to-date.
 - c. Docking Plans.
 - d. Piping and HVAC Diagrams. Manufacturer makes and model number data that might be shown on diagrams will not be updated.
 - e. One-Line Electrical Drawings.
 - f. Propulsion Shafting Arrangement Drawings. This includes all general arrangement, shaft, shaft bearing, strut, seals and support structures and the table of bearing reactions and influence numbers.
 - g. Underwater Body Appendage Drawings. Such as rudder, rudder stock, bow propeller, fin stabilizer, bow thruster, sonar dome, strut bearing, grid coolers, etc.
 - h. Structural Drawings. Including drawings (such as watertight hatch drawings) which depict features of watertight integrity.
 - i. Mast Arrangement Drawings.
 - j. Shell Expansion Drawings.
 - k. Weight Handling System Drawings. Such as boat handling arrangements, boom/crane arrangements, rigging for integrated tow, spud/spud well arrangements, etc.
 - 1. Navigation Light Arrangement and Details.
 - m. Antenna Arrangement Drawings. Sometimes included as part of outboard profile drawings.
 - n. Ordnance Benchmark Drawings.
 - o. Tank Capacity Tables.
 - p. Machinery Arrangement Drawings. Normally included in the booklet of general plans.
 - q. Propulsion and Electric Plant Control System Diagrams.

- **F.** 2. r. Fueling-At-Sea Arrangement Drawings.
 - s. Draft Marks Drawings.
 - t. Compartment Air Testing Diagrams.
 - u. Stability and Loading Data Book, Inclining Experiment Reports and other stability-related documents.
 - v. All Fleet Drawings.
 - w. Visual ID. Sometimes shown on outboard profile drawings.
 - x. Curves Of Form Drawings.
 - y. Steering Gear Arrangement Drawings.
 - z. Interior Communication (IC) Block/Elementary Wiring Diagrams.
 - aa. Flight Deck Marking Drawings.
 - bb. Propeller and Propulsor Drawings.

G. DRAWING TITLE BLOCKS AND NUMBERING SYSTEM.

1. Coast Guard Title Blocks.

- a. Coast Guard title blocks are required on all engineering drawings with the exception of the cases noted below:
 - (1) Coast Guard drawing numbers and title blocks are not typically required on vendor standard drawings and similar drawings not specifically prepared for Coast Guard use. However, Coast Guard drawing numbers and title blocks must be applied to such drawings or a package of such drawings in order to make them part of the official record.
 - (2) Coast Guard drawing numbers and title blocks may be assigned to vendor drawings or similar third party drawings by creation of a cover drawing sheet with an index of attached (related) drawings, or by creation of a dual title drawing (see 085-G.1.d).
 - (3) Under certain situations, with ELC (02T) approval, a Coast Guard drawing number may be assigned to a drawing without a Coast Guard title block (i.e. Platforms with related drawing received from the Navy). If a Coast Guard number is assigned to a drawing without a Coast Guard title block, it shall be obvious to the drawing reader that the Coast Guard is responsible for the drawing content.
- b. Drawing title blocks shall follow ASME/ANSI Y14.1 or Y14.lM documentation format practices, with the following exceptions and specific requirements:

- G. 1. b. (1) Block A Activity. "UNITED STATES COAST GUARD" shall be in the upper left corner, "WASHINGTON, D.C. 20593" shall be in the upper right corner, and "OFFICE OF NAVAL ENGINEERING" shall be centered on the second line in a larger type face.
 - (2) Block B The Drawing Title. This block and the overall height of the title block shall be increased in height to accommodate four separate lines of drawing title text.
 - (3) Block C Drawing Number. The length of this block shall be increased to accommodate a Coast Guard drawing number of eighteen alpha/numeric characters.
 - (4) Block I CAGE Code. This block shall read "81340"
 - c. Questions concerning Coast Guard drawing numbers and title blocks, including use and need, should be referred to ELC (02T).
 - d. Under certain conditions it may be beneficial to add a Coast Guard title block to an existing third party drawing. To add a title block to an existing drawing, the drawing shall be extended ahead of the existing drawing title block and number to add the Coast Guard title block and number and to create a dual title drawing.
 - (1) The new drawing panel shall include a Coast Guard title block, a single Coast Guard signature approval block, and a revision block. The original drawing title block shall be hashed out to indicate that it is no longer applicable, but it shall remain legible. The revision block shall note the appropriate revision level and words "ADDED USCG TITLE BLOCK AND DRAWING NO.", plus an explanation of the reason and/or authority for doing so.
 - (2) The appropriate approving official shall sign the signature block.

2. Drawing Numbering System.

- a. Coast Guard drawing numbers must be a prominent part of the Coast Guard drawing title block.
- b. Drawing numbers shall be structured as follows:

Pla	an-set Number C	onsisting of:		
Platform Length	Platform Sub-Class	Vessel Class	Ship Work Breakdown Structure (SWBS)	Serial Number
110	A	WPB	521	001
	Drawi	ng Number: 110	OA-WPB-521-001	

NOTE: The plan-set number (Platform Length, Platform Sub-Class and Vessel Class) for new platform classes or platforms undergoing major renovation shall be assigned by ELC (02T).

H. ELECTRONIC (AutoCAD) FILE LABELING CONVENTION.

- 1. There are several entities needed to uniquely define and identify electronic (AutoCAD) files. In addition, strict file labeling convention must be used to allow drawings to be entered into storage and management databases such as the Naval Engineering Technical Information Management System (NE-TIMS).
- 2. All electronic AutoCAD files shall be labeled as follows:
 - a. Engineering Drawings. Each sheet of an engineering shall be placed in a separate electronic file. Each electronic file shall be labeled with six unique entities, each separated with an underscore:

<Plan-set>_<SWBS>_<Serial>_<Sheet>_<Insert Sheet>_<Revision>.dwg

Examples

DRAWING NUMBER	ELECTRONIC FILE NAME
378-FRAM-E-0243-002, Sheet 5A, Rev.	378-FRAM-E_243_2_5_A_D.dwg
D	
76-TE-9811-001, Sheet 5, Rev	76-TE_9811_1_5dwg

Note 1: All fields are mandatory.

Note 2: If the sheet is not an insert sheet, use dash in the insert sheet field.

Note 3: Use dashes in the revision field to indicate an original, non-revised sheet.

Note 4: Do not use leading zeros in any field (i.e. SWBS 0243 = 243).

Note 5: .dwg indicates file extension (type).

b. Procurement, Equipment, Parts and Materials Lists. Each sheet of this type of drawing shall be placed in a separate electronic file. Each electronic file shall be labeled with five unique entities, each separated with an underscore:

<Plan-set>_<PR/BM/PL/EL-Number>_<Sheet>_<Insert Sheet>_<Revision>.dwg

Examples

DRAWING NUMBER	ELECTRONIC FILE NAME
378-FRAM-E, BM-004, Sheet 5, Rev. A	378-FRAM-E_BM-004_5A.dwg
76-TE, EL-750, Sheet 3A, Rev	76-TE_EL-750_3_Adwg

Note 1: All fields are mandatory.

Note 2: If the sheet is not an insert sheet, use dashes in the insert sheet field.

Note 3: Use dashes in the revision field to indicate an original, non-revised sheet.

Note 4: Do not use leading zeros in any field (i.e. SWBS 0243 = 243).

Note 5: .dwg indicates file extension (type).

I. <u>NEW DRAWING PREPARATION</u>.

1. New drawings should be created (with a new drawing number) when the data to be presented involves an entirely new system, equipment or cannot otherwise be appropriately integrated (by revision or by suppression) into the existing drawing.

2. New drawings shall be prepared in accordance with Naval Engineering, Automated Computer Aided Drawing Standards Manual, COMDTINST M9085.1 (series). It includes diagrams and figures of drawing format requirements. The technical point of contact for Naval Engineering, Automated Computer Aided Drawing Standards Manual, COMDTINST M9085.1 is ELC (02T). Drawing format shall follow ASME/ANSI Y14.1 or Y14.1M documentation format practices.

J. <u>DRAWING REVISIONS</u>.

- 1. <u>Standard Revision Practices</u>. The following standard drawing revision practices shall be observed. These practices are generally in accordance with MIL-T-31000 Technical Data Packages, General Specifications and DOD-STD-l00. Additional information may be found in those documents or commercially prepared compilations of those documents for industry use. For specific questions and assistance, contact ELC (02T).
 - a. Drawings should be revised if the extents of drawing changes are minor and the old data can be easily retained as explained in 085-J.1.c. Adding additional sheets to a drawing (see 085-J.1.e) applies here.
 - b. Revise Original Engineering Drawings Only. Only original engineering drawings shall be revised. Revising a re-producible copy results in the generation of a duplicate drawing and leads to endless confusion. If it becomes necessary to prepare a draft revision on a duplicate drawing, the drawings shall be clearly marked in large letters "UNOFFICIAL DRAWING: FOR DRAFT REVISION PURPOSES ONLY" immediately adjacent to the title block.
 - c. Retaining Historical Data. Revisions shall be prepared retaining as much of the previously shown data as possible. Ideally, it should be possible to reconstruct the previous version of the drawing simply by undoing the changes described in the revision column. Thus the revision column itself should detail every change made, using wording that describes the change as accurately as possible, such as "ADDED DETAIL 9-F", "DELETED REF 16", or "RV-7 SET PRESS WAS 60 PSI". Note in the last case that it would be redundant to say "CHANGED RV-7 SET PRESS FROM 60 TO 75 PSI", because the body of the drawing already shows the set pressure as 75 PSI. Data should be hashed-out (not erased, unless the revision column will document the previous data) and redrawn in another place. It is important to retain the previously shown data because it may be years before an engineering change is actually accomplished aboard a platform, and the operational and maintenance commands must have information that depicts their actual platform configuration in the interim.

- d. Give Reason for Revision. The revision column should begin by documenting the reason for the revision, such as "TO SUIT ENGINEERING CHANGE (number if known) TO REPLACE BEARING MATERIAL XXX".
 - e. Add Additional Sheets. An effective way to revise a drawing is to add new sheet(s). This approach is especially effective when large portions of a drawing must be re-drawn. The old portions are simply hashed out, and the new sheet(s) can then be drawn in AutoCAD. This approach also retains the old data for historical purposes.

f. Show Revision Status.

- (1) On drawings that consist of more than one sheet, it is common practice for each sheet to carry its own revision designator (i.e. all sheets of the drawing do not necessarily carry the same revision), so that only the affected sheets need to be issued when revised, not all the sheets. Sheet one of all drawings will always contain the highest revision character of the drawing as well as any subsequent sheets that contain a revision block, while each remaining sheet carries the revision character associated with the last revision that happened to affect that particular sheet. The revision character on any sheet (except sheet one and subsequent sheets containing revision blocks) can therefore skip letters, such as from D to G.
- (2) Accordingly, the first sheet of a multi-sheet drawing shall have a revision status table, which shall indicate the revision character of each sheet of the drawing. A revision status table shall be added if needed to all multi-sheet drawings whenever the drawing is revised for other reasons. With each revision to any part of the drawing, the revision status of sheet 1 and any subsequent sheets that contain a revision block shall be updated to the next sequential letter. Likewise, the revision character of each affected sheet shall be updated to the same character as sheet 1, and finally the revision status table shall be updated. The revision character of unaffected sheets shall not be changed.
- (3) The revision designator for a drawing shall be identified by an upper case letter or letters. The first revision shall be identified by "A", the second revision by "B", and so forth. Successive changes shall use the next sequential letter, except that the letters "I", "O", "Q", "S", "X", and "Z" shall not be used. Upon exhaustion of the alphabet, the next sequential revisions shall be "AA", "AB", etc., and then "BA", "BB", etc.
- (4) Where numbers have been used instead of letters for revision designators, the use of numbers shall be continued.

g. Revision Block.

(1) All revision notes for a multi-sheet drawing shall be placed in one revision block or column, beginning on sheet 1 and continuing to other sheet(s) as needed for space. In addition to revision details, the revision note shall identify the sheet number and applicable panel. However, if existing revisions to a drawing have been noted on

- J. 1. g. (1) the individual sheets, that practice may continue as long as a bold print note on sheet 1 identifies that "REVISION NOTES ARE DETAILED ON INDIVIDUAL SHEETS". This latter practice shall not be used for revisions to new or previously un-revised drawings.
 - (2) A triangular revision symbol or identifier shall be placed adjacent to all revised areas, except where the entire sheet has been added by revision. The triangular symbol shall contain the appropriate revision character. Where multiple items are being revised under the same revision, each item or group of items shall be identified with a superscript number outside the revision symbol that relates to the revision notes in the revision block.
 - Multi-Cutter Drawing Applicability. Drawings applicable to more than a single platform may
 be revised only if changes made do not result in the loss of information describing other
 platforms. Drawings may include alternative details applicable to different platforms if the
 applicability is clearly indicated and no alternative detail applicable to any other platform is
 erased or crossed out.

K. REVISION PROCEDURES FOR SPECIAL SITUATIONS.

- 1. Revision Of Drawings Associated With Engineering Changes (Ship/Boat).
 - a. The question of when to revise an engineering drawing frequently arises during the course of platform Engineering Change development. Changes are occasionally not approved as originally conceived. Thus, if the engineering drawing has been extensively revised before the change is disapproved or redirected, "un-revising" the engineering drawing to its original form is extremely difficult. For this reason, engineering drawings shall not be revised for prototyping purposes.
 - b. Accordingly, an engineering drawing shall not be revised until a Configuration Control Board (CCB) has reviewed and approved the change. If a CCB has not been held, or is not planned to be held, ELC (02T), in concert with Commandant (G-SEN) as appropriate, must give approval before starting to revise an engineering drawing.
 - (1) Engineering Changes. In general, drawings issued with or referenced by changes will be the minimum necessary to effect the modifications. In some cases, a sketch included in the change package may be all that is required. If SRDs are affected by the change, then the drawings shall normally be revised to suit by the time the change is issued. If a drawing showing details of the modification is needed for proper change execution, then revision of the applicable detailed drawing will be accomplished by the time the engineering change is issued. Unless specifically called for in the change, no additional drawing revisions shall be made at the time of change accomplishment.
 - (2) Engineering Changes for standard boats. Because it is intended that all standard boat drawings be kept up-to-date, all drawings affected by an engineering change will be revised before the change is issued.

- K. 1. c. In most cases, a diagrammatic drawing or sketch, per paragraph 085-B.6 should be made with red pencil on a print for checking purposes before proceeding with the revision to the master tracing. Using AutoCAD for DRAFT prototype design purposes is acceptable. Any DRAFT revision drawing should have a suitable note added, per paragraph 085-J.l.b.
 - 2. <u>Original Drawing Not Available</u>. This situation arises for example when original engineering drawings have not yet been received from the shipbuilder, and changes need to be made to certain systems.
 - a. A single, new engineering drawing for each appropriate set of drawings shall be created for the purpose of documenting needed changes. This new engineering drawing will remain in ELC (02T) and will be available for depicting various needed changes until the complete engineering drawings are received from the shipyard.
 - b. The title of this new engineering drawing shall be "CHANGES TO VARIOUS DRAWINGS". The following note shall be displayed prominently on it's face: "THIS DRAWING WAS CREATED FOR THE PURPOSE OF DOCUMENTING CHANGES TO VARIOUS SYSTEMS AND EQUIPMENT WHICH WERE DETERMINED TO BE NECESSARY WHEN THE ORIGINAL DRAWINGS WERE NOT AVAILABLE FOR REVISION." The USCG drawing number for this new engineering drawing shall be (Cutter Class Number) WXXX 085-100.
 - c. This new engineering drawing (which may grow to many sheets) shall be used to depict changes to any and all systems and equipment regardless of the SWBS grouping of the system or equipment being changed. The drawing will serve as a single "place" where all such needed changes can be documented.
 - d. This engineering drawing shall be used to depict the needed changes in the most practical manner, by recreating only as much of the (absent) system drawing as necessary to understand the modification(s) that is to be made.
 - e. It is mandatory that this new engineering drawing make reference (by drawing number in a list of references on sheet 1) to the (absent) system drawing. The list of references will be used as a "tickler" to update the absent original engineering drawings when received. In addition, a note shall state: "This change was developed based on information shown at Revision "X" of reference (Y)."
 - f. When the (previously absent) engineering drawings become available, it will only be necessary to pull the affected drawings and revise them as follows: Place the following note immediately adjacent to the title block: "FOR CERTAIN REVISIONS TO THIS DRAWING, SEE USCG DWG WXXX 085-100."
 - g. If time permits and it is feasible, the changes can actually be incorporated by revision, in which case the related portions of WXXX 085-100 should be hashed out to minimize confusion.

L. SUPERCEDING A DRAWING.

- 1. Drawings should be superseded if extensive revisions are required or if the quality of the existing original engineering drawing is poor (torn, faded, smeared, etc.). If a drawing is superseded, the following steps shall be followed:
 - a. The title block of the superseded (old) engineering drawing shall be hashed out and the following statement entered in bold characters near the drawings title block "THIS DRAWING IS SUPERSEDED BY USCG DWG (S) YYY."
 - b. The new (superseding) engineering drawing shall carry a new USCG drawing number as assigned by ELC (02T). The superseded drawing title, approval names (text format) and approval dates shall be carried over to the new drawing. The new drawing shall be a "clean" drawing; i.e. revision symbols, cross-outs, and the revision block from the old superseded drawing shall not be reconstructed on the new drawing. The following statement entered in bold characters shall be placed immediately adjacent to the title block "THIS DRAWING SUPERSEDES USCG DWG XXX." The original issue of this drawing shall be REV "A", and the revision column shall be annotated as follows "THIS DRAWING WAS CREATED BECAUSE (give reason)." If redrawn with substantive change from what was shown on the superseded drawing, describe the changes and the reason for the changes in the revision column as per normal revision practices. The new drawing's revision block shall be signed in accordance with paragraph 085-D.12.
 - c. The superseded drawing, with the title block hashed out and superseded statement entered next to the title block, shall be returned to ELC (02T) and retained in the active file and in the drawing index for the affected platform(s) for historical information purposes.
- M. <u>CANCELING A DRAWING</u>. If a drawing no longer contains useful or applicable information, such as an entire system being removed from a platform, the drawing shall be cancelled. Hash mark out the title block and place the following bold face note immediately adjacent to the title block "THIS DRAWING HAS BEEN CANCELLED." Give the reason for the drawing cancellation in the revision column. The cancelled drawing, with the title block hashed out and cancellation statement entered next to the title block, shall be returned to ELC (02T) and retained in the active file and in the drawing index for the affected platform(s) for historical information purposes.

N. <u>TECHNICAL PUBLICATION DRAWINGS</u>.

- 1. Drawings in technical publications may require revision after accomplishment of engineering changes to reflect the updated system configuration. Drawings are revised and new prints issued to technical publication holders by technical publication amendments.
- 2. Revisions to technical publication drawings that have an assigned Coast Guard drawing number are accomplished by revising the engineering drawing located in ELC (02T) and republishing the revised drawing(s) as an amendment to the technical publication.

- **N.** 3. Revisions to technical publication drawings that do not have an assigned Coast Guard drawing number shall be accomplished as follows:
 - a. Changes that are "moderate to major" in nature require that an engineering drawing be created. This drawing can be prepared by: 1) photographic production of a mylar or a suitable print or, 2) production of an electronic copy of the drawing by digital scanning or digitizing to AutoCAD, revising as required, and plotting the new engineering drawing. The new drawing shall contain the original manufacturer's title block, revision block, notes and list of references. The new engineering drawing shall also be given a standard Coast Guard title block and a new revision block for documentation of Coast Guard revisions. These drawings shall be assigned a Coast Guard drawing number and become a part of the engineering drawing file.
 - b. Changes that are "minor" in nature can normally be accomplished without creating a new engineering drawing. In such cases, make pen-and-ink changes to the drawing contained in the master technical publication and document these changes in the revision block.

CHAPTER 086. TECHNICAL PUBLICATIONS

- A. NAVAL ENGINEERING TECHNICAL PUBLICATIONS. ELC (02T) is the sole authority for publishing and issuing amendments to Naval Engineering Technical Publications (TPs). ELC (02T) maintains a "Master Library" of all TPs. These publications provide technical information and data concerning certain cutters and boats and equipment installed on board them.
 - 1. <u>Publication Listing and Index.</u> An Engineering Information Data Base (EIDB) is available from ELC (02T) for all controlled Naval Engineering TPs. EIDB listings for a particular cutter or command can be obtained from ELC (02T). Printouts of the following sub-listings are also available:
 - a. Alphabetical list of cutters.
 - b. List of cutters by number, district, home port, class, length and plan set.
 - c. Alphabetical list of manufacturers.
 - d. Listing of all TPs by TP number with distribution.
 - e. List of manufacturers.
 - f. List by hull number.
 - g. List of effective TPs.
 - h. List of obsolete TPs.

NOTE: The EIDB is no longer being updated as all Technical Publications are being transitioned to Naval Engineering – Technical Information Management System (NE-TIMS).

- 2. <u>Publication Distribution and Ordering</u>. ELC (02T) determines the distribution of TPs when assigning TP numbers. All commands may contact ELC (02T) for addition to or removal from distribution. With few exceptions all TPs and amendments are assigned stock numbers. All commands can order TPs and amendments using the MIL-STRIP requisition system and the routing identifier ZNC.
- 3. <u>Publication Issuance</u>. ELC (02T) assigns numbers to Technical Publications and will determine which equipment or systems are included. Initial TP proposals shall be forwarded to ELC (02T) for approval, promulgation, and compilation into final format, printing and distribution. Proposals submitted by Coast Guard commands, shipbuilding facilities and equipment manufacturers, under contract to the Coast Guard, will be reviewed and approved by ELC (02T).

- A. 4. <u>Change Proposals</u>. Recommended changes to existing TPs shall be submitted to ELC (02T) via the cognizant MLC for approval. Changes to equipment and parts are regularly issued by equipment manufacturers and vendors as bulletins, notices, and informational data. ELC (02T) will review these changes to determine applicability.
 - 5. Amendments to Technical Publications. ELC (02T) will issue Technical Publication
 Amendments. Such amendments will be entitled "Coast Guard Amendment Number _ ."
 Amendments shall be issued in consecutively numbered series for each Technical Publication.
 Each amendment will be assigned a unique stock number, separate from the stock number of the original TP. ELC (02T) will review the circumstances and determine if an amendment to a Technical Publications should be issued, whenever a requirement exists to:
 - a. Change the physical characteristics or composition of any piece of equipment.
 - b. Alter the operational characteristics or procedures for any equipment.
 - c. Change parts or part numbers of any equipment component in sufficient detail to require proper review and evaluation by ELC (02T).
- **B.** <u>NE-TIMS</u>. The Naval Engineering program is in the process of eliminating the EIDB and incorporating all Technical Publications in NE-TIMS. During this conversion process the EIDB will not be maintained as efforts will be devoted to updating NE-TIMS.

CHAPTER 088. PERSONNEL

- A. NAVAL ENGINEERING SHORE-BASED SUPPORT TEAMS. In recent years, changes in mission profiles, increased tempo of operations, and reduced cutter manning levels have occurred. As a result, it has become increasingly difficult to achieve adequate shipboard HM&E and ordnance maintenance and training. To improve the overall reliability of the Coast Guard fleet and provide enough technical expertise and flexibility to adequately support Coast Guard unique systems and equipment as well as Navy-owned ordnance, four types of naval engineering augmentation and support teams have been established. These teams are: the Maintenance Augmentation Team (MAT), the Advanced Ship System Instruction and Support Team (ASSIST), Centralized Supply/CMplus Assistance Team, and the Weapons Augmentation Team (WAT).
 - 1. <u>Maintenance Augmentation Teams (MAT)</u>.
 - a. Purpose. A MAT is a group of engineering technicians assigned to a NESU for a chartered or group of chartered, customer cutters. A chartered cutter is one that has been designated by COMDT (G-SEN) as a cutter that will be supported by a MAT. The sole purpose of the MAT is to augment shipboard engineering personnel in the accomplishment of routine HM&E preventive and corrective maintenance. Because MATs are an integral part of chartered cutters' organizational maintenance effort, each MAT must be included in the mobility planning of the cutters it supports. This is especially true for cutters that will not receive additional Navy maintenance resources in time of national emergency or mobilization. The program will not achieve its objectives unless the full resources of MATs are used for the accomplishment of shipboard preventive and corrective maintenance. When the MAT schedule permits, the MAT shall be made available to render routine shipboard maintenance assistance to non-chartered cutters or boats. MATs are not to be considered as a source of TAD personnel to replace cutter personnel during at-sea periods, with the exception of the CGC HEALY MAT.
 - b. MAT General Routine. The MLC shall issue instructions describing the procedures for MAT utilization, work item submission, and documentation. Provisions shall be included in these procedures for recording feedback on MAT performance. Workforce hours expended by MAT personnel will be recorded in "Interim Time Accounting System the CG Standard MAT Work Tracking System. Since the MATs work under the direction and supervision of the NESU commanding officer, the NESU shall establish the daily routine of the MATs that best supports its chartered cutters and other customers.
 - c. Training. Formal MAT training shall be consistent with the requirements of the cutter class supported per the Cutter Training and Qualification Manual, COMDTINST M3502.4 (series).
 - 2. Advanced Ship System Instruction and Support Teams (ASSIST). ASSISTs are groups of highly skilled and technically qualified engineering technicians assigned to the Naval Engineering Divisions of the MLCs. They perform inspections and provide mobile technical support and instruction to cutter and boat personnel. This support is available to units at their

- A. 2. a. homeport, inport at other locations, or underway. It is designed to promote the expected level of organizational maintenance and repair of fleet machinery, equipment, and systems. Particular emphasis is placed on maintenance of more advanced and complex systems, infrequent or unusual casualty repairs, or casualty repairs that are beyond the current technical capability of unit personnel. It is not intended that ASSISTs perform or compete with projects or work that normally should be attended to by unit engineering personnel. Rather, by assistance and supervision, ASSISTs instruct and train unit personnel to perform preventive and corrective maintenance expected at the unit level. For maintenance or repair actions normally beyond unit-level capability, ASSISTs shall be made available to provide training and support. ASSISTs are an integral part of the MLC naval engineer's technical resources and, as such, must be included in the MLC naval engineering mobilization plan.
 - b. Duties of ASSIST. The MLCs are responsible for promulgating the duties of the ASSISTs. As a minimum their duties shall include the following:
 - (1) Conduct Engineering Technical Assessments.
 - (2) Provide MK, EM, DC rate training and technical support aboard units.
 - (3) Conduct specialized condition assessments using NDT techniques such as thermographic analysis and vibration analysis of all units that require assistance. Provide training in the use of such assessments for condition based maintenance.
 - (4) Assist in the preparation of Preventive Maintenance System (PMS) and Instruction Manuals for major equipment not covered by other technical publications.
 - c. ASSIST General Routine. The MLCs shall issue instructions describing the details of ASSIST utilization, work request submission, and documentation of their use.
 - 3. <u>Centralized Supply/CMplus Assistance Team.</u> MLC naval engineering staff conducts periodic visits to cutters to evaluate store room inventory accuracy, review status of CMplus and provide configuration, maintenance and supply module training to cutter personnel.
 - 4. <u>Weapons Augmentation Teams (WAT)</u>. The purpose, organization and operational guidelines for WATs are contained in Ordinance Manual, COMDTINST M8000.2 (series).
- **B. FORCE MANAGEMENT.** G-SEN assists G-SRF in the oversight of the Naval Engineering Program's segment of the Coast Guard Military workforce (i.e., the FN, DC, EM, and MK enlisted ratings; the ENG, MAT, and WEP warrant officer specialties; and the 52XXX and 53XXX Series OBC commissioned officer specialties). This requires forward thinking to ensure all ratings and grades evolve to accommodate new technology, equipment and missions. This includes monitoring and providing input to the following:
 - 1. Pyramid structural concerns for rating/grade size and billet distribution.
 - 2. Location of billets.

- **B.** 3. Setting of performance standards.
 - 4. Content of training.
- C. ENGINEER OFFICER IN TRAINING (EOIT) PROGRAM. The primary goal of the EOIT program is to prepare junior officers for duty as Engineer Officers (EO) afloat. Completion of this program also provides an officer with an excellent foundation for future assignments in technical, logistical, and operational specialties. Specific qualification requirements of this program are outlined in the Engineer Officer in Training (EOIT) Personnel Qualification Standard, COMDTINST M3502.11 (series). Amplifying guidance is contained in Chapter 6 of the Cutter Training and Qualification Manual, COMDTINST M3502.4 (series).
- D. NAVAL ENGINEERING POSTGRADUATE (PG) AND ADVANCED TRAINING (NET) PROGRAMS. These programs provide an opportunity for officers to receive advanced specialized training to meet Naval Engineering specialty requirements while considering the applicant's capabilities, interests, and personal goals for achievement. The details of these programs are described in the Training and Education Manual, COMDTINST M1500.10 (series). Specific educational requirements for the postgraduate program are outlined in Advanced Education Opportunities Sponsored By Systems, COMDTNOTE 1500. Published each spring, this document also contains a list of required and recommended courses for universities to which the Naval Engineering program sends its students.
- **E. <u>DUTIES OF SHORE UNIT ENGINEERING PERSONNEL.</u>** While it neither practicable nor desirable to list the duties of all engineering personnel, the duties of some specific shore personnel are such that direction is required. These are:
 - 1. <u>Group Engineer</u>. The Group Engineer is the head of the Engineering Department and is responsible to the Group Commander for all Naval Engineering matters within the Group. In addition to those duties prescribed in United States Coast Guard Regulations 1992, COMDTINST 5000.3 (series) for the department, (such as assigning evaluation marks, counseling subordinates, and recognizing outstanding performance), the Group Engineer provides technical and logistical support to outlying units, afloat and ashore. The Group Engineer, assisted by the appropriate subordinates is responsible to:
 - a. Review and respond to CASREP's from Group Units as per established guidelines.
 Provide counsel to Group operations department and command level personnel concerning effect of casualties on cutter and boat mission readiness and any recommended restrictions.
 - b. Review Engineering Change requests (cutter and boat) from group units
 - c. Review and maintain copies of all reports from Group units pertaining to or concerning engineering matters, such as Current Ships Maintenance Projects (CSMP) forms and standard boat reports, to ensure that data is accurate
 - d. Attend technical, maintenance and compliance inspections for group units
 - e. Participate in Acquisition Team process

- **E.** 1. f. Perform duties of Contracting Officer's Technical Representative (COTR)
 - g. Review and or develop contract specifications
 - h. Coordinate Availability for boats
 - i. Make regular inspections of all cutters and standard boats assigned to the Group
 - j. Serve as a member of the Ready For Operations/Sea (RFO/RFS) evaluation team.
 - k. Maintain up-to-date Group OM&S spare parts inventory
 - 1. Comply with CFO Audit requirements
 - m. Administer the Group Engineering budget
 - n. Draft and review messages
 - o. Supervise Reserve engineering personnel
 - p. Maintain direct interaction with EPOs including relief process, training and mentorship.
 - 2. <u>Shore Unit Engineer Petty Officer (EPO)</u>. The Shore Unit EPO is the head of the Engineering Department and is responsible to the CO/OIC for all Naval Engineering matters within the unit. In addition to those duties prescribed in United States Coast Guard Regulations 1992, COMDTINST 5000.3 (series) for the head of a department, (such as assigning evaluation marks, counseling subordinates, and recognizing outstanding performance), the EPO, with the appropriate subordinates, is primarily responsible to:
 - a. Ensure completion of PMS
 - b. Conduct DEMPS/Full Power Trials on boats
 - c. Submit Boat Inspection Report, Quarterly PMS feedback report and other required reports.
 - d. Maintain Boat Record, PMS records, hull history, machinery history, deviation record and required engineering logs
 - e. Conduct unit readiness drills/STRs (SPM)
 - f. Participate in Acquisition Team process
 - g. Coordinate boat availabilities
 - h. Review and develop specifications and provide feedback
 - i. Conduct contract inspections
 - j. Maintain OM&S Inventory and comply with CFO Audit requirements

- **E.** 2. k. Administer Engineering Department budget
 - 1. Conduct material inspections
 - m. Properly care for, stow, and use fuels and lubricants not assigned to other departments
 - n. Train and qualify departmental personnel including coordination and submission of requests for short term training from outside resources.
 - o. Qualify as Boat Engineer and keep qualifications current
 - p. Participate in Boat Crew qualification process and serve as an active member of the unit Boat Crew Examining Board
 - q. Maintain technical library
 - r. Draft and file department correspondence
 - s. Draft Messages and CASREPS
 - t. Conduct Organizational level repairs
 - u. Make arrangements for the repair of casualties beyond unit capabilities
 - v. Initiate and manage CSMPs, PMS changes, Engineering change requests, BOSS/MICA changes.
 - w. When assigned, collateral duties and responsibilities such as the operation, maintenance and repair of unit utilities, machinery, piping systems, interior communication systems, and electric and electronic devices not specifically assigned to other departments.
 - x. Conduct quarterly self audit of standard boat(s) to ensure boat(s) are "fully mission capable" in accordance with Boat Readiness and Standardization Program Manual, COMDTINST M16114.24 (series).

Page Intentionally Left Blank

CHAPTER 090. INSPECTIONS, RECORDS, REPORTS, AND TESTS

- **A. GENERAL.** This chapter summarizes the records, inspections, reports and tests that the Commandant requires for maintaining certain equipment under the cognizance of G-SEN.
 - 1. Reports and Records. The records and reports discussed throughout this chapter are considered essential to a well-administered engineering department. Nothing in this chapter is meant to prohibit the use of locally prepared reports and records to assist in department administration. Constructive comments concerning any particular record or report are invited. Units with Configuration Management Plus (CMplus) installed shall follow the reporting procedures and format in the CMplus user's and operation manuals.
 - 2. <u>Applicability of Naval Ships Technical Manual (NSTM)</u>. The requirements set forth in NSTM, Chapter 090, do not apply to the Coast Guard.
- **B.** GENERAL INSPECTIONS AND TESTS. This section describes the minimum requirements concerning inspections.
 - 1. Routine or periodic Inspections. Commanding Officers/Officers-in-Charge (CO/OIC) are required to conduct frequent inspections of shipboard spaces and machinery to ensure the proper operation of safety devices, maintenance of material readiness and watertight integrity. These inspections are normally carried out weekly while underway and bi-weekly in port. The usual frequency of physical inspections applicable to occupied spaces, storerooms, and other frequently entered spaces is not practical for double bottoms, cofferdams, voids, or tanks, and special precautions are necessary before entering into or working in such spaces. Such precautions are described in later paragraphs. Unless specifically required elsewhere, no report of these inspections need be made. Necessary repairs indicated by these inspections shall be entered in the Current Ships Maintenance Projects (CSMP).
 - 2. <u>Double Bottoms, Voids, and Ballast Tanks.</u> Ballast tanks, except those used for fuel oil, unused double bottom tanks, voids and cofferdams shall be inspected during each drydock availability. Special inspections may be necessary because of unusual conditions or suspected unsatisfactory conditions of these spaces. Specific attention should be given to inspecting tank sounding tubes and striker plates. In some cases, the sounding bob has worn a hole first through the striker plate, then through the hull plating. Where severe corrosion is present upon inspection and corrective measures are taken, the affected area shall be inspected 6 months later to ensure that corrosion has not recurred.
 - 3. <u>Thermographic Inspection</u>. Thermographic inspection of electrical systems has proven to be a useful preventive maintenance tool. These inspections are an effective way to identify loose connections and high resistance grounds on switchboards, load centers and other distribution equipment. MLCs shall schedule and conduct periodic thermographic inspections (surveys) for cutters and boats within their respective AOR. Inspection results shall be entered into Machinery History or the maintenance module in CMplus for CMplus equipped cutters, .

- **B.** 4. <u>Fresh Water and Reserve Feed Tanks</u>. Double bottoms and tanks ordinarily filled with fresh water and their check valves in overflow piping, sounding tubes, striker plates, and air escape terminals shall be inspected annually or when emptied and opened for any other purpose. Any pertinent information regarding material condition of these tanks shall be entered in the Hull History. Upon completion of the inspection, tanks shall be sterilized in accordance with instructions contained in Safety and Environmental Health Manual, COMDTINST M5100.47 (series) which establishes minimum chlorine/bromine residuals and testing procedures. Cutters shall maintain a status sheet showing dates and results of all tank inspections.
 - 5. <u>Fuel Tanks</u>. The instructions for the detailed inspection of fuel oil tanks are contained in NSTM, Chapter 541. Sounding tubes, tank level indicator transmitters, and striker plates should be checked during tank inspections. Cutters shall maintain a status sheet showing dates and results of all tank inspections.
 - 6. <u>Corrosion</u>. When corrosion of a serious nature is discovered, the cognizant MLC shall be notified so that corrective action may be initiated.

C. <u>HULL HISTORY, MACHINERY HISTORY, RESISTANCE TEST RECORDS, AND</u> CURRENT SHIP'S MAINTENANCE PROJECTS (CSMP).

- 1. <u>Hull History</u>. All cutters 65 feet in length and greater are required to maintain a Hull History. Composite cutters, such as 75-foot WLIC class, shall maintain a separate Hull History for pusher and barge. Units equipped with CMplus shall maintain their Hull History utilizing corrective maintenance actions and PMS entries in CMplus. Coast Guard Regulations Manual, COMDTINST M5000.3 (series), charges the First Lieutenant with the responsibility of maintaining a cutter's Hull History.
 - a. Contents of Hull History. The Hull History consists of Hull Board Results, Hull Surveys, and separate data cards for the following cutter subdivision:
 - (1) Each compartment and compartment subdivision.
 - (2) Each weather deck, deck house, and other deck appurtenances.
 - (3) Hull above/below the waterline.
 - (4) Major hull equipment systems not otherwise listed in the Machinery History, such as ground tackle, boats, life rafts, and related material.
 - b. The Hull History is an important record for planning and reference. Only concise data that has value should be entered. In general, entries should cover repairs, alterations, maintenance, semiannual visual inspections, leakage inspections of compartments, tanks, and voids, tank cleanings, painting, rearrangements and casualties. Hull History entries shall be made as soon as practical following the event. For underwater inspection and maintenance, refer to Chapter 997 of this manual.

- C. 1. c. Records. Cutters equipped with CMplus shall maintain Hull History using the CMplus maintenance module and maintain a folder with copies of any Hull Board results, Underwater Body Inspection Reports, and Hull Potential Surveys until these reports are incorporated into CMplus. Units not equipped with CMplus shall maintain Hull History on Hull History Form, CG-3765 or electronic equivalent.
 - 2. <u>Machinery History</u>. All cutters 65 feet and longer shall maintain a Machinery History. Composite units, such as the 75-foot WLIC class, shall maintain a separate Machinery History for pusher and barge. Units equipped with CMplus shall maintain their Machinery History utilizing corrective maintenance actions and PMS entries in CMplus.
 - a. Contents of Machinery History. The Machinery History serves as a method of recording important maintenance information on all machinery installed aboard a cutter. It is the prime means of preserving the continuity of the operational history of a piece of equipment. A factual and complete Machinery History is excellent background for the preparation and submission of an alteration or repair request. The Machinery History loses its effectiveness if filled with non-essential data. On the other hand, it should contain all pertinent information concerning the equipment. For example, whenever a piece of machinery is altered from the standard shown in a manufacturer's instruction book or a plan, such as sleeving, installation of oversized bearings or material substitution, that information should be entered in the Machinery History. Important part numbers should be entered when parts are renewed. Information concerning ball bearings, packing sizes and similar data should be entered. Whenever a large amount of data is to be entered in the History, such as after an engine overhaul, it is permissible to enter the main facts in the Machinery History and file the remainder of the data elsewhere. Machinery safety device deficiencies should always be entered in the machinery log.
 - b. Instructions for Maintaining the Machinery History (without the aide of CMplus).
 - (1) One form shall be made out for each piece of equipment, electrical or mechanical, that is listed in the cutter's CALMS/MICA.
 - (2) Forms shall be indexed in the same way as the equipment is indexed in CALMS/MICA.
 - (3) Information should be entered in the Machinery History concerning such matters as repairs, alterations, inspections, safety device deficiencies, casualties, failures, parts renewal including important part numbers, and clearance measurements.
 - (4) Each entry shall include a date, a summary of the important data, and for internal combustion engines and auxiliary boilers, the operating hours. Care should be taken to ensure information entered elsewhere, such as the lubricating oil history or the results of PMS, is not needlessly duplicated in the Machinery History.
 - (5) Information should be entered in the Machinery History as soon as feasible after the event.

- C. 2. c. Records. Cutters equipped with CMplus shall maintain Machinery History using the CMplus maintenance module. Units not equipped with CMplus shall maintain Machinery History on Machinery History Form, CG-2929 or electronic equivalent
 - 3. <u>Resistance Test Records</u>. The Resistance Test Record card, NAVSHIPS Form 531, which is used to record resistance measurements of electrical equipment, is a part of the Machinery History. However, it is not necessary to file these cards with the main body of the Machinery History. They may be filed together and should be readily available for review.
 - 4. Current Ship's Maintenance Project(CSMP) File.
 - a. The CSMP file is an administrative method of tabulating all outstanding repairs and alterations. Each MLC shall develop detailed guidance for the submission and tracking of CSMPs for cutters within their purview.
 - Cutters equipped with CMplus shall maintain CSMP files in the CMplus maintenance module.
 Units not equipped with CMplus shall maintain CMplus on Machinery History Form, CG-2929 or electronic equivalent
 - c. Maintenance of CSMP File. The Engineer Officer/Engineer Petty Officer (EO/EPO) is responsible for maintaining the CSMP file for a cutter. The various department heads are responsible for the preparation of file cards for items under their cognizance. The station engineer is responsible for maintaining the file for all boats without permanent crews.
 - OPNAV Form 4790/2K Ships Maintenance Action Form. All maintenance assistance requests to the Navy must be accompanied with an OPNAV Form 4790/2K or the computer/CMplus equivalent OPNAV Form 4790/2Q.
 - a. Due to the large percentage of ordnance maintenance actions forwarded to the Navy for action, all assistance to complete backlogged ordnance maintenance or document completed ordnance maintenance actions shall be submitted on OPNAV Form 4790/2K or the 4790/2Q as detailed in COMDTINST M8000.2A.
 - b. Backlogged HM&E maintenance actions that will be forwarded to the Navy shall be submitted on the OPNAV Form 479O/2K or 4790/2Q. Those HM&E maintenance actions to be completed by Coast Guard or commercial resources shall continue to be submitted on CG CSMP Form CG-2920 or equivalent.
 - c. Detailed instructions on how to fill out and process the OPNAV Form 4790/2K and 4790/2Q are contained in OPNAVINST 4790.4 and MLC promulgated instructions.
- D. ENGINEERING DEPARTMENT RECORDS AND ACCOUNTS. This section describes the logs, operating records, accounts, worksheets, and other records that are basic to a well-administered engineering department of any afloat unit. All are important to the efficient operation and administration of any engineering department, whether large or small. Except where indicated, particularly in connection with the required records, the various records described in this chapter may

- D. vary in content, format, and other particulars, depending on the needs of the individual unit. Cutters with a high degree of automation may keep department records and accounts in electronic format. Individual/watchstander accountability must be maintained regardless of format. Accurate record keeping is a tool used to maintain an efficient, effective Engineering department.
 - 1. <u>Machinery Log.</u> The Machinery Log is the complete set of daily records kept for shipboard machinery. It includes the Engineer's Bell Book and all operating logs, and it shall be bound together with the Machinery Log, Form CG-2616G, Sheet A. The completed Machinery Log is an official record. Retention and disposal shall be in accordance with the Paperwork Management Manual, COMDTINST M5212.12 (series). All cutters 65 feet long and longer are required to keep a Machinery Log.
 - a. Procedures for Keeping the Machinery Log. The following procedures shall be followed in the preparation and maintenance of the Machinery Log:
 - (1) The Machinery Log shall be written for each day, covering the period from 0000 to 2400. At sea, the Log shall be kept in 4-hour watches and signed by the Engineer Officer of the Watch (EOW). In port, the log shall be written in three periods: 0000 to 0900, 0900 to 1600, and 1600 to 2400. Each period shall be signed by the EOW. Machinery Log entries must be legible and in black ink.
 - (2) The Watch Officer's remarks shall include the following:
 - (a) The machinery status at 0000 and subsequent changes as they occur. A prefabricated check-off sheet with the 0000 plant status may be inserted into the machinery log to meet this requirement as long as it referred to in the first entry on the CG-2616G.
 - (b) Abnormal operation of machinery.
 - (c) Casualties within the engineering department.
 - (d) Machinery out of commission.
 - (e) A brief general description of major work performed on all machinery.
 - (f) Any data pertinent to the operation of machinery that is deemed necessary by the Watch Officer or required by the EO/EPO.
 - (3) Page 2 of Form CG-2616G, Sheet A, shall be completed as applicable to the cutter's machinery installation.
 - (4) The Machinery Log shall be signed daily by the EO/EPO, with remarks as necessary. The Logs for one month shall be bound together and maintained aboard as required by current instructions concerning official records.
 - (5) The CO/OIC is not required but is encouraged to sign the Machinery Log.

- D. 2. Engineer's Bell Book. The Engineer's Bell Book, Form CG-2930, shall be kept on all cutters 110 feet and longer when bells in the engine room are answered in accordance with specific main propulsion speed/pitch/direction settings transmitted from the conning station. When a cutter is under pilothouse control, an entry to this effect shall be made in the Machinery Log, and no Bell Book need be kept.
 - a. Instructions for Keeping the Bell Book. Specific instructions for keeping the Bell Book are contained on the reverse of Form CG-2930. The following information is offered to supplement these instructions:
 - (1) The Bell Book is not required to be kept on days that the propulsion shafting is not turned.
 - (2) The records for each day must begin with a new sheet.
 - (3) Bell Book entries shall be made in ink.
 - (4) Alterations or erasures to this record are not permitted. Mistakes are to be lined through with a single line and initialed by the responsible individual.
 - (5) Upon relief, the assigned throttleman will sign the Bell Book immediately after the last entry. The EOW shall countersign the Bell Book on the line immediately following the signature of the throttleman. If the throttleman and the EOW are the same person, one signature will suffice. The throttleman for the next watch will begin his/her entries on the line immediately after the last signature of the previous watch.
 - (6) The completed Bell Book(s) for each day will be bound with the Machinery Log for that day.
 - 3. Operating Record. The recording of data onto operating record forms ensures frequent observation of machinery and provides the basis for performance analysis. Such records should be examined by the EO/EPO as part of his routine examination of the daily Machinery Log. Operating records are to be filed with the daily Machinery Log and bound into the monthly Machinery Log binder.
 - a. Required Operating Records. The following are the minimum operating records that shall be maintained by all cutters 65 feet and longer that are equipped with the applicable machinery:
 - (1) Main engine and auxiliary machinery operations.
 - (2) Boiler log.
 - (3) Evaporator log.
 - (4) Refrigeration equipment log.
 - (5) Auxiliary and emergency electrical power prime movers and systems.

- D. 3. b. Standard Forms. Forms CG 3186 Operating Record Main Engines, and CG 3186A Operating Record Main Propulsion (Combined Operation Diesel or Gas (CODOG) Plants) were developed for particular cutter classes and shall serve as the standard format in developing unit/class specific forms. Units currently using Forms CG 3186 and 3186A may continue to do so, or using these forms as a guide, develop operating records that reflect the requirements of the individual unit. Forms CG 3186 and 3186A may also be used as a pattern in developing operating records for auxiliary and electrical equipment that pertain to a specific cutter class. Cutters equipped with a MPCMS system can substitute computer printouts for hand written logs. Periodic review of these logs shall be conducted to ensure that all necessary information is being recorded and that superfluous information. is not being accumulated.
 - 4. <u>Fuel and Water Record</u>. All cutters are required to maintain a daily record of the amount of fuel oil, lubricating oil, and water on board. Such records may be maintained on any suitable form, and the information is to be entered in the appropriate section of the Machinery Log, Sheet A. Reports of receipts, expenditures, and amounts on board must be made to those persons requiring such information.
 - 5. Engineering Department Standing Orders. EO/EPO shall prepare, sign, and publish standing orders for the Engineering Department, with the approval of the command. In preparing the Standing Orders, the EO/EPO should be guided by the provisions of Coast Guard Regulations Manual, COMDTINST M5000.3 (series), the Cutter's Organization Manual, this instruction, CO/OIC's Standing Orders, NSTM where applicable, current Commandant Instructions and Notices, and the MLC SOP. Orders must be published for the following items, plus any others deemed necessary by the command:
 - a. Duties of the watchstanders in port and at sea, including the method and times of relieving the watch.
 - b. Instructions and the circumstances under which the EO/EPO is to be called.
 - c. For non-centralized shipboard supply cutters: Instructions on the issue, use, and replenishment of spare parts.
 - d. Instructions showing the division of responsibility for maintenance and repair of machinery and equipment under the cognizance of the Engineer Officer.
 - e. Instructions regarding the receipt and transfer of water, fuel oil, and lubricating oil, including transfer at sea and transfer between tanks within the cutter. Included should be a listing of personnel to be notified in each situation, stations for personnel engaged in the work, and safety precautions to be followed.
 - 6. Night Order Book. The EO/EPO shall provide a Night Order Book to be read and initialed by the Engineer Officer of the Watch for each night, in port and at sea. The Night Order Book shall contain instructions regarding changes in machinery status, system alignment, or any other special instruction to be carried out during the night. For small cutters that do not have a regular in port engineering watch, CO's/OIC's may elect to have EO/EPO's utilize the Executive Officer's Morning Orders to pass specific instructions relevant to the engineering systems.

- D. 7. <u>Steaming Orders</u>. Steaming Orders shall be published well in advance of getting underway. These orders are the means by which the EO/EPO communicates to the EOW when to have the engineering plant ready to answer bells. The form normally includes the time at which the plant should be ready to answer bells, the destination, and the EOW and Engineering duty section responsible, and a copy of the Light-Off Schedule should be attached. These orders should be incorporated into the Machinery Log.
 - 8. <u>Lite-Off Schedule</u>. A Lite-Off Schedule shall be prepared, consisting of a chronological check-off list of the key steps necessary to prepare the machinery plant for getting underway. The scheduled times of the respective steps relative to the time to report "ready" shall be printed on the form, and the corresponding clock times of accomplishment should be entered. The use of such a check-off list ensures that the operation is carried out according to a safe, effective, and proven schedule. It is to be used each time the machinery plant is prepared for getting underway, without regard to the experience of the individuals performing the actual work. The Lite-Off Schedule shall be incorporated into the Machinery Log as an attachment to the Steaming Orders.
 - 9. <u>Securing Schedule</u>. The Securing Schedule is comparable to the Lite-Off Schedule, in that it is a chronological check-off list of the steps required to properly secure the machinery plant. The use of such a check-off list ensures that the plant is secured in an orderly manner, and overcomes the tendency to secure too rapidly. This schedule should also list the auxiliary units to be used when moored or anchored.
 - 10. <u>Department Organization Chart</u>. The preparation of an organization chart, showing the assignment of personnel in the Engineering Department by rank and rating, is recommended.
 - 11. Personnel Training Records. The Engineering Department should establish a personnel training record for all personnel assigned to the Engineering Department. This record includes name, rank, service number, and information on advancement, training courses completed, schools attended, watch-standing qualifications, plus any other special qualifications or information concerning personnel assigned to the department.
 - 12. <u>Files and Publications</u>. It is recommended the following files and publications be maintained by the Engineering Department.

NSTM

Coast Guard Technical Publications, as applicable to the individual unit

Manufacturer's instruction books and service manuals, as applicable to the individual unit

Drawings of cutter and machinery

Allowance Documents, as applicable to the individual unit

DC Books or Stability and Loading Data Booklet

Current Commandant and MLC Naval Engineering Instructions and SOPs.

13. <u>Watch. quarter. and Station Bill.</u> The EO/EPO is responsible for the preparation and upkeep of the department Watch, Quarter, and Station Bill, in the format of CG-3485. Cutters maintaining the Watch, Quarter, and Station Bill manually shall keep them on the form; however, use of a computer

generated equivalent is authorized. This Bill is a summary of the personnel assignments to duties and stations specified in each of the cutter's bills.

- D. 14. Engineering Casualty Control Manual (ECCM). The ECCM shall contain emergency procedures to be followed by personnel assigned to the various Watch Stations if a casualty or machinery derangement occurs. Specific instructions for the preparation of the ECCM are contained in Chapter 079 of this Instruction.
 - 15. Gas Generator Log. A Gas Generator Log is a maintenance record furnished by a gas turbine manufacturer with each gas generator supplied. The Gas Generator Log is considered to be a part of the engine, and as such, should accompany the engine wherever the engine may go, for example, to an overhaul and repair facility. A record of all Service Bulletins must be kept in this log, along with all overhaul and repair data.
 - 16. <u>Boat Records</u>. Cutters with small boats attached shall comply with the reporting requirements in paragraph E of this Section.
- **E. REPORTS.** Directives, Publications and Reports Index (DPRI), COMDTNOTE 5600, contains a list of reports required by higher authority and their frequency of submission and unit applicability.
 - 1. <u>Cutter Engineering Report</u>. A Cutter Engineering Report, Form CG-4874 (Rev. 7-92) or CMplus equivalent, shall be completed and submitted by all cutters 65 feet in length and greater. This report shall be submitted annually covering a 12 month period ending 31 December.
 - a. CO/OICs of the above cutters shall:
 - (1) Submit this report no later than 31 January; if at sea at the end of the reporting period, submit the report upon reaching a port.
 - (2) Submit the report to the MLC (v) via the chain of command with a copy for each intermediate command. One copy shall be retained on board for the cutter files. An informational copy, with enclosures, shall be forwarded to ELC (01).
 - (3) Use Section VI, REMARKS, to explain any discrepancies evidenced in prior sections.
 - (4) Provide the following information for each diesel engine center section overhaul (as defined in Chapter 233) completed during the reporting period:
 - (a) Engine manufacturer and model
 - (b) Completion date of Center Section Overhaul
 - (c) Operating hours since previous Center Section Overhaul
 - (d) Total operating hours on engine at time of Center Section Overhaul

interval, failed component, etc.

(e)

Reason for overhaul, that is, oil analysis, trend analysis, recommended

- **E.** 1. a. (4) (f) If the reason for the overhaul is a failed component, state what caused the initial component to fail.
 - (g) If the reason for the overhaul is other than a failed component, was overhaul justified by condition of opened engine? If yes, what major deficiencies required correction?
 - (5) Provide the hours of operation since the last major overhaul for all diesel engines and gas turbines in Section VI of the report, REMARKS.
 - (6) In Section V of the report, Cutter Engineering Summary, provide the completion status of PMS by division; main propulsion, auxiliary, etc., in percent complete for the reporting period. Percent complete the number of monthly, quarterly, semiannually, annual, occasional (pertaining to a particular event) and hourly MPCs completed, divided by the number of monthly, quarterly, semiannual, annual, occasional, and hourly MPCs scheduled by the unit for the reporting period. Daily and weekly MPCs are assumed completed and are not included in the calculation. If scheduled PMS cannot be completed, or if individual MPCs are deferred two or more consecutive times, indicate the reason. Those cutters equipped with CMplus shall use the data provided by CMplus.
 - (7) Attach a copy of the Full Power Trial Report (refer to cutter PMS) for trials conducted during the reporting period. If a Full Power Trial has not been attempted for over two reporting periods as determined by cutter PMS, provide reasons in Section VI, "Remarks".
 - b. Group and Section Commanders shall:
 - (1) Review copies of the Cutter Engineering Reports for all cutters assigned to their Group or Section.
 - (2) Enter comments concerning action intended toward discrepancies and problems reported that are within the scope and capabilities of the Group or Section to resolve.
 - (3) Forward the report within 7 days after receipt to the MLC (v).

c. The MLC Commander shall:

(1) Have authority to use blank spaces in the Cutter Engineering Report to have cutters report items relating to temporary requirement of the MLC. If additional items of a permanent recurring nature are believed required in the report, the MLC shall refer them to G-SEN for review and possible inclusion in the report.

E. 1. c. (2) Review the Cutter Engineering Report and take appropriate action to correct discrepancies and to correct or resolve report problems as soon as possible. Engineering discrepancies beyond reasonable MLC capabilities shall be forwarded to G-SEN by letter or Engineering Change request.

2. <u>Boat Inspection Report.</u>

- a. A detailed Boat Inspection Report, Form CG-3022, shall be submitted on all boats less than 65 feet long, except for those boats powered by outboard motors and non-powered boats. In addition, reports shall be submitted for all barges.
 - (1) Group, Section, District Commanders, and MLCs shall schedule a regular detailed boat inspection of each boat as defined above, at an interval not to exceed 1 year between inspections. A special inspection shall be conducted as described in Paragraph E.2.b. The inspection should be conducted by the most qualified personnel available in the Group, Section, or Command.
 - (2) The Inspection Report shall be submitted by the unit having custody of the boat, via the chain of command, to the MLC. Submission shall be made within 10 days after completion of the inspection.
 - (3) Each step in the chain of command shall review the report closely and take all action within their capabilities to effect repairs to discrepancies reported.
 - (4) If a problem develops that cannot be resolved within the MLC resources, or indicates widespread application, a letter description of the problem and associated amplifying data should be forwarded to ELC (01) for research and solution.
- b. Special Boat Inspection Reports In case of boat transfer, a special inspection shall be completed. Detail all repairs and alterations pending CO/OICs comments. The comments shall also include the date the boat was transferred, the unit or cutter transferred to, and the date the boat records were forwarded to the unit or cutter. Upon disposal of a boat, indicate the survey number and date the boat was disposed of. For example, "Boat disposed of in accordance with approved Board of Survey No. ____ on (date)."

c. Completion of the Boat Report

(1) The persons conducting the inspection shall sign the report in the space provided and shall enter appropriate comments concerning unsatisfactory items under inspection team remarks.

- E. 2. c. (2) Prepare an original and two copies. One copy shall be retained by the unit, the original shall be forwarded to the MLC (vr), and one copy shall be forwarded to the Area/District boat managers.
 - (3) Completion of this report does not relieve units from the requirement and intervals for various inspections, tests, and checks as described in current directives. Specifically, fuel, tank, water, and sediment are to be checked during this inspection as a supplement to the normal daily or weekly interval for this check.
 - (4) After initial implementation of the Boat Inspection Report, inspection personnel shall use previous inspections used as a reference to more easily recognize items previously reported as unsatisfactory and not repaired in the interim. Unsatisfactory items unchanged from one inspection to the next should be indicated to bring them to the attention of responsible personnel for corrective action.
 - (5) All items on Form CG-3022 are self-explanatory. However, this instruction should be consulted for specific inspection methods wherever reference is made to it.
 - (6) The CO/OIC shall comment on all unsatisfactory items and list any other items deemed necessary, especially those requiring assistance by higher authority.
 - (7) MLCs may require additional information to be included at their discretion.
 - (8) MLCs shall establish the due dates and frequency of submittal of this Boat Inspection Report and the interval of inspection.
- F. NAVAL ENGINEERING CUTTER MATERIEL ASSESSMENT. Maintenance and Logistics Commands will assess the materiel condition of each cutter within their respective AOR. A Materiel Assessment will be accomplished at least once during each cutter's scheduled drydock cycle. The maintenance actions resulting from the Materiel Assessment will be documented by the CSMP process and incorporated into the cutter's long range maintenance planning. The MLCs will work together to ensure that each MLC conducts the Materiel Assessment in the same manner. The process should be documented in the MLC Standard Operating Procedures.
- **G. ADDITIONAL RECORDS.** In addition to those records and files required elsewhere in this chapter, the following records shall be maintained:
 - 1. Oil History Log (Cutters only)
 - 2. Degaussing Folder, where installed

- **G.** 3. Inventory of Spare Parts (CMplus if equipped)
 - 4. Gyrocompass Service Record Book, where installed
 - 5. Flexible Piping (HOSE) Logs (Cutters only)
 - 6. File copies of reports
 - 7. Engineering portion of the Routine Maintenance and Financial Program, for cutters 82 feet and over
 - 8. PMS records (CMplus if equipped)
 - 9. Completed and incomplete Engineering Changes for cutters and boats. (CMplus if equipped)
 - 10. Copies of Engineering Watch Officer CertificationsRecord of tank inspections.
 - 11. Zinc Log

H. RELIEF OF THE ENGINEER OFFICER OR ENGINEER PETTY OFFICER

(EO/EPO). Coast Guard Regulations specifically require an administrative inspection to be conducted when the EO/EPO is to be relieved. The Regulations further require that a machinery trial be held during the relieving process if such a trial is possible. The purpose of conducting these evolutions is to familiarize the relieving EO/EPO with the status of the items for which he/she will be held responsible. A written report outlining the results of the inspection and trial is to be submitted in letter format to the CO/OIC. Figure 090-1 shows a sample letter of relief. It contains those items which, if applicable, shall be addressed. The sample should serve as a guide. Items not mentioned in the sample that are of current or potential importance should also be addressed in the relieving letter. The CO/OIC shall forward the letter of relief to the appropriate MLC. Figure 090-2 shows a sample forwarding letter. CO/OIC shall forward subject letter via their chain of command. Figure 090-5 and 090-6 contains suggested EO/EPO relief check lists for afloat and ashore respectively.

I. MAINTENANCE OF BOAT RECORD FILES. Shore based commands with boats attached shall maintain a separate boat record file for each boat assigned. Cutters with boats aboard shall incorporate their Boat Record Files as part of the Machinery History File. A shore based command's boat record file shall be maintained in a six-part folder as follows:

- I. Part 1 Boat Record Book (CG-2580). Note: this book includes pages for Hull and Machinery History. Additional pages will be produced by the unit and be added to this book as needed. The boat record book shall be maintained in accordance with the instructions in the front of the book. Once machinery is replaced, all entries pertaining to that particular machinery should be removed from the machinery history and discarded.
 - 2. Part 2 Boat Inspection Reports. Only required to be kept for a period of three years. The current life raft inspection receipt and a copy of the current compass deviation table shall be kept until they are renewed each year. A copy of the STAN Material Inspection Discrepancy List shall be kept here until the next STAN visit.
 - 3. Part 3 CASREPS and CASCORS. Only CASREPS and CASCORS pertaining to the current fiscal year shall be kept in the boat record. All others should be kept in a separate file for an additional two year period then discarded.
 - 4. Part 4 Engineering Changes Pending (including a cover sheet listing the Change number, class, and description).
 - 5. Part 5 Engineering Changes Completed (including a cover sheet listing the Change number, class, description, and completion date).
 - 6. Part 6 Pending CSMPs. Completed CSMPs shall be removed and kept in a separate file for a three year period then discarded.

J. PROCEDURES FOR LISTS OF TOP TEN MAINTENANCE PROBLEMS.

- 1. <u>Definition</u>. The list of "Top Ten Maintenance Problems" details the ten most important problems for that cutter class. It is supplemented by the top ten ordnance problems and the top five problems from the perspective of MLC (v) regardless of class. It is intended to identify hardware problems on the cutters and provide an indication of the condition of the fleet. In addition, it will help the MLC, ELC and Commandant staffs to focus on the high priority problems of the fleet.
- 2. <u>List Requirements</u>. Top Ten Maintenance Problem lists (Figure 090-3) shall be submitted by the MLC for each cutter class and a single list for fleet ordnance. Each MLC shall ensure the respective Operational Commander is a partner in this process. Where more than one cutter size exists per class of cutter, a list shall be prepared for each length of the class, e.g. WLIC's: 75' WLIC's, 100' WLIC's, 160' WLIC's. Exceptions may be made where populations are too small to warrant a separate list. MLC (vr) shall make the determination of cutter class list divisions.

J. 3. Format.

- a. Each MLC type desk shall prepare their top ten problems as outlined in Figure 090-3.
 - (1) The title shall be limited to ten words.
 - (2) Type desks shall prioritize their lists in decreasing order of importance.
- b. For each new problem a supporting form shall be submitted on a separate page in accordance with the format outlined in Figure 090-4. This support form does not have to be provided for subsequent submittals of the same problem unless major changes have occurred which have not been communicated by other means.
 - (1) The title shall be limited to 10 words.
 - (2) Information provided in the DISCUSSION and RECOMMENDED ACTION sections should be kept brief, not to exceed 3 lines each. Additional information for these two areas should be provided by separate correspondence on an as needed basis.
 - (3) Use yes/no statements to identify the organization which has the proposed responsibility for action. In some cases, both MLC and Commandant may have action on a problem.
 - (4) Use yes/no statements to propose who will provide resources, if needed. The "MLC AFC-45 FUNDED" option means MLC AFC-45 base funds will be used to fund the solution. If Commandant funds are required, i.e. funding of the solution is not within the funding capability of the MLC, then indicate "yes" for "Commandant AFC-45 POP".
- 4. <u>Submission Schedule</u>. MLC's shall submit their Top Ten Lists annually no later than 31 March to coincide with the AFC-45 Planned Obligation Project (POP) process.

5. Submission Procedures.

- a. MLCs shall compile lists based on CER, CSMP and CASREP data and forward to ELC (01).
- b. The ELC shall add comments as necessary and forward to G-SEN who will distribute the Top Ten lists to the following support partners at the end of April: G-OCU, G-OCS and G-SL.
- c. The lists will be used to assist in developing priorities for POP funding and RP's for recurring/non-recurring resources.

FIGURE 090-1

SAMPLE EO/EPO RELIEVING LETTER

From	LT N. U. MANN, USCG	
	LT O. L. SCHMUTZ, USCG	
То:	Commanding Officer/Officer in Charge, USCGC READY (WHEC-710)	
Subj:	RELIEF OF ENGINEER OFFICER/ENGINEER PETTY OFFICER	
Ref:	(a) Coast Guard Regulations Manual, COMDTINST M5000.3 (series)(b) Coast Guard Naval Engineering Manual, COMDTINST M9000.6 (series)	
	accordance with references (a) and (b), an underway ry trial was conducted on All major main propulsion machinery was orily operated, with the following exceptions:	
	No. 3 Cooling Pump. The pump motor has been removed for rewinding with an ETR of March.	f
	No. 2 Diesel Engine. The control box for the governor is OOC. A replacement unit is o	due
2.	ne main propulsion control system operates satisfactorily in all modes.	
	ne ship service and emergency generators operate satisfactorily except for the automatic start fithe emergency generator. This problem surfaced during the trial, and its solution pends all troubleshooting.	t
4. auxili	ne steering gear, boilers, ship's boats, and bow propulsion units operate satisfactorily. All oth equipment is operating satisfactorily, except:	her
	No. 1 Lube Oil Purifier. Parts due on	
	No. 2 Sump Heater. Scheduled for repair during the upcoming AA.	

is 3 months behind, no major discrepancies were apparent at the last semi-annual visual inspection.

The watertight integrity of the ship appears good. Although the compartment air testing program

5.

6. The department files, blueprints, and instruction books are in good order. is up to date; however, the Machinery Index has not been updated for 3 years. good order.	

FIGURE 090-1 (cont.)

SAMPLE EO/EPO RELIEVING LETTER (CONT.)

- 7. A check of the personnel allowed to the Department has shown the shortage of one DC3 and two FN/FA. This should not critically affect the Department. Replacements are due prior to 15 May.
- 8. The recent inventory, dated 1 February, of the Engineering Department spare parts shows shortages amounting to \$5,000. The most critical items are:
 - a. MDE Blower Assy.
 - b. Control system overload unit.
- 9. The CSMP and Engineering Change systems are current. The following Engineering Changes are outstanding:
 - a. 350-A-10 Scheduled AA, July.
 - b. 350-C-19 Deferred pending receipt of materials.
- 10. The following major repairs are pending:
 - a. Strengthen the No. 2 Main Motor foundation, scheduled AA, July.
 - b. Replacement of tile, scheduled AA, July.
- 11. The PMS System is in use and approximately __ percent of the items were completed last quarter. A detailed record of accomplishment is contained in the last completion report.
- 12. A joint inspection of compartment spaces and material was conducted on ______. There were no material discrepancies. LT. N. U. MANN has assumed custody of all accountable material and keys.
- 13. There are no facts in dispute in this relief process.
- 14. As of 1600 this date, LT N. U. MANN has relieved LT O. L. SCHMUTZ of his duties as Engineer Officer aboard the CGC READY.

LT. N. U. MANN LT O. L. SCHMUTZ

SAMPLE CO/OIC FORWARDING LETTER

From: Commanding Officer/Officer in Charge, USCGC READY (WHEC-710)

To: Commander, Maintenance and Logistics Command, Atlantic (v)

Subj: ENGINEER OFFICER/ENGINEER PETTY OFFICER LETTER OF

RELIEF

Ref: (a) Coast Guard Regulations Manual, COMDTINST M5000.3 (series)

- 1. Subject letter of relief of LT O. L. SCHMUTZ by LT N. U. MANN as Engineer Officer is forwarded per reference (a).
- 2. The condition of the machinery, watertight integrity, Engineering Department files and records, personnel shortages, spare parts shortages, and pending action as detailed in the letter are noted.

I. M. COMMAND

TOP TEN LIST (example)

378 WHEC MLCPAC APR 1992

- 1. OWS Reliability
- 2. IC Switchboard
- 3. Aviation Power Supply Deficiencies
- 4. Main Propulsion console design problems
- 5. MGT Maintenance and Supply Support
- 6. H, M, & E Supply Support
- 7. H, M, & E PMS
- 8. Machinery Readiness Bill
- 9. Doppler Speed Log Reliability
- 10. Technical Publications

NEW ITEM SUPPORT FORM (EXAMPLE)

MLCLANT

140 WTGB

APR 1992

1.0		WE CENT (I	111 11 1332		
OIL IN MDE EXHAUST SYSTEM					
(1)	DISCUSSION: Oil builds up in 140 exhaust system due to engine being operated under light loads. Stack fires result when engine load increased (higher exhaust temps).				
(2)	RECOMMENDED ACTION: Install blower bypass on engine (S/A request already forwarded). COMDT to authorize prototype installation; MLCLANT to install.				
(3) R	ESPONSIBILITY FOR ACTION	:			
	Commandant Action Required/ReMLC Action Required:	equested:	YES YES		
(4)	RESOURCES REQUIRED:.				
	MLC AFC-45 FUNDED Commandant AFC-45 POP MLC AFC-45 POP		NO YES NO		
(5)	MLC (vr) COMMENTS: Ship safety problem; one fire alread	available this summer for prototyp ly this year.	e installation. Serious		
(6)	G-SEN COMMENTS: POP ap	proved for prototyping this FY.			

EO/EPO RELIEF CHECKLIST AFLOAT

- 1. Review Personnel Allowance List.
- 2. Review Departmental and Divisional Worklist.
- 3. Review Current Ship Maintenance Project (CSMP File).
- 4. Review Current Availability Package(S).
- 5. Review Previous Availability Report(S).
- 6. Review Engineering Changes
- 7. Review Long Range Maintenance Plan (LRMP) for planned improvements and equipment replacement.
- 8. Review Last Technical Assessment.
- 9. Review Old Relief Letter.
- 10. Review Preventative Maintenance System (PMS) Reports and Records.
- 11. Observe last time Maintenance Procedure Card (MPC) updates were submitted.
- 12. Review Machinery History (CG2929 computer generated equivalent is acceptable)
- 13. Review all Engineering Personnel Qualification Letters.
 - A. Auxiliary Watch Inport.
 - B. Auxiliary Watch Underway.
 - C. Fuel, Oil and Water King.
 - D. Throttle Watch.
 - E. Engineering Officer of the Watch (EOW) Inport.
 - F. EOW Underway.
 - G. Electrical Safety Officer.
 - H. Damage Control Petty Officers (DCPO's)
 - I. Damage Control Assistant (DCA) Letter of Designation.
 - J. Chemical, Biological and Radioactive (CBR) Letter of Designation.

- 14. Review Cutter Organizational Manual (COM) and Ship's Instructions for recent update.
- 15. Submit Short Term Training Request for MK-01 Engineering Administration Course
- 16. Review Last Underwater Body and Paint Report.
- 17. Review Diesel Engine Maintenance Program (DEMP).
- 18. Review Engine Lubricating Oil History.
- 19. Review Tag-Out Log.
- 20. Review Electrical Megger Cards.
- 21. Inventory General Purpose Property.
- 22. Review Full Power Trial Reports/Performance Analysis Report (PAR).
- 23. Review Boat Files and Boat Inspection Reports.
- 24. Cycle the sewage system in auto and manual modes.
- 25. Operate All Machinery.
- 26. Review Latest Material Inspection Reports.
- 27. Review EO Night Order Book.
- 28. Operate Small Boats.
- 29. Review Casualty Report (CASREP) File.
- 30. Review Pending Maintenance and Logistics Command (MLC) Contracts.
- 31. Review Logs Required in Chapter 090 of this Manual.
- 32. Review EO/EPO Standing Orders.
- 33. Review 2-Kilo File. (Navy Work Order System For Repairs Done In Navy Yards).
- 34. Review Unit Instructions For The Following.
 - A. Unit Safety and Occupational Health Program.

- B. Respiratory Protection Program.
- C. Heat Stress Program.
- D. Potable Water Management Program.
- E. Hearing Conservation Program.
- F. Hazardous Material Control Program.
- G. Unit Pre Mishap Program.
- H. Eye Protection.
- I. Equipment Tag Out Procedures.
- J. Electrical Safety Program.
- K. Fire Watch and Hot Work Safety.
- L. Helicopter Pre-Accident Plan.
- M. Working Aloft or Over The Side.
- N. Asbestos Management Plan.
- O. Gas Free Engineering.
- P. Confined Space Ashore Program.
- 35. Check Meter and Gauge Calibrations.
- 36. Check Calibration Log.
- 37. Review Ship's Maneuvering Instruction.
- 38. Review Ship's Standby Status Instruction.
- 39. Check Emergency Escape Breathing Device (EEBD) Status.
- 40. Review Training Files.
- 41. Review Departmental Budget.
- 42. Review Allowance Shortages.
- 43. Review Latest Configuration Management Plus (Cmplus)/Shipboard Computer-Aided Maintenance Program (SCAMPS)/Management Information For Configuration And Allowances (MICA)
- 44. Review Inventory.
- 45. Review Watch, Quarter and Station Bill.
- 46. Review Cutter Class Maintenance Plan (CCMP)
- 47. Determine CSMP Backlog.

- 48. Inventory Draeger Tubes.
- 49. Inventory Repair Locker.
- 50. Review DCPO PMS System.
- 51. Review Casualty Control Manual/Main Space Fire Doctrine.
- 52. Locate Original Copy Of Docking Plan.
- 53. Check Hydrostatic Testing of Compressed Gas Cylinders.
- 54. Review General Emergency Bill.
- 55. Review Ship's Bills.
- 56. Review Damage Control (DC) Closure Log.
- 57. Check For 2 Or 4 Man Airline Hose Mask (ALHM).
- 58. Review Repair Party Manual.
- 59. Inventory DC Plates and DC Central.
- 60. Inventory CBR Equipment especially injections and monitoring equipment.
- 61. Review DC Book.
- 62. Review Stability Book.
- 63. Review Rescue and Assistance (R and A) Bill.
- 64. Review Jettison Bill.
- 65. Review CBR Bill.
- 66. Inspect all Spaces.
- 67. Inspect Twin Agent Unit (TAU) or Single Agent Unit (SAU) System.
- 68. Review Metrology (Navy Inventory of CBR Equipment).

- 69. Review Hull History (CG3765, computer generated equivalent is acceptable).
- 70. Review Strip Ship Bill.
- 71. Obtain Compartment Checkoff List (CCOL) Master File.
- 72. Obtain pertinent floppy disks for your area of responsibility.
- 73. Obtain master copy of Standard Specifications.
- 74. Review training records for frequency of Basic Engineering Casualty Control Exercises (BECCE) and Damage Control Casualty Exercise Training (DCCET) Recorded Drills.
- 75. Locate Blueprint File Index.
- 76. Locate Aperture Card File.
- 77. Review completeness and entered changes of Naval Ships Technical Manual (NSTM) Library.
- 78. Review Fueling policy.
- 79. Determine DC Personnel Qualification Statements (PQS) Posture.
- 80. Review Watch List Rotation for Department.
- 81. Review SSMR File.
- 82. Review Last CART Discrepancy List
- 83. Review Unit Fuel Reports.
- 84. Review Cutter Engineering Reports.
- 85. Review Status of On-Board Training Teams.
- 86. Review Last Degaussing Range Results.
- 87. Review Machinery Log and Machinery Log Files.
- 88. Check Bell Book (110 Foot and above).
- 89. Review Lite Off Schedule.

- 90. Review Securing Schedule.
- 91. Review Boiler Water Treatment Procedures.
- 92. Review Jacket Water Treatment Program.
- 93. Review Fuel Treatment Procedures.
- 94. Obtain Department Keys.

EO/EPO RELIEF CHECKLIST ASHORE

- 1. Review Personnel Allowance List.
- 2. Review Departmental and Divisional Worklist.
- 3. Review Current Ship Maintenance Project (CSMP File).
- 4. Review Current Availability Package(s).
- 5. Review Previous Availability Report(s).
- 6. Review Engineering Change Files.
- 7. Review Last STAN/RFO Assessment.
- 8. Review previous Relief Letter.
- 9. Review PMS Reports and Records.
- 10. Review Machinery History (CG2929) (Computer generated equivalent is acceptable)
- 11. Review all engineering personnel qualification letters.
- 12. Review Group SOP, MLC Sops and Instructions
- 13. Review Diesel Engine Maintenance Program (DEMP).
- 14. Review Engine Lubricating Oil History.
- 15. Review Tag Out Log/Lock Out Program.
- 16. Inventory General Purpose Property.
- 17. Review Full Power Trial Reports/Performance Analysis Report (PAR).

- 18. Review Boat Files and Boat Inspection Reports.
- 19. Operate All Machinery.
- 20. Operate Small Boats.
- 21. Review Casualty Report (CASREP) File.
- 22. Review Pending Maintenance and Logistics Command (MLC) Contracts.
- 23. Review Logs Required As Per The Naval Engineering Manual Chapter 090.
- 24. Review EO/EPO Standing Orders.
- 25. Check Unit Instructions to include the following.

Unit Safety and Occupational Health Program.

Respiratory Protection Program.

Hearing Conservation Program.

Hazardous Material Control Program.

Unit Pre Mishap Program.

Eye Protection.

Fire Watch and Hot Work Safety.

Aircraft Pre-Accident Plan.

Working Aloft or Over the Side.

Asbestos Management Plan.

Confined Space Ashore Program.

- 26. Review Training Files.
- 27. Review Departmental Budget.
- 28. Review Allowance Shortages.
- 29. Review Latest Configuration Management Plus (Cmplus)/Shipboard Computer-Aided Maintenance Program (SCAMPS)/Management Information for Configuration and Allowances (MICA)
- 30. Review Inventory/OM&S.
- 31. Review Watch, Quarter and Station Bill.
- 32. Determine CSMP Backlog.

33. Inventory Repair Locker. 34. Review original copy of Docking Plan. 35. Check hydrostatic testing of compressed gas cylinders. 36. Inspect all spaces. 37. Obtain pertinent floppy disks for your area of responsibility. 38. Obtain master copy of standard specifications. 39. Obtain blueprint file index. 40. Review completeness and entered changes of Naval Ships Technical Manual (NSTM) Library. 41. Review fueling policy. 42. Review unit fuel reports. 43. Review Lite Off Schedule. 44. Review Securing Schedule. 45. Review Jacket Water Treatment Program. Review Fuel Treatment Procedures. 46. 47. Obtain Recent Commanding Officer (CO)/Officer In Charge (OIC) Material Inspection Reports. 48. Discuss Duty Section Rotation for Department. 49. Review Shore Station Maintenance Program. Submit Short Term Training Request for MK-01 50. Engineering Administration 51. Obtain Department Keys.

CHAPTER 091. SURVEYS OF CUTTERS AND BOATS

- A. SERVICE LIFE. The original expected service life of a cutter or standard boat is established by a number of factors. The most important of these is the hull's structural life. The structural life is primarily determined by assessing the fatigue life of the hull material and the effects of expected reduction in material thickness due to corrosion and sandblasting. For most structural materials, the repeated cycles of loading due to motions in waves and slamming will eventually reduce the stress level at which the material will permanently deflect. Design engineers determine the number of stress cycles expected over the life of a craft, then design the structure so that the projected maximum stresses do not exceed the fatigue stress limits. Corrosion and sandblasting is expected to slightly reduce the thickness of metal structures over time. By estimating the amount of material lost per year, considering the corrosion protection and maintenance plans, the design engineer will also account for the effect of reduced material thickness on structural strength. Other factors in determining vessel service life include the life expectancy of associated major machinery and electrical systems, comparisons of actual service life achieved by similar type vessels, and the weight growth of a craft over time.
- B. SHIP STRUCTURE AND MACHINERY EVALUATION BOARD (SSMEB). The SSMEB is the prime source of information on the material condition and remaining service life of the cutter and standard boat classes. This information allows the Commandant to formulate cutter acquisition plans and modernization alternatives. A fundamental step in this planning cycle is to periodically evaluate the remaining service life of each cutter and standard boat class and compare this against the future mission requirements. The SSMEB thoroughly evaluates the material condition of the cutter or standard boat class and determines its remaining service life. Table 091-2 lists for each class cutter and boat the original design service life, extensions to service life, the date of the last and next SSMEB, and the expected remaining service life.
 - 1. <u>Objective</u>. The Board's overall objective is to determine the condition and estimate the Remaining Service Life of the cutter or boat class and its component systems. The Remaining Service Life as determined by the Board can then be further evaluated by G-SEN and cutter/boat Facility/Program managers to determine what further life-cycle cost analyses may be necessary to facilitate overall asset management decisions. In addition, this Remaining Service Life estimate can be compared by Facility, Program and Support managers to forecasted future mission requirements to enable renovate versus replace decisions.
 - a. Definitions. The term "Remaining Service Life" shall be defined as the time period during which no "major expenditures" will be required for hull and structural repairs or modernizations, nor for machinery or system modernizations based solely on the cutter's/boat's capability to meet existing mission requirements. The definition of "major expenditures" is currently being established by the Naval Engineering Program guidance team in concert with cutter/boat facility managers and will be promulgated by G-SEN in a future change to this manual. However, as guidance in the meantime, Boards shall consider the "cumulative" cost effect when finding individual or multiple systems equipments which require estimated, aggregate expenditures in excess of 50% of the cutter's or boat's annual Standard Support Level.

- B. 1. b. Purpose & Further Guidance. By highlighting these areas, the Board serves to advise G-SEN and HQ Facility Managers that further cost-benefit analysis may be necessary to more accurately evaluate the Remaining Service Life of the cutter or boat in light of keeping those highlighted systems/equipments operational, supportable and maintainable. Using input from the cutter or standard boat Facility Manager, the Board must identify the existing mission requirements and evaluate the material condition of the cutter or boat, determine if those existing mission requirements are being met and establish the Remaining Service Life. All assumptions and caveats made by the Board concerning this determination shall be clearly stated in the Findings and Recommendations section of the report.
 - 2. <u>Evaluation Interval</u>. One or more cutters of each class shall normally be evaluated 10 years after commissioning of the lead ship of the class and at each 5-year interval thereafter during the commissioned life of the cutter. One or more of each boat class may be evaluated 10 years after the midtime construction of the class and at each 3-year interval thereafter. Earlier evaluations may be appropriate for certain boats and cutters because of unusual design, service, or other special conditions. An Operational commander may request that G-SEN convene a SSMEB at a time other than stated in this instruction by submitting a letter request stating the reasons for the SSMEB. If G-SEN concurs, ELC (01) shall convene a board.
 - 3. <u>Cutter Selection</u>. G-OCU/G-SEN shall determine the cutter or cutters to be evaluated. Input from the operational commander and MLCs shall be used to determine candidate cutters as well as the date and place of the cutter's drydock availability. ELC (01) will fund all SSMEBs.
 - 4. <u>SSMEB Members</u>. The SSMEB shall consist of at least four Coast Guard personnel. One of these members shall be designated as President and another as recorder. At least three of the members shall be experienced in naval architecture or marine engineering. Board membership shall include representatives from the Facility Manager, ELC (01), Maintenance and Logistics Command (MLC(v)), NESU, and the area or district operations as appropriate. The Facility Manager shall provide information on existing mission requirements consistent with current policies and shall provide guidance on prime mission equipment. Other members, such as ordnance or logistics specialists, may be included on the board as conditions warrant. MLC(v) shall recommend a board president to ELC (01). ELC (01) shall designate all board members in writing. The evaluation shall be conducted on the selected cutter or boat during a shipyard availability at the time of a scheduled routine drydocking. ELC (01) shall maintain specific guidance on the planning and development of the SSMEB in addition to the following guidance:
 - a. SSMEB development is a 24 month process beginning with the G-SEN Planned Obligation Program (POP) two years prior to the SSMEB convening date.
 - b. At least 18 months prior to the SSMEB, ELC shall send invitations for board membership, identify a cutter or cutters for the evaluation and begin to compile work items for the availability contract.
 - c. Twelve months prior to the SSMEB, ELC shall submit a request to G-SEN for POP funding of the SSMEB. G-SEN will also request a Future Mission Determination from the Facility Manager and a Supportability Review from the ELC.

- **B.** 4. d. ELC will provide the cognizant MLC(v) with the finalized items to be included in the availability contract prior to the first A team meeting. The list will include removal of interferences such as insulation, ballast, built-in furniture, shell plating, and piping, gas freeing of tanks, ultra-sonic thickness testing, drawing tail shaft if not accomplished during the previous 6 years, and inspection of valves and machinery. G-SEN, ELC and the MLC(v) will conduct any fleet surveys and task outside engineering firms to complete research or developmental work items as necessary.
 - e. Once designated, the President of the SSMEB shall coordinate with G-SEN, the ELC and the MLC, all work to be performed by a shipyard, the ship's crew, Manufacturer's Technical Representatives and the Board.
 - 5. Reporting Procedure. The President of the SSMEB shall prepare a report of each board using Form CG-3496 (Ship Structure and Machinery Evaluation Board). The President shall submit the SSMEB Report to MLC (v) who in turn will forward the report to the operational commander. The operational commander shall review and comment upon the findings by endorsement. The operational commander shall then forward the report to G-SEN for review, comment and approval. G-SEN shall forward a copy of the approved report to the Facility Manager, operational commander, ELC, MLC(v) and the cutter CO/OIC. If information on conditions uncovered and reported by individual boards are applicable to other cutter or boat classes, ELC will disseminate the information to the appropriate operational commander.
 - 6. <u>Completion of Report</u>. Form CG-3496 consists of nine sheets. The sheets provide the criteria under which the cutter is evaluated, the findings of the component evaluations, and the summary of findings and recommendations. The sheets are listed in Table 091-1 and explained in the following paragraphs.

TABLE 091-1. SHEETS OF FORM CG-3496

<u>Form</u>	<u>Purpose</u>
CG-3496A	Index
CG-3496B	Board Members and Cutter Data
CG-3496C	Findings and Recommendations
CG-3496D	Main Propulsion Machinery Findings
CG-3946E	Auxiliary Machinery and System Findings
CG-3496F	Prime Mission Equipment Findings
CG-3496G	Inside Compartment Findings
CG-3496H	Exterior Deck Space Findings
CG-3496I	Hull Exterior in Drydock Findings

a. Sheet 3496A. Index. The board shall list the sheets and enclosures and their page numbers. Examples of enclosures which must be listed in the index are supportability documents from ELC, manufacturer's letters, and other supporting technical data.

- B. 6. b. Sheet 3496B. This sheet lists the board members, previous SSMEBs, major mechanical and structural repairs and alterations, and primary mission data. The primary mission data is obtained from the Program Manager and forms the basis on which the cutter is evaluated. This mission data must represent present requirements and must be as definitive as possible.
 - Sheet 3496C. This is a summary of the findings sheets. It consists of two sections: c. Section 1, Findings and Section 2, Recommendations. In Section 1, the material fitness for the cutter's mission is determined and amplified by the summary of conditions and work list. The determination that the cutter is fit will be made on the premise that the urgent work list items will be accomplished as soon as practicable. If the cutter is determined to be materially unfit, the reason for this determination must be explained in Section 2. In Section 2, Part A, the board will predict the remaining service life of the four ship components: main propulsion, auxiliary, prime mission equipment, and ship's structure. In determining these values, the board must consider the present mission requirements, the material condition, and the supportability of the machinery. In Section 2, Part B, the board will provide the amplifying data on the minimum service life. If the cutter was determined unfit in Section 1, this shall be reflected as zero remaining service life and the reasons given for that condition. It must be noted that it is not the intent of this board to determine future suitability. The board must restrict its evaluation to material condition and supportability to meet present mission requirements.
 - d. Sheet 3496D. This sheet documents the condition and supportability of the main propulsion components. The condition will be determined from the examination of the machinery and from trends of full power trials. The condition shall be expressed in subjective terms such as "excellent," "poor," etc. The machinery supportability consists of the availability of parts and technical expertise. The board will receive input from the ELC on the supportability items before the evaluation. The board may augment or refine the ELC's determinations as necessary. The supportability items will be expressed in years. From this findings sheet, the board will input the cutter's present condition and will be able to estimate the main propulsion remaining service life.
 - e. Sheet 3496E. This sheet documents the condition and supportability of the auxiliary machinery. The same instructions (3496D) shall apply. Besides the listed auxiliary machinery the board may include other machinery and systems. The determination of which equipment is included must be based on replacement or modernization cost estimates. If the modernization cost is considered "major" (per para B.1.a) or requires Program Manager's funding, that cost estimate shall be included in the evaluation.
 - f. Sheet 3496F. This sheet documents the condition of the prime mission equipment. Mission essential equipment is that equipment specifically required to perform the cutter's mission. The equipment that is inherently necessary for the transportation and habitability of the crew is considered to be main propulsion and auxiliary equipment. Because of the variation in equipments, this sheet is generalized. The board shall list the equipment, its condition, and its supportability.

- **B.** 6. g. Sheet 3496G. One sheet shall normally be prepared for each deck between primary transverse watertight bulkheads. Compartments extending through more than one deck, such as engine rooms, need only be reported on one sheet. If a given sheet includes more than one compartment, the compartments shall be listed in the space provided.
 - h. Sheet 3496H. One sheet shall normally be prepared for each exterior deck, including superstructure decks.
 - i. Sheet 3496I. With the cutter in drydock, one sheet shall normally be prepared to document the hull exterior condition.
 - 7. Machinery Evaluation Boards (MEB). To address overall supportability conditions for a class, ELC will schedule an MEB, approximately 6 years after commissioning of the lead cutter. The actual scheduling of the board will depend on logistic feedback information provided by the cutters, operational commander and the MLC. The MEB will conduct its evaluation like the SSMEB, except that forms CG-3496G, 3496H and 3495I, dealing with interior compartments, exterior deck spaces, and hull conditions, will not be completed. In special situations, special-case MEB's may be convened to evaluate only one major piece of machinery or HM&E system (for example, MDE's, main gas turbines, propeller control systems, CPP's, etc.). Reporting procedures for the MEB, including special case MEB's, are the same as for SSMEBs.
 - 8. <u>Ship Structure Evaluation Boards (SSEB)</u>. When the machinery supportability and condition of a cutter's installed equipment is not in question, a SSEB may be convened to determine the soundness of the cutter's structural members. The actual scheduling of the SSEB will depend on information provided by the units and the district. A board may be convened on a cutter of any age to document the condition of its hull structure. The SSEB will conduct its evaluation like the SSMEB, except that forms 3496D, 3496E, and 3496F, dealing with machinery and equipment will not be completed. Reporting procedures for SSEBs will be the same as for SSMEBs.
- C. BOARDS OF SURVEY FOR BOATS. This section provides supplementary instructions for operational commanders and commanding officers of Headquarters units for the conduct and processing of Boards of Survey for boats. This information supplements the Property Management Manual, COMDTINST M4500.5 (series).
 - 1. <u>Discussion</u>. In general, boats are the most costly item handled by a Board of Survey. Boats present problems not encountered in other surveys. Decisions must be made as to whether operational requirements for a particular boat justify repairs, and in some cases, as to which of two or more boats of a type in a district can most economically be repaired. If a boat is to be removed from service, a determination must be made on the following matters: (1) whether the need for salvageable equipment justifies the cost of removal and repair of certain major components, (2) whether a boat shall be disposed of as surplus or scrap, or destroyed. Considerations involving Federal law governing disposal of excess property versus public safety are involved.

- C. 2. Appointments of Boards or Survey. Operational Commander Operational commanders and commanding officers of headquarters units shall ensure that one or more members of a Board of Survey have adequate knowledge and experience to accurately arrive at a list of defects and required repairs. The convening authority shall ensure that the Board of Survey is given assistance as available and needed for arriving at estimated cost of repairs. Surveyed boats, if offered for further use, may be subject to inspection pursuant to 46 CFR Subchapter T, Parts 175 to 187 prior to their use and certification under Title 46, United States Code, section 390. To save time, Boards of Survey shall include a Marine Safety Office Representative when considering a boat that might be subjected to current inspection laws if offered for further use. In such cases, compliance with paragraph C.7 of this chapter is required. The convening authority shall assist the Board of Survey as necessary in determining the condition of the boat.
 - 3. Action Required of Boards of Survey. In making surveys and preparing the record of action, Boards of Survey for boats shall be guided by the appropriate sections of the Property Management Manual, COMDTINST M4500.5 series, and appropriate sections of this Instruction. The boat shall, if operable, be operated underway before or after hauling for inspection. The Board of Survey shall make maximum use of probing, drilling, and non-destructive testing in performing the inspection.
 - 4. Action Required of Operational Commander. When a Board of Survey report recommends disposal of a boat, the operational commander shall ensure that the Board recommendations are reviewed with careful consideration of the best interest of the government and public safety. Note that the end results are different when a boat is destroyed, that is, burned or cut into sections, and when it is scrapped. Boats placed on a scrap pile are frequently removed by other parties and eventually placed into use by private owners. Generally a boat will be disposed of in the district where it is surveyed. Therefore, when disposition is recommended, consideration shall be given to local conditions. Unfortunately, this matter cannot be simplified by destroying all boats that are surplus to Coast Guard needs. Boats having further usefulness are required by law to be offered to other government agencies for use or donation. Those determined to be surplus and not donated are required to be sold. Whatever the means of disposal, all documents associated with the transfer of the surveyed boat shall display the notice shown in para C.6.c as applicable.
 - 5. <u>Delegation of Authority</u>. The operational commander's endorsement on Boards of Survey for boats shall not be delegated below Chief of Division level for powered boats, and Chief of Branch level for non-powered boats.
 - 6. <u>Additional Information Required on Survey Reports</u>. The Board of Survey finding shall include:
 - a. Specific Information.
 - (1) Engines: Manufacturer, Model, Date installed and Hours of operation since last overhaul.
 - (2) Maintenance cost for current and preceding fiscal year. (Hull and Machinery)
 - (3) Hours of operation for current and preceding fiscal year.

- C. a. (4) List of repairs and estimated cost of each item to place the boat in sound operating condition. These repairs are those that good, economical maintenance practice would require to put the boat in condition for normally expected operations. The list shall not be made with the purpose of completely restoring the boat to like new condition. Repairs shall be grouped under headings of hull, machinery, electrical, and electronic.
 - (5) Condition code of engine as outlined in Simplified Acquisition Procedures Handbook, COMDTINST M4400.13 (series).
 - b. Opinions. The Board may, at its discretion, include opinions related to how suitable the boat is for its present usage and how feasible repairs are for retaining the boat at its present assignment or for reassigning it.
 - c. Inspection Under Subchapter T. When a boat is to be offered for further use and such use may be as a passenger vessel of any sort, an inspection pursuant to Subchapter T regulations shall be accomplished. This inspection need only be made until one or two serious deficiencies are discovered. The finding of such deficiencies shall cause the Board to issue the following notice on the survey documents:

NOTE: This boat has been inspected pursuant to 46 CFR Subchapter T, Parts 175 to 187, and does not comply with those regulations pertaining to vessels carrying passengers subject to Title 46, United States Code, section 390.

7. <u>Inspection Procedure for Boats.</u>

- a. General Procedures. The following general procedures are applicable to inspections made of steel, aluminum or plastic boats:
 - (1) Obtain a construction plan of the boat for general guidance in making the inspection. Study the plan to determine the areas where major deterioration is probable.
 - (2) Have miscellaneous portable equipment and outfit removed from the boat.
 - (3) Have all manhole and access covers, hatches, and plates removed, as well as all removable sections of deck and deck plating. The Board shall first confer with the convening authority; if it's necessary to gain access to a compartment for inspection by removing any permanent structure or section.
 - (4) In making the inspection, pay particular attention to the structural members on which the basic structural soundness and seaworthiness depend. These main strength members, when damaged, are normally expensive items to repair. In addition, if deterioration is serious, these members must be repaired if the boat is to remain in service. These items usually determine whether restoration and continued use of the boat are economically justifiable, although a great number of less critical repair items may also make repairs uneconomical.

- C. 7. b. Guidance Checklist for Inspection of Steel Boats. A preliminary visual inspection will expose defects such as deep pitting, excessively thin edges on structural shapes, fractures, bands or belts of corrosion across bottom plating that may indicate heavy working, and marked local corrosion. Sounding of the hull with a hammer will be indicative of condition only by comparison of one hull section to an adjacent one. An audio-gauge or equivalent device may be used to rapidly measure thickness at many locations. No penetration of steel is required but it may be necessary to remove the paint where the small sonic transducer is held to get an accurate reading. Gauging shall be accomplished whenever hull condition is marginal and a final determination must be made as to seaworthiness and the economics of repair. Gauging consists of drilling holes in the metal and measuring the thickness of the metal with a caliper or micrometer designed for the purpose. The following specific areas shall be inspected:
 - (1) Inspect all dissimilar metal joints, including all aluminum-to-steel connections.
 - (2) Where the vapor barrier is destroyed or insulation is loose, cut away the insulation and inspect, especially in bilge areas.
 - (3) Inspect all hull fittings for corrosion regardless of the fastening method.
 - (4) Inspect all underside areas.
 - (5) Inspect rudder carriers and rudder posts.
 - (6) Inspect shaft log, struts, stern tubes, sea chests and waster pieces.
 - (7) Inspect all other hull inlet and outlet pieces.
 - (8) Inspect all bearing and bearing pieces.
 - (9) Inspect hull interior and exterior, particularly in flat areas for cracking with high intensity lighting.
 - (10) Inspect all framing, and stiffeners, particularly webs and underside of flanges. Special note shall be taken of any tripping or buckling.
 - (11) Inspect all machinery for condition and operation, including steering and wiring.
 - (12) Inspect all bottom areas for evidence of overstress or failure, generally indicated by dishing, cracks in weld or plate, or bands of corrosion.
 - c. Guidance Checklist for Inspection of Plastic Boats. The easiest and simplest method of inspecting plastic boats is visually. Many flaws can be detected during a visual inspection, particularly when transmitted light can be seen through the laminate. On most boats, however, the exterior resin coat is pigmented, making detection of interior flaws difficult. However, when inspected with transmitted light, a good laminate will appear uniformly translucent. Some variations may appear due to changes in gel coat thickness or pigmentation, laminate thickness, or overlaps in reinforcement. These light variations do not necessarily indicate flaws. Surface flaws in fiberglass laminates may generally be

- C. 7. c. detected without difficulty. Particular attention shall be paid, therefore, to the inside areas that are hard to see and reach. The workmanship in these areas is indicative of the overall quality of the structure, since great care and attention to detail are essential to the production of a sound laminate. Sound is an important non-destructive testing method. A good laminate will, when tapped with a hard object such as a coin or a small hammer, produce a clear hard sound. A dull or muffled sound indicates that substantial quantities of air bubbles may be present, that delamination has occurred, or that the resin has not been cured properly. Before inspecting any boat, a thorough study shall be made of construction plans, if available. Familiarization with the structural details of the boat and possible hard spots, etc., will save time and minimize the danger of overlooking an important area. Inspections shall start with an overall look at the exterior surface, observing the following:
 - (1) Stress concentrations due to holes, hard spots in flexible panels, abrupt changes in shape, and inadequate thickness.
 - (2) Fatigue cracking, particularly on high speed boats subjected to repeated wave impact loading.
 - (3) Secondary bond failure. A secondary bond is a connection made between separate members after the primary cure of the resin in the basic members. Examples are the connections between hull and longitudinals, hull and bulkheads, and transverse and longitudinal framing. These bonds must be made carefully during construction; they have been the source of more failures in fiberglass boats than any other cause.
 - d. Secondary Bonds. The longitudinal framing system of a plastic boat generally uses fiberglass hat sections, the top of which serve as support for the inner bottom.
 - (1) Possible sources of difficulty include failure of the stiffener-to-hull bond due to insufficient bond area, failure of the inner bottom-to-stiffener connection due to either bonding or mechanical fastening and collapse of the stiffener sides due to insufficient thickness. Stiffener-hull delamination is difficult to detect unless it is sufficiently well-advanced to permit observation of bottom shell movement relative to the stiffener flange. Failure of the inner bottom-stiffener connection will result in persistently loose fasteners. In extreme cases of bond failure, an apparent flexibility of the bottom will be evident when the boat is supported at bow and stern when out of the water. Stiffener wall collapse will be indicated by unusual flexibility of the inner bottom. Any of these failures will produce unusual flexure of the bottom with the boat running in waves.
 - (2) The best means of inspecting secondary bonds is by mechanical probing. This will frequently require the removal of interferences to gain access to the connection. In an unpainted laminate, white areas will be the first indication of weakness. Using a screwdriver or a paint scraper, the inspector shall attempt to probe between the two members and separate them by prying. If they are not securely bonded, they can be readily separated. A crack or separation, once started, will tend to continue along the joint. Continued flexing and vibrating in service will aggravate the condition.

- C. 7. e. Guidance Checklist for Inspection of Aluminum Boats. Before the inspection, the surveyor shall become familiar with the class of vessel by studying the general plans and construction data available. If possible, he/she shall interview personnel who know the particular boat or class regarding any known inherent problems, deficiencies, accident history, etc.
 - (1) Visual inspection is the primary method of surveying aluminum boats. However, aluminum construction lends itself to problems that may not be visually perceptible to the surveyor. If doubts or problems arise, more sophisticated methods such as portable X-Ray, air or water (pressure) testing, or audio-gauging may be used to advantage. Dye penetrant testing of welds is also effective.
 - (2) Welds, structural members and bulkhead connections shall be inspected, with particular attention to the complete bottom structures of SAR boats. Particular attention shall be paid to areas prone to deterioration by electrolyte and corrosive action. Composite joints (connections) such as aluminum to steel and aluminum to fiberglass, shall be closely examined.
 - f. Guidance Checklist for Inspection of Rigid Hull Inflatable Boats. Inspect inflatable hulls by a visual and pressure check of the hull. Check visually for:
 - (1) Apparent damage to the hull such as scrapes, cuts or cracks. Note the number, location and condition of hull patches.
 - (2) Condition of hull anti-fouling gel coat.
 - (3) Damage or blockage of inlet and outlet holes in the ballast system.
 - (4) Condition of transom.
 - (5) Signs of mildew on the fabric.
 - (6) Conditions of floorboards and any other wooden pieces of the boat.
 - (7) Ability to perform scheduled PMS satisfactorily.
 - (8) Condition of steering and control cables.
 - (9) Conditions of associated fittings such as inter-communicating valves, navigation light systems, and lifting slings.
 - g. A pressure check shall be made on the hull to determine air tightness of all pressure compartments. Pressure shall be checked using a calibrated pressure gauge. The boat shall be inflated to the prescribed test pressure and monitored for the time recommended by the boat manufacturer. Small leaks, detectable by a loss of pressure over the test period, can be located by a soap and water test. The rigid fiberglass reinforced plastic portion of the boats shall be inspected in accordance with paragraph C. 7.c.

TABLE 091-2 SSMEB SCHEDULE AND REMAINING SERVICE LIFE

VESSEL CLASS	COMMISSIONED	DESIGN S/L	S/L EXTENSIONS	LAST SSMEB	NEXT SSMEB	REMAINING S/L*
420' WAGB	1999	30 Years	None	None	2009	30 Years
400' WAGB	1976	30 Years	RIP	1992	2002	12 Years
378' WHEC	1967	30 Years	FRAM 1989	1999	2004	10 Years
295' WIX	1936	Unknown	None	1998	2003	10 Years
290' WAGB	1944	30 Years	None	1990	None Planned	8 years
283' WMEC	1972	30 Years	1999	1999	2009	29 Years
270' WMEC	1983	28 Years	None	1999	2004	12 Years
230' WMEC	1942	30 Years	None	2000	2005	Unknown
225' WLB	1996	30 Years	None	None	2006	27 Years
213' WMEC	1944	30 Years	None	1991	2004	4 Years
210' WMEC	1965	30 Years	MMA 1987	1998	2003	10 Years
180' A Class WLB	1942	30 Years	SLEP 1984	1995	None Planned	5 Years
180' B Class WLB	1943	30 Years	SLEP 1988	1995	None Planned	5 Years
180' C Class WLB	1944	30 Years	MAJ REN 1978	1995	None Planned	5 Years
175' WLM	1997	30 Years	None	None	2007	28 Years
160' WLIC	1976	30 Years	None	1996	2001	7 Years
140' WTGB	1977	30 Years	None	1992	2001	10 Years
133' WLM	1943	30 Years	None	None	None Planned	3 Years
110' A Class WPB	1986	25 Years	None	1995	2001	10-15 Years
110' B Class WPB	1989	25 Years	None	1997	2002	13-18 Years
110' C Class WPB	1991	25 Years	None	2000	2005	15-20 Years
100' WLI	1964	30 Years	None	1996	2001	8 Years
87' WPB	1998	25 Years	None	None	2008	25 Years
82' WPB	1959	30 Years	None	1993	None Planned	10 Years
75' WLR F Class	1991	30 Years	None	None	2001	20 Years
75' WLR	1964	30 Years	None	1996	2001	8 Years
75' WLIC	1962	30 Years	None	2000	2005	7 Years

TABLE 091-2 (CONT.) SSMEB SCHEDULE AND REMAINING SERVICE LIFE

VESSEL CLASS	COMMISSIONED	DESIGN S/L	S/L EXTENSIONS	LAST SSMEB	NEXT SSMEB	REMAINING S/L
65' WYTL	1962	30 Years	None	1997	2002	15 Years
65' WLR	1960	30 Years	None	2000	2005	7 Years
65' WLI	1946	30 Years	None	1995	2001	7 Years
	•					
BOAT CLASS	COMMISSIONED	DESIGN S/L	S/L EXTENSIONS	LAST SSMEB	NEXT SSMEB	REMAINING S/L
55' ANB	1976-1987	25 Years	None	1999	2002	5-10 Years
49' BUSL	1997-2000	25 Years	None	None	2004	25 Years
47' MLB	1994-2003	25 Years	None	None	2005	25 Years
44' MLB	1961-1972	25 Years	None	Not Avail.	None Planned	1-5 Years
41' UTB	1973-1983	25 Years	None	1998	2001	5-15 Years
38' DPB	1999-2000	5 Years	None	2000	None Planned	5 Years
30' SRB	1982-1986	20 Years	None	1999	2002	5-7 Years
26' MSB	1995-1997	15-20 Years	None	None	2002	14-19 Years
25' TPSB	1998	10 Years	None	None	None Planned	8 Years
	<u> </u>		•			<u> </u>

NON-STANDARD BOATS	COMMISSIONED	DESIGN S/L	S/L EXTENSIONS	REMAINING S/L
52' MLB	1956-1962	25 Years	None	5-10 Years
46' BU	1966-1969	not avail.	None	2 Years
45' BU	1957-1962	not avail.	None	2 Years

NOTE: (1) Remaining Service Life is projected from January 2000.
(2) 15 year design Service Life extended to 25 years on 110' WPBs with ShipAlt 110-A-021.

CHAPTER 094. FULL POWER TRIALS

- **A. FULL POWER TRIALS FOR CUTTERS.** The full power trial is a periodic test of a cutter's propulsion plant operated at maximum rated power. The report of the trial results advises operating personnel and cognizant area, district, ELC, and Headquarters personnel of the cutter's current full power performance capabilities and characteristics.
 - 1. <u>Specific Trial Requirements and Reporting Procedure</u>. Specific trial requirements and reporting procedures for each cutter class shall be in accordance with their respective PMS. A satisfactory Report of Full Power Trial shall be forwarded to ELC (01) at the following times:
 - a. Within the first 6 months after the Coast Guard accepts a new cutter.
 - b. Within the 6 months of completion of engineering changes that affect the full power capabilities of a cutter.
 - 2. <u>Reviewing Authority</u>. The MLC(v) is the reviewing authority for full power trials. Trial data shall be compared with original or updated test or operating standards as applicable, and the cutter's capability determined with regard to the appropriate standard.
 - 3. <u>Corrective Action</u>. In the event of an unsuccessful full power trial, the CO/OINC shall initiate action to correct deficiencies as soon as possible. Deficiencies beyond the unit's capabilities to correct shall be identified via CASREP for resolution.
 - 4. <u>Availability of Forms</u>. Full Power Trial Log Summary forms for cutter classes required to perform full power trials are located in SWII Form Filler or can be obtained from MLC or the ELC.
 - 5. <u>U.S. Navy Trial Requirements</u>. Cutters under the operational control of the Navy shall perform any required full power trial according to the provisions of their respective Coast Guard PMS.
- **B.** Full Power Trials for Standard Boats. Coast Guard standard boats are required to comply with a PMS requirement to verify the ability of the boat's power plant to function properly throughout its full rated range of operation. Specific requirements for these trials are outlined on the respective Maintenance Procedure Cards. Completion of this PMS shall be reported per Chapter 081. There is no requirement for a separate report of these results.

Page Intentionally Left Blank

CHAPTER 097. STABILITY TESTS

A. GENERAL.

- 1. The intent of this chapter is to prescribe the policy for stability tests performed on Coast Guard cutters and standard boats. The results of the stability test will determine the cutter's light ship center of gravity (KG) and displacement. The Stability Test Report documents the stability test and presents the data for all required loading conditions.
- 2. ELC (02) and G-SEN are aware of the ASTM Guide for Conducting Stability Tests and have carefully reviewed the first edition. The guide already has two annexes with several exceptions and contains several errors. For simplicity and clarity, it was decided to include inclining procedures herein and not refer to the ASTM guide at the present time.

B. STABILITY TEST FREQUENCY AND SCHEDULE.

- 1. G-SEN will determine which cutters receive a stability test. ELC (02) will be responsible for maintaining files on all stability tests. When a stability test is required, ELC (02) will notify the proper authority (MLCLANT, MLCPAC) at least 12 months in advance.
- 2. Cutters will be scheduled for a stability test per the following schedule:
 - a. At least one designated cutter of a class shall have a stability test once every ten years except as stated in the following paragraph.
 - b. For cutters which either cannot accept increases in KG or whose KG increases require close monitoring at least one designated cutter of a class shall have a stability test once every five years.
 - c. All new construction cutters and existing cutters which undergo a major overhaul such as SLEP, MAJOR REN, MMA, RIP, or FRAM shall have a stability test as follows:
 - (1) Within 60 days of completion of the availability or before the vessel is deployed for an operational mission, whichever occurs first.
 - (2) The first two cutters of a class delivered from the same shipyard shall undergo a stability test. Stability tests of subsequent cutters shall be decided by G-SEN based on evaluation of the results of the first two.
 - (3) ELC may recommend to G-SEN to waive a stability test as required above if weight and moment monitoring data or other circumstances permit.

C. TEST PERSONNEL.

1. The Commanding Officer/Officer-in-Charge (CO/OIC) shall be responsible for preparing the cutter/boat for the stability test.

- C. 2. The MLC representative shall be present during the stability test to ensure the stability test is performed in accordance with the contract specifications.
 - 3. Stability tests shall be witnessed by a G-SEN/ELC (commandant representative). The Commandant representative shall be given four weeks notice before the stability test. The Commandant representative will verify the acceptability of the stability test arrangements and procedures. The Commandant representative shall notify the MLC representative and CO/OIC of any discrepancies noted before and during the stability test that may adversely affect or jeopardize the outcome of the stability test.
 - 4. The Stability Test Officer (STO) is the person designated by the contractor having overall responsibility for the preparation for the stability test, the conduct of the stability test, and the presentation of accurate test data. The MLC Representative is responsible to ensure the STO performs the stability test properly. The STO shall have experience in conducting stability tests.

D. STABILITY TEST REPORTS: REVIEW AND APPROVAL.

- 1. Stability Test Reports shall be prepared by the STO per the specifications for the stability test. Computer programs used to prepare the Stability Test Report shall be preapproved by ELC (02).
- 2. The STO shall verify that all data used in the Stability Test Report correspond to the test data and have been correctly incorporated into the report. Within four weeks of the stability test, the STO shall forward a draft of the Stability Test Report to ELC (02) via the MLC Representative for review. ELC (02) will provide comments on the draft report within four weeks of receipt.
- 3. The final Stability Test Report shall be approved by ELC (02).
- 4. Stability tests which were not required by ELC (02) shall not be used for updating any stability documentation.

E. STABILITY TEST PROCEDURES.

- 1. Stability test procedures shall be in accordance with Appendix 1 of this manual entitled "Coast Guard Cutter Stability Test Procedures". There shall be no deviation from or modifications of these standard procedures without ELC (02) approval.
- 2. Prior to departing the cutter, the STO, the MLC representative, and the Commandant representative shall initial each sheet of the stability test record to indicate their concurrence with the acceptability of the stability test conditions and performance. These initials do not preapprove the Stability Test Report that is to be developed and submitted by the STO and finally approved by ELC (02).

CHAPTER 110. BOAT STRUCTURE

- **A. GENERAL.** In order to keep cutters abreast of the latest improvements in repair techniques, MLCs shall promulgate and maintain standard specifications for fiberglass (reinforced plastic), laminated wood, and rigid inflatable boats. Specific manufacturer's instructions shall be followed when provided.
 - 1. Repair of Fiberglass Reinforced Plastic Structures. Damaged sections of reinforced plastic structures can be repaired by patching with materials similar to those used in the construction of the structure itself. The repair process involves preparation of the damaged section and application of a patch, consisting of glass reinforcing material and liquid polyester resin compatible with the OEM lay-up schedule..
 - 2. Repair of Boats of Laminated Wood construction. The stem, stern posts, shaft logs, and in some cases, the keels of certain older type boats are made of laminated wood. Construction consists of layers of wood glued together under pressure and planking consisting of two filleted (usually diagonal) layers with, light canvas in between. All are laid in glue, clamped under pressure, and cured in a heated chamber. The repair of damage to laminated craft is difficult. Units should contact MLC for technical guidance and assistance.
 - 3. <u>Repair of Rigid Inflatable Boats</u>. Manufacturer supplied or manufacturer recommended repair kits shall be used in the repair of inflatable hulls.

Page Intentionally Left Blank

CHAPTER 233. INTERNAL COMBUSTION ENGINES

- A. JACKET WATER TREATMENT PROGRAM. Internal combustion engines equipped with a jacket water cooling systems must be maintained to keep these cooling systems free of rust, scale, and sludge, so that the cooling water may carry away engine heat. Since these contaminants are deposited in a non-uniform manner, they can cause hot spots on cylinder liners or engine blocks. This results in uneven stresses and in eventual material failure. Since an oil film cannot be maintained in an overheated area, rapid piston ring and liner wear may occur. To guard against such conditions, the use of distilled, de-ionized water and an approved cooling system corrosion inhibitor shall be used. Using distilled, de-ionized water reduces the minerals and dissolved solids which can be deposited on the cooling system's components while the inhibitor's function is to buffer acids and deposit a film on the metal surfaces of the cooling system to protect them from cavitation, corrosion, and erosion attack.
 - 1. Applicability. The jacket water treatment program applies to all internal combustion engines on cutters and boats that use a closed loop jacket water cooling system. It also applies to jacket water cooled air compressors. Engines using sea water as a coolant and those using a jacket coolant that passes through the engine only once and is then discharged overboard (open loop design) are exempted from this program. Cutters that may be exposed to freezing temperatures and require antifreeze and boats less than 65 feet long shall adhere to the requirements established in paragraph A.4.b.
 - 2. <u>Requirements for an Effective Treatment Program</u>. To be effective, the cooling system treatment program must meet the following conditions:
 - a. The cooling system should be clean so that the inhibitor will be able to act on the bare metallic surfaces of the water jacket.
 - b. The coolant must be checked periodically for contaminants and inhibitor concentration. The inhibitor must be maintained at the concentration specified by its manufacturer.
 - c. The coolant must be clean, mineral-free water (distilled) containing a minimum of dissolved gasses, such as air, oxygen, or carbon dioxide, and contain the appropriate level of chemical additives (inhibitors) and, if required, antifreeze.
 - d. The primary cooling system must be mechanically tight to prevent excessive leaks of coolant out of the system or leaks of combustion gasses or air into the system.
 - 3. <u>General Treatment Requirements</u>. The regular use of clean, distilled, de-ionized water in closed loop jacket water cooling systems is required for all engines. If distilled, de-ionized water is not available, water that has been treated by a reverse osmosis system, water softener or like system may be used, provided it does not exceed the following maximum allowable specification:

Chlorides 40 ppm

Sulfates (Sulfur) 100 ppm

Total Dissolved Solids 340 ppm

170 ppm

pH 5.5 - 9.0

NOTE: Care must be taken to avoid the use of water known to be contaminated with chemical or industrial wastes. Hard water shall not be used because it will form sludge and scale on cooling system components. In general, inhibitors contain no chemical ingredients to soften water. For units operating continuously in hard water areas, the installation of water treatment equipment should be considered. Units should consult with their MLC for installation of water treatment equipment if they are required. Water samples may be tested from a local vendor, if a local vendor is not available contact engine manufacture to obtain source of water testing.

- a. Jacket Water System Maintenance. Engine jacket water cooling system maintenance shall include the following checks:
 - (1) Maintain the pump and piping on the suction side of the cooling system airtight to avoid aerating the coolant. Aeration would cause the coolant to become highly corrosive, cause rapid oxidation of glycol and drop in pH.
 - (2) Maintain the jacket water system vents clear to allow continuous venting of all vapors.
 - (3) Maintain jacket water pump packing glands tight enough to prevent excessive loss of coolant.
 - (4) Inspect the jacket water passageways periodically and thoroughly to determine how effective the jacket water treatment program is in preventing corrosion and erosion. Whenever major work is done on an engine, it is recommended that at least one cylinder liner be removed and the adjacent jacket water areas of the engine block be carefully examined.
- b. System Corrosion. Any engine experiencing corrosion, erosion, scaling, or sludging conditions should be thoroughly examined to determine the cause. CO/OIC should report the facts to the MLC. The MLC(v) should take whatever steps are necessary to determine the cause and assist in corrective action. Where practical, a coolant analysis should be conducted to assist in identifying the cause of an adverse condition. The ELC (01) should be kept advised of all instances where the jacket water treatment program is not effective.
- c. System Cleaning. If it is necessary to CHEMICALLY CLEAN the cooling system of any internal combustion engine, the CO/OIC should request the assistance of the MLC (v). Only chemical cleaning agents approved by the engine manufacture, heat exchanger / keel cooler manufacture and MLC's standard specifications for installed piping system shall be used for cleaning engine cooling systems. The use of such chemicals is authorized only for repair facilities, shipyards, or contractors specializing in this service. After the

- A. 3. c. chemical cleaning of a cooling system, the entire cooling system shall be flushed with water meeting the specifications in paragraph A.3. and chemically analyzed to ensure all residual cleaning chemicals have been removed. Failure to remove the cleaning agent will result in acids remaining in the system compromising the cooling system. All chemicals and wastes generated shall be disposed of in accordance with all federal, state and local laws.
 - d. Special Treatment. MLC's are authorized to provide additional water treatment instructions in areas of adverse water conditions. ELC (01) shall be kept advised of all such instances.
 - e. Safety Precautions. Most corrosion inhibitors and chemicals used to test inhibitors contain alkalis or acids and are poisonous. Engine jacket water systems shall never be directly connected with the potable water supply. Personnel should avoid any contact of the skin or eyes with corrosion inhibitors, antifreeze or testing chemicals. If the inhibitor, antifreeze or testing chemicals come in contact with the skin, the affected areas should be washed immediately with soap and water. Seek immediate medical attention if eye contact or ingestion occurs.
 - (1) Handling Procedures. All personnel working with or around cooling system inhibitors, inhibited antifreeze, or testing chemicals shall wear protective clothing as listed in NSTM Chapter 233, i.e. rubber gloves, a face shield, and an apron. . Inhalation of ethylene glycol vapors from hot coolant treated with antifreeze shall be avoided.
 - (2) Alkalis. Corrosion inhibitors and corrosion inhibitive antifreeze contain strong alkalis. Do not mix alkalis directly with acids because the heat generated may cause the chemicals to splatter. If alkalis contact the skin, flush the affected area with cold water until the slippery feeling disappears. If a burning or itching sensation persists, seek medical attention. If alkali comes in contact with eyes, flush with large amounts of potable water and seek immediate medical attention. All alkalis must be stored separately from acids.
 - (3) Acids. Cupric sulfate pentahydrate is an acid used in the chloride test for coolant treated with MIL-A-53009 inhibitor, PENCOOL 2000, or MIL-L-46153 inhibited antifreeze. Do not mix acids with alkalis. If acids contact the skin, flush the affected skin area with cold water and seek medical attention. If acids come in contact with the eyes, flush with large amounts of potable water and obtain immediate medical attention.
 - (4) Poisons. All the test and inhibitor chemicals are poisons having varying degrees of toxicity. Isopropyl alcohol is different from ethyl alcohol. Small amounts of isopropyl alcohol, if swallowed, can cause serious illness. Sodium chromate is poisonous by ingestion, inhalation, or skin absorption and is irritating to the eyes, skin, and mucous membranes. Inhibitive antifreeze consists primarily of ethylene glycol, which is toxic by ingestion. Its vapors are also toxic. MIL-A-53009

- **A.** 3. e. (4) inhibitor and PENCOOL 2000 are both toxic by ingestion. Cupric sulfate pentahydrate is toxic and is irritating to the eyes, skin, and mucous membranes. Phenolphthalein is also a poison.
 - (5) Oxidizers. Sodium chromate is an oxidizing material and must not be stored or allowed to come in contact with reducing materials.
 - 4. <u>Specific Treatment Requirements</u>. The following paragraphs describe the specific treatment requirements for internal combustion engines in the Coast Guard.
 - Jacket Water Treatment, Cutter Diesel Engines, non-ethylene Glycol based. This section establishes the policy for jacket water treatment in diesel engines in Coast Guard cutters 65 feet long and longer whose coolant systems are using a non-ethylene glycol based coolant. The following sub-paragraphs apply to these systems:
 - (1) Sodium dichromate-based corrosion inhibitors are prohibited. The Environmental Protection Agency (EPA) has determined that dichromate solutions are a toxic waste.
 - (2) Cutters with engines prone to cavitation shall use PENCOOL 2000, PENCOOL 3000 (PENCOOL formerly known as NALCOOL) coolant/inhibitor or any corrosion inhibitor approved for use by the engine manufacturer. PENCOOL 2000 is available in the stock system. PENCOOL 2000 shall NOT be used in engines, which have aluminum components in their jacket water system. PENCOOL 3000 may be used in engines with aluminum in the cooling system. PENCOOL 2000 inhibitor is a blend of chemicals in water. The major components are: sodium nitrite, sodium borate, sodium silicate, and an organic copper inhibitor. Sodium nitrite aids in formation of a protective oxide layer on ferrous metal surfaces. Sodium borate is an alkaline buffer that neutralizes acidic by-products resulting from combustion blow-by gases leaking into the coolant and glycol oxidation byproducts (e.g. Glycolic, acetic, oxalic, form and carbonic acids. Sodium silicate forms a protective film on metal surfaces and provides effective corrosion protection for mixed metal systems. The organic copper inhibitor chemically bonds with copper contained in copper alloys, resulting in a protective layer on the surface.
 - (3) MIL-A-53009 corrosion inhibitor for diesel engine jacket water systems is available in the national stock system. Its use is only authorized in engines that are not prone to cavitation. MIL-A-53009 corrosion inhibitor shall NOT be used in engines, which have aluminum components in their jacket water system. MIL-A-53009 inhibitor is similar to PENCOOL, however, it contains no sodium nitrite. Chemicals contained in MIL-A-53009 are: sodium metaborate, potassium silicate, and mercaptobenzothiazole (MBT). Sodium metaborate is an alkaline buffer that neutralizes acidic by-products resulting from combustion blow-by gases leaking into the coolant and glycol oxidation by-products (e.g. Glycolic, acetic, oxalic, form and carbonic acids. Potassium silicate forms a silicate film on metal surfaces that provide effective corrosion protection for mixed metals. MBT chemically bonds with copper and forms a protective layer on copper alloys.

- A. 4. a. (4) Cutters may request to use other corrosion inhibitors. Requests to use other corrosion inhibitors shall be submitted to the cognizant MLC (v). MLC (v) will forward the request to ELC (01) for consideration. These requests must be accompanied by written testimonial from the engine manufacturer. Testimonials must explicitly state that the corrosion inhibitor is suitable for use in a specific model or line of engines and will not cause or contribute to cooling system corrosion, cavitation or damage to the engine.
 - (5) When one corrosion inhibitor is exchanged for another, the jacket water system shall be flushed and chemically cleaned of all traces of the former inhibitor before the new inhibitor is added. Authorized product reps and engine manufacturer reps shall be consulted to ensure that this flushing is done properly.
 - Engineer Officer/Engineer Petty Officer (EO/EPO) shall ensure instructions set (6) forth by the engine and coolant manufacturers for testing for and maintaining the concentration of the corrosion inhibitor, testing the jacket water system for contaminants, and if required, testing for and maintaining the concentration of antifreeze are strictly adhered to. Appropriate test kits for each inhibitor type are available in the stock system. At minimum, jacket water shall be tested monthly and whenever jacket water, inhibitors or antifreeze is added. Concentrations of PENCOOL 2000 should be maintained to provide a minimum Nitrite level of 1000 ppm. Concentration of MIL-A-53009 inhibitor should be maintained to provide an MBT level between 300 and 400 ppm, and a minimum reserve alkalinity of 6 RA units. Chloride levels should not exceed 100 ppm regardless of the type of inhibitor used. Step by step testing procedures for MIL-A-53009 inhibitor, PENCOOL 2000 and MIL-A-46153 are provided in NSTM Chapter 233. Test results shall be recorded in the equipment coolant test log, as per NSTM Chapter 233. Photocopying of the illustration in NSTM Chapter 233 is authorized. Cutters that operate exclusively in fresh water and do not use cooling water that was treated by a water softener using salt are exempt from testing cooling water for chloride content. Alco and Cummins engines have a history of cavitation and corrosion and may require higher inhibitor concentration levels. Concentration levels of inhibitor should not exceed the manufacturer's recommendation.

Spent testing chemicals that are compatible should be stored together in a clearly labeled 5-gallon plastic container for disposal as hazardous waste. Jacket water containing inhibitor or antifreeze is not a hazardous waste because the chemicals, when diluted, are no longer reactive. Although not considered a hazardous waste, treated engine jacket water may be harmful to marine life. Therefore, it shall not be discharged overboard, but treated as a shipboard hazardous waste. Chapter 593 provides guidance for disposing shipboard wastes.

(7) 110 C WPB shall use only de-ionized distilled water and Caterpillar coolant additive. Caterpillar coolant additive levels shall be checked for proper mixture as per applicable MPC.

- **A.** 4. b. Antifreeze as a Jacket Water Treatment. This section establishes the policy for treating closed loop jacket water systems of engines installed in Coast Guard boats/cutters operating with anti-freeze.
 - (1) At minimum, cutters and barges using antifreeze shall include: All boats less than 65 feet long, boats/cutters longer than 65 ft, and cutters and barges that may be exposed to freezing temperatures, such as systems using jacket water skin coolers. NOTE: ALL Caterpillar engines may operate with ethylene glycol based Texaco/Caterpillar Extended Life Coolant 50/50 pre-mix.
 - MIL-A-46153 is a Navy ethylene glycol-based inhibited heavy duty (a) antifreeze that is available through the stock system. MIL-A-46153 is authorized for use in engines not prone to cavitation. Mixtures of PENCOOL 3000 with MIL-A-46153 antifreeze and PENCOOL 2000 with MIL-A-46153 antifreeze are authorized for engines prone to cavitation that require freezing protection. Extreme caution shall be used when adding PENCOOL 2000 and 3000 to MIL-A-46153 antifreeze to avoid over concentrating cooling system with corrosion inhibitors. Over concentrating will result in a "Slime" in the cooling system and place an insulating barrier on all surfaces of the cooling system that can only be chemically removed. Inhibited antifreeze MIL-A-46153 consists of ethylene-glycol and corrosion inhibiting chemicals sodium borate, sodium trisodium phosphate and an organic copper inhibitor. Sodium borate is an alkaline buffer, Trisodium phoshate contributes additional alkalinity buffering and aids in the formation of a protective layer on metal surfaces. The organic copper inhibitor chemically bonds with copper contained in copper alloys resulting in a protective film on the surface.
 - (b) The use of commercial antifreeze is authorized, pending approval of the cognizant MLC (v). Different brands are formulated with different corrosion inhibitors. Not all ethylene-glycol coolant corrosion inhibitor packages provide adequate protection for a given engine. Avoid mixing different brands/types of antifreeze. The different inhibitor packages may be incompatible with each other and with the inhibitors in MIL-A-46153. Automotive/gasoline engine antifreeze shall NOT be used in any diesel engine cooling system. They do not provide the proper corrosion inhibitor protection required by diesel engine cooling systems.
 - (c) Antifreeze solutions of less than 33 percent concentration by volume do not provide enough corrosion protection. Concentrations greater than 66 percent concentration by volume adversely affect the freeze protection and heat transfer rates severely.
 - (d) Applicable to all ethylene-glycol based anti-freeze except Texaco/Caterpillar Extended Life Coolant). For engines using ethylene glycol based antifreeze (except as noted), the corrosion protection becomes depleted during normal operation. Therefore, these jacket water systems shall be tested monthly and results shall be recorded in the equipment coolant test log, as per NSTM

A. 4. b. (1) (d) Chapter 233. Photocopying of the illustration in NSTM Chapter 233 is authorized. Cooling system will be drained, flushed and refilled when coolant testing indicates the following:

Corrosion inhibitor levels have been depleted to an unsafe level. Antifreeze protection levels have been depleted to an unsafe level. Cooling system has been contaminated and requires cleaning. Vessel is scheduled for a normal drydocking. Testing indicates an unusual contaminated system.

(e) Where Texaco/Caterpillar Extended Life coolant is used, Texaco/Caterpillar extender corrosion inhibitor supplement shall be added every 3 years or 3000 operating hours (whichever occurs first) or when sample analysis dictates. Coolant shall be changed every 6 years or 6000 hours regardless of the condition. Units with engines operating with this coolant shall participate in the Caterpillar S-O-S coolant analysis program. Cutters/boats shall arrange this through a local Caterpillar dealer. Coolant samples shall be collected monthly and sent out to the cognizant Caterpillar dealer or lab for analysis. Cutters have the option of sending out samples to Caterpillar for analysis on a quarterly basis and testing the coolant with ship's force for the other two months of the quarter. If this option is exercised, the following chemicals/properties shall be tested for:

<u>Test for</u> <u>Acceptable Range/Threshold</u>

pH 7.5-9

Carboxylates 75% of initial Concentration

Nitrites 400-2000 ppm

In order to perform these tests the TELSCAN EXTRA test kit, Texaco code # 2823 shall be used. In addition to the tests described above the specific gravity of coolant shall be tested with a hydrometer. An acceptable range of specific gravity shall correspond to 45-55% ethylene glycol concentration.

(f) Texaco/Caterpillar Extended Life Coolant 50/50 Premix Texaco Code no. 7998: The use of this Coolant has been approved for all Caterpillar engines. Texaco/Caterpillar 50/50 premix is a premixed 50/50 solution of ethylene glycol in de-ionized water with corrosion inhibitors that includes carboxylates, nitrites and tolytriazole. Carboxylates are effective anodic corrosion inhibitors for steel, iron, and aluminum components. They are as effective as nitrites in preventing cylinder liner cavitation. Nitrites protect iron and steel from corrosion and cavitation. Tolytriazole (TTZ) is an organic inhibitor that protects copper and copper alloys.

- A. 4. b. (2) If corrosion inhibitors are used in addition to antifreeze, be aware that some corrosion inhibitors are not compatible with ethylene-glycol based antifreeze. Recommended concentrations of compatible inhibitors and inhibitive antifreeze must not be exceeded. Use of higher doses than recommended can result in the formation of silicon gel, which will clog heat exchangers. Inhibitive antifreeze and corrosion inhibitors must be mixed separately into the cooling water. Avoid mixing inhibitive antifreeze and corrosion inhibitor together in their concentrated form because this may precipitate inhibitive chemicals out of solution.
 - (3) When a ship/boat switches to an ethylene-glycol based inhibitor, and the inhibitor formerly used is incompatible with the ethylene-glycol based inhibitor, the jacket water system shall be chemically cleaned and flushed of all traces of the former inhibitor before the antifreeze is added. Authorized engine manufacturer reps and manufacturer's reps of the formerly used inhibitor shall be consulted to ensure that flushing is properly accomplished.
 - (4) Saltwater contamination of engine jacket water treated with MIL-A-16453 antifreeze and PENCOOL 2000 is detectable using field procedures outlined in NSTM Chapter 233. Saltwater contamination in commercial grades of ethylene glycol antifreeze solutions may only be detectable by laboratory methods not available in the field. If saltwater contamination is suspected in jacket water treated with commercial antifreeze, CO/OINCs shall request that MLC (v) have the jacket water tested for chlorides by an industrial chemical testing lab.
 - (5) Jacket Water Conditioners. Certain engines are equipped with a "Perry Filter" type water conditioner that filters and softens the cooling water. It also adds a combination of inhibitors to the water and deters galvanic corrosion of the cooling water system. Cutters having these units shall supplement the water conditioner with jacket water treatment specified in this chapter. They shall also ensure that the corrosion inhibitor used is compatible with the "Perry Filter" conditioner.
- **B. <u>DIESEL ENGINE MAINTENANCE PROGRAM.</u>** This section describes an engine maintenance program for the diesel engine models listed in Table 233-1. The diesel engine maintenance program for boats shall be performed in accordance with the prescribed maintenance procedure card. Marine diesel engines not covered by Table 233-1, Paragraph F, or PMS shall be maintained according to the applicable Technical Publication or manufacturer's instruction book.
 - 1. <u>Background</u>. The Coast Guard Diesel Engine Maintenance Program (DEMP) provides cost-effective maintenance by renewing engine components near the end of their useful lives without incurring an unacceptable risk of in-service failure. Several maintenance systems have been used in the past to maintain diesel engines. Various engine component systems lend themselves to different methods of determining the time to overhaul, that is, oil analysis, condition monitoring, accumulated hours, full power trials, trend analysis, etc. At present, the most effective approach to minimizing the risk of center section failure is periodic inspection or overhaul, supported by interim maintenance as indicated. Many factors affect the permissible operating interval between overhauls. Among these are:

- **B.** 1. a. Design and quality of components installed originally or during subsequent overhauls.
 - b. Operation of the engine at the rated power versus speed curve and variations in the load and speed during operations.
 - c. Operation in abrasive (airborne sand) and corrosive (salt water spray) environments.
 - d. Quality of workmanship during an overhaul.
 - e. Operating procedures such as maintaining engine system temperature and pressures within specified limits.
 - 2. Required Periodic Inspection or Overhaul. To provide a basis for planning maintenance time, budgeting engine remanufacture/repair, orderly acquisition of parts, on-the-job training, and a high quality overhaul, the hourly intervals listed in Table 233-1 shall be used strictly as guidance for planning center section overhauls. Center section overhauls shall be done based on the condition of the engine and not solely based on engine hours. This is especially true for the larger medium speed diesels engines used by the Coast Guard such as the ALCO's, Caterpillar 3608's and Fairbanks-Morse. The condition of the engines shall be determined by, but not limited to: DEMP readings and the trends they indicate, full power trial results, condition based monitoring programs such as Caterpillar PAR testing, boroscope inspections and in some cases, continuous monitoring by an online monitoring system. Before the engine reaches the hours in table 233-1, each engine shall be evaluated by the cutter or station EO/EPO and the MLC to ascertain whether the condition warrants overhaul. If the conditions do not warrant an overhaul, the MLC may authorize a delay in overhaul. Delays shall be requested from the cognizant MLC (v) via the unit's chain of command. The unit shall continue to perform full power trials and DEMP (as required) at their required periodicity during the overhaul extension period, to monitor possible degradation in engine performance. Successive extensions to OVH's may be granted by the MLC as engine conditions warrant. This includes canceling top end overhauls or performing top end overhauls in place of center section overhauls if conditions warrant. The MLC's response to requests for overhaul extensions shall include a new projected date of overhaul or next condition assessment and a reminder to continue PMS procedures (including DEMP and full power trials as required) at the required periodicity.

3. As-Indicated Maintenance.

- a. The condition of the center section of an engine, or any other portion of the engine, can be estimated by the effective use of the following aids:
 - (1) Full power trials
 - (2) Observation of engine operating characteristics
 - (3) Periodic spectrochemical analysis of the lubricating oil
 - (4) Observation and analysis of the trends of certain engine operating parameters.
 - (5) Physical inspection of engine components.

- **B.** 3. a. (6) Performance testing other than DEMP and full power trials. An example of this is Caterpillar PAR testing.
 - (7) Proven diagnostic testing. Examples of this are crankshaft phase marked cylinder head vibration, cylinder firing pressures, ultrasonic measurements and thermographic measurements. Together, these measurements provide conclusive and telling information about the engine cylinder power balance, and the top end condition of the engine. As with other diagnostic measurements, the value of these measurements is contingent upon the expertise of individual(s) evaluating the results.
 - (8) On-line monitoring systems These systems can be used to detect anomalies and degradation in engine performance. Reliance on these analytic tools for the determination of the internal condition of an engine's center section, without having to open the engine and physically measure for wear, is the substance of the "as indicated" maintenance system. It is important that each of these aids be continuously monitored. If repair or overhaul is indicated by any of these programs before the periodic overhaul required by Table 233-1, appropriate maintenance action shall be taken.
 - 4. <u>Program Benefits</u>. Establishment of periodic inspection and overhaul intervals for Coast Guard diesel engines, backed by the as-indicated maintenance described in the previous section, should accomplish the following:
 - a. Permit revision of the operating intervals between overhauls. These intervals should reflect the unique demands placed on Coast Guard engines, based on the feedback from each major overhaul, as provided in Paragraph D.5.
 - b. Give the operator a better appreciation of engine condition at all times.
 - c. Increase the probability of detecting impending casualties.
 - d. Provide a high degree of support in planning engine overhauls for several reasons: The internal condition of an engine can be estimated at any time, its time to scheduled maintenance will be known, and the scheduled overhaul may be delayed by the MLC if justified.
 - 5. <u>Center Section Overhaul Feedback</u>. To optimize the intervals of the required period maintenance, the overhaul experiences of afloat units must be collected, analyzed, and disseminated. To this end, any major inspection or overhaul on a diesel engine center section shall be reported as specified in Chapter 090.
 - 6. <u>Program Application</u>. The "as indicated" maintenance program applies only to the center section of an engine and engine components whose performance can be observed through engine operating parameters, or whose internal condition can be analyzed through the use of spectrochemical analysis of lubricating oil.

TABLE 233-1 ENGINE APPLICATION TABLE

Engine Make and Model	Overhaul Interval Hours *	Oil Analysis	Compression and Firing Pressures	Crankcase Vacuum	Inlet Air Pressure	Exhaust Pressure	Lube Oil Consumed
ALCO**							
#16-251-B	24,000	X	X	X	X	X	X
#16-251-CE	24,000	X	X	X	X	X	X
#TOP END	14,400						
#MAJOR	24,000						
16-251-F	18,000	X	X	X	X	X	X
TOP END	9,000						
MAJOR	18,000						
18-251-F	24,000	X	X	X	X	X	X
TOP END	14,400						
MAJOR	24,000						
8-251							
TOP END	14,400	X	X	X	X	X	X
MAJOR	24,000	X	X	X	X	X	X
CATERPILLAI	R						
D-333	12,000	X		X	Х	X	X
D-343	12,000	X		X	X	X	X
D-348	12,000	X		X	X	X	X
D-353 ****	20,000			X	X	X	X
D-379 ****	20,000	X		X	X	Х	X
D-379 D-398	16,000	X		X	X	X	X
D-398-TA	20,000	X		X	X	X	X
D-399	16,000	X		X	X	X	X
3304	10,000	X		X	X	X	X
3412	20,000**			X	X	X	X
3406	10,000	X		X	X	X	X
3406B	12,000	X		X	X	X	X
3516	12,000	X		X	X	X	X
3508	,						
TOP END	11,000	X		X	X	X	X
MAJOR	22,000	X		X	X	X	
3608				_	_		
TOP END	20,000	X	X	X	X	X	X
MAJOR	40,000	X	X	X	X	X	X

CUMMINS

V 12-525M	8,000	X	X	X	X	X
VT12-600M	8,000	X	X	X	X	X
VTA12-700M	8,000	X	X	X	X	X
VT 903M	5,000		X	X	X	X
NT-8565-G2	20,000	X	X	X	X	X
6CTA8.3-M	9,000					
4BT3.9-M	5,000					

TABLE 233-1 ENGINE APPLICATION TABLE (continued)

Engine Make and <u>Model</u>	Overhaul Interval Hours *	Oil Analysis	Compression and Firing Pressures	Crankcase Vacuum	Inlet Air Pressure	Exhaust Pressure	Lube Oil Consumed
SULZER							
Under Deve	lopment						
PAXMAN							
16RP200M	9,000	X CO	MPRESSION	ONLYX	X		X
FAIRBANKS-I	MORSE						
38D 8 1/8 38TD8 1/8	16,000 16,000	X X	X X	X X	X	X	X X
DETROIT	10,000	21	21	21	21	21	Λ
6V53 6V92 6V92TADDEC	12,000 12,000 3 3,000			X X X	X X X	X X X	X X X
GENERAL MO	OTORS						
8-645 12-567 12-278 8-278 8-268 6-268 3-268 6-110 12-V-71 8-V-71 6-71 4-71 3-71	20,000 12,000 10,000 10,000 10,000 10,000 10,000 10,000 10,000 12,000 12,000 12,000	X CO X CO C(X X X X X X X MPRESSION MPRESSION MPRESSION OMPRESSION OMPRESSION	ONLY X ONLYX ONLYX	X X X X X X X X X X	X X X X X X X X X X X	X X X X X X X X X X
MTU							
8V396TE94	14,000	X	X	X	X	X	X

NOTE:

^{*} Engines shall be evaluated at 80% of the stated interval as per para D.2. An engine that has already exceeded the stated interval shall have the center section overhauled within the next 2,000 hours.

^{**} Traditional overhauls may be replaced by as-indicated repairs if the engines are supported by a fully integrated Condition-Based Maintenance Program. Condition-Based Maintenance Programs are to be

implemented at the MLC level, with concurrence of ELC, to be eligible for eliminating traditional overhauls. LANT Area WMEC 210 and WMEC 270's meet the criteria for an integrated Condition-Based Maintenance Program. The 400' WAGB, 270' WMEC and 210' WMEC PMS manuals require measurements to be taken on specified components during overhaul. Cutters shall ensure these

- ** (cont) measurements are taken and forwarded to the cognizant MLC(vr) for review and file. This information will be used by equipment managers to determine if the overhaul intervals are correct.
- *** Caterpillar 3412 engines on the 82' WPB shall be overhauled at 11,000 hours.
- **** 20,000 hours interval for guidance only, actual overhaul indicated by PAR test results.
- **B.** 6. a. The center section of an engine includes all cylinder assemblies and related components, plus crankshaft and camshaft assemblies, including bearings. Other engine components, such as attached pumps, vibration dampers, blowers, turbochargers, and like parts shall continue to be inspected and overhauled as required by existing Technical Publications or manufacturer's recommendations.
 - b. The importance of these inspections or overhauls cannot be overemphasized. The parameters that must be monitored for each engine model are indicated in Table 233-1. Engines of the types listed in Table 233-1 are included in the program if they are installed as main propulsion engines, or as ship service or propulsion generators. Emergency generators, air compressors, and barge engines are not covered by this program.
 - 7. Overhaul Kits. An extended overhaul interval is valid only if it is measured from some point at which the engine was in a baseline condition. Certain components shall always be renewed when a scheduled center section overhaul is performed. This will ensure that engines are returned to an acceptable baseline after overhaul. Except for these compulsory renewal items, center section components shall be renewed if the measured wear exceeds one-half the allowable wear.
 - a. Overhaul kits are being established for some engines. These kits contain all the mandatory renewal components for the related engines. Center section overhaul kits are available for the diesel engines listed in Table 233-2.

TABLE 233-2 AVAILABLE CENTER SECTION KITS

Engine Manufacturer	Model
ALCO	251B
ALCO	251F
ALCO	251F Fuel Pump
Fairbanks-Morse	38TD8-1/8
Fairbanks-Morse	38D8-1/8 Type AR4

NOTE: (1) Refer to the applicable Cutter Class Maintenance Plan and/or Equipment Support Plan for NSN/ACNs.

(2) Pistons and rings for 251F must be ordered separately.

- B. 7. b. Policy on the Use of Overhaul Kits. Center section overhaul kits are issued on a non-reimbursable basis. These kits will only be issued when the MLC initiates a requisition for them from the ELC. All the components of the kit shall be used for the overhaul and none of the parts returned to ELC. Kits or partial kits are not to be stocked on board cutters or in district storage. Other long lead time engine parts that might be required after an engine is opened up may be requisitioned from ELC. Individual allowance list spare parts for casualty repairs are available through the stock system.
 - 8. <u>Standard Trend Monitoring Indicators</u>. Engine trend monitoring requires an input of several readings, taken at specified intervals of operating time, and considered as a group and in comparison with the previous values. Seven basic readings are required on engines under this program. Different parameters are relevant indicators for different engine designs. Table 233-1 designates the appropriate readings for each major engine type in the Coast Guard. These parameters are:

Cylinder compression pressure
Cylinder firing pressure
Cylinder exhaust temperature
Crankcase vacuum
Intake manifold pressure (Boost pressure)
Exhaust back pressure
Lube oil consumption.

The requirement for monitoring exhaust temperatures is not shown in Table 233-1. If exhaust pyrometers are currently installed on each engine cylinder, their exhaust temperatures shall be monitored. If only a combined exhaust pyrometer is installed, then combined exhaust temperature shall be monitored.

a. Cylinder Compression and Firing Pressures. Cylinder compression and firing pressures provide a good indication of the relative power balance between cylinders, the efficiency of the combustion space, and the total power output. For engines equipped with fittings that allow cylinder compression and firing pressure readings to be observed, both individual and average cylinder readings shall be recorded in tabular form and compared with previous readings for apparent trends. Under normal conditions, these values will remain nearly constant until the engine is approaching the time of overhaul, then the values will start to fall off. If both firing and compression pressures drop noticeably at about the same point, this is an indication that the rings are sticking, broken, or beginning to wear; valves, if applicable, are not functioning properly; the liner is beginning to score; or possibly a piston has cracked. A significant change in crankcase vacuum, scavenging air pressure, or exhaust back pressure may isolate the source to the ring/liner interface, intake valves, if applicable, or exhaust valves, if applicable, respectively.

B. 8. b. Exhaust Temperatures.

- (1) A drop in the exhaust temperature and firing pressure only would indicate a problem in the fuel system. If the drop is isolated to a small number of cylinders, the problem may be in the injectors. If the drop is reflected in all cylinders, the problem is more likely in the low pressure pump or distribution system.
- (2) Carboning of exhaust ports or valves may cause a rise in exhaust temperatures. This may be reflected in the exhaust back pressure at the same time. A faulty injector occasionally causes a high exhaust temperature. More often, high exhaust temperatures indicate that the fuel control system is sticking or the overall condition of the engine has deteriorated so that excess fuel is being fed to the engine to bring it up to speed at a standard load setting.
- (3) An abnormal temperature with no accompanying changes in the other indicators may be attributable to a faulty pyrometer. The pyrometer in question should then be carefully inspected and tested before any other inspections or adjustments are accomplished. Values of exhaust temperature should be recorded in tabular form for those engines fitted with appropriate pyrometers.
- c. Crankcase Vacuum. Assuming proper functioning of the various crankcase ventilating devices, deficiencies such as internal wear, defective pistons, and excessive carboning of rings will be indicated by a gradual loss of crankcase vacuum. After an engine overhaul, crankcase vacuum will tend to level off and remain relatively constant for a long period of time at any given condition of load and speed. As wear occurs between ring, piston, and liner, crankcase absolute pressures will slowly increase, that is, break down vacuum will decrease. As blow-by increases, the relatively high pressure combustion gasses break down the protective oil film on the cylinder walls, causing metal-to-metal contact. As further wear occurs, additional corrosive gasses blow by, accelerating the wear. With increasing blow-by, the engine sump temperature will begin to rise appreciably, driving off the relatively light lubricating oil and fuel fractions. As the oil becomes hotter, more vapors will form. Eventually, hot combustion gasses entering the crankcase can cause a crankcase explosion.
 - (1) It is important to consider the effect of atmospheric pressure when using a manometer to measure crankcase vacuum. Many Coast Guard diesels are aspirated directly from the engine room. In using a manometer, crankcase vacuum is measured relative to engine room atmospheric pressure. Engine room atmospheric pressure will vary with the number or pieces of combustion equipment in operation, the rate at which they are operating, the status of inlet and exhaust vents, the position of access closures, and the weather atmospheric pressure and temperature. Therefore, it is important to duplicate the settings for the ventilation system and the position of all hatches and doors leading to the engine room when recording crankcase vacuum.

- B. c. (2) Crankcase vacuum is an indication of engine condition only if the vacuum system is operating normally. If crankcase vacuum decreases with no change in other indicators, the crankcase scavenging, or ventilation system should be checked for proper operation. Also, scavenging air may be leaking into the crankcase. An increase in crankcase vacuum may be caused by a clogged intake screen or improper ventilation line up
 - (3) Changing the size of the orifice plate on an engine to adjust the crankcase vacuum only treats the symptom of the problem. It does not justify ignoring the possible need for an engine overhaul.
 - d. Intake Manifold Pressure. On a naturally aspirated engine, the intake manifold vacuum, will provide an excellent indication of the condition of intake valves, if appropriate, and the general condition of sealing within the engine cylinder on the intake stroke, assuming correct engine timing.
 - (1) In an engine that uses a positive displacement blower, the intake manifold pressure will only indicate a general composite of the internal engine sealing, less the exhaust system, and the condition of sealing within the blower.
 - (2) For an engine that uses a turbocharger driven by exhaust gases, the air pressure in the intake manifold will vary considerably during acceleration and deceleration of the engine. However, when the air box pressure does settle out at a constant speed and load, assuming proper operation of the turbocharger, a drop in air box pressure can be attributed to improper sealing of the intake valves if appropriate, or of the pistons, rings or cylinders, or clogged aftercooler.
 - (3) It is especially important to duplicate rpm and load setting when taking intake and exhaust manifold pressures. A change in intake manifold pressure, and to a lesser extent exhaust back pressure, may be due to carboning of the turbocharger, if fitted. This change should be investigated before concluding that difficulties exist in the engine's center section.
 - e. Exhaust Back Pressure. When the exhaust manifold or engine's exhaust system is fouled or when there is leakage of combustion gasses past the exhaust valves, the pressure in the exhaust manifold will begin to rise. For a given condition of speed and load, engine operation with no appreciable rise in exhaust back pressure would indicate that the exhaust valves are functioning properly. Any rise in exhaust manifold back pressure should be investigated for cause. Any increase will reduce engine combustion efficiency. Stack fires may cause distortion of internal tubing in mufflers and restrict exhaust gas flow, causing an increase in exhaust manifold back pressure. Carbon build up in two-stroke cycle exhaust ports will cause a decrease in exhaust back pressure. Carboning of turbochargers may increase exhaust back pressure. No two installations are alike. Some engines have mufflers that create greater back pressure than others. Piping diameter, bends, and other resistance to flow vary with each installation. Each installation must

- **B.** 8. e. establish its own pattern of operation for this parameter. The important consideration is to observe any trend, such trend indicating potential difficulties. Exhaust manifold back pressures should not exceed the manufacturer's recommended maximum.
 - f. Lube Oil Consumption. Lubricating oil consumption is a generalized indicator of internal and external engine condition. Consumption must be recorded to correct the oil spectrochemical analysis for dilution. Plotting this data is useful in comparing consumption between engines, as well as estimating future requirements. It should be noted that, in general, the values are initially high, decrease, then remain nearly constant until the engine is approaching its overhaul time. The initial high consumption is due to unseated piston rings. As rings become seated, the consumption will decrease to a normal value and remain nearly constant until the rings or liners begin to wear. Any significant increase in lube oil consumption should be carefully evaluated to determine whether the oil is really being consumed in the engine or is being lost because of leaks external to the engine. Too often an engine is assumed to be at fault when lube oil is really being lost because of leakage.
 - 9. Secondary Indicators. Several other parameters are good general indicators of engine health, but they are not may not be indicative to specific areas of engine wear or do not change rapidly enough to warrant plotting. These are considered secondary indicators and their values, where available, should be occasionally compared to previous readings. Secondary indicators include, but are not limited to, the following:

Fuel rack settings or fuel system pressures

Fuel consumption

Pressure differential across fuel oil strainers and filters

Fuel pump delivery

Fuel pump rack and governor load indicator position in relation to HP or kW

Load sharing checks & calibrations (225 WLB)

Lube oil pressure

Lube oil temperatures

Pressure differential across lube oil strainers and filters

Jacket water temperatures

Jacket water consumption.

Jacket water contamination

Appearance of exhaust

Vibration

The operator should be familiar with the above engine observations made while underway. They may indicate deterioration of an engine by a gradual or sudden change in values.

a. Fuel Rack Calibration. Fuel rack calibration is an indication of general fuel system or engine condition. An increased rack setting for a given power output is an indication of fuel pump deterioration or a decrease in engine combustion efficiency. Generally, high rack settings will be supported by other indications.

- B. 9. b. 225 WLB Load Sharing Checks and Calibrations. The 225 WLB cutters have a propulsion plant in which two main diesel engines drive a single propeller shaft through a reduction gear. Each engine is outfitted with a Woodward 721 Electronic governor. These governors are specifically designed for applications where two prime movers are sharing a single mechanical load. Load sharing is accomplished by equalizing the rack position. The rack position signal is provided by a Heinzmann rack position indicating system. Where the governor actuator, Heinzmann rack position system, or fuel control linkage are out of calibration or adjustment on one or both engines the plant will likely be out of balance, resulting in one engine assuming most of the load. (See MPC Cards for load balancing tests and procedures).
 - c. Fuel Consumption. Fuel consumption is a measure of general engine condition. An increase in fuel consumption for a given power output indicates a loss in engine efficiency.
 - d. Lube Oil Pressure. Lube oil pressure at the engine is an indicator of engine-bearing condition, lube oil pump condition, piping conditions, bypass or relief valve conditions, fuel oil dilution, temperature, etc. Lube oil pressure obtained at the upper header of Fairbanks Morse opposed piston engines is particularly useful in monitoring the condition of the internal portion of the lube oil system.
 - e. Pressure Differential Across Fuel Oil Strainers and Filters. Observe and note fuel oil strainer and filter condition and pressures. Shift duplex strainers no less than once a day. Look for signs of foreign matter. It may be helpful to install a magnet in the strainer. Filter pressure drop should not exceed that recommended by the filter manufacturer.
 - f. Jacket Water Temperature. Water temperature rise across engine should not exceed 10 or 12 degrees.
 - g. Lube Oil Temperatures. The lube oil temperature should not exceed the normal operating temperatures because the oxidation rate above these temperatures accelerates rapidly. The oxidation rate doubles with each 18-degree rise in temperature. Oxidation is the chemical process promoting the formation of crankcase sludge, known as "mayonnaise", and other products, such as gum and lacquers, that are detrimental to engine condition.
 - h. Uniformity of Fuel Pump Delivery to Each Cylinder. Normal fuel pump rack position should be within 1 or 3 mm (graduations) of one another. Any greater spread indicates derangement in the pump, the nozzle, or both.
 - i. Appearance of Exhaust. Exhaust smoke color is usually a good indicator of engine condition and balance. White smoke shortly after getting underway indicates that the engine is not warm enough for the load. Heavy, dense smoke indicates overloading. Dirty, amber smoke indicates problems with the fuel system. Cooling water leaking into the combustion system may produce white smoke. Likewise, lube oil in the combustion spaces may produce blue hazy smoke.
 - j. Vibration. The engine operator should be familiar with the engine's normal pattern of vibration.

- B. Jacket Water Contamination. Observe the color and any motion of the jacket water in the engine surge tank. Check for carbon or corrosion particles, bubbles, or an oil film.
 Leakage from engine spaces exposed to combustion gasses may result in a pulsing action in the jacket water. (See Paragraph A).
 - Fuel Pump Rack and Governor Load Indicator Position. Generator engines are governed
 to a specific speed. Therefore, if a cylinder fails to carry its share of the load, the
 governor will call for more fuel to maintain the engine output. Diesel electric propulsion
 plants respond similarly.
 - m. Jacket Water Consumption. Noting the daily required makeup jacket water may provide an early indication of jacket water sealing problems or excessive temperatures.
 - 10. <u>Instrumentation</u>. All engines subject to this program are required to monitor the parameters indicated in Table 233-1. Most engines provide for the installation of the instruments necessary to monitor these parameters. The instructions for their use that are given in the applicable technical publications shall be followed. Necessary modifications to engines not having such provisions are authorized under the MLC's supervision. Most MLC's have designated sensor locations for engines under their cognizance. The following guidance is provided for these modifications:
 - a. Cylinder compression and firing pressures shall be taken with a good quality pressure indicator on engines originally fitted with test fittings for cylinder pressures. Except on Caterpillar engines, compression readings shall be taken with the engine running and the fuel cut off to the cylinder being tested. On the Caterpillar engines, use the pressure leak-down system described in the manufacturer's manual.
 - b. Cylinder exhaust temperatures shall be measured only with original, permanently installed pyrometers. If only a combined exhaust thermocouple is fitted, it shall be used.
 - c. For crankcase vacuum, locate the sensor access well above the sump lubricating oil level, but in a position where it will not interfere in any way with moving parts of the engine. The access should be perpendicular to the side of the engine block or frame. Installation in an inspection cover is preferable; however, if this cannot be accomplished without elaborate reinforcement, then access should be made elsewhere. The ideal location of the sensor is as remote from the breathing access as possible, preferably at the point of highest static pressure.
 - d. For intake manifold air pressure, the best sensor location is in the area nearest the point where inlet air is admitted to the manifold or air box. Care must be taken to install the probe perpendicular to the air flow, to eliminate the possibility of introducing air velocity pressure into the reading. For exhaust manifold back pressure, install the sensor as close to the exhaust manifold outlet flange as possible. The sensor should be perpendicular to the path of flow. Care must be taken to ensure that there is no penetration of a water jacket. On some engines, it is possible to substitute a cylinder thermocouple for the combined exhaust thermocouple and insert a pipe tee to read the pressure.

- **B.** 11. Gauges. Because of the wide variation in engine design and normal pressures and vacuums, no specific gauge can be recommended for installation at each location. Unless the engine came originally equipped with a sensor installed, no permanent installation of a sensor will be made. When not in use, sensor connections shall be plugged. Sensors shall be approved for use by the MLC. For the purpose of this program, no mercury manometers shall be used on board boats or cutters.
 - 12. <u>Engine Performance Tests</u>. The Engine Performance Test under DEMPS was intended as a condition based monitoring maintenance program for diesel engines. Over the years, Engine Performance Testing has had limited success as a predicator of the need for a center section overhaul and experience has shown that the standard overhaul intervals are accurate. However, there is still an intrinsic value to running the tests, as it provides a valuable snap shot of the engine condition and can indicate premature failure problems, particularly as the engine hours exceed the half-life of the overhaul cycle.
 - Performance tests, or their PAR equivalent, for Caterpillar engines, shall be conducted on a. each engine when the engine's overhaul break-in period is completed in order to establish a baseline. A second set of tests will then be completed when the engine reaches 50 percent of its stated overhaul hours. Performance tests will then be completed annually unless troubleshooting is needed. WAGBs shall conduct performance tests each time load banking is conducted. These are minimum requirements and EOs and EPOs should increase the frequency of performance tests if engine operating condition or previous performance test results are abnormal. It is intended that tests be conducted during the course of normal operations. It is the responsibility of the cutter's CO/OIC to ensure that enough time is dedicated to performance of these tests. When conducting performance tests, engines should normally be operated at approximately 80 to 90 percent of the Coast Guard rated load. Regardless of the exact operating condition chosen to conduct the test, it is extremely important that the engines be test run under the same load, speed, and ambient conditions each time a test is conducted. Lube oil and engine jacket water should be within 5 degrees of the normal operating temperatures. RPM and load should be duplicated. Before the test is conducted, the following should be accomplished:
 - (1) Ensure that all instruments are accurate. Test and calibrate them if any doubt exists about their accuracy and reliability.
 - (2) Install any required temporary gauges into the system.
 - (3) Set ventilation and engine room accesses to duplicate standard test conditions.
 - b. Engine operating trends in crankcase vacuum, inlet air pressure, exhaust pressure, and lube oil consumption shall be plotted on graph paper. Use operating hours as the horizontal scale, even if testing is on a monthly basis. Choose the vertical scale carefully. Minor variations in readings due to normal operating variables should appear small enough to not distort the trend information. It may be advisable to plot a faired line rather than one through every data point. It is the overall trend of the values that indicate wear

- B. 12. b. patterns and project overhaul. Drastic shifts are either incorrect data or machinery malfunctions requiring immediate response. Do not assume that a reading is incorrect unless the reason for the unusual reading can be explained or additional normal readings can be taken. Cylinder compression readings and firing pressures shall be monitored per paragraph D.8.a. Exhaust temperatures shall be monitored per paragraph D.8.b. Chapter 262 of this instruction provides guidance for monitoring lube oil analysis readings. Vessel using the Caterpillar PAR program shall retain all prior PAR tests and compare them with the most current test.
 - c. This approach to maintenance is intended to aid the engineer in maintaining diesel engines. It is not intended to be a license to ignore obvious maintenance because it is not specifically identified by the "as indicated" maintenance program.
 - d. It is intended that overhauls be as infrequent and as manageable as is compatible with a cutter's mission. This approach will succeed in direct proportion to the quality of the maintenance actions taken and the promptness with which they are taken. No formal inspection requirements, overhaul requirement, or diagnostic process yet devised will provide more reliable machinery than will the knowledgeable attention of those persons, of whatever rate or rank, responsible for the machinery in question.
 - 13. On-Line Monitoring Systems. Vessels with engines with approved on-line monitoring systems need not perform DEMP testing as described in paragraph 12 of this section. Performance testing used in conjunction with on-line engine monitoring systems shall be developed to exploit the features/capabilities of the monitoring system while providing the most telling indication of engine condition possible. Approval for on-line engine monitoring systems shall be provided by ELC-01. Suitable on-line monitoring systems are systems with the capability to:
 - a. Acquire and log all primary DEMP parameters and selected secondary DEMP parameters including, rack position, fuel consumption, jacket water temperature(s), lube oil temperature(s), lube oil pressure, raw water temperature(s), fuel pump pressure etc..
 - b. Monitor engine performance by comparing measured relationships between key parameters with engine manufacturer's performance data or baselines established during trials. Typically, key engine parameter's are functions of engine BHP, RPM or both.
 - 14. <u>Allowances for Emerging Technologies</u>. Where the emergence of diesel engine diagnostic technologies provides equipment and or testing methods potentially beneficial to the Coast Guard, requests may be submitted through the cognizant MLC (v) to replace or supplement existing DEMP or PMS procedures with diagnostic procedures associated with the new equipment/methods.

C. DIESEL ENGINE CRANKWEB DEFLECTION REQUIREMENTS.

1. Frequency.

a. Crankweb deflection readings need only be taken after each major overhaul, unless damage is suspected to the engine or driven equipment, such as generator or reduction gear, as a result of a grounding/collision.

- C. 1. b. Crankweb deflection readings should only be taken with the cutter waterborne. On opposed piston engines, it is not considered necessary or important enough to check the upper crankshaft, since any misalignment of the engine will be distributed throughout the block and will not be measurable in the upper crank. On engines such as the Cummins, on which crankweb deflections cannot easily be taken after the engine is installed, there is no requirement for taking or reporting crankweb deflection readings on installed engines.
 - c. The test is relatively easy and can be done in a short time. Although not required by some manufacturers, the check remains a good engineering practice for marine diesel engines. Crankshaft deflection readings are to be recorded in the machinery history and reported in the Cutter Engineering Report for engines with crank journals of 4 inches or more.
 - 2. <u>Instructions</u>. Instructions for taking web deflection readings and the meaning of their results can be found in the Naval Ships Technical Manual (NSTM), Chapter 233. It is good engineering practice to take deflection readings on all crank throws. Maximum allowable crankweb deflection for Fairbanks Morse (38D8 1/8 and 38TD8 1/8) and General Motors EMD diesel engines is from 0.004 to 0.005 inches on any throw.
- D. PERFORMANCE TESTS OF SHIPBOARD AND SHORE-BASED GASOLINE AND DIESEL BOAT ENGINES. This section gives minimum performance testing schedules for engines in shipboard and shore-based boats not included in Table 233-1, or covered by the boat's maintenance procedure card.
 - 1. Periodic operation of boat engines is necessary to ensure reliability. Manufacturer's instruction books vary widely and frequently omit performance test instructions.
 - a. Operating a boat engine once a week exercises movable engine parts, relieves valve and injector springs under compression, replenishes the coating of lubricating oil on polished surfaces, flushes out stagnant fuel from fuel lines and injectors, and checks the engine starting system, alternator, etc. If an engine has not been operated for 7 days, start and run for a few minutes without load and bring up to operating temperature.
 - b. Operating a boat engine under load once a month checks its operating ability; warms up the engine and driven equipment, thereby reducing the effects of moisture; and trains operating personnel. The engine should be run until all operating temperatures have leveled off at normal values. This normally requires 30 minutes, while operating at 50 percent or more of rated full load. If an engine has not been operated under load for 30 days, operate it at 50 percent load until completely warmed.
 - c. The boat engine should be operated at rated full load and speed for 10 consecutive minutes semi-annually to check the reliability of the engine and the driven equipment. Record all useful readings. Maintain a file at the unit level for comparison with the manufacturer's instructions and previous tests. Inability of an engine to carry full load satisfactorily should be investigated and corrected as soon as practical.
 - d. The stated frequency of performance tests is a minimum. More frequent tests are encouraged if conditions warrant.

- **D.** 1. e. The above instructions do not apply to engines in storage.
 - 2. Include the above tests on the appropriate check-off records. Log non-accomplishment of tests and the reasons. Reports of these tests are not required.

E. MARKING BOAT INSTRUMENT PANEL GAUGES.

- 1. To provide a ready reference for boat operators, boat instrument panel gauges should be marked to show dangerous operating ranges.
- 2. All units operating inboard powered boats shall be sure that any existing markings on boat instrument panel gauges are as shown in Table 233-3. Remove any incorrect markings and signs and mark operating gauges as follows:
 - a. Refer to Table 233-3 to determine the normal temperature and pressure range at normal continuous duty RPM. Mark these ranges in GREEN.
 - b. Determine the dangerous operating ranges from the table and mark those on the gauges in RED.
 - c. Install a warning sign in a conspicuous location near the instrument panel, showing the maximum continuous duty RPM of the engine.
- 3. Since gauge glasses are difficult to remove, the ranges can be marked on the surface of the glass by a stripe about 1/8 to 3/16 inches wide, located at the outer edge of the glass. The gauges shall be marked neatly and checked periodically to be sure that markings have not been obliterated or otherwise rendered useless. For engines not listed in the table, consult the appropriate manufacturer's instruction book. Refer questions to the MLC (v).

TABLE 233-3. ENGINE PRESSURE AND TEMPERATURE CHART

Engine Model	Lube Oil Pressure		Fresh Water Temperature	
	Green	Red	Green	Red
GM-71 Series	18-60	0-18	160-195	195 UP
GM-53 Series	10-60	0-10	160-185	185 UP
Cummins V6, VT6, V8, VT8	10-70	0-10	160-185	185 UP
Cummins VT903M	30-65	0-30	165-195	195 UP
Mercruiser (4,6,8 cyl)	15-60	0-15	160-185	185 UP
Caterpillar	15-60	0-15	180-205	205 UP
DD 6V92TA DDEC3	49-70	0-49	160-185	185 UP
GM-6V92TI	15-70	0-15	160-185	185 UP

Page intentionally Left Blank

CHAPTER 235. ELECTRIC PROPULSION

A. PROPULSION DIELECTRIC ABSORPTION TESTS.

- 1. The dielectric absorption test (DAT), as described in the Institute of Electrical and Electronic Engineers (IEEE-43; 1974), is a good way to determine the degree of moisture and dirt to which windings have been subjected. This test differs from the normal megger reading in that the test involves applying a fixed voltage for a period of time and observing the insulation resistance or leakage current as a function of time. DAT'S should be performed in accordance with PMS procedures or when low megger readings indicate that further insulation testing is required and before any high-potential testing. Where IEEE-43 and Naval Ships Technical Manual (NSTM), Chapter 300, differ, the NSTM takes precedence. Refer to paragraph C for high potential testing.
- 2. DAT test equipment should include a motor-driven or electronic magneto/megohmmeter that will deliver constant DC potential. A hand-cranked megohmmeter will not give close enough voltage regulation for the long time tests required to determine dielectric absorption. For safety reasons, the test voltage should not exceed the normal circuit voltage. Test equipment is available both commercially and through the Federal Stock System. It is not intended for DAT test equipment to be required as part of shipboard allowances. MLCs/NESUs having DAT test equipment shall coordinate its use as needed.

B. <u>IN-PLACE CLEANING OF DIRECT CURRENT PROPULSION MOTORS AND</u> GENERATORS.

- 1. Approved procedures for in-place cleaning of direct current propulsion motors and generators are described in the following publications:
 - a. Naval Engineering Technical publication No. 1986, available from the ELC.
 - b. Naval Ships Technical Manual (NSTM), Chapter 300, Section 5, entitled "Reconditioning Electrical equipment after Damage by Seawater or Similar Material".
 - c. Technical Guide: Practices for Respiratory Protection, COMDTINST M6260.2 (series)."
- 2. NSTM, Chapter 300, Section 5, provides appropriate information on reconditioning electrical equipment after seawater damage. Contact MLC(v) for specific instructions for each occurrence of sea water damage or flooding of propulsion motors or generators.
- 3. Technical Guide: Practices for Respiratory Protection, COMDTINST M6260.2 (series), provides the minimum required respiratory and clothing protection for personnel who clean direct current propulsion motors and generators with approved cleaning solvents.

C. <u>HIGH-POTENTIAL TEST</u>.

- 1. A high-potential test of propulsion machinery and cabling shall not be accomplished without MLC approval.
- 2. An alternating-current high-potential test shall not be performed on installed propulsion machinery or cabling.
- 3. Only direct-current, high-potential testing will be approved for machinery in service as a diagnostic test that may be terminated if leakage current indicates impending failure.

Chapter 243. PROPULSION SHAFTING

A. GENERAL. Each MLC shall develop and promulgate detailed guidance on the inspection and repair of propulsion shafting. Procedures outlined in NSTM 243, MIL-STD-2199(SH), and MIL-STD-2191 may be used for guidance.

Page Intentionally Left Blank

CHAPTER 244. PROPULSION BEARINGS

- **A. BEARING STAVE MATERIAL.** "ROMOR" backed rubber faced and "THORDON" bearing staves are authorized substitutes for naval brass backed and rubber faced or micarta bearing staves. The alternate staves have demonstrated similar or improved service life and reliability; they are interchangeable (in sets) and are available in a variety of dimensions.
- **BEARING SLEEVES.** 70Cu 30Ni alloy C96400 ASTM Specification B369-95 or C95500 may be used as a substitute for all bronze and naval brass water lubricated stern tube and strut bearing sleeves. It may not be used as a substitute for monel bearing sleeves without specific approval from ELC (02).
- **C.** <u>CUTLASS BEARINGS</u>. For boats, rubber water lubricated bearings having a Fiberglass Reinforced Epoxy (FRE) shell may be used as an alternative to micarta, bronze or naval brass backed water lubricated bearings. The FRE shells are lighter, less expensive and reduce corrosion problems.
- **D. BEARING CLEARANCE CRITERIA.** NSTM Chapter 244, Table 244-4-1, provides bearing clearance criteria.

Page Intentionally Left Blank

CHAPTER 245. PROPELLERS

- **A. PROPELLERS FOR BOATS.** This section provides in tabular form propeller requirements for Coast Guard standard boats. The following general notes apply to the information contained in Table 245-1.
 - 1. Unless otherwise specified in the "Remarks" column, all propellers shall be three-bladed, right-hand turning, manganese bronze wheels.
 - 2. The hub bore, taper, and keyway shall be in accordance with the Society of Automotive Engineers (SAE) Standards for Marine Propeller Shaft Ends and Hubs.
 - 3. "R & L" in the "Remarks" column indicates that both right and left hand turning propellers are required.
 - 4. A Type A propeller blade shall have an essentially elliptical contour, vertical generatrix, true helical face, and ogival section.

Mean Width Ratio: 0.29 to 0.32, for up to

36-inch diameter 0.25 to 0.30, for over 36-inch diameter

Blade Thickness Fraction: 0.035 to 0.050

5. A Type B propeller blade shall have a skewed blade, vertical generatrix, true helical face, and ogival cylindrical section.

Mean Width Ratio: 0.31 to 0.35

Blade Thickness Fraction: 0.035 to 0.050

6. A Type C propeller blade shall have skewed blade.

Mean Width Ratio: 0.36 and over

Blade Thickness Fraction: 0.035 to 0.055

TABLE 245-1. TABLE OF PROPELLERS FOR BOATS

BOAT	ENGINE	PROPELLER			REMARKS	
		DIA"	PITCH"	BORE"	TYPE	
25'8" Motor Cargo Boat	Detroit Diesel 12V-71TI	16	13	1 1/8	С	
26' MK-V Motor Surfboat	Cummins 4BT	18	16	1 1/4	N/A	3 BLD, RH, .55 DAR, 15 Deg Skew, Maganese Bronze Michigan Wheel Dynajet
30' Surf Rescue Boat	Detroit Diesel 6V-92TI	24	26	2	В	
41' Utility Boat	Cummins VT-903M	26	28	2		R&L 4-BLD, 6" Hub ABS Type 4, Nickel Aluminum Bronze Columbian Tetradyne, or Michigan Dynaquad
44' Motor Lifeboat	Detroit Diesel 6V-53	30	25	2		R&L
45' Buoy Boat Type A MK I	Detroit Diesel 6-71A	30	26	1 7/8	A	
45' Buoy Boat Type A MK II	Detroit Diesel 6-71A	30	22	1 7/8	A	
46' Buoy Boat	Detroit Diesel 6-71	33			A	Schottel, Obtain from APA Material
47' Motor Lifeboat	DDA 6V-92TA	28	36	2 1/2	N/A	R&L 4 BLD .675DAR, 15 Deg Skew. Nickel Aluminum Bronze
49' BUSL	Cummins 6CTA.3-M	31	22	2 ½	N/A	R&L 4 BLD75 DAR, 15 Deg MWR .367 Skew, Nickel Aluminum Bronze, Michigan Wheel Dura-Quad of EQ
52' Motor Lifeboat	Detroit Diesel 6-71	36	25	2 1/8	A	R&L
55' ANB	Detroit Diesel 12V-71TI	38	32	2 4/4	A	R&L 3-BLD

CHAPTER 254. CONDENSERS AND HEAT EXCHANGERS

- A. ZINC ANODES IN CONDENSERS AND HEAT EXCHANGERS. If dissimilar metals connected together are immersed in an electrolyte (a current-carrying liquid such as sea water), a simple galvanic cell is formed. An electric current flows from one metal to the other through the electrolyte. The connection between the two metals completes the circuit. The metal from which the current is flowing (the anode) will tend to suffer accelerated corrosion; the metal to which the current is flowing (the cathode) will tend to be protected from galvanic corrosion. The current's direction depends on the composition of the metals or alloys exposed to the electrolyte and on such factors as the hardness of the metal and the cleanliness of the metal surfaces. Thus, if a single metal is immersed in an electrolyte and one part of the metal is harder or cleaner than another part, current will flow from one part to the other, and galvanic corrosion will take place.
 - 1. <u>Use of Zinc</u>. If clean metallic zinc is properly attached to the condenser or heat exchanger water chests, current will tend to flow from the zinc to adjacent metal surfaces exposed to the sea water since zinc is more active than the materials used in a condenser. This sea water constitutes the electrolyte of the galvanic cell. The zincs are corroded as the current flows from the zinc surface to the sea water and to the other metal surfaces. The current flowing to the metal surfaces of the condenser tubes, tube sheets, and water chests tends to protect these parts from galvanic corrosion. The electrical circuit is completed through the metal parts of the condenser. Since the circuit is completed through the metallic bolts and collar studs that secure the joints, the flow of current is not interrupted by gaskets between the water chests and manhole covers (to which the zinc is generally attached) and those between the tube sheets and the water chests.
 - 2. <u>Types of Zinc</u>. Zinc as specified in MIL-A-18001 is required for use in a sea-water circuit. These zincs possess a property of sloughing off corrosion products, thus maintaining a high current output.
 - a. Class 1 zincs contain cast-in cores and are recommended wherever possible. Class 1 zincs are of the following types:
 - ZEP Square or circular slab, with a pipe core.
 - ZBP Bar, with a pipe core.
 - ZDM Segmented disc, with a machine formed interlocking core.
 - **NOTE:** Types ZEP and ZBP are usually secured on a 1/2-inch diameter stud by two jam nuts. Not more than one anode per stud is used. Type ZDM anodes can be screwed together and tightened by hand or simple tools.
 - b. Class 2 zincs are plain zincs. A National Fine Thread 12-28 stud secures each anode to the next and to the support plug. Class 2 zincs are of the following types:
 - ZPN Rolled or extruded plate.
 - ZRN Solid cylindrical rod.

A. 2. b. NOTE: Type ZRN rod, or pencil, zincs are available in iron pipe size (ips) diameters. They are sized so that one end may be threaded with the standard pipe die and inserted into the bore of the support plug that is tapped for the ips thread. To ease mating, zinc oxide paste may be applied to the bottom two or three threads.

B. INSTALLATION AND MAINTENANCE REQUIREMENTS.

- 1. Only cutters operating exclusively in fresh water where the use of zincs has not been necessary to prevent corrosion of heat exchangers are exempted from the requirements of this section.
- 2. It is essential that good metallic contact exist between the zinc and the metal of the condenser, so that the electrical circuit will not be interrupted. Zincs shall be installed in accordance with MIL-A-19521. The average life of zincs is 3 months. Maintenance on zincs shall be in accordance with published PMS procedures.
- 3. Cutters having equipment (machinery) outfitted with zincs shall report the following in the unit Zinc Log (until incorporated in CMplus):

Machinery and zinc location

Types and amount of zinc in use

Zinc size

Amount remaining at last inspection

Action taken upon inspection

Date of this inspection

CHAPTER 262. LUBRICATING OILS

A. GENERAL. This chapter establishes a service-wide policy concerning lubricating oil to be used in the various diesel engines in service throughout the Coast Guard. It describes the Navy Oil Analysis Program (NOAP), and provides guidance regarding the use of commercial oil analysis labs for units that wish to use commercial labs in lieu of NOAP labs.

B. DIESEL ENGINE LUBRICATING OIL POLICY.

Policy. In the past, Coast Guard cutters and boats were authorized to use MIL-L-9000 1. lubricating oil, Military Symbol 9250, in main propulsion and auxiliary diesel engines and reduction gears. Executive Order 13101 requires the use of recycled (re-refined) oil where ever possible. Cutters with centralized lube oil storage tanks and lube oil purifiers may continue to use Military Symbol 9250. Cutters and boats whose equipment OEM have approved the use of recycle oil will use recycled (re-refined) oil supplied by Defense Supply Center Richmond. Oil ordered from the stock system is delivered together with empty barrels. The empty barrels are used to off load used oil. The re-refiner picks up the barrels. This supplies a stock of oil to be re-refined and relieves the unit's burden of disposing the used oil. The recycled (re-refined) oils are qualified to MIL-L-2104 and API and are available in 15W-40 and 40W viscosity grades. Caterpillar, Cummins and Detroit Diesel have approved the used of recycled (re-refined) oils. Table 262-1 provides a list of engines that use MIL-L-2104 lubricating oils. Units may obtain waivers to use lube oils other than 9250 and MIL-L-2104 for diesel engines. Waiver requests shall be submitted to the ELC (01) via the unit's chain of command and the cognizant MLC (v) Waiver requests shall be accompanied by written testimonial from the engine manufacturer stating that the candidate lube oil is suited for use in the engine(s) in question operating under the intended service and that the use of either MIL-L-9000, type 9250 or MIL-L-2104 is detrimental to the engine.

APPROVED ENGINE OIL EXCEPTIONS TABLE 262-1

Cutter/Boat Type	Main/Gen/Aux Engine	Lubricating Oil
175 WLM	CAT D-3508	MIL-L-2104 SAE40
160 WLIC	CAT D-3304	MIL-L-2104 SAE40
160 WLIC	CAT D-379	MIL-L-2104 SAE15W40*
160 WLIC	GM 4-71	MIL-L-2104 SAE15W40*
160 WLIC	GM 8-53	MIL-L-2104 SAE15W40*
140 FT WTGB	Fairbanks Morse	MIL-L-2104 SAE40
	Detroit 12-71	MIL-L-2104 SAE40**
	CAT D-3306	MIL-L-2104 SAE40
133 FT WLM	CAT D-353	MIL-L-2104 SAE40
	Detroit 4-71	MIL-L-2104 SAE40
	Cummins HR-6	MIL-L-2104 SAE40
110 FT WPB (A&B)	Paxman 16RP200M	MIL-L-2104 SAE40
	CAT D-3304	MIL-L-2104 SAE40
110 FT WPB (C)	CAT D-3516	MIL-L-2104 SAE15W40
	CAT D-3304	MIL-L-2104 SAE15W40

APPROVED ENGINE OIL EXCEPTIONS TABLE 262-1 (CONT.)

Cutter/Boat Type	Main/Gen/Aux Engine	Lubricating Oil
100 FT WLI (A&C)	CAT D-353	MIL-L-2104 SAE40
(22)	Detroit 6-71	MIL-L-2104 SAE40
82 FT WPB	CAT D-3412	MIL-L-2104 SAE15W40
	Cummins 4B 3.9	MIL-L-2104 SAE15W40
87 FT WPB	MTU 8V396TE94	MIL-L-2104 ***
	MAN D0824LF01	MIL-L-2104 ***
75 FT WLIC (A,B&D)	CAT D-353	MIL-L-2104 SAE40
	Detroit 4-71	MIL-L-2104 SAE40
75 FT WLR (C&E)	CAT D-353	MIL-L-2104 SAE40
	CAT D-3304	MIL-L-2104 SAE40
75 FT WLR (F)	CAT D-3412	MIL-L-2104 SAE40
	CAT D-3304	MIL-L-2104 SAE40
65 FT WLR (A&B)	CAT D-353	MIL-L-2104 SAE40
	CAT D-3304	MIL-L-2104 SAE40
65 FT WLI (A)	Detroit 8-71	MIL-L-2104 SAE40
	Detroit 2-71	MIL-L-2104 SAE40
65 FT WLI (B)	Detroit 8-71	MIL-L-2104 SAE40
	Detroit 3-71	MIL-L-2104 SAE40
65 FT WYTL (A)	CAT D-3412	MIL-L-2104 SAE40
	CAT D-311	MIL-L-2104 SAE40
65 FT WYTL (B,C&D)		MIL-L-2104 SAE40
	Detroit 2-71	MIL-L-2104 SAE40
55 FT ANB	Detroit 12-71	MIL-L-2104 SAE40
	Cummins 4.2	MIL-L-2104 SAE40
52 FT MLB	Detroit 6-71	MIL-L-2104 SAE40
	Perkins 4.108	MIL-L-2104 SAE40
49 FT BUSL	Detroit 8-71	MIL-L-2104 SAE40
	Perkins 4.236	MIL-L-2104 SAE40
49A BUSL	Cummins 6C & 4B	MIL-L-2104 SAE 15W40
47 FT MLB	Detroit 6-92	MIL-L-2104 SAE40
46 FT BUS	Detroit 6-71	MIL-L-2104 SAE40
45 FT BUS	Detroit 6-71	MIL-L-2104 SAE40
44 FT MLB	Detroit 6-53	MIL-L-2104 SAE40
41 FT UTB	Cummins VT-903	MIL-L-2104 SAE15W40
39 FT ASB	Detroit 6V-53	MIL-L-2104 SAE40**
36 FT LCVP	Detroit 6-71	MIL-L-2104 SAE40**
30 FT SRB	Detroit 6-92	MIL-L-2104 SAE40
25 FT 8 IN MCB	Detroit 3-53	MIL-L-2104 SAE40**
26 FT MSB MK V	Cummins 4BT 3.9	MIL-L-2104 SAE15W40
130 FT BARGE	Cummins 4BT 3.9	MIL-L-2104 SAE15W40
100 FT D A D C E	Cummins 6BT 5.9	MIL-L-2104 SAE15W40
120 FT BARGE	Cummins 6BT 5.9	MIL-L-2104 SAE15W40
	Cummins NTA 855	MIL-L-2104 SAE15W40

APPROVED ENGINE OIL EXCEPTIONS TABLE 262-1 (CONT.)

Main/Gen/Aux Engine Lubricating Oil

100 FT BARGE Detroit 4-71 MIL-L-2104 SAE15W40 90 FT BARGE Detroit 4-71 MIL-L-2104 SAE40 84 FT BARGE Detroit 4-53 MIL-L-2104 SAE40 70 FT BARGE Detroit 4-53 MIL-L-2104 SAE40 68 FT BARGE Detroit 3-71 MIL-L-2104 SAE40

*** Use Kendall Super D-3, Mobile DELVAC 1300 or Shell Rotella

Cutter/Boat Type

- **NOTE 1:** Cutters and boats currently using MIL-L-9000 SAE 40 weight oil in reduction gears and auxiliary equipment are authorized to use MIL-L-2104 SAE 40 weight oil in reduction gears and auxiliary equipment unless specifically prohibited by the equipment manufacturers.
- **NOTE 2:** Cutter and boat PMS documents will be amended to reflect this change.
- **NOTE 3:** Cutters and boats shall expend existing stocks of MIL-L-9000 oil before changing to MIL-L-2104.
- NOTE 4: Although MIL-L-2104 and MIL-L-9000 oils are compatible when mixed together, smaller cutters and boats shall drain engine sumps, clean external strainers and change oil filters before adding MIL-L-2104 to an engine. Larger cutters are not required to drain oil sumps and bulk storage tanks before adding MIL-L-2104, however, manufacturers recommend expending existing stocks of MIL-L-9000 oils in bulk storage tanks to the lowest possible levels before adding MIL-L-2104.
- **NOTE 5:** On cutters equipped with lube oil centrifuges, the difference between the specific gravity of MIL-L-2104, MIL-L-9000, and suitable commercial grades (where authorized) may be great enough to require a change in the size of centrifuges discharge rings, ring dams and float assemblies.
- **NOTE 6:** When evaluating waiver requests, the following factors shall be considered:
 - Compatibility: The candidate commercial lube oil must be compatible with the existing lube oil (whether the existing lube oil is MIL-L-2104 or 9250).
 - Commonality: A single lube oil should be used for all engines on the vessel. In light of this, the candidate lube oil's capacity to serve as a suitable engine oil for all engines on the vessel shall be considered.

^{*} Use MIL-L-2104 SAE 15W-40 with an API rating of CD or CDII or later.

^{**} When cold ambient temperatures result in cranking or starting problems, MIL-L-2104 SAE 30 may be used.

NOTE 6: (cont.)

- Shared lube oil storage tanks and lube oil distribution systems: Where multiple engine types share a common lube oil storage tank or lube oil distribution system, commercial lube oils shall not be considered unless it is suited for all connected engines. Commercial lube oils shall not be considered where engines and reduction gears share a common lube oil storage tank and and/or common lube oil distribution system.

C. LUBRICATING OIL TESTING AND ANALYSIS PROCEDURES.

1. <u>General</u>. This section provides the Coast Guard's policy regarding lube oil sampling and analysis. Although lube oil testing and analysis will never be a substitute for determining engine condition by component inspection, it is a proven system that will:

Permit maximum useful life of lube oil
Determine when to change oil
Detect fuel dilution and water leaks
Determine harmful changes in viscosity - high and low
Detect buildup of wear metals
Reduce costly engine damage

- 2. <u>Administration</u>. MLCs shall administer the lubricating oil testing program in accordance with the guidelines set forth in this chapter. Funding for Coast Guard participation in NOAP shall be handled centrally by Commandant (G-SEN).
- 3. <u>Applicability</u>. All OPFAC cutters 65 feet in length and longer, including those assigned to SARFAC and ANFAC, are required to participate in the Navy Oil Analysis program or an oil analysis program administered by a qualified commercial lab. Qualified labs shall be able to perform the tests and analyses required in paragraphs 7a., 7b. and 7c. of this chapter. Qualified labs shall comply with any one of the following requirements:
 - a. The Lab shall have obtained chemical testing accreditation from the American Association of Laboratory Accreditation (AALA) or shall be certified to be in accordance with the practices and procedures specified in ISO Guide 25.
 - b. The Lab shall be certified and approved by a major manufacturer of marine equipment for performing oil analysis. Examples of this are labs that are certified in accordance with Caterpillar's Vision of Excellence Program.
 - c. The Lab shall be certified and approved by a major manufacturer of lubricants or hydraulic oils for performing oil analysis.
 - d. Laboratories not meeting the above requirements may be used if approval to do so is obtained from ELC(01).
- 4. <u>Equipment Sampled</u>. Periodic oil samples on some equipment is required and shall be taken in accordance with the cutter's PMS manual on the following equipment:

C. 4. **WAGB (HEALY)**

Main Diesel Engines AC Propulsion Motors Auxiliary Diesel Generator

WAGB (POLAR CLASS)

Main Diesel Engines
Main Gas Turbines
Reduction Gears
Controllable Pitch Propeller Systems
DC Propulsion Motors
Ship Service Diesel Generators
Central Hydraulic System

WAGB (MACKINAW)

Main Diesel Engines Ship Service Diesel Generators

378 WHEC

Main Diesel Engines Main Gas Turbines Reduction Gears Controllable Pitch Propeller Systems Ship Service Diesel Generators

295 WIX (USCGC EAGLE)

Main Diesel Engine

283 WMEC

Main Diesel Engines
Ship Service Diesel Generators
Emergency Diesel Generator
Reduction Gears
Controllable Pitch Propeller Systems

270 WMEC

Main Diesel Engines
Ship Service Diesel Generators
Emergency Diesel Generator
Reduction Gears
Controllable Pitch Propeller Systems
Fin Stabilizer Hydraulic Systems

C. 4. **230 WMEC**

Main Diesel Engines Ship Service Generators

225 WLB

Main Diesel Engines Controllable Pitch Propeller System Bow Thruster Stern Thruster Forward Buoy Deck HPU's Aft Deck Machinery HPU's Steering Gear HPU's Boat Davit Winch HPU's

213 WMEC

Main Diesel Engines Ship Service Generators Reduction Gears

210 WMEC

Main Diesel Engines Reduction Gears Controllable Pitch Propeller System

180 WLB

Main Diesel Engines Central Hydraulic System Bow Thruster

175 WLM

Z-drive Hydraulic Oil Central Hydraulic System HPU Boat Davit Winch HPU.

140 WTGB

Main Diesel Engine

133 WLM

Main Diesel Engines Ship Service Diesel Generators

WYTL, WLIC, WLI, WLR

Main Diesel Engines

C. 4. **110 WPB**

Main Diesel Engines
Reduction Gears
Fin Stabilizers (water and particulate content tests only)
Steering Gear (water/particulate content tests only)

87 WPB

Main Diesel Engine Reduction Gears Steering Gear

- 5. <u>Sampling Point</u>. Oil samples shall be drawn from running machinery at normal operating temperatures and only from the designated sampling points.
 - a. All sampling points shall meet the approval of the cognizant MLC. Engineers are cautioned to ensure that the metals between the machine and sampling installation are compatible; that is, stainless steel plumbing to a gas turbine. In general, sampling valve installation shall be as follows:
 - (1) Insert a tee pipe fitting in the lube oil line ahead of the oil filter connection. Locate the tee fitting so that it will not be an obstacle for maintenance work or personnel.
 - (2) If necessary reduce the tee fitting's base leg (branch) to accommodate the sampling valve. This valve shall have a 1/4-inch opening and be able to withstand a pressure of at least 100 psi and a temperature of 275 degrees F. This valve shall be capped and the cap chained to the valve. A double male pipe spacer (nipple) will be required between the valve and the cap.
 - b. <u>Precautions In Sampling</u>. The overriding emphasis is to avoid contamination of the samples. The following instructions should ensure this:
 - (1) Store unused kits in clean closed containers, such as the packaging boxes in which received.
 - (2) Cap off sampling point valve opening to prevent contamination.
 - (3) When drawing samples, allow adequate oil run out before filling the sample bottle.
 - (4) Never take a sample immediately after an oil or filter change or the addition of oil to the sump.
 - (5) After an oil and filter change, or the addition of oil, allow a minimum of 25 hours operation before sampling.
 - (6) Avoid contact of the sample bottle with equipment, rags, hands, etc. A "sterile" sample is required.

- **C.** 5. b. (7) Open the sample bottle only when completely ready to take the sample. Replace bottle cap immediately after taking the sample.
 - (8) If a sampling tube is used, discard the tube after taking the sample.
 - (9) Hot samples are the required method because of flushing action, etc. Samples shall be drawn from the machinery while running at normal operating temperature and only from the designated sampling point.
 - (10) If the time to sample a piece of machinery and the necessity for adding lube oil coincide, take the lube oil sample before adding oil.
 - (11) Use a clean, lint-free wiping cloth to avoid introducing lint into the system or oil. Sweaty hands will cause an erroneous reading if they come in contact with the bottle or stopper.
 - (12) Exercise caution to avoid dropping the sample bottle or other material into the system during sampling.
 - 6. <u>Oil Sample Intervals</u>. The oil sampling interval policy provided in this paragraph applies to main diesel engines, ship service diesel engines, reduction gears, thrusters, controllable pitch propeller systems, and hydraulic systems. Sampling intervals shall be as follows:
 - a. For diesel engines with defined oil change intervals greater than or equal to 750 hours, oil samples shall be taken a minimum of three times between oil changes, at even operating hour intervals. Oil sampling intervals shall not exceed 250 operating hours.
 - b. All equipment with defined oil change intervals of less than 750 hours shall not be required to undergo routine sampling. Unless specified herein. Where specified the oils samples shall be taken at oil change intervals.
 - c. Sampling intervals for reduction gears, thrusters, controllable pitch propellers, and hydraulic systems that don't have defined oil change intervals shall be taken quarterly. Samples from reduction gears, thrusters, controllable pitch propellers and hydraulic systems with defined oil change periods shall be taken a minimum of three times between oil changes at even increments of elapsed time. Oil samples shall be taken no less frequently than quarterly.
 - d. Samples shall be taken before oil is changed. Samples of new oil being installed shall be taken. In addition, newly overhauled engines shall have oil samples drawn and submitted after 1, 25, 50 hours, and thereafter at the regularly scheduled sampling intervals.
 - e. If at all possible, an oil sample shall be drawn and submitted after any major engine casualty. The sample will be used to relate the casualty to oil characteristics and develop data that may be useful in predicting similar casualties. A sample from the engine sump will suffice.

- **C.** 7. Oil Analysis Tests and Analysis. The following tests and analysis shall be done regardless of whether NOAP or commercial labs are used:
 - a. Spectrometric Analysis for wear metals: Data shall be reported in parts per million (ppm). Results shall be trended. Labs shall use both wear metal levels and wear metal trend levels to make determinations regarding the existence and severity of machinery problems. Labs shall also make diagnostic determinations based on the types of wear metals exhibiting abnormally high wear metal concentrations and trend levels. The following wear metals levels shall be measured and reported:

Iron

Silicon

Lead

Magnesium

Copper

Chromium

Aluminum

Molybdenum

Nickel

Silver

Tin

Zinc

b. Particle Count Analysis (Applicable to CPP and Hydraulic Systems only): Labs shall perform particle count analysis on all hydraulic oil system samples (including CPP systems). Particle counts shall be determined and reported for each of the following particle size categories:

Greater than 2 Microns

Greater than 5 Microns

Greater than 15 Microns

Greater than 25 Microns

Greater than 50 Microns

Greater than 100 Microns

In addition to the above particle count determinations, Labs shall provide ISO 4406 3-digit cleanliness codes for hydraulic oil samples.

c. Physical properties tests. Labs shall test for and report on the following physical properties:

Diesel Engines

Viscosity @ 40 C

Viscosity @ 100 C

Viscosity Index

Fuel dilution

C. 7. c. Glycol Contamination

Suspended Solids

Non-suspended solids

Water

Total Base Number

Percent oxidation

Flash point

PH

Reduction Gears, Thruster Lube Oil

Viscosity at 40 C

Viscosity at 100 C

Viscosity Index

Water

Suspended Solids

Non-suspended Solids

Percent Oxidation

Total Base Number

Flash Point

PH

Gas Turbines

Viscosity at 40 C

Viscosity at 100 C

Viscosity Index

Water

Suspended Solids

Non-suspended Solids

Percent Oxidation

Total Acid Number

Flash point

PH

Hydraulic Systems (Including CPP Systems)

Viscosity at 40 C

Viscosity at 100 C

Viscosity Index

Water

Particle Count

8. Reporting Requirements, Commercial Labs:

- C. 8. a. Commercial oil analysis reports shall include a complete oil analysis history and applicable recommendations for the sampled equipment. Pursuant to this, the unit providing the sample shall provide labs with the following information for each sample:
 - (1) Name/Address of the Cutter or unit providing the sample
 - (2) E-mail address of the unit providing the sample
 - (3) Addresses of units receiving the oil analysis results. This shall include the ELC (para: C.8.c.)
 - (4) E-mail addresses of the units receiving the sample results. This shall include the ELC (para: C.8.c)
 - (5) Equipment type, manufacturer and model number
 - (6) Equipment Serial Number
 - (7) Date the sample was taken
 - (8) Operating hours/days since last overhaul
 - (9) Operating hours/days since last oil change
 - (10) Reason for submitting the oil sample i.e. routine, request by the lab, other
 - (11) Quantity of oil added since the last sample was taken
 - (12) Actions taken since the last sample was taken, i.e. oil was purified
 - (13) Symptoms/problems experienced
 - (14) An indication of how the sample was taken, drain, hot sample, sampling tube, or cold sample
 - b. Commercial oil analysis shall include:
 - (1) A complete oil analysis history for all applicable equipment/systems. The history shall present results listed in tabular format. Each test shall indicate the date the sample was analyzed, the number of operating hours on the equipment sampled, the number of operating hours since last overhaul (if applicable), and the number of operating hours since the last oil change. It shall include an indication of whether or not an oil change was performed after the sample was taken, and the quantity of oil added since the last sample was taken. Sample results shall include spectrometric wear metal levels, particle counts, and oil physical properties IAW paragraphs 7a., 7b. and 7c.
 - (2) Recommendations shall be provided based on the sample results.
 - (3) The lab shall provide the response time on the lube oil analysis report. The response time is the difference in hours between the time the sample is submitted and the lab response is provided.

C. Lube oil analysis reports shall be provided to the unit/cutter that submitted the sample and to the ELC. Oil analysis reports to the ELC shall be provided in either electronic or hardcopy. An electronic copy is preferred. In order to accommodate the desire of some units to use commercial oil analysis facilities, it is important that copies of oil analysis reports from commercial labs are sent to the ELC. The purpose of this is to allow the ELC to establish and maintain a consolidated data base that can be used to track trends in equipment health. Reports shall be forwarded to the ELC at the following address:

Attn: Condition Based Maintenance Group U.S. Coast Guard Engineering and Logistics Center Code 026, Propulsion Branch 2401 Hawkins Point Road, Mail Stop 25 Baltimore MD 21226-5000

Electronic copies of oil analysis reports shall be sent to the following E-mail Address: **ELCOAR.elcbalt.uscg.mil**

NOTE: Commercial labs will usually provide oil analysis sampling bottles, labels and shipping bags. These items may or may not be included in the price of the analysis.

- d. Questions/Comments regarding this chapter may be submitted by E-Mail to ELCOAR.elcbalt.uscg.mil.
- 9. This section applies only to submission policies, analysis, procedures and practices associated with NOAP Labs with the exception that wear metal threshold limits listed in table 262-2 apply to the equipment listed. These limits shall be provided to the testing laboratory regardless of whether NOAP or commercial Labs are used.
 - a. Submission to NOAP Labs: Samples to NOAP Labs shall be mailed first class mail within CONUS and air mailed outside CONUS to the participating laboratory.
 - (1) Pacific Area cutters and units shall submit samples to:

Commanding Officer, SIMA San Diego (Code 2442A) Box 368106 3755 Brinser Street San Diego, CA 92136-5299 SIMA San Diego CA//2400//

(2) All other cutters/units shall submit samples to:

C. 9. a. (2) Shore Intermediate Maintenance Activity
ATTN: NOAP Lab
9170 Second St. Suite 100
R2 95A
Norfolk, VA 23511-2392
SIMA Norfolk VA//322//

- (3) All samples shall be labeled and be accompanied by the "Oil Analysis Request," DD Form 2026. Instructions for completing the form are listed in Paragraph C.9.b.
 - (a) Sample Bottles. Oil samples shall be submitted in lube oil analysis bottles. A kit of 72 bottles, labels, shipping bags and forms is available through the Navy supply system.
 - (b) Delayed Submission. In those instances when a cutter is unable to comply with the testing interval specified in paragraph C.6., because of operational schedules, oil sampling shall continue and samples collected shall be forwarded to the analyzing facility at the first opportunity. The purpose of these delayed submissions is to maintain continuity both in the oil history and in the flow of maintenance information feedback, even though the benefit of rapid response to an oil sample submission is lost.

NOTE: If an oil sample for any unit of equipment is not received by NOAP within a 240 day period, NOAP will delete all historical data on that piece of equipment from its data base.

- (c) Acting on Laboratory Recommendations. The lube oil analysis program is a maintenance tool to be used in conjunction with other indicators. Ultimate maintenance responsibility remains with the unit. Recommendations made are based on the preprogrammed criteria in the automated laboratory system and final evaluation of abnormal results by a trained laboratory evaluator. Advice may range from "normal" to "sample in a specified number of hours" or even to "reinspect." The laboratory advice codes are listed for information.
- b. How to fill out "Oil Analysis Request," DD Form 2026. Care must be exercised when filling out the "Oil Analysis Request." Without a correctly and completely filled out form, a correct evaluation of the oil sample may be impossible. Figure 262-1 shows an example of a correctly filled out form.
 - (1) TO OIL ANALYSIS LAB Enter the address of the laboratory.
 - (2) FROM MAJOR COMMAND Enter the district or Area for the unit submitting the sample. Example: CGD ONE.
 - (3) FROM OPERATING ACTIVITY Enter the complete mailing address of the unit submitting the sample. Example: Commanding Officer, USCGC SPENCER (WMEC 905), Boston, MA 02109.

- C. 9. b. (4) EQUIPMENT MODEL/APL Enter the complete APL of the equipment from CALMS from which the oil sample was taken if available.
 - (5) EQUIPMENT SERIAL NO. Enter the complete serial number of the equipment from which the sample was taken. For SIMA Norfolk use the unique ESN (Hull #, Unit # and Type Equipment Code (TEC)).
 - (6) END ITEM MODEL/HULL NO. Enter the cutter class and number for the unit submitting the sample. Example: WMEC 905.
 - (7) END ITEM SERIAL NO./EIC Enter the EIC of the equipment from which the sample was taken. Example: B101/Main Propulsion Engine, Diesel, Mechanical.
 - (8) DATE SAMPLE TAKEN (day-month-year) Self-explanatory.
 - (9) LOCAL TIME SAMPLE TAKEN Self-explanatory.
 - (10) HOURS/MILES SINCE OVERHAUL Enter the number of operating hours or miles since overhaul, or since new if never overhauled.
 - (11) HOURS/MILES SINCE OIL CHANGE Self-explanatory.
 - (12) REASON FOR SAMPLE Check appropriate block. Be sure to explain if "other" block is checked.
 - (13) OIL ADDED SINCE LAST SAMPLE (pints, quarts, gallons) Enter the amount of oil added since the last sample was taken.

NOTE: Accurate reporting for oil added will allow correction of the apparent spectromatic reading for this factor.

- (14) ACTION TAKEN Enter any maintenance action taken since the last sample.
- (15) DISCREPANT ITEM Enter the nomenclature of the discrepant item found as a result of the previous sample.
- (16) HOW MALFUNCTIONED Enter a description of how the equipment malfunctioned prior to finding the discrepant item.
- (17) HOW FOUND Check the appropriate block.
- (18) HOW TAKEN Check the appropriate block.
- (19) REMARKS Enter appropriate remarks or leave blank as applicable.
- (20) FOR LAB USE ONLY Complete the sample number block only.
- (21) KEYPUNCH CODE Disregard these blocks.

	OIL A	NALYSIS	RE	OUES	T		KEY PUNCH CODE
OL A		AB CHARLE	_			RD	3300
TO NO	P LAB (CC	OE 134), CI	LAR	LESTON	L SC 2940	8	
	OR COMMA					······································	
O OPER	ATING ACT	IMTY (Inch	ude	ZIP Cod	(e/APO)	2109	
	NT MODEL			-,		 -	
EQUIPM	ent ser. n	iO.	<u>. </u>				
5350 1754	A MODEL/H	70-873					
		٧	VME	C-905			
	m ser, no. Main prof	./EIC PULSION ENC	INE	DIESE	L. MECHAN	ICAL	
DATE SA	MPLE TAK	EN (DAY, M	10.,			SAMPLE	
	22-12-8	32			AKEN 13	345	
HOURS/	MILES SING	E OVERHAU	L 1	200 H	CURS		
HOURS/	AILES SINC	E OIL CHAN		12001	OURS		
REASON	FOR SAME	Ή.	•				
	ĻA	8 T	EST	0	THER		
MROUT	INE TRE	QUEST 🔲 C	ELL		pecify)		
OIL ADDI	D SINCE L	AST SAMPL SO GAL			., Gais)		
ACTION	TAKEN	PURIFIE	o a	L			
DISCREP	ANT ITEM			-			
HOW MA	LFUNCTION	€D		· · · ·			
HOW FO		OSCULECT	_	7 COCW	<u> </u>		
HOW TA		REQUEST		1 CKEN			
□ DRA	UN D TU	BE DO HO)T_S	AMPLE	□car	SAMPLE	
REMARK	_	AIN DIESEL	EN	GINE			
		FOR	Ι Δ	8 USE C	MY		
SAMPLE	RESPONSE		<u>La</u>	o ose c			
FE	AG	AL	CR		CU	MG	N
PU	SI	SN	ΥI		MO .	·	
LAB REC	OMMENDA	TION					
SAMPLE	NO.			COMPO	NENT CONT	ROL NO.	(CCN)

DD FORM 2026 REPLACES AFTO FORM 110, APR 78, DA FORM 3282, NOV 72. 1 AUG 76 AND NAVMAT FORM 4731/1, FUL 72 WHICH ARE OBSOLETE

Figure 262-1: "Oil Analysis Request Form." DD Form 2026

- C. 9. c. Providing Feedback Information. Feedback reports are required to answer laboratory advice on maintenance action, to describe significant maintenance actions taken in accordance with laboratory advice, and to describe maintenance actions such as inspections or overhauls. Feedback information must be included with each oil sample submitted, regardless of how insignificant the maintenance may seem. The conditions found on inspection or replacement of components may be reported on DD Form 2026. An attached typewritten summary may also be used. This information will ensure that decision-making criteria are updated. Reports shall list significant actions that could affect laboratory results. All cases of material failure shall be reported. Feedback information shall be reported on the following occasions:
 - (1) When the laboratory warns of critical impending failure.
 - (2) When special samples are requested.
 - (3) Malfunctions (actual or incipient) that should have been detected by oil analysis.
 - (4) When the equipment is removed from service or stricken from inventory.
 - (5) When the equipment is transferred to another operating activity, maintenance activity or storage.
 - (6) When specific maintenance feedback information is requested.
 - (7) When samples of unused lube oil are required to compare with the lube oil in the system.
 - (8) After oil filter changes and centrifuging of oil. Certain cutters may realize a dilution factor from common suction and discharge piping with other machines in the purifier system. The testing facility must also be notified if your unit has this type of system.
 - (9) Upon striking aboard new oil. Submit a new oil sample from the storage tank to the testing facility as soon as possible.
 - d. Laboratory Services. The Navy oil analysis program laboratories provide the following services:
 - (1) Spectrometric measurements of wear metals, particle count, and physical properties testing and analysis as described in para 7 a., 7.b. and 7.c.
 - (2) Analyze samples within 24 hours after receipt. If the item is indicated to be abnormal, the unit will be advised by fastest possible means.

- **C.** 9. d. (3) Laboratory recommendations which will consider results of both spectrometric and physical tests.
 - (4) Continual analysis of data to upgrade threshold criteria, determine differences between equipment models and make and correlate feedback data with laboratory criteria.
 - e. Lube Oil Analysis: Theory, Reports, and Threshold Values. Lube oil analysis is the process by which oil samples, drawn from machinery at periodic intervals such as every 500 hours or quarterly, are tested by spectrometric analysis and physical properties tests for abnormal conditions. Both tests help evaluate the internal condition of an enclosed mechanical system. Spectrometric analysis is the method by which wear metals in the fluid are measured by an emission spectrometer in parts per million. Physical tests are a series of tests for the physical condition of the oil.
 - (1) Spectrometric analysis is based on the fact that moving contact between metallic components wears away fine metal particles that are carried in suspension. After a break-in period, the wear metal is produced at about the same rate until near the overhaul period when wear metal production increases sharply. The laboratory technique is accurate, but interpretation depends on many variables, beginning with the sampling process. Data interpretation requires knowledge of normal and abnormal quantities, threshold limits, trend tables, decision guides, metallurgy, data trend, and accurate data from the cutter concerning the sample. Contrary to some belief, no single level of wear metal concentration can be used as a go/no go indicator.
 - (2) Figure 262-2 shows the hypothetical effect of constant oil replenishment on wear metal concentration, from the NOAP laboratory manual. Figure 262-3 shows the actual results of oil added, also from the lab manual. Note that there is a drop after each oil addition and a drop to near zero after an oil change. Oil samples shall not be taken after an oil change or within 25 hours after oil has been added. A correction for oil added will be included in the automated system.
 - (3) Threshold value is the amount of trace metal concentration expressed in parts per million at which level evaluation for abnormality starts; that is concentrations below threshold values are normal. As the data base increases these threshold values will be automatically adjusted up or down to reflect more accurately normal and abnormal conditions.
 - f. Reports. The automated laboratory system generates the following messages and reports:
 - (1) Message When any sample tests abnormal in either trace metal monitoring (spectrometric) or oil condition (physical tests), the unit is informed by message of the abnormality and quantitative value of the parameter or parameters responsible. Laboratory advice (resample, inspect) is also given with probable source of the problem indicated.




Figure 262-2. Wear Metal Concentration Vs Constant Oil Replenishment




Figure 262-3. Wear Metal Concentration Vs Periodic Oil Addition and Oil Change

- C. 9. f. (2) Equipment History After each sample is analyzed, an equipment history will be printed, giving all data on the sample and the five previous samples in the automated laboratory data system. A copy will be forwarded to the unit. Interpretation of the data requires knowledge of trend analysis and criteria. Figure 262-4 shows an example of an "Equipment History." In the event that a unit receives abnormal readings or feedback from the oil analysis lab, that unit shall notify its respective MLC.
 - g. Decision-Making Procedure. The evaluation of spectrometric data is automatically performed by the automated laboratory system and reviewed by a trained evaluator. A simplified version of the steps involved using the ALCO V16-251B engine as an example follows:
 - (1) EQUIPMENT/EQUIPMENT IDENTIFICATION CODE AND MANUFACTURER Select equipment/equipment identification code/manufacturer -- B101 Main Propulsion Engine ALCO V16-251B.
 - (2) WEAR METAL THRESHOLD LIMITS Find the appropriate threshold limits for the trace metals from Table 262-2.

NOTE: Using the above example, the wear metal threshold limits are:

Fe	Ag	Al	Cr	Cu	Mg	Ti	Pb	Sn	Ni	Мо	Si
52	0	13	23	33	100	0	10	0	4	4	50

TREND ANALYSIS LEVELS - The threshold limits are used to find the trend analysis levels for decision-making. For each trace metal, using the threshold values, find the ppm level for the threshold in "Trend Analysis Levels." Next find the level (1, 2, 3, or 4) in which the present sample results fall.

(a) EXAMPLE - for the B101 ALCO propulsion diesel, assume the spectrometric readings for the sample were:

Fe	Ag	Al	Cr	Cu	Mg	Ti	Pb	Sn	Ni	Мо	Si
35	0	13	41	13	35	0	8	0	0	0	7

COAST GUARD WEAR METAL THRESHOLD LIMITS (PPM)

	Fe	Ag	Al	Cr	Cu	Mg	Ti	Pb	Sn	Ni	Mo	Si
EQUIPMENT/EIC												
EQUPMENT/EIC MPE/B101											2	11
ALCO V16-2519	52	0	13	23	33	45	0	10	0	2	4	54
ALCO 18-251-8	51	0	13	23	33	100	0	10	0	4	4	54
CATERPILLAR D-353	57	0	17	7	15	41	0	21	0	2	2	11
CATERPILLAR D-375	57	0	17	7	15	41	0	21	0	2	2	11
CATERPILLAR D-379	57	0	17	7	15	41	0	21	0	2	2	11
CATERPILLAR D-398 CUMMINGS V12-525	57 75	0	17 15	7	15 20	41	0	30	0 15	0	0	11 12
CUMMINGS V12-323 CUMMINGS V12-600	75	0	15	13	20	40	0	30	15	0	0	12
CCIMIM (OD V12 000	,,,		10	10	20	.0	Ü		10	Ü		
FAIRBANKS-MORSE 38TD 8-1/8	39	2	6	53	35	100	0	15	2	2	2	11
GM 6-71	88	0	27	30	27	100	0	19	5	2	2	17
GM 6-110 GM 16V 149	140 140	0	0	30 30	125 125	100 100	0	30	45 45	0	0	50 50
PAXMAN 16RP200M	85	0	10	50	15	0	0	20	17	0	0	25
TAMATAN TORT 20001	0.5		10	50	15			20	17			20
MTU 8V#(^												
CATERPILLAR 3516	-											
CATERPILLAR 3412	65	-	15	6	25	-	-	40	-	-	-	23
CATERPILLAR 3406 CATERPILLAR 3508	65 90	-	15 17	6	45 75	-	-	33	-	-	-	23 28
CATERPILLAR 3508 CATERPILLAR 3608	25	-	6	3	12	-	-	8	-	-		12
MPE/C101												
ALCO V16-251-F	52	0	13	23	33	45	0	10	0	2	2	11
ENTERPRISE DSR 46	43	0	9	25	19	34	0	10	0	1	1	6
FAIRBANKS-MORSE 38D 8-1/8	65	0	3	12	100	100	0	21	13	2	4	7
CATERPILLAR D-698	57	0	17	7	15	41	0	21	0	2	1	11
COOPER-BESSEMER GN-8, GND-8, GSB-8	43	0	8	6	14	24	0	10	0	2	2	21
GM 12-567	84	0	26	27	26	100	0	17 90	3	2	2	15
GM 8 & 12 278A INGERSOLL RANDS	99 68	5	32	15 20	105 60	100 100	0	35	0	0	0	17 17
INGERSOLL RANDS	00	4	32	20	00	100	U	33	U	U	U	1/
MPE/D101												
PRATT-WHITNEY FT4A-2	39	3	0	4	3	21	4	40	17	3	3	9
PRATT-WHITNEY FT4A-6	39	0	0	4	1	0	0	40	10	2	0	9
PRATT-WHITNEY FT4A-12	39	0	0	4	3	21	4	40	17	3	3	9
RGM/B301												
FARRELL-BIRMINGHAM	50	0	5	2	30	40	0	40	0	2	2	10
LUFKIN HSQ 1616	28	0	6	2	33	41	0	43	0	2	2	14
LUFKIN MSQ 2724	34	0	6	2	33	45	0	39	0	2	2	14
PHIL-GEAR DHMGS	56	0	5	2	15	28	0	10	0	2	2	17
PHIL-GEAR 75VMGS	56	0	5	2	15	28	0	10	0	2	2	17
PHIL-GEAR 120 DHMGS	56	0	5	2	19	100	9	10	4	3	3	13
PHIL-GEAR 96DHCMG-CP	56	0	5	2	19	100	9	10	0	3	3	21
WESTERN 46123R	22	2	5	2	19	100	9	10	4	3	3	13
PC/8408												
ESCHER-WYSS 400G	87	3	4	5	23	100	0	12	0	2	3	10
KAMEWA 66/4	23	0	5	2	76	100	1	23	5	2	1	11
PROP SYS PSI 50/3	18	1	2	1	24	1	2	6	7	1	3	10
PROP SYS PSI 63/4	18	1	2	1	24	1	3	6	7	1	3	10
PROP SYS PSI 125/4	18	1	2	1	24	4	3	6	7	1	3	10
PC/C408												
ESCHER-WYSS N	87	3	4	5	23	100	0	12	0	2	3	10
MM/M101											<u> </u>	
WESTINGHOUSE S082P046-SSG/3101	20	0	0	4	20	100	0	10	5	2	3	10
ALCO V8-2518	52	0	13	23	33	45	0	10	0	2	2	11
CATERPILLAR D-343	57	0	17	7	15	41	0	21	0	2	2	11
CATERPILLAR D-318	57	0	17	7	15	41	0	21	0	2	2	11
CATERPILLAR D-348	57	0	17	7	15	100	0	10	0	4	4	50
CATERPILLAR D-398 CATERPILLAR 3304	57 86	0	17 18	9	15 26	41 0	0	21 51	0	0	0	11 24
FAIRBANKS-MORSE 38E5-1/4	69	0	8	4	26	100	1	13	6	1	3	9
FAIRBANKS-MORSE 38E5-1/4 FAIRBANKS-MORSE 38F5-1/4	69	0	3	3	11	100	1	13	6	1	3	6
GM LL-8-567CR	24	2	5	12	23	100	7	9	0	2	2	12
GM8	110	0	25	20	25	100	0	30	5	2	2	15
GM6061	88	0	27	30	27	100	0	20	5	2	2	15
GM 4 & 6071	88	0	27	30	27	100	0	19	5	2	2	17
GM 3, 6, 8, - 268A	99	5	4	15	105	100	0	90	0	0	0	17

Table 262-2. Wear Metal Threshold Limits

EQUIPMENT HISTORY	YD CHARLESTON SC	EQUIP: MPEDM	630			GUARD		SPECTROMETRIC HISTORY	PPM READINGS FOR SAMPLEFE AG AL CR CU MG TI PB SN NI MO SI ADVICE	112 000 027 976 035 049 000 059 000 042 000 011 394 016 036 000 019 000 000 000 000 017 036 000 010 000	025 000 009 094 015 033 000 013 000 001 000 004 50 035 000 013 035 000 008 000 000 000 007 NRML/50	OLDS 052 000 013 023 033 100 000 010 000 004 004 050	PHYSICAL TEST HISTORY	ACID % FLASH FUEL % LAB NUM WATER PT DILUT VISC SOLIDS ADVICE	00.0 325 XXX 159 XXX 00.0 325 XXX 131 XXX	A 00.0 325 XXX XXX A2 A 00.0 325 XXX XXX A2 A 00.0 325 XXX 114 XXX A2
Й	NAVSHIPYD	B101 E	WMEC 63	П	6640100	COAST (00003	SPE	REASON	ROUTINE	ROUTINE	THRESHOLDS		OIL	XXX	XXX 053
	••	••	••	••	••	••	••		HOURS SINCE OIL CH	0306	0023			HOURS SINCE OIL CH	0306	0023
	LAB	EIC	NUMBER	NUMBER	NUMBER	SERVICE	TYCOM UIC/CGD		HOURS SINCE OVHL	04657 04017	04861 05077			HOURS SINCE OVHL	04657 04017	04061 05077
			HULL N	UNIT N	APL N	CUST SE	IO MO		RESP TIME	0 2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	122			RESP TIME	0.3	N N N N
			H	D		CO	TYC		DATE ANAL ADVICI	6244 6258	3 2 8 0			DATE ANAL	6244	6209 6307
									SMPL NUM	3318 1461	1819 0281			SMPL	3318 1461	516 1619 0281

Figure 262-4 Example of Equipment History

C. 9. g. (3) (b) Using the threshold limits from the example under Step 2, the present trend analysis levels for each trace metal are:

Fe	Ag	Al	Cr	Cu	Mg	Ti	Pb	Sn	Ni	Mo	Si
2	1	2	4	1	1	1	2	1	1	1	1

- (c) These trend levels are used in the decision-making process to recommend maintenance actions.
- (4) TREND ANALYSIS AND DECISION-MAKING Trend analysis is the method by which data from prior samples are averaged and used with laboratory results from the current oil sample to find out if there are increasing levels of trace metals pointing to abnormal internal wear. It is important to understand that both the previous trend levels and the present trend levels determine the recommendation for action, not the present sample results alone. Trend analysis levels are expressed as whole numbers (1, 2, 3, or 4).
 - (a) Levels 3 and 4 are the more serious. Level 1 is normal and 2 may require resampling in either 25 or 50 hours.
 - (b) To average the trend analysis level for each wear metal, add the trend numbers for at least the previous three samples, then divide by the number of samples. If there are fewer than three samples, the previous trend level is left to the evaluator's judgement. This average is the previous trend analysis level to be used in "Decision-Making Guide." A worksheet example of previous trend level computation is provided on the next page:
 - (c) Note that a present trend level of 4 results in an inspection or resample laboratory recommendation, depending on the evaluator's judgment. A present trend analysis level of 3 preceded by a trend level of 4 requires inspection. The automated laboratory system automatically averages the trend levels for each trace metal, applies the present trend analysis level, and selects those warranting inspection or resampling and the resample period. In determining the advice code, physical test criteria are used by the ADP system in addition to spectrometric data. The most critical advice is selected by the computer. The laboratory evaluator reviews the automated system recommendation and concurs, or substitutes another recommendation. The above example would result in a recommendation to resample in 25 hours.

C. 9. g. (4) (c)

	Fe	Ag	Al	Cr	Cu	Mg	Ti	Pb	Sn	Ni	Mo	Si
Threshold	52	0	13	23	33	100	0	10	0	4	4	50
Previous SampleTrend Levels	2	1	2	4	1	1	1	2	1	1	1	1
	1	1	2	4	1	1	1	2	1	1	1	1
	1	1	2	3	1	1	1	2	1	1	1	1
	1	1	2	4	1	1	1	2	1	1	1	1
Average	1.3	1	2	4	1	1	1	2	1	1	1	1
Present Trend Level	2	1	2	4	1	1	1	2	1	1	1	1

^{* =} Use 1 if no previous data exists.

DECISION MAKING GUIDE

Present Trend	Previous Trend	Lab
Analysis Level	Analysis Level	Recommendation
1	1	Normal
1		
	2	Normal Resample in 50 hrs*
	3	Resample in 50 hours
	4	Resample in 25 hours
2	1	Resample in 25 hours
	2	Normal Resample in 50 hrs*
	3	Resample in 25 hours*
		Resample in 50 hours
	4	Resample in 25 hours*
	·	11000mmp10 m1 20 m00m0
3	1	Resample in 25 hours*
	2	Inspect Resample in 25 hrs
	3	Resample in 25 hours
	4	Inspect
	4	mspect
4	1	Resample in 25 hours*
₹	$\overset{1}{2}$	Inspect Resample in 25 hrs*
	3	Inspect Resample in 25 hrs*
	4	Inspect

^{* =} The preferred code is left to the evaluator's judgment based on the circumstances.

- **C.** 9. g. (4) (c) **NOTE:** For initial sample on equipment, use Level 1 for previous Trend Analysis Level.
 - (5) OIL ANALYSIS LABORATORY ADVICE CODES Laboratory Advice Codes are developed for wear metal monitoring (spectrometric) and oil condition. For each sample, two laboratory recommendations are recorded and will appear on the equipment history. Advice Code depends on several factors, including trace metal concentration, trend levels, the trace elements, equipment metallurgy, time after overhaul (break-in wear), type of oil, oil added, oil condition, viscosity and rate of change in viscosity, water, and fuel dilution.
 - (6) INTERPRETATION The above process decides whether the results are normal or abnormal. If abnormal, the trend levels determine whether to inspect, resample, or both, and the resample interval (25 to 50 hours). Resampling confirms that the sample was a valid indication of lube oil condition.
 - (7) LABORATORY RECOMMENDATION (ADVICE CODE) The selection of advice code depends on the wear metals with abnormally high readings. Metallurgy of engine parts and prior failures indicate the probable cause, such as cylinder liner, rings, pistons, camshafts, lube oil pumps, salt water leaks, etc. Often the cause could be two or more items. Data feedback is essential to confirm diagnosis and aid future analysis.

The summaries are listed for information only:

- . Physical Test Criteria
- . Significance of Wear Metals and Source
- . Trend Analysis Levels

PHYSICAL TEST CRITERIA

PHYSICAL TESTS	WARNINGS
Viscosity	 - 130 CS (fuel dilution warning) - 190 CS 10% decrease in viscosity 40% increase in viscosity - 25 CS warning for main propulsion gas turbine engines only
Fuel Dilution	- 5.0%
Water	- 0.2% Salt Water- 0.5% Fresh Water
Neutrality	- 0.5- 1.0 warning for main propulsion gas turbine engine only

WEAR METALS AND SOURCE

<u>ELEMENT</u>	<u>SYMBOL</u>	INDICATOR/SOURCE
Iron	Fe	Antifriction bearings, gears, cams, shafts, oil pumps, valves, cylinder liners, piston rings
Silver	Ag	Wrist pin bearings (in some engines)
Aluminum	Al	Bearings, pistons, pumps, blowers, cylinder heads
Chromium	Cr	Chromium-plated cylinder liners, rings, bearings.,
Copper	Cu	Bushing wear (Camshaft, rocker arm, or fuel pump.). Piston thrust washers
Lead	Pb	Bearing overlay material, main and connecting rod bearing shells
Magnesium	Mg	Salt water or contaminated fuel
Titanium	Ti	Bearings, supports, sleeves
Tin	Sn	Bearings, bushings, pistons.
Nickel	Ni	Valves, crankshaft
Molybdenum	Mo	Piston rings
<u>ELEMENT</u>	SYMBOL	CONTAMINANT ELEMENTS
Silicon	Si	Airborne sand/air filters
Boron	В	Commonly found as additives in coolant, presence in an engine oil may indicate an internal water leak.
,Sodium	Na	Commonly found as additives in coolant, presence in an engine oil may indicate an internal water leak.
Potassium	K	Commonly found as additives in coolant, presence in an engine oil may indicate an internal water leak.
Sodium	Na	This element is associated with sea water contamination.
Magnesium	Mg	This element is associated with sea water contamination.
<u>ELEMENT</u>	SYMBOL	ADDITIVE ELEMENTS
Magnesium	Mg	Dispersent/detergent additives to enhance the oil's ability to clean and neutralize acids.

ELEMENT	SYMBOL	ADDITIVE ELEMENTS (CONT)
Calcium	Ca	Dispersent/detergent additives to enhance the oil's ability to clean and neutralize acids.
Barium	Ba	Dispersent/detergent additives to enhance the oil's ability to clean and neutralize acids.
Zinc	Zn	Anti-Wear additive to enhance the oil's ability to reduce friction.
Sodium	Na	Anti-Wear additive to enhance the oil's ability to reduce friction.

STANDARD LAB RECOMMENDATION CODES - SPECTROMETRIC ANALYSIS

DAKD LAD	RECOMMENDATION CODES - SI ECTROMETRIC ANALTSIS
<u>CODE</u>	GENERAL LAB RECOMMENDATIONS
A	Sample results normal, continue routine sampling
Z	Previous recommendation still applies
<u>CODE</u>	INSPECTION RECOMMENDATIONS (Requires Feedback)
H**	Inspect unit and advise lab of finding. Abnormal wear indicated by (ppm) (element). Resample after (maintenance/*** hours/etc.)
K**	Impending failure, critical wear indicated by (element). Inspect unit and advise lab of findings. Resample after (maintenance/*** hours/etc).
L**	Inspect brake and clutch plate adjustments, change oil service filters, resample after *** hours of operation.
M**	Perform engine coast-down check. If engine fails test, examine for discrepancy and advise lab of results; otherwise, resample after *** hours of operation.
U**	Cooling system leak indicated by (Mg/CR/Na/B). Inspect unit and advise lab of findings. Resample after (maintenance/*** hour/etc).
<u>CODE</u>	OIL CHANGE RECOMMENDATIONS
D	Change oil and service filters. Resample after *** hours of operation.

<u>CODE</u> <u>LAB REQUESTED SAMPLES</u>

- B^* Resample as soon as possible; do not change oil.
- C Resample after *** hours.
- F* Do not change oil. Submit special sample after test run. Do not operate until after receipt of lab results or advice.

G* Contamination suspected; resample in accordance with break-in schedule or after *** hours.

N* Unit 'wear-in' indicated; resample in accordance with break-in schedule or after *** hours.

P* Do not operate; do not change oil; submit resample as soon as possible.

NOTE: * Resample (red cap) required.

** Maintenance feed back required; advise lab of findings

*** Laboratory will specify time limit

STANDARD LAB RECOMMENDATIONS

CODES PHYSICAL TEST

AA Oil condition normal continue routine sampling.

DN Do not operate.

ER Evaluate and repair component.

TS Check oil type and source.

ZZ Previous recommendation still applies.

CODE OIL CONDITION STATEMENTS

FD Fuel dilution.

NN Neutralization or acid number.

PC Particle count excessive.

SA Solid or abrasive material.

VS Viscosity (high/low/change).

WA Water.

CODE OIL CHANGE RECOMMENDATIONS

CS Change oil and service filter.

CP Purify, renovate or change oil and service filters.

CODE LAB REQUESTED SAMPLES

RB* Resample as soon as possible.

RC* Resample after *** hours.

RH* Submit hot sample.

RI* Resample, insufficient amount of sample received.

RS* Submit sample of new oil servicing this unit.

<u>CODE</u> <u>INSPECTION RECOMMENDATIONS</u> (Requires Feedback)

IA** Inspect and repair air induction system.

IC** Inspect and repair fuel system; change/service filter and oil.

IW** Inspect for source of water.

NOTE: * Resample (red cap) required.

** Maintenance feed back required; advise lab of findings

*** Laboratory will specify time limit

- C. 10. Records. Each unit participating in this program shall maintain a file containing the complete lubricating oil history, including the report of the result of spectrochemical and physical properties tests, accompanying analyses, and the resultant maintenance recommendations for each unit of machinery entered in the test program. This record shall be called the "Oil History Log".
 - 11. <u>Field Evaluation</u>. The information received from the analyzing facility must be evaluated in light of all other known factors in order that sound engineering decisions may be made concerning the need for preventive maintenance on any piece of equipment. The key to the success of this program is "evaluation". The responsibility for evaluation rests with the submitting unit.
 - 12. <u>Cutter and Boat Lubricating Oil Testing Procedures</u>. All cutters and boats are required to carry equipment to test and compare the viscosity of lubricating oil of diesel engines. Either the lube oil testing kit outlined in NSTM Chapter 233 (Falling Ball) or the Visgage are acceptable for testing 9000 and 2104 series oil.
 - a. Viscosity. Viscosity is a measure of the internal friction of the oil. Lubricating oil used in internal combustion engines is subject to a change in viscosity due to fuel dilution, water contamination, and the by-products of combustion etc.. Some of the major causes of viscosity changes are provided below.
 - (1) Fuel Dilution. This type of contamination cannot be removed by filtration or centrifuging. Lubricating oil dilution may be detected by testing oil with a viscosity comparator or tester and comparing it with the viscosity of the oil when new.
 - (2) Water Contamination. The presence of appreciable amounts of water in lubricating oil can usually be detected by the cloudy or milky appearance of the oil and an increase in viscosity. Where contamination with water exists and cannot be removed by centrifuging, the lubricating oil should be discarded and replaced with fresh oil, after the source of the contamination has been located and repaired.

C. 12. b. Testing Procedures.

- (1) The following applies to all cutters and boats (weather/operations permitting). All engines shall have a viscosity test made every day the engine is operated. This check shall be made by the operating personnel and the results shall be recorded in the machinery or boat log as applicable. Viscosity limits are 40 percent increase and 5 percent fuel dilution from new oil; engine manufacturer limits shall apply if more stringent. Oil samples be taken in accordance with paragraph B.5.b.
- (2) Cutters with oil-filled propeller shaft stern tubes or controllable pitch propeller systems shall visually test this oil every week for water.

NOTE: For Detroit Diesel Allison Series 53, 71, and 149 engines, the manufacturer's recommended maximum viscosity increase is 40 percent. The manufacturer's recommended maximum fuel oil dilution is 1.0 percent fuel dilution for series 149 engines, and 2.5 percent fuel dilution for series 53, 71, and 92 engines. If fuel dilution reaches these limits, the oil shall be changed out and any fuel oil leaks shall be fixed. Engines with fuel systems designed in such a way that failures to oil seals will result in fuel contamination of the lube oil system shall have an oil viscosity check every four engine operating hours.

- c. Oil Filter Change Periods. Oil filters and centrifuges are installed to remove water and other contaminants that the engine adds to the oil and that raise the precipitation number. Liberal use of installed centrifuges will ensure that the oil is kept free of foreign matter. A point will be reached, however, when further centrifuging will prove to be of little value. Further, those cutters without centrifuges must rely solely on filters to remove these contaminants. When these installed filters have removed all they can hold, they must be changed. Oil filters shall be changed in accordance with manufacturer recommendations or as required by the respective PMS manuals.
- d. Lubricating Oil Change Periods. For internal combustion engines under normal conditions, no difficulty should be experienced in maintaining satisfactory viscosity of the oil with periodic centrifuging or by filter changes. If, however, such action does not reduce or halt the rise of the viscosity, it is to be expected that the mechanical condition of the engine is less than satisfactory. When operational commitments require continued use of the engine or where routine oil testing is not possible, the oil will eventually reach a viscosity limit beyond which further use of oil is ill-advised. In addition, neither centrifuging nor filtration will affect acidity or fuel dilution. Therefore, lubricating oil shall be changed in accordance with manufacturer recommendations, as required by the respective PMS manuals, or whenever the condemning limits as stated above, are reached.
- **D.** TWO-STROKE CYCLE GASOLINE ENGINE LUBRICATING OIL. All Coast Guard two-stroke cycle gasoline engines, including those powering outboard motorboats and P-250 MOD 1 fire pumps, shall use oil having the BIA-TC-W or later designation (Boating Industry of America, two-cycle, water or air cooled). BIA-TC-W oilshall be used with a fuel-to-oil ratio of 50 to 1 (one pint of oil per 6 gallons of fuel). This is the ratio recommended by most manufacturers of modern two-stroke cycle engines. There are several fuel-oil ratios now recommended for various older applications, and

D. it is recommended that the subject oil be used at the fuel-to-oil ratio specified by the applicable equipment technical manual. The importance of thorough mixing of the oil and fuel at the specified ratio cannot be over emphasized. Improper mixing can greatly affect engine operation and maintenance. See chapter 555 for additional requirements regarding the P-250 MOD 1.

CHAPTER 300. ELECTRIC PLANT (GENERAL)

A. SHORE ELECTRIC POWER FACILITIES. Commercial electric power services are installed and available at most Coast Guard mooring facilities to provide shore-to-ship electric power. Use of commercial electric power is encouraged to reduce operating costs, reduce engine operating hours, and ease the demand for watchstanders.

1. <u>Connection Requirements</u>.

- a. Dockside electric shore tie connections are normally sized for the cutter or boat homeported there. Both homeport and visiting cutters and boats shall ensure that the dockside connection has the proper voltage, current rating, configuration, and phase rotation each and every time they hook up.
- b. The long time delay setting of each dockside circuit breaker shall be no greater than the smaller of:
 - (1) The total ampacity of the shore-to-ship cable(s) connected to it.
 - (2) The ampacity of the feeder between the associated shore power receptacle(s) and the in hull circuit breaker, including the rating of any step down transformer.
- c. Cable ampacities shall normally be calculated at 40 DegC (104 DegF) ambient air temperature. A 50 DegC (112 DegF) ambient air temperature should be substituted in exceptionally hot climates or when a cable passes through an operating engine room or boiler space. For cutters with LSTHOF-400 shore-to-ship cables and [LS]TSGU or [LS]TSGA-400 feeders, the limiting ampacity is normally 400 amperes per cable; however, LSTHOF-400 ampacity derates to 365 amperes per cable at 50 DegF
- d. When necessary, approved adapters may be used for connection to dockside receptacles, provided their rating is equal to or greater than the dockside protective devices. IEEE-45 clause 10.11.1 prohibits splicing of cable for repeated flexing service (e.g. shore power cables).
- e. Cutters with three-phase systems shall verify phase rotation compatibility of shore power to ship's power before transfer to shore power.
- f. When the shore tie is not in use, all circuit breakers shall be secured, shore side and ship side, and the cable(s) shall be disconnected at both ends. The receptacle and plug ends shall be covered to prevent moisture or foreign material from entering the plug or receptacle. The shore tie cable shall be properly stowed to prevent accidental damage.
- g. During dockside electric plant testing evolutions, the cable(s) need not be disconnected when shore power will be restored at the conclusion of testing.
- 2. <u>Operating Precautions</u>. The following procedures are recommended for cutters and boats when using shore electric power.

- **A.** 2. a. In general, Ship Service Generators shall not be operated in parallel with shore power, however, those cutters with the built in capability may do so momentarily for the sole purpose of shifting power supply from ship to shore or vice versa.
 - b. Shore power cable connections shall not be made or broken before dockside and vessel shore power circuit breakers have been opened.
 - c. Heavy equipment, whose operation would result in excessive load on the shore tie connection, shall be operated with the ship service generator(s) supplying the shipboard power system.
 - d. Shore power plugs and receptacles shall be kept clean and dry, and receptacles shall be tightly covered when not in use.
 - e. Contacts should be examined frequently for signs of arcing or loose connections.
 - f. Frequent inspections shall be made to ensure that no undue heating of plugs, receptacles, or cables exists.
 - g. Whenever the electrical load nears the maximum value of the shore tie's capacity, steps should be taken to either reduce the shipboard load or have a ship service generator placed in operation.
 - h. Cutters shall include, in their Inport Fire Bill, procedures to be followed when the cutter is receiving electric power from ashore.

CHAPTER 475. DEGAUSSING

A. DEGAUSSING INSTALLATIONS.

- 1. <u>References.</u> NSTM Chapter 475 and NAVSHIPS 250-66034, Degaussing Manual, provide guidance on the operation, maintenance, inspection, testing and repair of degaussing installations and compass compensating equipment. NAVSEA 8950/1, Degaussing Folder, provides guidance on record keeping, and reporting procedures.
- 2. <u>Applicability</u>. The instructions in this chapter apply only to the cutters indicated in Table 475-1. Maintenance on all other cutters may be discontinued, and system deactivation is authorized.
- 3. Degaussing Ranging. Each cutter outfitted with degaussing coils shall be ranged at least once a year. In addition, 378-foot WHEC and 270-foot WMEC Class Cutters shall adhere to the provisions of Magnetic Silencing, COMDTINST 8950.3 (series). During wartime, 378' WHECs and 270' WMECs shall be ranged at least every 6 months. Deviation from this requirement may be approved by the Area Commander in special circumstances. Deviation examples include when impending expenditures for maintenance appear to be unjustified or when the area of the cutter's operation is not within a reasonable distance of a degaussing facility. "Reasonable distance" is considered to be approximately 24 hours steaming each way. When a cutter is required to operate where the use of degaussing is necessary, arrangements shall be made to have the cutter ranged, if ranging has not been accomplished within the past 12-month period. This relaxation of ranging requirements is not to be construed as an overall relaxation of other degaussing maintenance requirements. The latest edition of "Degaussing Facilities" shall be maintained in the Degaussing Folder and kept current with changes issued by the Hydrographic Center of the Defense Mapping Agency as "Notice to Mariners." The current "Degaussing Facilities" is distributed to all cutters having degaussing installations.
- 4. <u>Watch List</u>. For magnetic and degaussing equipment, recommendations on conditions requiring attention that are made known to NAVSEASYSCOM as a result of ranging or inspection are published in the "Degaussing Watch List" issued by the Naval Ordnance Laboratory. The code letter inserted after the cutter name indicates the action to be taken by the cutter.
- 5. <u>Reports</u>. Report the date of the last ranging and last degaussing inspection on Line 17 of the Cutter Engineering Report, Form CG-4874.
- 6. <u>Coast Guard-Navy Responsibility</u>. Magnetic Silencing, OPNAVINST C8950.2 (series) describes the basic policy of the Navy regarding degaussing protection for ships of the United States. For Coast Guard cutters, the delegation of responsibilities is as follows:
 - a. Installation and conversion is the Coast Guard's responsibility.
 - b. Maintenance and repair is the Coast Guard's responsibility.
 - c. The Navy supplies special materials through appropriate stocking and control activities, on an exchange-of-funds basis.

- **A.** 6. d. Appropriate Navy activities will provide industrial degaussing inspections and compass compensation assistance upon request, on an exchange-of-funds basis.
 - e. Naval degaussing facilities will perform non-industrial degaussing effectiveness tests and deperming on a non-reimbursable basis.
 - 7. <u>Coast Guard Degaussing Installations</u>. Table 475-1 shows the Degaussing Coils applicable to Coast Guard Cutters.

TABLE 475-1. DEGAUSSING COILS

Cutter Class	Beam (FT)		Degaussing Coils								
		M	F	Q	FI	QI	FP	QP	L	A	
WHEC 378			X			X		X			
WMEC 270		X			X		X				

CHAPTER 505. FLEXIBLE HOSE AND EXPANSION JOINT PROGRAMS

A. GENERAL. A more detailed Commandant Instruction for the Maintenance of Flexible Hoses and Expansion Joints used on Coast Guard vessels is under development. Until the instruction is promulgated, this chapter will provide guidance for the classification, inspection, maintenance and replacement schedule for all flexible hoses used on all Coast Guard cutters and boats.

B. HOSE CLASSIFICATION.

1. All flexible hoses shall be classified according to the type of hose and the system in which it is operating. For maintenance purposes, hoses will be grouped in one of three groups.

Standard

Non-Standard

Condition Based Maintenance (CBM)

a. Standard Hoses: Synthetic rubber hoses in the following systems shall be considered standard duty, with a normal replacement schedule of 8 years.

Fuel oil

Hydraulic oil

Lube oil

Jacket water cooling

Compressed air and compressed gas

Refrigerant and Oxygen

Chilled water.

Seawater

Boiler Feed water, Steam condensate

Distilling

Potable water

Weather deck hoses (with appropriate protective coverings)

Bilge

Non-Standard: The following hose applications shall be considered as non-standard and shall
have special replacement schedules established because of known hose degradation or operating
limits.

Weather deck hoses that are exposed to extreme sun, heat, cold, ice or snow, AND do not have an outer covering specifically designed for such abuse. The replacement cycle shall not exceed 5 years.

Special hoses as identified by the hose manufacturer, equipment manufacturer, or by MLC that must be replaced on a more frequent basis.

Engine exhaust system hoses shall be replaced as recommended by the hose manufacturer or

equipment manufacturer, on a schedule not to exceed 5 years.

- **B.** 1. b. Metal, PTFE and thermoplastic hoses in high pressure systems which are frequently pressurized, (such as operating hydraulic systems), shall be removed from service for through internal and external examination on a schedule not to exceed 8 years. These hoses may be reinstalled if found to be fit for service.
 - c. Condition Based Maintenance (CBM): The following hose applications shall be considered as CBM unless otherwise directed. Renewal of these hoses will be on condition and not service life.

Test, instrumentation and specialized maintenance hoses.

Metal, PTFE and Thermoplastic hoses in low pressure or infrequently pressurized systems. - Pneumatic hoses with quick-disconnect couplings which connect portable tools to ship service air systems

Auxiliary drain systems, plumbing/gravity drain systems, or other drainage systems open to ship's atmosphere.

Vacuum flush waste systems.

Halon and CO2 fixed extinguishing system hoses.

d. USN Hose Criticality Method: NAVSEA Technical Directive S6430-AE-TED-010/Volume 1 is not approved for use on Coast Guard vessels.

C. HOSE LOG.

- 1. <u>Implementation</u>. Hose Log software is under development. Until Hose Log program issues are resolved and software is distributed, units shall use their existing Hose Logs.
- 2. <u>Inclusion</u>. Hose Logs shall include all standard and non-standard hoses on the cutter or boat. In addition, the following hoses shall be included because of high costs, or high cost of potential failures:
 - a. Metal, PTFE and thermoplastic hoses.
 - b. Test, instrumentation and specialized maintenance hoses which can be pressurized.
 - c. Halon and CO2 fixed extinguishing system hoses.
 - d. Expansion Joints (See Section K of this SWBS section) may be included in electronic database Hose Logs as a Non-Standard hose assembly.
- 3. Exclusions. The following hoses are exceptions and are not required to be listed in Hose Logs:
 - a. Outboard engine fuel hoses, and fuel hoses internal to gasoline or small diesel engine (packaged) units on boats. **NOTE: These hoses shall be inspected and maintained in accordance**

with the boat's PMS manual.

- C. 3. b. Fire hoses, firefighting foam (AFFF) hoses, water main jumper hoses, and other detachable water hoses covered under other programs. These hoses shall NOT be included in the Hose Log, and shall NOT be tagged as a flexible hose. NOTE: These hoses shall be inspected and maintained IAW the DC PMS manual.
 - c. General usage CBM hoses. **NOTE: These hoses are routinely inspected during use or during system inspections, or their failure is of low impact.**
 - (1) Pneumatic hoses with quick-disconnect couplings which connect portable tools to ship service air systems.
 - (2) Hoses internal to vacuum flush systems.
 - (3) Auxiliary drain systems, plumbing/gravity drain systems or other drainage systems open to atmosphere.

D. HOSE TAGS.

- 1. <u>Inclusion</u>. All hoses which are included in Hose Logs shall be identified with individual hose tags.
- 2. Form. Hose tags may be in one of several formats.
 - a. Tags may be stamped metal, engraved metal or plastic, photo etched metallic identification strips, or a permanent tag of equivalent durability.
 - b. The use of Navy Standard Hose Tags, as described in MIL-P-15024/15 and other USN hose documentation, is acceptable but not required.
 - MIL-P-15024 Plates, Tags, and Bands for Identification of Equipment may be used for material or process guidance. Color coding of black on natural or black on white shall be preferred.
 - d. Plastic plates and plastic tags shall not be used in the weather due to material degradation. Plastic plates or plastic tags which are not chemically compatible with the fluid in the hose being tagged shall not be used.
- 3. Hose Tag Information. The following information shall be placed on the hose tag.
 - a. Hose tags for hoses identified in a paper based Hose Log shall include the following information, and shall be reference keyed to the Hose Log.
 - (1) Hose Log Item Number. (Serial number)
 - (2) Hydro Test Pressure and Test Date [DD/MM/YY]
 - (a) Hydro Test Pressure and Test Date may be provided by the assembly manufacturer

on an independent tag.

- **D.** 3. a. (2) (b) Where a hydro test is not required, insert the annotation "NA".
 - (3) Service Life (Replacement Date) Date [QTR "Q"/FY]
 - b. Hose tags for hoses identified in an approved electronic database shall include the following information, which shall be referenced keyed to the Hose Log. **NOTE: Service life date and hydro test pressures will be tracked and recorded in the hose log, and are not needed on the hose tag.**
 - (1) Hose Log Item Number. (Serial number)
 - (2) Units may (optionally) also incorporate a scannable bar code identifier.
 - c. References to calendar year quarter should include the letter "Q" after the quarter number to avoid confusion with months. The 4th quarter of 1999 would be represented by "4Q99".
 - d. Hose tags shall be attached using materials that will not damage hose assembly in any way. (i.e. self cinching nylon straps, or equivalent means.) Tag installation shall be done in a manner not to cause damage to the hose assembly and shall not interfere with the normal flexing motion of the hose.

E. HOSE REPLACEMENT SCHEDULES.

- 1. This schedule shall reflect the service life of the hose and shall note the hose classification.
 - a. Standard. (8 year cycle) Standard hoses shall be identified as "STD" in Hose Logs and shall normally be scheduled for replacement at intervals not to exceed 8 years.
 - b. Non-Standard. Hoses which are in special service, or which are replaced IAW manufacturer's recommendations shall be noted as "NSTD". Special requirements and replacement cycles shall be noted in the Hose Log.
 - c. Condition Based Maintenance (CBM). Replace all CBM hoses when the hose shows signs of extreme wear or damage or when they fail hydrostatic test.
- 2. The above schedules may be modified, on a case by case basis, by ELC or the cognizant MLC to reflect service life conditions.

F. FLEXIBLE HOSE SHELF LIFE.

1. The shelf life for all synthetic rubber flexible hose, and prefabricated flexible hose assemblies shall not exceed 10 years. **NOTE: Hoses manufactured to SAE J518 and similar industry standards are designed to have a shelf life of not less than 10 years under ideal storage conditions.** Storage environment, along with rubber materials can vary the shelf life. Shelf life is difficult to qualify as many factors affect the hose or hose assembly. Hoses and hose assemblies which have been on the shelf for more than 6 years shall not be automatically

- **F.** 1. rejected for age alone; hoses shall be inspected before rejection. If there is any question concerning adequacy of an assembly, a hydrostatic test of the assembly may be warrantied if the previous test was conducted more than 12 months prior. All questions concerning hose shelf life should be referred to the cognizant MLC and/or to the ELC.
 - a. Bulk stowage of hose or hose assemblies should be in a cool, dry area never exceeding 100° F. Periodic inspections shall be made. Visual inspection of all hose prior to fabrication or installation is recommended. Never stack hoses too high, as the weight can crush hoses on the bottom. Direct sunlight, rain, heaters, or being near electrical equipment can reduce hose life. See also, SAE J1273, Recommended Practices for Hydraulic Hose Assemblies.

G. <u>FLEXIBLE HOSE SERVICE LIFE</u>.

- 1. All flexible hoses shall be renewed at the end of their service life. The start of service life marks the end of the shelf life of the hose or hose assembly. All questions concerning hose service life should be referred to the cognizant MLC and/or the ELC.
 - a. Hose manufacture dates, and the resultant shelf life and service life dates are typically marked in quarter calendar year increments. Most hose manufacturers stamp the manufactured date onto the hose or a hose tag attached to hose.
 - b. The service life of a hose assembly shall begin when the assembly is installed in the system, or when contractually agreed upon during extensive cutter overhauls.
 - c. The service life of a "standard" hose shall not exceed a nominal 8 years, unless otherwise directed. The service life of a "non-standard" hose shall not exceed the special service life as noted for that hose.
 - d. Stowage of a minimal quantity of bulk hose and a minimum number of mating reusable or field attachable fittings for emergency use is acceptable. Bulk hose stored on a cutter shall not be routinely fabricated into hose assemblies.
 - e. A used hose or hose assembly, regardless of its service life, shall not be reused if one or both of its fittings are removed. The hose shall be discarded and any reusable fitting removed for reuse if possible.
 - f. To distribute the cost of renewing all hoses, units are encouraged to implement a phased replacement philosophy. However, for high pressure hydraulic systems, all hoses in a system or major subsystem should be scheduled to be replaced at the same time to minimize contamination to the system.

H. HOSE INSPECTION SCHEDULE AND MAINTENANCE INSPECTIONS.

1. <u>Preventive Maintenance Schedules</u>. Schedules should reflect the criticality of the equipment system, recommended maintenance procedures of the equipment manufacturer, regulatory requirements (if

any), Coast Guard guidance, appropriate commercial or Navy guidance, and

- H. 1. Coast Guard experiences (MLC/NESU/UNIT) with the equipment or system. The PMS schedules may be determined independently for each class of cutter, except for fleet system equipment. In general, PMS shall include periodic visual inspection of hoses, and a second level, more detailed periodic visual inspection where necessary. Hoses which are subject to weather or other adverse conditions should be inspected on a more regular basis.
 - A direct correlation between Navy guidance and Coast Guard applications can not be assumed due to compartment classification differences and the use of MILSPEC hoses versus commercial grade hoses.
 - 2. <u>Preventive Maintenance Inspections</u>. All flexible hoses should be inspected in the same manner. Preventive maintenance inspections shall follow the guidance provided in each PMS manual.
 - a. In addition to PMS inspections, second level hose inspections should include very through examination of the hose for presence of soft spots, bulges or accelerated deterioration. Long hoses should be inspected with the hoses pressurized and under operating conditions. The intent is to check for alignment, hose movement and chaffing which occurs under pressure and which may not be obvious when the system is not under pressure.
 - b. Poor hose installation practices which could lead to hose failure or reduced service life should be identified as part of any inspection. Replacement hoses should not be installed in the same manner. SAE Standard J1273, Recommended Practices for Hydraulic Hose Assemblies, and hose manufacturer's literature may be used for guidance. Installation of anti-chaffing covers, stand-offs, clamps or other devices to reduce wear or failure is encouraged.
 - c. All hoses, including PTFE, nylon, CPE, silicone and rubber, will normally "take a set"; that is after a period of use in a particular configuration the hose has permanently assumed a fixed shape. Drastically changing this shape in removal, inspection or to access another part may cause damage, thus terminating the life of a flexible hose.

I. HYDROSTATIC TESTING.

- 1. Standard and Non-Standard hose assemblies which are assembled by Coast Guard personnel, hose vendor or contractor as a contractual hose purchase requirement, shall be hydrostatically tested prior to the assembly being installed. This test is of the complete hose assembly, including attached fittings; pressure tests conducted on the hose alone (at the factory) are not applicable for this test.
- 2. Testing procedures shall comply with CFR Title 46, Subpart 56.97-5 requirements, which require a test pressure of twice the rated working pressure of the hose. The test pressure shall be held for approximately 5 minutes. Where a high pressure hose is intentionally used in an extreme low pressure application (e.g. a 4000 psi rated hose in a 100 psi drainage system),

- **I.** 2. the hose assembly may be tested to at least twice the design pressure of the system, provided that such test pressure is clearly noted on the hose tag. The system design pressure must be verifiable on the system diagram.
 - 3. After hydrostatic testing, the hose shall be flushed and capped to minimize contamination. For hydraulic system hoses, the flushing procedure shall be to the established contamination level for the intended system.
 - 4. Those hoses which are identified as "Condition Based Maintenance", and are operating in low pressure (less than 150 psi) do not have to be hydrostatically tested.
 - 5. Instrumentation hoses which are factory assembled and subject to factory quality assurance testing do not have to be hydrostatically tested.

J. HOSE SELECTION.

- Synthetic rubber hoses and hose assemblies used in hydraulic, fuel oil, lube oil, salt water and high
 pressure air systems shall meet the requirements of SAE J 1942, Hose and Hose Assemblies for
 Marine Applications. SAE J1942-1, Qualified Hoses for Marine Applications, may be used for
 guidance. SAE J1942-1 tables indicate whether a fire sleeve assembly is required to meet SAE J1942
 fire resistance requirements.
 - a. Where hoses meeting this requirement can not be used or are inappropriate, hose selection shall be justified and documented in an appendix to the hose log. Justification must be acceptable to cognizant MLC and/or ELC
 - b. ISO Standard 15540, Ships and Marine Technology, Fire Resistance of Hose Assemblies, is emerging as an alternative to the 2-1/2 minute fire test currently required by SAE J1942 and 46 CFR. Compliance with ISO 15540 test requirements is not required at this time, but it may be used as an indication of acceptability for use with hydrocarbon fluids.
- 2. Gasoline or diesel oil hoses aboard small boats shall meet the requirements of SAE J1527 Marine Fuel Hose.
- 3. For metal, PTFE and thermoplastic hose applications, NAVSEA Technical Directive S6430-AE-TED-010/Volume 1 and other USN references may be used as guidance.
- 4. Hoses used in other Condition Based Maintenance applications shall be manufacturer's standard commercial grade product.
- 5. The service pressure rating of hose assemblies shall not be less than the design pressure of the system.

K. EXPANSION JOINTS (FLEX JOINTS).

- 1. <u>General</u>. Replacement expansion joints shall comply with one of the following documents, which replace MIL-E-15330. NAVSEA S6430-AE-TED-020 provides guidance on the alignment, installation, and inspection of expansion joints.
 - a. Synthetic rubber, flanged joints comply with ASTM F1123, Standard Specification for Nonmetallic Expansion Joints.
 - b. Synthetic rubber, non-flanged, corrugated comply with Commercial Item Description A-A-50604, Expansion Joint, Sleeved, (Non-Flanged), Fire-Retardant, With Retaining Clips.
 - c. TFE fluorocarbon resin, corrugated joints comply with Commercial Item Description A-A-50605, Expansion Joint, TFE Fluorocarbon Resin, Corrugated with Ductile Iron Flanges.

2. Lube Oil Joints.

- a. The inner lining of Diesel Engine Lube Oil expansion joints shall be constructed of NITRILE (also know as BUNA-N) and shall be rated for the maximum temperature and pressure of the engine's lube oil system. Chlorobutyl, neoprene and stainless steel expansion joints have proven to be INADEQUATE and should be replaced with NITRILE. When ordering lube oil flex joints, units must specify the application, overall length, inside diameter, maximum temperature, and pressure operating limits, bolt backing rings, Navy or commercial flange, with or without backing rings and number of humps.
- b. Expansion joints shall be installed with movement limiters (stay rods).

3. Flexible Joint Log.

- a. A Flexible Joint Log shall be maintained for each cutter and boat, where applicable and may be incorporated into the Hose Log; See paragraph C of this Chapter. Where such joints do not exist on the cutter, the Cutter Engineering Report shall note "N/A".
- b. It is intended that the Flexible Joint Log be a consolidated reference for documentation of joint requirements, identification of joints installed, and procurement of replacement joints.
- c. The Flexible Joint Log shall include at least the following information:
 - (1) A sequential identification number.
 - (2) Specific service, including system name and SWBS number, descriptive joint location and function, and system fluid. The information must be specific enough to fully locate the joint, since the joint will not have an identification tag.
 - (3) Joint type, nominal diameter, length, and end connections (including thread nomenclature, if any).

- K. 3. c. (4) Design pressure of piping system, and required rate working pressure of the joint.

 NOTE: The system design working pressure is not the normal working pressure seen by the joint. If the system design pressure is not shown on the system drawings, guidance from the cognizant MLC should be sought.
 - (5) A list of applicable references, drawings, technical publications, specifications, vendors information, source of supply, describing the joint, requirements. This includes part number, and Federal Stock Number (if applicable).
 - (6) Date of installation for each joint [MO/YR], and projected service life (replacement) date [QTR/YR].
 - 4. <u>Tags</u>. Due to the configuration and size of most flexible fluid joints, tags are not required. The reference information and service identification in the Flexible Joint Log should be sufficiently detailed for identification purposes.
 - 5. <u>General Maintenance Policy</u>. All flexible fluid joints shall be inspected and maintained in accordance with cutter specific PMS, and manufacturer technical publications. Flexible fluid joints shall be inspected at least twice a year.
 - 6. Replacement Policy. All flexible fluid joints shall be replaced in accordance with manufacturer technical publications. At a minimum the change out interval shall not exceed 5 years. MLC's shall abbreviate the 5 year upper limit for those cutters that require more frequent change-outs. Abbreviated intervals shall be captured within specific Cutter Class Maintenance Plans.

Page Intentionally Left Blank

CHAPTER 517. AUXILIARY BOILERS AND FORCED CIRCULATION STEAM GENERATORS

- **A. FEEDWATER TREATMENT.** Boiler feedwater on board Coast Guard cutters with auxiliary boilers or forced circulation steam generators shall be treated in accordance with the respective cutter class PMS Manual, using either of the following techniques.
 - 1. Magnetic Water Treatment.
 - a. The current alternative to the chemical treatment method is Magnetic Water Treatment (MWT) with devices meeting or exceeding the following salient characteristics:
 - (1) Mount external to the feedwater piping.
 - (2) Require no outside source of electrical power.
 - (3) Capable of generating a magnetic field of at least 20,000 Gauss (+/-5%) perpendicular to the feedwater flow which will penetrate the pipe walls producing a measurable magnetic field in the water stream.
 - (4) Flux leakage during shipping and after installation must not exceed .00525 Gauss at 15 feet.

A known source of MWT devices with these characteristics is International Water Management Inc. of Seal Beach, CA. They are registered under the trade name "MagneGen".

- b. With MWT, the need to purchase, store, and add boiler treatment chemicals is eliminated, and daily boiler water treatment and testing PMS is reduced. MWT eliminates the need for active scale removal (acid flushing), and protects boiler waterside components from corrosion. Existing scale will be removed and watersides will remain scale free, resulting in improved heat transfer efficiency and service life.
- c. The exclusive use of distilled water is not required with MWT. The water chemistry monitoring and blowdown procedures in B.1.b allow for make-up sources to include the potable water shore-tie.
- d. Water softeners shall not be used.
- e. The treatment requirements of NSTM, Chapter 220, Vol. 2 for Auxiliary Boilers do not apply to boilers using MWT.

A. 2. <u>Coordinated Phosphate Chemical Treatment</u>. Cutters without an Engineering Change directing MWT shall use chemical treatment. Cutters using chemical treatment should make every effort to use distilled water, obtained from a properly functioning evaporator, as make-up. Some cutters may have no alternative but to use dock water as make-up. Where such a condition exists, particularly in areas with hard water, units shall use a water softener. The MLCs shall review and approve new chemical treatment products prior to implementation on a cutter or boat. Chemical treatment for Auxiliary Boilers shall be as prescribed in NSTM, Chapter 220, Volume 2.

B. FEEDWATER TESTING.

- 1. <u>Boilers and Steam Generators Using Magnetic Treatment</u>. Systems using this type of treatment remain subject to continued careful monitoring of water chemistry and waterside inspections per cutter class PMS. MWT is simply an alternative to the chemicals traditionally used for scale prevention and corrosion control.
 - a. With MWT, the daily feedwater testing program shall include pH and Total Dissolved Solids (TDS) of boiler, hotwell, and make-up water. Boiler water chloride testing is required only on cutters with raw water heat exchangers in the condensate return system and without feedwater salinity detection systems. Cutters with such systems shall maintain the ability to test for chloride levels in the event of a salinity sensor failure.
 - b. Recommended ranges for boiler water parameters using MWT is:
 - (1) pH. 8-11.5
 - (2) <u>TDS</u>. 1000 parts per million (ppm) or 2X make-up TDS, whichever is GREATEST. Identifying maximum boiler TDS as a function of make-up TDS is commonly referred to as "cycles of concentration". As long as the make-up has a TDS reading of 500 ppm or less, the upper limit for boiler blow down is a TDS level of 1000 ppm. In some areas, notably the southwest, dock water may have TDS levels in excess of 1000 ppm. In those situations, the upper limit for boiler TDS may be extended to 2X that of the make-up (i.e. 2 cycles of concentration).
 - (3) <u>Chloride</u>. Less than 10 ppm for all cutters (except less than 50-60 ppm on WAGB 400). If chloride levels exhibit a distinctive upward trend, there is likely salt water incursion taking place somewhere in the system.
 - (4) <u>Feedwater Temperature</u>. Feedwater temperature shall be kept at approximately 200 degrees F to assist in the removal of dissolved oxygen.
 - c. These limits should be maintained by adjusting the frequency and duration of surface and bottom blowdown. If the parameters exceed their upper limits surface blowdown will, in general, return them to within acceptable limits, as well as remove any oils which may enter the feedwater system. Bottom blowdown will remove accumulated sludge; however, for a bottom blowdown to be effective the boiler should be taken off line for

- **B.** 1. c. approximately 30 minutes before blowing it down to give the sludge time to settle. When it becomes necessary to blowdown due to water chemistry exceeding recommended ranges, wait at least 12 hours before testing again to allow fresh make-up to enter the system and dilute the feedwater. Once a boiler is stabilized with MWT, water chemistry will likely remain within the recommended ranges for several days or more. Regardless, blowdowns should be done on a periodic basis per cutter class PMS.
 - d. Advances in sensing technology provide an opportunity to shift from traditional chemical titration type water testing procedures to relatively inexpensive and faster electronic means in most cases. With MWT there is no need to test for Phosphates since that measurement's purpose is to assist in determining the amount and type of treatment chemical to add. The Alkalinity test is replaced by a direct measurement of pH, and TDS level is used to determine when the blowdown threshold is reached. Tests are performed using hand held electronic pH and TDS testers which provide direct and instantaneous digital readout, in conjunction with a chloride test kit. Both the electronic testers and the chloride test kit, which uses Silver Nitrate as the titrant, are available from The Hach Company. The catalog numbers are as follows: pH tester 44350-00, TDS tester 44400-00, chloride test kit #144001, MODEL 8-P. Hach also has available a Mercuric Nitrate based chloride titration test kit; however, it is being phased out due to the difficulty in disposing of the test by-product which contains mercury. Cutters using the Mercuric Nitrate-based test kit should allow their stock of this titrant to deplete and replenish with the Silver Nitrate version. In addition to being easier to dispose of the titration by-product, it costs less than the Mercuric Nitrate version.
 - e. The testing requirements of NSTM, Chapter 220, Vol. 2 for Auxiliary Boilers, including use of Navy Standard log sheets, do not apply to boilers using magnetic treatment.
 - 2. Boilers and Steam Generators using Chemical Treatment.
 - a. <u>Boilers</u>. Chemical testing shall be as prescribed in NSTM, Chapter 220, Vol. 2 for Auxiliary Boilers.
 - b. Forced Circulation Steam Generators.
 - (1) The chemical used in the treatment of feedwater for forced circulation steam generators shall contain each of the following chemicals, in approximately the proportions given:

Compound	Parts by Volume
Sodium Sulfite	4.17
Trisodium Phosphate	1.0
Sodium Hydroxide	1.59
Cobalt Sulfate	0.02

A known product used in chemical feedwater treatment is Clayton compound 1A.

B. 2. b. (2) The purpose of each of the compounds is as follows:

<u>Compound</u> <u>Purpose</u>

Sodium Sulfite Oxygen scavenging

Trisodium Phosphate Scale reduction and pH control

Sodium Hydroxide pH control

Cobalt Sulfate Increased rate of oxygen scavenging

(3) All cutters equipped with forced circulation steam generators are required to have a test kit. The Clayton Model UH-2442D Kit (Clayton Mfg. Co.) is a known product that can be used in conjunction with the chloride test kit described in B.1.d.

C. SUPPLEMENTAL REQUIREMENTS FOR ALL BOILERS AND STEAM GENERATORS.

- 1. When placing boilers in an extended lay-up, the primary consideration is prevention of oxygen corrosion on waterside surfaces. No matter which water treatment is used, the treatment loses its effect when the boiler is secured for long periods. Each MLC shall ensure an adequate wet or dry lay-up process is carried out prior to placing a boiler out of commission for an extended period. The lay-up procedures listed in NSTM Chapter 220 Volume 2, are acceptable, however the quantities of chemicals cited are for large propulsion boilers. When carrying out this process consult the boiler manufacturer.
- 2. Waterside corrosion will be reduced by MWT; however, for maximum protection, feedwater temperature shall be kept at approximately 200 degrees F to assist in the removal of dissolved oxygen.
- 3. In general the loss of feedwater should be limited to reduce introduction of impurities. Once a week, cutters equipped with a condensate tank and hotwell shall drain approximately 10% of the water from the bottom of the tank to prevent sludge accumulation.
- 4. Due to its carcinogenic properties, the chemical hydrazine, in any combination or in any circumstance, shall not be used.

CHAPTER 530. POTABLE WATER SYSTEMS

- **A. POTABLE WATER SYSTEMS.** Water Supply and Waste Water Disposal Manual, COMDTINST M6240.5 (series), and NSTM Chapter 533 provides detailed guidance on the arrangement, operation, maintenance, and treatment of shipboard potable water systems.
- **B.** TREATMENT OF EVAPORATOR FEEDWATER. The build-up of scale in evaporators has plagued operating personnel since the evaporator was first developed. Various methods have been used to reduce or eliminate scale. The chemical treatment of feedwater has proven to be a most effective method in combating and preventing scale build-up in Coast Guard evaporators.
 - 1. <u>Applicability</u>. Coast Guard cutters equipped with evaporator feedwater treatment equipment shall use this equipment to the fullest extent. Major cutter classes have been equipped with feedwater treatment equipment, as authorized by Engineering Changes. Requests for issuance of Engineering Changes for classes of cutters not so equipped, but that need such equipment, will receive favorable consideration.
 - 2. <u>Selection of Treatment Chemical</u>. Presently, there are two authorized feedwater treatment chemicals, HAGEVAP PD-8 and AMEROYAL. While the Coast Guard cannot test every new commercial product introduced, there are instances where a controlled program of evaluation may be beneficial. MLCs may request such a program under the Testing of Commercial Products Section in Chapter 041 of this manual.

C. CHEMICAL CLEANING OF EVAPORATORS.

- 1. <u>General</u>. Manufacturer technical instructions and cutter specific PMS provides guidance on the chemical and mechanical cleaning of evaporators. NSTM Chapter 531, Volumes 1, 2, and 3 provide additional information. In the event that chemical cleaning is unsatisfactory, mechanical methods may be used.
- 2. <u>Policy</u>. Sulfamic acid shall be used as the chemical cleaning agent for Coast Guard evaporators. Requests and recommendations for exemption to this policy shall be forwarded to the appropriate MLC for review.

NOTE: Chill shocking is not an authorized method for descaling evaporators.

D. JOINT SEALING COMPOUNDS.

- 1. <u>General</u>. The use of a sealant or paste on piping and pressure vessel joints is standard practice. White lead is a common choice for this purpose. However, lead is toxic, and contamination of potable water supplies is possible.
- 2. <u>Prohibited Sealing Material</u>. The use of white lead is prohibited on flanged or threaded connections on evaporators, all elements of the evaporator salt water feed system, and all elements of the potable water system. The removal of white lead from applicable systems shall be accomplished the first time the connections are opened for inspection, maintenance, or other similar purpose.

D. 3. <u>Proper Sealing Compounds</u>. Only sealing compounds that conform with Type I of MIL-A-46146 shall be used. These compounds are noncorrosive, silicon, room-temperature vulcanizing, adhesive-sealants. Type I is a soft, spreadable thixotropic paste.

CHAPTER 540. GASOLINE, HANDLING AND STOWAGE

- **A.** GASOLINE, GASOLINE EQUIPMENT, AND STOWAGE. This chapter provides guidance on authorized quantities, stowage, and handling of gasoline on board Coast Guard cutters and boats.
 - 1. <u>Classification of Material</u>. Gasoline is classified as a Category I FLAMMABLE (extremely flammable, highly volatile) Material. NSTM Chapter 670 provides guidance on the stowage, handling, and disposal of gasoline and other hazardous general use consumables.
 - 2. <u>Gasoline Stowage</u>. Gasoline containers shall be stowed on the weather deck (aft, if possible) and located so that they can be readily jettisoned overboard. Interior stowage of gasoline is prohibited on board Coast Guard cutters and boats. Stowage locations shall not be in the vicinity of hatches, doors, galleys, ready service magazines, heat producing spaces, ventilation intakes and exhausts, or helicopter launching and recovery areas.
 - a. 55-gallon drums may only be stowed on cutters that have installed (by ShipAlt or original outfit) quick-release, remote activated jettison racks as detailed on NAVSHIPS dwg 801-4444641.
 - b. Portable containers shall be secured within P-250 foundation housings or designated storage locations (easily detachable for hand-jettisoning).
 - c. The Dewatering Pump Kit, with gasoline, shall be stowed in accordance with the Coast Guard Rescue and Survival System Manual, COMDTINST M10470.10 (series).
 - **NOTE:** Gasoline stowage areas shall be designated as GASOLINE HAZARD AREAS. Gasoline containers shall be labeled as FLAMMABLE.
 - 3. Authorized Gasoline Containers. The following containers are authorized for shipboard use:
 - a. Stowage Containers.
 - (1) 5-gallon metal cans meeting MIL-C-1283F
 - (2) 6-gallon or smaller safety cans meeting FED Spec RR-S-30F
 - (3) 6-gallon or smaller molded plastic containers meeting Underwriter Laboratory (UL) and Factory Mutual (FM) approval standards for safety containers.
 - (4) 55-gallon drums meeting FED Spec PPP-D-729E, Type I, Class A.

A. 3. b. Portable Fuel Systems for Outboard Motors and the P-250. 6-gallon portable fuel tanks certified for marine use and meeting American Boat and Yacht Council (ABYC) standard requirements for portable fuel systems.

WARNING

Gasoline shall be handled with extreme caution. Partially filled and empty gasoline containers contain an explosive mixture of gasoline vapors and air. Empty or partially filled containers shall be drained completely or refilled as soon as practicable.

- 4. Quantities to Be Carried.
 - a. Cutters and boats should carry enough gasoline to operate portable equipment for at least 4 hours at its maximum gasoline usage rate. The following reflects the approximate quantities of gasoline used by portable equipment in a 4 hour period:

P-250 Mod 1 fire pump - 21 gallons Dewatering Pump Kit - 2 gallons

- b. Sufficient quantities of gasoline shall be carried to meet the operational requirements of gasoline powered boats and equipment.
- 5. <u>Deterioration of Gasoline</u>. To reduce the risk of using deteriorated gasoline, storage containers shall be renewed with fresh gasoline every 3 months.
- <u>Disposal of Gasoline</u>. Disposal of gasoline must be controlled and shall comply with local, state, and federal environmental regulations. The Hazardous Waste Management Manual, COMDTINST M16478.1 (series), provides guidance on the disposal of hazardous waste materials.

CHAPTER 541. FUEL SYSTEM, PROPULSION

- **A. FUELING EVOLUTIONS.** Prior to taking on or transferring fuel, cutters and boats shall be electrically grounded. Only those fuels outlined in paragraphs B.1 & B.2 are authorized for Coast Guard uses. Clear and Bright Tests shall be conducted before accepting fuel.
- **B.** AUTHORIZED FUELS FOR CUTTERS AND BOATS. This policy reflects the increasing concern with minimizing fuel costs.
 - 1. Cutters equipped with gas turbines, or cutters/boats who anticipate <u>not</u> being able to burn the fuel within approximately six weeks after onload, shall select the least expensive of (NATO) F-76 or (NATO) F-44 (JP-5), provided the fuel selected meets the technical specification requirements of paragraph B.4 below.
 - 2. Cutters/boats not equipped with gas turbines, who anticipate being able to use the fuel within approximately six weeks, shall select the least expensive of F-76, F-44 (JP-5), or Navy Purchase Description Marine Gas Oil (NPD MGO), provided the fuel selected meets the technical specification requirements of paragraph B.4 below.

NOTE: The following manufacturers recommend the following precautions when using F-44 (JP-5):

- a. In Caterpillar engines, JP-5 should not be allowed to exceed 100°F in temperature. This ensures that adequate viscosity is retained.
- b. Volvo Penta diesel engines used in diesel RIBs, some TANBs and other small boats require five (5) percent clean lube oil to be mixed with JP-5 prior to use.
- 3. <u>Mixing Fuels</u>. F-76, F-44 (JP-5), and NPD MGO may all be mixed without adverse effects. However, some fuel oil purifiers will require modifications to remain effective when used with JP-5. Units with centrifugal purifiers should review technical manuals, and contact the respective manufacturer and MLC for guidance. Where purifier performance is affected by the type of fuel used, mixing of fuels should be avoided to ensure adequate purifier performance.
- 4. <u>Minimum Acceptable Requirements</u>. The following are the minimum acceptable requirements for F-76, F-44 and NPD MGO:
 - a. F-76 must meet MIL-F-16884J. Minimum cetane number is 42 (or 45 for cutters equipped with Paxman engines).
 - b. F-44 (JP-5) must meet MIL-PRE-5624S.
 - c. NPD MGO can be procured under National Stock Number 9140-01-313-7776 (domestic) and 9140-01-417-6843 (overseas). Minimum cetane number is 42 (or 45 for cutters equipped with Paxman engines). NPD MGO supplied under a DESC bunker fuel contract will meet the Navy Purchase Description.

D. 4. d. Special Restrictions for Gas Turbine Powered Cutters. Pending completion of Engineering Logistics Center fuel investigation results, NPD MGO should not be used in Coast Guard Pratt & Whitney FT4 gas turbine engines unless an operational emergency exists.

5. General Fuel Characteristics.

- a. F-76. F-76 is a MIL-SPEC distillate fuel suitable for use in shipboard diesels, gas turbines, or boilers. F-76 has very tight specification and storage/handling quality control requirements. It is the fuel normally obtained directly from naval facilities and oilers. It has a minimum flash point of 60°C (140°F). F-76 does not have an affinity for water; free-water will normally rapidly settle out. Older naval engineering terminology referred to F-76 as Diesel Fuel Marine (DFM). Current practice no longer uses "DFM" as a descriptive name for F-76. To avoid confusion, F-76 fuel should only be referred to as "F-76". F-76 should not be confused with a commercial product known as Marine Diesel Fuel (MDF). Commercial MDF can contain up to 10% residual (black) fuel. Residual fuel can contain high levels of trace metals and ash which dramatically increase hot section corrosion in gas turbines and/or some high and medium speed diesel engines. Residual fuel also has very high carbon residue which can lead to coking and plugging of fuel nozzles.
- b. F-44 (JP-5). F-44 (JP-5) is a MIL-SPEC kerosene type jet fuel with a special high flash point of 60°C (140°F). It also has very strict specification and storage/handling quality control requirements. JP-5 is ideally suited to FT-4 gas turbine engines. However, it has a lower energy content than diesel oils (e.g., F-76 and NPD MGO). Its consumption rate will therefore be higher. JP-5 also tends to hold water and particulates in suspension. In addition, the de-icing/biostat additive (FSII) which is added to JP-5 for aviation purposes tends to migrate from the fuel to water. This means rigorous stripping procedures are even more critical when using JP-5 fuel in order to keep the water from emulsifying with the fuel, and to prevent loss of the FSII limited biostat properties.
- c. Navy Purchase Description Marine Gas Oil (NPD MGO). Marine Gas Oil is a very broad classification of fuels, pertaining to their distillation temperature, general properties, and minimum flash point of 60°C (140°F). F-76, at one end of the quality spectrum, could be considered a marine gas oil, but so could fuels containing significant percentages of residual fuel (such as commercial MDF). The Navy Purchase Description has fewer and less strenuous requirements than the F-76 specification, but it does invoke additional requirements over what could otherwise be acceptable under a purely commercial specification (such as ASTM D-975). Storage and handling quality control is consistent with standard commercial practices. It is possible that fuel can meet the NPD MGO specification requirements, but be marketed under several different names, including "MDF" and/or "Commercial No. 2". As long as the NPD MGO is obtained through a Defense Energy Support Center (DESC) contract, and ordered under National Stock Number 9140-01-313-7776 (domestic purchase) or 9140-01-417-6843 (overseas),

B. 5. c. cutters/boats will be assured of receiving NPD MGO. Sources of NPD MGO are listed on DESC's internet homepage at 'http://www.desc.dla.mil/main/p/specialt/bunkers/bltngate.htm". As discussed below, there is currently a 6 week time limit placed on the use of NPD MGO, starting when the fuel is taken onboard, due to concerns with chemical storage stability (oxidation).

NOTE: The Naval Ship Technical Manual (NSTM) Chapter 541, Section 10, also lists (NATO) F-75 as an acceptable substitute fuel, but F-75 can only be obtained at some overseas locations and does not have a domestic specification. It is unlikely that Coast Guard vessels can obtain this fuel.

Emergency Substitute Fuels. If none of the above fuels are available, cutters should contact 6. their MLC (vr) for guidance prior to purchasing and taking on fuel. NSTM Chapter 541, Section 10, identifies a number of emergency substitute fuels. Emergency substitute fuels may be used in an emergency, in place of fuels discussed above, after determining that the product is acceptable. These fuels, in order of preference, are ASTM D-975 Grade No. 2-D or ASTM D-396 No. 2; ASTM D-2880 No 2-GT; and Commercial MGO (100% distillate), from a commercial supplier not under a DESC contract. These fuels may not be suitable for long term use in marine gas turbines and/or some diesel engines. They may contain additives which could degrade coalescer/separator performance. Because they were not originally intended for marine use, their specifications allow flash points lower than 60°C (140°F). The mixing of emergency substitute fuels with F-76, F-44 (JP-5), or NPD MGO is not recommended. Consolidate storage tanks before taking on emergency substitute fuels. Any emergency fuel taken onboard must be used as soon as possible. Storage stability will be a concern for all emergency substitute fuels. Due to safety concerns, only fuels with a minimum flash point of 60°C (140°F) are acceptable for shipboard use.

NOTE: F-54 and DF-2 are also mentioned in NSTM as emergency fuels. These fuels were procured under Fed Spec VV-F-800 which has been canceled. This information is not current and should be disregarded. The term Automotive Gas Oil (AGO) is sometimes requested as an emergency fuel. Like MGO, AGO is very broad non-specific term and could describe a very wide range of fuel properties. It is likely to have a flash point less than the minimum acceptable limit of 60°C (140°F). When offered AGO, determine what specific specification the fuel complies with and then apply the above criteria to determine suitability. Insist on documentation that shows an acceptable flash point value.

C. ONBOARD FUEL MANAGEMENT. Effective onboard fuel management is critical to maintaining adequate fuel quality. The primary concerns are with particulate, water, and microbiological contamination. With any fuels other than F-76 and F-44 (JP-5), oxidation (chemical storage stability) is also a potential concern. NSTM Chapter 541, Section 10, gives excellent fuel testing and maintenance procedures and guidance. While compliance with these guidelines is strongly encouraged, only partial compliance will be possible for most cutters/boats. Much of the test equipment discussed in NSTM (such as centrifuges for conducting "bottoms water and sediment" testing) is currently not provided to Coast Guard vessels. These policies are currently undergoing review.

C. 1. General Characteristics.

- a. Particulate Contamination. Particulate contamination can be caused by dirt, rust flakes, catalyst fines, or other foreign matter introduced into the fuel. It can be introduced from a fuel source, or from the ship's own storage tanks and piping. Particulates generally settle out of solution and gather at the bottom of storage tanks. However, biological contamination and chemical stability problems also generate particulates that can stay in solution. Particulate contamination will clog fuel filters, and can potentially damage fuel injection equipment. Timely and periodic tank stripping is the best means to keep particulate contamination manageable.
- b. Water Contamination. Water can be introduced by condensation, through onloaded fuel, via wet fueling lines, and by ballasting of fuel storage tanks. Free-water, if allowed to remain still for a relatively short time, will settle to the bottom of the tank (or container) as a distinct layer or as droplets. Periodic tank stripping will therefore remove free-water. Entrained water is suspended in the fuel. Haze observed in a "clear & bright" visual fuel test is often caused by entrained water. Water is also a primary contributor to microbiological contamination. Water can also cause damage to fuel injection equipment. Gas turbines are particularly sensitive to water contamination. Only water separators (coalescers) can remove entrained water from fuel. Timely and periodic tank stripping will help prevent free water from emulsifying with the fuel.
- c. Microbiological Contamination. Microbiological contamination is caused by organic growth, such as protozoa, fungus, or bacteria, that grows primarily at the interface between fuel and water. Microbiological contamination generally causes a brown, gray or black stringy or fibrous residue that will quickly clog fuel filters. Most recent Coast Guard fuel problems are believed to have been caused by microbiological contamination (as opposed to chemical storage stability). Warm and tropical environments encourage the onset and growth of microbiological contamination. If free-water could be eliminated from the fuel, microbiological contamination would no longer be a major concern. Once again, timely and periodic tank stripping will minimize concerns with microbiological contamination. Biocides are another means of preventing microbiological contamination. However, any fuel additive (including biocides) increase the chance of fuel compatibility problems when fuels are commingled (adding a new fuel load to a partially filled tank). Effectiveness of biocides can also be problematic. The use of biocides is discussed further below (C.2.c).
- d. Chemical Storage Stability. F-76 and F-44 (JP-5) are the only marine fuels that have built in protection against oxidation. NPD MGO, and other commercial fuels, do not contain fuel stabilizing additives or undergo storage stability testing and therefore should be consumed as soon as possible nominally within six weeks. This six week figure is taken from NSTM (Chapter 541, Section 10) and is very conservative. Work is in progress to better define a more operationally realistic holding period. However, it will normally not be a problem if a cutter has to inadvertently hold NPD MGO fuel beyond six weeks.

- C. 1. d. Operational indications of destabilized fuel are very similar to that of microbiological contamination. It will most likely be manifested by frequently clogged fuel filter elements. Filter elements clogged by destabilized fuel may appear to be coated with a black gummy material or a gel.
 - e. Fuel Incompatibility. Incompatibility problems between distillate fuels are rare, but it can happen. Incompatibility will cause rapid formation of particulate matter similar to what can be observed with storage instability. The factors that influence incompatibility are not well understood. Chances for a compatibility problem are highest for cutters that fuel from multiple and remote locations, and from fuel sources that likely originated from different crude oils. Cutters and boats that generally refuel from the same supplier are at minimal risk.

2. <u>Recommended Fuel Management Practices.</u>

- Clear & Bright Testing. Clear and bright visual testing upon receipt of fuel is essential. a. NSTM, Chapter 541, Section 10 provides specific directions for performing this test. Clear and bright testing can identify water and particulate contamination, and to a limited degree microbiological and storage stability problems. This test is particularly important when receiving NPD MGO, or other emergency commercial fuel. If fuel passes clear and bright criteria, chances are slight that a storage stability problem will occur before the fuel has been burned within the nominal six week time limit. However, if the fuel appears cloudy, brown, or dark in color, storage instability (or microbiological contamination) problems may already be in progress (due to time spent in shore side storage). Except in operational emergencies, do not accept NPD MGO fuel that will not pass clear and bright visual inspection criteria. When required by operational emergencies to accept fuel that will not pass clear and bright visual inspection criteria, minimize amount of fuel taken onboard and burn it as soon as possible. NSTM Chapter 541, Section 10, also recommends periodic clear & bright testing at specific locations in the fuel service system during operation.
 - (1) Marine fuel may have a red dye mixed in with the fuel. The resulting fuel/dye blend will have a <u>red</u> tint, but it must not be visually brown or darker in appearance.
 - (2) Strict interpretation of the NPD MGO contract requirements require that if a sample fails clear & bright visual testing, it must then be subjected to a water & sediment centrifugal test (max allowable water content = 0.05%). If the fuel passes this more rigorous test, it is acceptable for use. However, Coast Guard vessels are not currently supplied with the required equipment to conduct this test onboard. Alternative arrangements may therefore become necessary to conduct the test if the supplier insists on the next stage of testing.
 - (3) Fifteen Coast Guard vessels are participating in a pilot fuel quality sampling program. Fuel samples are drawn by ships force when non-MIL-SPEC fuel is delivered. The samples are then shipped to an analysis laboratory for a rigorous set of tests. The results of these tests will help define the impact of Coast Guard vessels

- C. 2. a. (3) burning <u>non-MIL-SPEC</u> fuel. The samples are subjected to both the NPD MGO contract requirement tests and (for informational purposes) the more numerous and strenuous F-76 specification requirements. Operationally, the participating cutters will get fuel quality testing far beyond what could ever be accomplished onboard ship and timely recommendations for corrective actions (should a problem be identified).
 - b. Tank Stripping. Timely and periodic tank bottoms stripping of water and particulate contaminates is the single most effective procedure for maintaining the quality of the fuel. Storage tanks are to be tested for free-water content using bottom soundings and water indicating paste. Testing for free-water shall be performed:
 - (1) Prior to receiving fuel (if the receiving tank had been ballasted),
 - (2) 24 hours after receiving fuel,
 - (3) Before transfer to a service or day tank,
 - (4) And on a monthly schedule.

NOTE: Strip the tank if free-water is detected.

c. Use of Biocides. This section states the requirements for biocide treatment of all diesel oil and JP-5 fuel carried for shipboard use. All cutters that receive fuel from NAVY Oilers, or ballast their fuel oil storage tanks, shall comply. MLC's may, at their discretion, require the participation of other cutters in the program.

NOTE: The provisions of this section **DO NOT** apply to fuels carried on board cutters for use in aircraft.

(1) Biocides/Biostats. Biocides and biostats are commercially available products that combat fuel contamination. Biostats are used to prevent clean fuel from becoming contaminated with microbiological growth. In addition to preventing contamination, biocides are capable of disinfecting fuel that is already contaminated. To be effective for shipboard use, both biocides and biostats must be fuel and water soluble, and must not alter the characteristics of the fuel. Biocides must also be compatible with fuel storage, handling, transfer, and delivery systems for equipment that uses fuel. Fuel treatments shall comply with MIL-S-53021A and its associated qualified products list (QPL-53021-5), which provides a listing of authorized biocides that have been approved for Coast Guard use. Products which have passed ASTM E 1259-88, Standard Test Method for Evaluation of Antimicrobials in Distillate Fuels, and the test procedure outlined in USCG Fuel Additive Study GLP 1991-039 may also be used.

NOTE: Prior to taking on fuel, cutters shall ascertain the fuel type and associated fuel treatment (if any) used. Certain fuel treatments are not compatible with one another (i.e. BIOBOR is not compatible with NALFLEET).

- C. 2. c. (2) Storage and Handling of Fuel Treatments. Containers of fuel treatment chemicals must be kept closed to the atmosphere and water contamination. Fuel treatment chemicals contain Material Safety Data Sheets that provide guidance on first aid, handling, stowage, and disposal.
 - (3) Use of Fuel Treatments. To ensure maximum mixing with the fuel, the chemical should be added to the tank to be filled either immediately before fueling or during the fueling process. Normally, two treatment levels are specified for the addition of biocides. The higher level of concentration should be used for the treatment of fuel added to an empty tank and for treatment of fuel added after ballasting or deballasting a tank. This level is normally twice the concentration used for routine maintenance, and will ensure rapid initial disinfection. The lower (normal) concentration level should be used for fuel added to a tank after the initial or post-ballasting treatment.
 - (4) Magnetic fuel treatments are being investigated, but currently are not authorized for use in place of biocides.
 - d. Stock Rotation. In order to counter the concerns with storage stability, it is critical to keep track of the fuel product in each onboard storage tank, and when it was received. NPD MGO and other emergency fuels should be burned as quickly as possible after being taken onboard. The stock should be rotated so that older fuels are used first. Continually drawing fuel in the same tank order, and not transferring fuel from tanks at the bottom of the normal tank rotation, is inviting disaster. When the opportunity exists to take onboard F-76 or F-44 (JP-5), it is recommended that these tanks be designated as "longer term" storage.
 - e. Corrective Action. Once severely contaminated, or destabilized, fuel has been detected, stop burning it as soon as possible, isolate that storage tank, and contact your group engineer or type desk for assistance with tank cleaning. Do not attempt to cut destabilized fuel with good fuel this will most likely only add to the problem and will certainly add to the expense of disposal. If you have a fuel storage stability concern, MLCLANT/MLCPAC can assist you in getting your fuel tested.
- **D.** <u>FUEL REQUEST/LOGREQS</u>. When requesting fuel in Logistics Requestes (LOGREQS) or when arranging fuel deliveries, cutters should not use the term "DFM" (which is non-specific), but should utilize the standard naming phraseology listed above in paragraph B.4 to ensure the fuel requested is the fuel received. Cutters should also contact their husbanding agent or ship chandler to obtain the latest fuel info for planned foreign port Brief Stop for Fuel (BSFs). To help cutters meet the fuel selection policy and ensure the fuel received meets the listed technical requirements, recommend the following in all LOGREQS: **NOTE: Gas turbine equipped cutters, or cutters who anticipate not being able to utilize the fuel in approximately six weeks, should delete all references to NPD MGO listed below.**

D. FOXTROT: RQST XXX GALS FUEL, SEE PARA ZULU (1) FOR SPECIFICS. ZULU: (1) FUEL PREFERENCE AND REQUIREMENTS AS FOLLOWS: IF AVAILABLE, SUPPLIER PREFERENCE FOR FUEL IS DOD FACILITY (FIRST), DESC CONTRACTED SUPPLIER (SECOND) AND COMMERCIAL SUPPLIER (LAST). FROM THE SUPPLIER WITH THE HIGHEST PRIORITY ONLY, REQUEST THE LEAST EXPENSIVE FUEL AVAILABLE OF NATO F-76, NATO F-44, OR NPD MGO. ZULU: (1) LIST NPD MGO TECH REQUIREMENTS PER PARAGRAPH B.4 ABOVE. CUTTERS EQUIPPED WITH PAXMAN ENGINES REQUIRE MINIMUM CETANE NUMBER OF 45, REGARDLESS OF WHETHER F-76 OR NPD MGO IS SUPPLIED.

E. REPORTING FUEL PROBLEMS.

- 1. DESC Contractor Supplied Fuel. If you encounter problems with the fuel you have received and the source is a DESC contractor, all problems and information should be directed back to DESC FORT BELVOIR VA//DESC-BQ//. COMCOGARD MLC LANT NORFOLK VA//VR/F//, COMCOGARD MLC PAC ALAMEDA CA//V/VR/F//, COGARD ENGLOGCEN BALTIMORE MD//026//, AND COGARD COMDT WASH DC//G-SEN// should be listed on the info line of these messages. DESC needs the following information to assist with the investigation and determination of appropriate corrective action: Unit POC and the preferred method(s) of contact (phone, e-mail, message; other); the type and quantity (gallons) of fuel received; current disposition of the fuel (how much has been used, problems that were encountered, if product is commingled with other fuels onboard); if there are retained samples of the problem fuel; the name of the DESC contractor and the contract number.
- 2. Navy Supplied Fuel. If you encounter problems with fuel received from a Navy facility, all problems and information should be directed back to NAVPETOFF FORT BELVOIR VA//NPO//. COMCOGARD MLC LANT NORFOLK VA//VR/F//, COMCOGARD MLC PAC ALAMEDA CA//V/VR/F//, COGARD ENGLOGCEN BALTIMORE MD//026//, AND COGARD COMDT WASH DC//G-SEN// should be listed on the info line of these messages. The Naval Petroleum Office (NPO) needs the following information to assist with acting on your problems: Unit POC and the preferred method(s) of contact (phone, e-mail, message, other); the type and quantity (gallons) of fuel received; current disposition of the fuel (how much has been used, problems that were encountered and has it been mixed with other fuels); the name of the facility that the fuel was received from.
- **F.** GENERAL QUESTIONS. If you have any questions regarding the DESC contract or fuel locations and prices, contact MLCLANT (f) or MLCPAC (v). If you have any technical questions on fuel types, please contact your unit type desk manager or ELC-026.

CHAPTER 542. FUEL SYSTEM, SHIPBOARD AVIATION

A. <u>SHIPBOARD JP-5 AVIATION FUEL HANDLING</u>. Shipboard Helicopter Operational Procedures Manual, COMDTINST M3710.2 (series) provides detailed guidance on minimum quality and surveillance standards, testing requirements, safety precautions, and handling procedures concerning the acceptance, storage, and dispensing of aviation fuel.

NOTE: Biocides are not authorized for use in aviation fuels.

B. MAINTENANCE OF EQUIPMENT. JP-5 fuel transfer, service, and storage equipment shall be maintained in accordance with cutter specific PMS and MLC Standard Specifications.

Page Intentionally Left Blank

CHAPTER 550. COMPRESSED GAS CYLINDERS

A. GENERAL. Fixed and portable compressed gas cylinders carried on board Coast Guard cutters shall comply with Department of Transportation (DOT) Code of Federal Regulations (CFR), Title 49, Part 173, Defense Logistic Agency (DLA) requirements, and the U. S. Navy's mandatory 12 year test limit. TP 2006 (series), Damage Control Preventive Maintenance Manual, provides guidance for inspecting, testing, and maintaining portable and compressed gas cylinders. NSTM Chapter 550 provides additional guidance.

B. HYDROSTATIC TESTING INTERVALS.

1. <u>Fixed Cylinders</u>. The compressed gas cylinders listed below shall be tested as follows:

Air Hydrogen
Argon Helium
Carbon Dioxide Nitrogen
Refrigerant Oxygen

- a. 12 Years. An installed or stowed compressed gas cylinder that has not been disturbed or discharged may remain installed or stowed up to 12 years from its previous date of hydrostatic testing. When 12 years have elapsed, the cylinder shall be removed from service, discharged, and hydrostatically tested before being returned to service.
- b. 5 Years. If a cylinder is discharged and 5 years have elapsed since the cylinder was last tested, that cylinder shall be hydrostatically tested prior to recharge.

NOTE: Cylinders marked ICC8, DOT 8, ICC8AL, or DOT8AL are authorized for acetylene only. NSTM Chapter 074 and 550 provide guidance for transport, handling, and stowage of acetylene and gas welding and cutting equipment.

2. <u>Halon 1301 Fixed Cylinders</u>. Since Halon (Fluorinated Hydrocarbons) is free of corroding components, CFR Title 49, Part 173.34, permits complete external visual inspections in lieu of hydrostatic retests. If this inspection is used in lieu of hydrostatic retesting, subsequent inspections are required 5 years after the first such inspection and periodically at 5-year intervals thereafter. Inspections shall only be made by a competent person and the results shall be recorded on a suitable data sheet CFR Title, Part 173.34 provides guidance for conducting complete external visual inspections and maintaining inspection records. The external visual inspections outlined in the Compressed Gas Association (CGA) Pamphlet 6 meet the CFR requirements for visual inspection.

NOTE: If a Halon cylinder is discharged and 5 years have elapsed since the cylinder was last tested, that cylinder shall be hydrostatically tested prior to recharge.

B. 3. Portable Cylinders.

- a. Portable CO2 cylinders shall be tested every 5 years.
- b. Portable Halon 1211 cylinders shall be tested every 5 years.
- c. Portable oxygen cylinders (i.e. of the exothermic cutting unit) shall be tested every 5 years.
- d. Portable PKP cylinders shall be tested every 12 years.
- C. <u>IDENTIFICATION MARKS</u>. Compressed cylinders shall be marked with the following information. Marks include the manufacturer's symbol, the Navy serial MFG 4500 NONSHAT number if one was assigned, and the NONSHAT number when the cylinder was tested in accordance with Navy Specifications for nonshatterable cylinders.

EXAMPLE:

Navy symbol, if manufactured

under a Navy contract USN

Inspector's mark XY

Other side

Navy specification number and date of manufacture

(month and year) 51631 3/63

Original test date 7/63

Subsequent test dates 9/69/6/75

- **D.** <u>TEST FACILITIES</u>. Hydrostatic testing shall be performed as prescribed in CFR, Title 49, Sections 178.36, 178.37, or 178.38, as appropriate.
- **E. USE OF NONSHATTERABLE CYLINDERS.** Nonshatterable-type cylinders for high-pressure gases are standard for shipboard use. Shatterable-type cylinders may be used only in the event of an emergency. If used, shatterable-type cylinders shall be replaced by nonshatterable as soon as possible. Nonshatterable cylinders, when used, shall be manufactured to appropriate DOT (ICC) specifications.

CHAPTER 551. COMPRESSED AIR SYSTEMS

- **A.** COMPRESSED AIR PLANTS AND SYSTEMS. NSTM Chapter 551 provides guidance on the safe operation and inspection of compressed air plant components, equipment, and systems.
- **B.** MOISTURE SEPARATORS AND AIR OILERS. Commands shall ensure that moisture separators or air oilers of installed compressed air systems are equipped as follows:
 - 1. For service below 125 psig, either plastic or metal bowls may be used. Plastic bowls shall have threaded inserts and metal guards.
 - 2. For service above 125 psig, metal bowls are required.

Page Intentionally Left Blank

CHAPTER 555. FIREFIGHTING

- A. FIREFIGHTING EQUIPMENT AND PROCEDURES. The following provide guidance on firefighting equipment and procedures: Machinery Space Firefighting Doctrine for Class Bravo Fires, COMDTINST M9555.1 (series), Shipboard- Helicopter Operational Procedures Manual, COMDTINST M3710.2 (series), Surface Ship Survivability, NWP 3-20.31, NSTM Chapter 555 Firefighting-Ship, NSTM Chapter 074 Volume 3 Gas Free Engineering, NSTM Chapter 077 Personnel Protection Equipment, NSTM Chapter 079 Volume 2 Damage Control-Practical Damage Control, Damage Control-PMS Manual, TECHPUB 2006 (series).
- **B.** FIREFIGHTING ORGANIZATION. Surface Ship Survivability, NWP 3-20.31, NSTM Chapter 555 and NSTM Chapter 079 Volume 2 shall be used for guidance in the development and training of repair locker personnel.
- **C.** MAINTENANCE. Guidance for maintaining, operating, and inspecting firefighting equipment is provided in Damage Control-PMS Manual, TP-2006 (series), manufacturers' technical publications, NSTM Chapter 555, NSTM Chapter 077, NSTM Chapter 079 Volume 2 and NSTM Chapter 550 (Halon Cylinders).
- **D.** <u>AUTHORIZED EQUIPMENT</u>. Cutter Standard Repair Locker Inventory, COMDTINST M9664.1 (series) provides guidance for procurement of authorized Damage Control equipment.
- **E. FIREFIGHTING AGENTS.** Surface Ship Survivability, NWP 3-20.31, NSTM Chapter 555 and NSTM Chapter 079 Volume 2 provide information on fire chemistry, physics and firefighting agents.
 - 1. <u>Water</u>. To maintain optimum firefighting capabilities, firemain pressure shall be maintained at the cutter's designed pressure. Firemain systems (pumps and piping) shall be maintained, regulated and operated in accordance with manufacturer's technical publications and TP 2006 (series).
 - 2. <u>Dry Chemical</u>. Potassium bicarbonate (Purple Potassium Powder-PKP), meeting Federal Specification 0-D-1407, is the only dry chemical authorized for use in "portable fire extinguishers" on Coast Guard cutters and boats.
 - 3. <u>Carbon Dioxide Gas (CO2)</u>. Due to its noncorrosive and nonconductive properties, CO2 shall be used as the primary extinguishing agent for Class C, helicopter gas turbine and cutter gas turbine fires.
 - 4. <u>Foam.</u> AFFF concentrate, meeting MIL-F-24385, is the only firefighting foam concentrate authorized for use on Coast Guard cutters and boats. This specification is for both the six percent and three percent AFFF concentrates in each gallon of mixed AFFF solution. Three percent AFFF is only authorized for use on the 225 FT WLB, 175' WLM, 140 FT WTGB, 87 FT WPB and small boats equipped with the CG-P5 or CG-P6 pump. **NOTE: 6% and 3% foam concentrate requires different proportioners. Adjustable and dial-in proportioners are available through the Federal stock system.**
 - a. Foam Storage. AFFF is available in 5-gallon plastic containers and 55-gallon steel drums.
 Storage of the 5-gallon containers shall be in compliance with Fleet drawing FL-3000-13 (for stacking containers more than two-high). AFFF shall be maintained in accordance with its respective Material Safety Data Sheet (MSDS).

E. 5. Halon agents were selected for specific cutters and boats as a result of smaller space requirements and lower system weight and toxicity levels during application.

F. FIREFIGHTING EQUIPMENT AND INSTALLATION.

- 1. Fireplugs and Firehoses.
 - a. At minimum, two 1-1/2 inch, 50-FT lengths of hose shall be located at each firestation on the main weather deck, lower decks, and superstructures, with one 50-FT length connected to each fireplug. Flight Deck Firestations shall be outfitted with enough hose to extend past the aft edge of the flight deck. Main Space Re-entry Stations shall be outfitted with enough hose to enable fire teams to safely combat Main Space Fires. Firehoses used on Coast Guard cutters and boats shall meet Federal Specification ZZ-H-451, Class A, Type I or II, or MIL-H-24606.
 - b. Each fireplug shall be fitted with two spanner wrenches.
 - c. Fabric covers are not authorized and shall not cover fireplugs.
 - d. 1-1/2 inch hoses not used explicitly for training, firefighting and damage control (i.e. Potable Water Hoses and Water Washdown Hoses) shall be stored in a designated area and stenciled to reflect their intended use and "NOT FOR FIREFIGHTING USE".
 - e. When a new hose is placed in service, it shall be installed first at fireplugs below the weather decks and in repair lockers. The displaced hoses, if serviceable, shall be relocated topside and on the weather decks. Some cutters and boats may be outfitted with hose configurations different than those indicated above. Replacement hoses shall comply with original outfit requirements.
- 2. <u>Nozzles and Applicators</u>. The following nozzles and applicators are authorized for use on Coast Guard cutters and boats:
 - a. Vari-Nozzle. Vari-Nozzles meeting MIL-N-24408 are authorized for use on Coast Guard cutters and boats. The 1-1/2 inch (95 gpm or 125 gpm) Vari-Nozzle shall be used on Coast Guard cutters and boats. Flight deck fire stations shall be fitted with a 1-1/2 inch, 125 gpm Vari-Nozzle, and all remaining stations shall be fitted with the 1-1/2 inch, 95 gpm nozzles.
 - b. All-Purpose Nozzle.
 - (1) Coast Guard All-Purpose Nozzles (CGAP)/Navy All-Purpose Nozzles and applicators are authorized on cutters for special firefighting requirements. Cutters fitted with the MK 75 gun mount shall retain a CGAP nozzle and a low velocity fog applicator to combat hot gun conditions. Applicators shall be modified in accordance with Safety Manual For Clearing Of Live Ammunition From Guns, NAVSEA SW300-BC-SAF-010.

F. 2. b. (2) The 1-1/2 inch CGAP nozzle, meeting MIL-N-24408, and the 1-1/2 inch (4 FT and 10 FT) Coast Guard applicator are available through the National Stock System. The CGAP nozzle and applicator are equipped with nonclogging fog tips that will pass a 3/8 inch diameter ball. Akron Brass style 2033 (1-1/2 inch Nozzle Fog Head) and Akron Brass style 1034 (1-1/2 inch Applicator Fog Head) replacements tips are available through the Federal Stock System.

3. Foam Equipment.

- a. Portable Foam Equipment. NSTM Chapter 555 provides operating instructions for the inline foam proportioner.
- b. Installed Foam Equipment. Description and operation of installed foam equipment is contained in NSTM Chapter 555.

4. Halon 1301 Total Flooding System.

a. Halon 1301 on Boats. Only the following classes of standard boats are authorized to have permanently installed Halon 1301 total flooding systems:

30 FT Surf Rescue Boat

38 FT Deployable Pursuit Boat

41 FT Utility Boat

44 FT Motor Lifeboat

47 FT Motor Lifeboat

55 FT Aids-to-Navigation Boat.

Halon 1301 is stored in a steel cylinder, which is superpressurized with dry nitrogen to 600 psi. Halon cylinders shall be installed outside the engine room as a result of high temperatures which may cause the bottle to "cook off". Manufacturers' technical publications shall be used for specific guidance. System components, operating procedures and safety precautions are contained in NSTM Chapter 555.

b. Halon 1301 on Cutters. Halon 1301 Total Flooding Systems, meeting MIL-E-24572, are authorized only on the 400 FT WAGB, 378 FT WHEC, 110 FT WPB, 82 FT WPB, and 65 FT WYTL classes.

5. Portable Fire Extinguishers.

a. Portable PKP Fire Extinguishers. The following portable PKP extinguishers (CO2 pressurized cartridge type), meeting MIL-E-24091, are authorized for use on Coast Guard cutters and boats. NOTE: One 27 pound PKP extinguisher shall be provided at each AFFF hose reel or Self Contained AFFF station in propulsion and auxiliary machinery spaces.

10-pound (2 3/4 ounce cartridge)

18-pound (5 1/4 ounce cartridge)

27-pound (8 1/4 ounce cartridge)

- **F.** 5. b. Portable Carbon Dioxide (CO2) Fire Extinguishers. 15 pound CO2 extinguishers meeting MIL-E-24269 are authorized for use on board Coast Guard cutters and boats.
 - c. Portable Halon 1211 Fire Extinguishers. Commandant (G-SEN) authorization is required for the use of Halon 1211 fire extinguishers on board Coast Guard cutters and boats. Extinguishers shall be USCG approved and shall not exceed 9 lb agent capacity. In addition, extinguishers shall be equipped with a USCG approved bulkhead rack, metal control valves, and flexible discharge hoses.
 - 6. <u>Galley Fire Protection Equipment.</u> Fixed shipboard galley deep fat fryers and their exhaust systems shall be protected by Aqueous Potassium Carbonate (APC) fire extinguishing systems that meet MIL-E-24416 specifications. NSTM Chapter 555 provides detailed guidance on how to combat deep fat fryer fires.
 - 7. <u>Fixed Carbon Dioxide Systems</u>. Fixed flooding carbon dioxide system for manned compartments (located below the damage control deck and having vertical exit) shall be fitted with a discharge time delay. Installed time delay systems shall be in accordance with Coast Guard Fleet Drawing FL-9300-31.
 - 8. <u>Portable Firefighting Pumps</u>. The P-250 MOD 1, P-100, CG-P5 and CG-P6 pumps provide a dual function. They can be used either for firefighting or for dewatering. As a result, these pumps shall be maintained at the highest level of readiness.
 - a. P-250 MOD 1 Pump. The P-250 MOD 1 is the only P-250 pump authorized in the Coast Guard. NSTM 555 and TP S6225-BW-MM0-010 provide operating and maintenance instructions. Additional precautions for the P-250 MOD 1 pump are:
 - (1) Two-cycle oil with the BIA-TC-W3 designation (available through OMC, P/N 509903) shall be used with the P-250 MOD 1. This pump does not use oil premixed with gasoline, it has a separate oil injection system. Attempts to run the pump with oil in the gasoline and/or no oil in the injection system will result in a severely damaged pump.
 - (2) Failure to thoroughly read and understand the technical manual prior to starting may cause failure and/or destruction of the pump.
 - 9. <u>Portable Exothermic Cutting Unit (PECU)</u>. Only the Exothermic torch will be supported by MICA. The Exothermic torch is a direct replacement (one for one) for the Oxyacetylene Torch Cutting Outfit. NSTM Chapter 079 Volume 2 and the manufacturer's operating and maintenance manual provide further information.
 - 10. <u>Damage Control Wirefree Communications (WIFCOM)</u>. Repair Party personnel will use this system to supplement, NOT REPLACE, standard Interior Communications hard-wired circuits, i.e. sound powered phones. Refer to NAVSEA 61Z1-288-I-332 for further information.

F. 10. a. Use of the DC WIFCOM.

- (1) DC WIFCOM, where installed, shall be the primary means of communications within the repair locker organization (scene leaders and investigators). The system shall be used as one of the back-up means of communications from DC Central to the repair lockers. The priority of communications from DC Central to the repair locker is sound-powered phones, MC circuit, ship's telephone, DC WIFCOM.
- (2) Standard phone talker/radio telephone procedures shall be used with DC WIFCOM.
- b. Emission Control (EMCON) Considerations. DC WIFCOM radios emit radio frequency (RF) signals which can be detected. Therefore, use of DC WIFCOM must be considered in the ship's EMCON plans.
- c. Hazardous Electromagnetic Radiation To Ordnance (HERO). In general, WIFCOM shall not be used in a weapons handling incident/accident. Specifically, portable radios shall not be closer than 10 FT to HERO susceptible or unsafe ordnance (defined in NAVSEA OP 3565, Electromagnetic Radiation Hazards), especially in the presence of any damaged, broken, or otherwise exposed explosive ordnance.

11. International Shore Connection (Ship).

- a. The Navy and Coast Guard use two types of threads in the firemain system: National Standard Hose (NH) Threads, for 2 1/2 inch and larger connections, and National Pipe Straight Hose (NPSH) Threads, for 1 1/2 inch connections. These threads may not be compatible with municipal fire departments or commercial ships.
- b. On cutters that do not have 2-1/2 inch topside hose connections, it is necessary to install a 2-1/2 inch male by 1-1/2 inch female adapter to the International Shore Connection (Ship). All cutters shall ensure that local fire departments and other key facilities have the companion flange to the International Shore Connection (Ship). The connection shall be bronze or brass, suitable for 150 psi service. This connection can be purchased through most firefighting equipment dealers and from the supply system.

G. PROTECTIVE EQUIPMENT.

1. <u>Breathing Apparatus</u>. The only breathing apparatus authorized for any firefighting related evolution on board cutters and boats is the Navy Type A-4 OBA. Self Contained Breathing Apparatus (SCBAs) are not authorized unless a unit is taking part in an ELC approved SCBA prototype. The green, single candle, self-starting type canister is the only canister authorized to be used with the Type A-4 OBA.

NOTE: Red training canisters are available for training purposes only and shall not be stored in repair lockers. Type A-4 OBA's shall be stored in an approved locker in accordance with NSTM Chapter 077. However, canisters may be stored either horizontally, with the concave side down, or vertically, copper seal up. **NOTE:** At a minimum, there shall be 12 canisters per allotted OBA.

- **G.** 1. a. NAVSEA SS600-AA-MMA-010, NSTM Chapter 077 and NSTM Chapter 079 Volume 2 provide operating instructions for the Type A-4 OBA.
 - b. Tending Line. If a person wearing an OBA is working alone in a smoke-filled or oxygen-deficient compartment, an insulated tending line shall be used with a tender. The tender shall wear 7500-volt rubber gloves, inside leather gloves and rubber boots. The tender shall ground the end of the line to an bare metal structure, keep the line taut, and be observant of signals from the OBA wearer. Due to the number of interferences, it is not a recommended practice for an OBA wearer to enter a machinery space alone with a tending line. The prescribed procedure calls for two OBA wearers to enter the area together. If a second OBA is not available, then a tending line must be used when a machinery space is entered. Additional guidance on tending lines is provided in NSTM Chapter 077.
 - 2. <u>Emergency Escape Breathing Device (EEBD)</u>. Engineering Changes are being developed which will identify allowance requirements and locations for EEBD's on board cutters. Requests to change the allowance requirements or locations shall be submitted as an Allowance Change Request, per Property Management Manual, COMDTINST M4500.5 (series). EEBD's shall be installed using the installation guidelines contained in TP 2771. Each crew member shall be familiar with the operation and use of the EEBD. NSTM Chapter 077 and NSTM Chapter 079 Volume 2 provide operation and maintenance instructions. General Guidelines for EEBD Allowance Determinations are listed below and are summarized in figure 555-1:
 - a. All Manned Machinery Spaces during Condition IV (normal steaming) shall have one EEBD per watchstander for maximum manning during any evolution. These containers shall be installed not more than 5 feet and not less than 1 foot above the deck and equally allocated along the normal and auxiliary egress routes, adjacent to watch stations, or at the base of egress ladders.
 - b. All Berthing Spaces shall have one EEBD per rack if the primary (shortest) or secondary (second shortest) egress route is through a main or auxiliary machinery space. These containers shall be installed in the vicinity of the berth where it is readily accessible.
 - c. All Other Spaces shall have an EEBD(s) if the requirements of 3.a and 3.b are met.
 - d. The calculated egress distance between the most remote point of any space to a weather deck (fresh, open air) exit door along the primary or secondary egress route is 200 feet or greater. To calculate the distance use the following list:
 - (1) Horizontal passageways, 1 ft = 1 ft
 - (2) Vertical Passageways (Ladders), 1 ft = 1 ft
 - (3) Hatch/Scuttle/Door (NTD, WTD, QAWTD, including the final door), 1 fitting = 50ft.

AND

- G. 2. e. The space meets the requirements of one of the following criteria:
 - (1) Evolutions one per watchstander for any manned space for maximum manning during any evolution, except those assigned to Repair Lockers or Engineering Assist Teams. These containers shall be installed adjacent to watch stations.

OR

- (2) Remote Spaces spaces that may have personnel in them during a Condition IV (normal steaming) workday.
- (3) Passageways one EEBD shall be installed in all passageways below the maindeck. These containers shall be installed not more than 5 feet and not less than 1 foot above the deck, and along the normal and auxiliary egress routes or at the base of egress ladders.
- (4) Machinery Spaces one EEBD shall be installed in all main and auxiliary machinery spaces. (i.e. CHT pump rooms, Fuel pump rooms, shaft alleys) For Machinery Spaces, the EEBDs shall be installed not more than 5 feet and not less than 1 foot above the deck and equally allocated along the normal and auxiliary egress routes, adjacent to watch stations, or at the base of egress ladders.
 - In all fuel, CHT, and sewage pumps rooms the EEBDs shall be installed not more than 5 feet and not less than 1 foot above the deck and; at the base of vertical ladders for spaces with vertical primary egress routes and immediately outside the space adjacent to the primary egress exit door for spaces with horizontal egress routes.
- (5) Workspace and Lounge Areas One EEBD shall be installed in the common passageway immediately adjacent to each workspace or lounge. These containers shall be installed not more than 5 feet and not less than 1 foot above the deck, and along the normal and auxiliary egress routes or at the base of egress ladders.

OR

Berthing - one per rack in all berthing areas. These containers shall be installed in the vicinity of the berth where it is readily accessible

3. Clothing.

- a. Proximity Suit. The aluminized firefighting suits are used aboard flight deck equipped cutters. Description and maintenance instructions are contained in NSTM 077 and Shipboard-Helicopter Operational Procedures Manual, COMDTINST M3710.2 (series).
- b. Repair Party Firefighting Ensemble (FFE).

- **G.** 3. b. (1) Ensemble Components. NSTM Chapter 077 provides detailed descriptions of the FFE components.
 - (2) Allowance. FFE allowances are contained in Cutter Standard Repair Locker Inventory, COMDTINST 9664.1 (series).
 - (3) Storage and Donning. Storage and donning procedures are provided in NSTM Chapter 077 and 079 Volume 2.
 - (4) Repair. NSTM Chapter 077 and Damage Control-PMS Manual, TP-2006 (series) contain information for maintenance and repair of the FFE.
 - (5) Reduction of Heat Stress for Firefighter Ensemble. NSTM Chapter 077, NSTM Chapter 079 Volume 2, NSTM Chapter 555 and Cutter Heat Stress Program, COMDTINST 6260.17(series), provide guidance for heat stress with the FFE.
 - (6) Helmet. Alteration to the FFE helmet in any way is not authorized. All repair party personnel required to wear the FFE shall wear the firefighter's helmet in lieu of the hard shell battle helmet required for other repair party members.

H. FLEXIBLE HOSES IN FIREFIGHTING SERVICE.

- 1. <u>Scope</u>: It is Naval Engineering policy that firefighting systems and equipment on Coast Guard vessels generally meet USN requirements, to the extent practical. As a secondary requirement, it is a Naval Engineering policy that firefighting systems shall meet the intent of CFR requirements wherever possible and appropriate, particularly where safety is involved.
- 2. <u>General Maintenance Policy</u>. Firefighting system equipment shall be inspected and maintained in accordance with cutter specific PMS, and manufacturer technical publications.
 - a. Portable Extinguisher Hoses
 - (1) Portable extinguisher hoses which do not have a control valve at the working end of the hose are not required to be hydrostatic tested.
 - (2) Portable extinguisher hoses which are equipped with a control valve at the working end of the hose shall be hydrostatically test when the attached cylinder is tested.
 - b. AFFF Rubber Hoses and Related System Hoses.
 - (1) Nitrogen hoses and AFFF rubber discharge hoses of AFFF self-contained units (which utilize nitrogen as a propellant) shall be hydrostatically tested to 400 psi at 5 year intervals.
 - (2) AFFF Hose Reel System (ex Twin-Agent unit hoses subject to firemain system design pressure) shall be hydrostatically tested to 400 psi at 5 year intervals.
 - c. Carbon Dioxide (Nonmetallic) Hoses (Installed Hose Reel Systems)

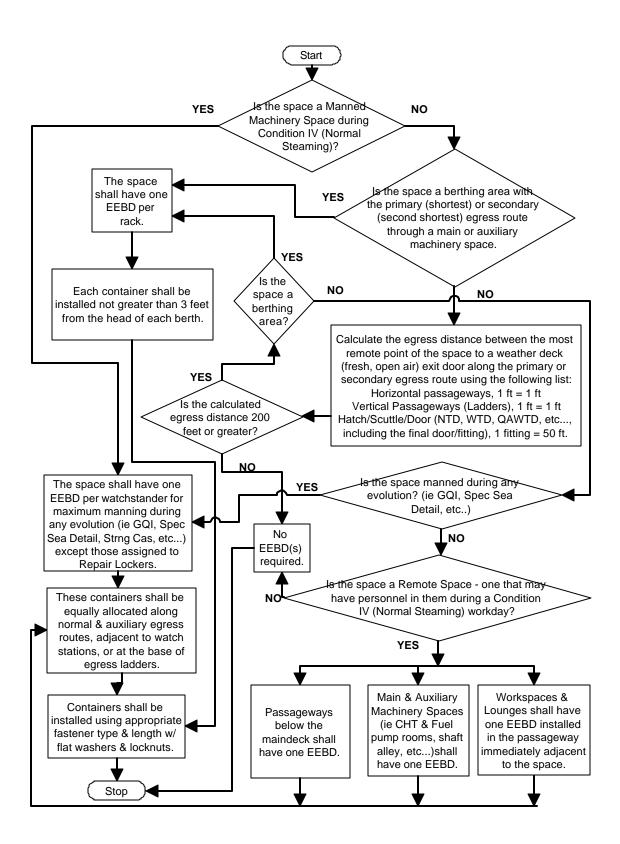


Figure 555-1

- **H.** 2. c. (1) Nonmetallic hoses are equipped with a metallic braid cover for electrical conductivity. Electrical conductivity shall be verified at least once annually.
 - (2) Carbon dioxide hoses which are equipped with a discharge control valve at the working end of the hose shall be hydrostatically tested at 5 year intervals. The test pressure shall be not less than 1250 psi, in accordance with National Fire Protection Association Standard 10- Standard for Portable Fire Extinguishers. **NOTE: This industrial standard test is higher than NAVSEA or 46 CFR guidance.**
 - d. HALON Fixed Flooding Systems and Carbon Dioxide Fixed Flooding Systems shall be maintained in accordance with NEM Chapters 505 and 550.
 - 3. <u>Shelf & Service Life</u>. See hose or equipment manufacturer recommendation for service life requirements and specifications.
 - 4. Hose Replacement Schedule.
 - a. Portable Extinguisher Hoses: Rubber discharge hoses shall be replaced at 5 year intervals.
 - b. AFFF Rubber Hoses and Related System Hoses
 - (1) Nitrogen and AFFF rubber discharge hoses shall be replaced at 5 year intervals.
 - (2) AFFF Hose Reel System (ex Twin-Agent unit hoses subject to firemain system design pressure) shall be replaced at 5 year intervals.
 - c. Carbon Dioxide (Nonmetallic) Hoses (Installed Hose Reel Systems)
 - (1) Nonmetallic hoses shall be replaced at 7 year intervals.
 - (2) Carbon dioxide hoses shall be replaced at 7 year intervals.
 - 5. <u>Hose Tags</u>. Hose tags are not required for flexible hoses used on Coast Guard fire fighting equipment.

CHAPTER 556. HYDRAULIC EQUIPMENT

- **A. GENERAL.** This section provides guidance for the inspection and maintenance of hydraulic equipment, the cleaning and flushing of hydraulic piping, and the replacement of hydraulic hoses (flexible rubber, synthetic or composite, hoses carrying petroleum or ester based hydraulic fluid).
- **B.** <u>INSPECTION AND MAINTENANCE</u>. Hydraulic equipment, piping, and hose assemblies shall be inspected and maintained in accordance with cutter specific PMS, manufacturer technical publications, and MLC Standard Specifications.
- C. <u>HYDRAULIC HOSE RENEWAL</u>. See chapter 505 of this Manual for specific hose guidance.
- D. GENERAL REQUIREMENTS FOR CLEANING AND FLUSHING HYDRAULIC SYSTEMS. Each MLC shall develop and promulgate guidance for cleaning and flushing hydraulic systems. American Society for Testing and Materials (ASTM) D4174, Standard Practice for Cleaning, Flushing, and Purification of Petroleum Fluid Hydraulic Systems and ISO 4406 Hydraulic Reporting Standard shall be used for guidance.
 - (1) NAS 1638 contains outdated information and shall not be used as a cleanliness standard for hydraulic flushing.
 - (2) ISO 4406 is the internationally recognized standard for cleanliness reporting.

Page Intentionally Left Blank

CHAPTER 571. REPLENISHMENT-AT-SEA (RAS) SYSTEMS

- **A.** TESTING AND INSPECTION OF REPLENISHMENT AT SEA (RAS) FITTINGS. This chapter pertains to all padeyes, booms, rigging, kingposts, fittings, and sockets, either fixed or portable, for use in the RAS system.
- **B. FREQUENCY.** Inspection and testing of the RAS system shall be undertaken under the following circumstances:
 - 1. A proof test (to 200% of Working Load Limit) shall be performed at the completion of all totally new installations, structural modifications or repairs to ship's fittings. Ship's wire used in service shall not be used for this test.
 - 2. A static load test (to 150% of Working Load Limit) shall be performed when wire or rigging components are replaced
 - 3. The RAS system shall be visually inspected before each use, but not less than annually.
- **C. METHOD OF INSPECTION.** As applicable, the visual inspection of a RAS system shall include:
 - 1. The RAS system wire rope and fittings shall be inspected IAW Naval Ships Technical Manual (NSTM), Chapter 613.
 - 2. All fittings shall be visually inspected for cracks. All fittings with evidence of corrosion shall be wire brushed and painted, or shall be replaced, as appropriate.
 - 3. All booms and kingposts shall be inspected for deformation, such as dents, cracks, and bends.
 - 4. All sheaves, swivels, blocks, block hangers, padeyes, connecting links, shackles, and associated pins should be visually inspected for corrosion, wear, deformation, surface cracks, or any other condition that may lead to failure.
 - 5. The standing rigging shall be inspected for proper tension.
 - 6. Guidance for such inspections is contained in NSTM, Chapter 571, and Replenishment-at-Sea, NWP-14,
 - 7. When visual inspections reveal the need for further testing, the part of the RAS system in question shall be proof-tested in accordance with the individual ship's plan, NWP-14, and applicable preventive maintenance manuals. Units shall request additional guidance from their respective MLC.
- **D.** <u>LOAD TEST RECORDS</u>. Test results shall be entered and maintained in the unit's Hull History (CMplus for those CMplus equipped units). Upon successful completion of load testing, an anodized-hydrated aluminum label plate, stating the test date, test facility, and the test load, shall be affixed to or immediately near tested equipment.

Page Intentionally Left Blank

CHAPTER 572. ELEVATORS AND HOISTS

- **A. GENERAL.** This section provides general guidance on the inspection, testing, maintenance, safety, and operation of elevators and hoists. This includes dumbwaiters, ammunition hoists, cargo hoists, commissary hoists, machinery parts hoists, and elevators for transporting stores and parts. Manufacturer technical instructions and cutter PMS shall be used for specific guidance in equipment operation, maintenance, and repair.
 - 1. <u>Operation</u>. Elevators and hoists shall be operated in accordance with the following general rules.
 - a. Elevators and hoists shall be operated in accordance with manufacturer's operating and safety instructions.
 - b. Operating Instructions and safety precautions shall be posted at each control area.
 - c. Shipboard elevators and hoists are not authorized for personnel transportation. Permanent warning plates inscribed "NO RIDERS" shall be posted and made visible to all personnel.
 - d. Unqualified personnel are not authorized to operate elevators and hoists.
 - e. Perform operational and safety checks prior to transporting or carrying a load.
 - f. If any defect has been noted, do not use the equipment until repairs have been made by qualified personnel.
 - g. Never pick up a load that exceeds the rated load. Rated Loads shall be posted at the control area.
 - h. Avoid jerking and sudden stopping while lifting a load.
 - i. Never leave suspended loads unattended.
 - j. Personnel shall stand clear of moving and suspended loads.
 - k. Do not stow material in elevator trunks. Stowage and handling areas shall be kept clean and uncluttered.
 - 2. <u>Tests, Inspections, and Routine Maintenance</u>. Tests, inspections, and routine maintenance of elevators and hoists shall be performed in accordance with cutter specific PMS or manufacturer technical instructions.
 - a. Prior to performing maintenance, personnel shall make sure that equipment is properly secured, and the system is properly tagged out.

- **A.** 2. b. Maintenance accesses that are in the path of elevators and hoists are considered hazardous areas, and shall be painted or striped as such (see Coatings and Color Manual, COMDTINST M10360.3 (series)).
 - c. Routine maintenance that requires personnel entry into a hoistway, particularly maintenance requiring personnel to be on top of or below the car, shall be reviewed for personnel safety. The installation of grease fitting extension tubes is encouraged, where practical, to minimize the need for personnel to access dangerous areas of the hoistway.
- **B.** <u>AMMUNITION HANDLING EQUIPMENT</u>. In addition to the operational and maintenance requirements outlined in cutter PMS and manufacturer instructions, equipment designated for handling ordnance shall also comply with NSTM Chapters 700 (Shipboard Ammunition Handling and Stowage) and 772 (Cargo and Weapons Elevators).

CHAPTER 573. CARGO HANDLING SYSTEMS

A. **BOOMS AND FRAMES.**

- 1. General.
 - a. Applicability.
 - (1) This section describes the full rated capacities and Working Load Limits of booms and frames on Coast Guard cutters and boats. It also defines the purpose and extent of tests, inspections and safety precautions for this equipment.
 - (2) USCG References. All cutters and boats having booms shall comply with the requirements of this chapter, except as noted herein.
 - (a) Naval Engineering Manual, COMDTINST M9000.6 (series) Chapter 505 provides inspection and replacement requirements for hoses.
 - (b) Naval Engineering Manual, COMDTINST M9000.6 (series) Chapter 583 provides information concerning boat handling gear (including davits and cranes).
 - (c) Naval Engineering Manual, COMDTINST M9000.6 (series) Chapter 591 provides information for oceanographic research equipment.
 - (d) Naval Engineering Manual, COMDTINST M9000.6 (series) Chapter 613 provides information on wire rope maintenance.
 - (e) USCG Drawing FL 1204-3, Welded Padeyes and Links, provides guidance on padeye ratings and testing.
 - (3) U.S. NAVY References.
 - (a) The following chapters of Naval Ships Technical Manuals (NSTM) may be used for guidance:
 - (i) Chapters 571 Underway Replenishment
 - (ii) Chapter 572 Shipboard Stores and Provisions Handling
 - (iii) Chapter 573 Booms
 - (b) If a conflict exists between this document and referenced documents, this document shall take precedence.

A. 1. b. Policy Changes.

- (1) Cranes have been separated from booms. See Naval Engineering Manual, COMDTINST M9000.6 (series) Chapter 589 for Cranes.
- (2) Many inspection, overhaul and test practices have been based on fixed time schedules which were driven by relatively frequent dry-dockings and have become dated. Many of these practices were written with the presumption of higher manning levels. It is recognized that frequent overhauls of certain components, particularly hydraulic systems, have led to increased damage to systems and increased maintenance costs. Changes to dry-docking schedules and general reductions in personnel levels have led to review of inspection and test practices.
- (3) Individual policy changes will be documented to the fleet by the promulgation of Equipment Support Plan (ESP), Preventive Maintenance System (PMS), Cutter Class Maintenance Plan (CCMP), or Boat Class Maintenance Plan (BCMP) documents to provide direction regarding specific equipment or cutter classes. If a conflict exists between directions, the order of precedence shall be ESP, PMS and then this chapter.
- (4) Development of ESP documents will require a team approach to changes in inspection requirements, logistics support, maintenance practices and testing requirements in order to reduce total support costs and improve operational reliability without degradation of safety. The team will include ELC, MLC and deck plate representation. ESP documents will be promulgated by ELC. In general, ESPs will increase Level 1 and Level 2 inspection requirements, decrease the frequency of Level 2 inspection and overhaul requirements, eliminate Level 3 inspections in favor of overhauls based on inspection recommendations, and increase the use of condition based maintenance. Reduction in testing frequency without thorough review and adjustment of inspection requirements may lead to a reduction in equipment safety and reliability.

c. Definitions.

- (1) Booms and Frames: A structural member used for lifting, transferring or supporting heavy weights. The lower part of the boom or frame is supported by a bracket or step, which allows the boom or frame to pivot while transferring loads to structure. Booms and frames are supported by rigging mounted on ships structure.
- (2) Working Load Limit (WLL): This is the maximum weight which can be handled by the equipment, with the maximum authorized number of parts in the main purchase, as listed in Table 573-2.

- **A.** 2. <u>Boom and Frame Inspections</u>. Unless more specific guidance is provided, inspections and overhauls shall be conducted using guidance contained herein.
 - a. Inspection Schedule. Inspection frequency shall be in accordance with Table 573-1, or as directed by the cognizant MLC. Where ESP or PMS documentation exists, it shall take precedence.
 - b. Level 1 Inspection and Test Requirements.
 - (1) General. The intent of this inspection is to ascertain the safety of the rigging and other critical equipment parts that could result in loss of life or equipment damage if failure occurs.
 - (a) In general, the inspection shall include all wire rope and fittings, block fittings, hooks, links, shackles and associated pins, swivels, boom and frame padeyes, hoist control linkages, and brake springs and linkages.
 - (b) Any visible permanent set of deformation, in the form of bent pins, elongated holes, bent or distorted staples and padeyes, are clear indications of overload or improper rigging. Their incidence should be reported, and the rig should not be used until the cause is found and corrected. Both the inspector and the operator should also be aware of recurring cracks in paint, particularly in areas of high stress corrosion. To inspect for surface cracks, paint shall be removed and surfaces wire brush cleaned.
 - (2) Inspection. The following requirements are generic in nature, and shall be included in inspections as applicable. Specific guidance in an ESP or PMS shall take precedence.
 - (a) Cradle the boom or frame and remove all wire rope. Inspect the wire rope in accordance with Chapter 613.
 - (b) Visually inspect all sheaves, swivels, blocks, block hangers, padeyes, connecting links, shackles, hooks, winches and associated pins for corrosion, wear, deformation, cracks and any other condition that may lead to failure. Inspection of sheaves shall include sheave gage wear measurement; see Chapter 613.
 - (b) Do not disassemble blocks, topping lift, vang swivels or equivalent devices unless there is reason to suspect damage, wear, corrosion or marginal condition when last overhauled.

- A. 2. b. (2) (c) Inspect hoist and rotating gear brake springs and linkage, where appropriate.

 Carefully check brake springs for permanent set and compression, and replace if necessary. NOTE: Failure of brake springs in service can result in loss of control or release of load.
 - (d) Inspect hydraulic or pneumatic hoses for ballooning, cracking and corrosion. Inspect electrical wiring and connections for corrosion. Inspect brake solenoids and switches for corrosion and contact wear.
 - (e) Inspect and lubricate all moving parts and wire rope in accordance with PMS and Chapter 613 of this manual, as applicable.
 - (f) Self contained reservoir gearboxes with less than five gallons of lube oil shall have the gear lube replenished. If possible, drains will be opened and the boxes checked for condensation at the bottom of the tanks. Check any magnetic plugs, if equipped, for particles. Gearboxes with capacities in excess of five gallons shall have oil samples drawn for analysis in accordance with Chapter 262 of this manual.
 - (g) Visually inspect all deck and bulkhead padeyes, links, chocks, cleats, bits, and mounting bolts. Where inspection indicates possible fractures, deformation or corrosion, a more detailed inspection shall be conducted.
 - (h) Conduct dynamic load test
 - c. Level 2 Inspection and Overhauls.
 - (1) General. The intent is to accomplish the Level 1 inspection above, and concurrently disassembly, inspect and overhaul all major components whose performance or mechanical condition may have deteriorated. Disassembly shall also be carried out to inspect other components whose performance is not affected by normal wear but whose failure could result in damage, injury or loss of life. Examples of these are reduction gears, goosenecks, topping fittings, and sheave pins. Disassembly of such items need be carried out only to the extent required to conduct the inspection. For example, it is not necessary to totally disassemble a reduction gear equipped with inspection plates that permit measurement of backlash and observation of wear patterns. Outside appearance is not necessarily indicative of the mechanical condition of the equipment and, as such, disassembly for the purpose of recoating is prohibited.

- **A.** 2. c. (2) Inspection. The following requirements are generic in nature, and as shall be included in inspections as applicable. Specific guidance in an ESP or PMS shall take precedence.
 - (a) Unship the boom or frame, disassembling the connection, between the boom or frame and the vessel, that allows slewing motion.
 - (b) Disassemble and inspect topping lifts, vangs, swivels, all blocks, hoist brakes, locking pawls, slewing gear, and pinion gear shafts and bearings. All pin, bearings, gears and sheaves shall be checked for compliance with dimensional tolerances shown on the original equipment drawings.
 - (c) Replace wire rope, as required. See NEM Chapter 613.
 - (d) Renew "O" rings and inspect brake linings and brake discs.
 - (e) Gear boxes which are equipped with inspection plates shall have backlash and gear pattern inspected in accordance with manufacturer's instruction manuals or NSTM Chapter 589.
 - (f) Perform a static test (150% of Working Load Limit) on all equipment or bulkhead mounted links and padeyes used in the boom and frame systems. See FL 1204-3 for information on generic welded padeyes. Following testing, perform nondestructive inspection using magnetic particle or dye penetrant tests prior to further usage.
 - (g) Cleats and bitts associated with boom and frame systems shall be visually inspected and non-destructively examined using magnetic particle, dye penetrant, eddy current or other method deemed suitable by the cognizant MLC.
 - (h) Conduct dynamic load test.
 - (3) Overhauls: Overhaul of components shall be based on equipment condition or evidence of problems.
 - d. Level 3 Inspection and Overhaul.
 - (1) Policy Change.
 - (a) This level of inspection and testing may be waived, on a case by case basis, by the cognizant MLC, provided that the condition of the systems are evaluated by diagnostic means.

- **A.** 2. d. (1) (b) The development of Equipment Support Plans will typically eliminate this inspection and testing in favor of increased maintenance, increased inspections, condition based maintenance, and overhauls based on inspection recommendations.
 - (2) General. This level is to accomplish the requirements of the Level 1 inspection and Level 2 inspection and overhaul, plus the requirements listed herein.
 - (3) Inspection. In addition to Level 1 inspection, and Level 2 inspection and testing, inspect and overhaul the following items, as applicable, based on condition.
 - (a) Disassemble and overhaul all pneumatic components.
 - (b) Disassemble and overhaul all hydraulic components to include pumps, motors, control valves, accumulators, rams, etc.

3. Boom and Frame Tests.

- a. Dynamic Load Tests shall be conducted at the pier with a test load equivalent to 125% of the Working Load Limit of the boom or frame. The test shall include rotation of the test load through a range of motion that the equipment is required to perform in service. The weight handling system must be able to stop, start and hold the test load at any position within the service area.
- b. Rated Load Tests (100% of Working Load Limit) shall be conducted while underway to prove the installation of a wire rope fitting or other repair conducted underway. Upon return to dockside, the Dynamic Load Test shall be completed as above.
- c. Dynamic test load requirements may be reduced by the ELC or cognizant MLC to address equipment design constraints or limitations. Detailed guidance should be promulgated in an ESP, CCMP, or BCMP.

4. Safety.

- a. Stability Documentation.
 - (1) All cutters and boats with booms or frames shall have vessel stability documentation (Stability and Loading Data Booklet or equivalent) which addresses the stability of the vessel with the weight handling equipment in use. See NEM Chapter 079.

- **A.** 4. a. (2) Where the stability of the vessel limits the operational capability of the weight handling equipment, a graphic safety placard shall be prominently displayed at the equipment operator's station to describe the limitation, and graphically show the safe working zone and safe working load while operating at sea.
 - (3) When considering a unit's stability characteristics during testing procedures, specified test loads shall be maintained within limits that can be handled safely. If any of the test loads result in an excessive list (generally 15 degrees) or the immersion of the deck edge, the load shall be reduced accordingly to stay within those limits. In such cases, ELC(02) shall be advised by letter or message of the load actually handled and the loading condition of the unit at the time of the test.
 - b. Label Plates. Engraved label plates shall be installed on cutter and boat booms and frames to document the Working Load Limit, test weights, and date of certification of the load and corresponding parts of the purchase. The information shall be engraved in such a manner as to prevent eradication when the boom or frame is painted.
 - c. Safety Precautions. The following safety precautions must be observed when conducting weight handling equipment tests.
 - Specified Dynamic Load Tests are designed to account for dynamic service conditions.
 Therefore, conditions which would cause sudden application of test loads should be avoided.
 - (2) To prevent excessive damage in the event of equipment failure during tests, dunnage shall be placed under test loads and each load shall be kept as close to the deck as possible.
 - (3) To prevent loads from moving off center in the event of a casualty, preventer lines or cables shall be rigged athwartships from the test load. At minimum, the breaking strength of the preventers must be greater than or equal to the test load.
 - d. Documentation of Test Results.
 - (1) The results of the inspections and tests prescribed shall be entered in the cutter or boat's Hull History record (CMplus if equipped with CMplus). The maximum list of the cutter observed during the testing shall also be recorded and posted in the pilothouse for a ready reference to indicate the approximate loading on the boom, crane or frame during unusual operating conditions such as removing mudded-in sinkers, pilings, sunken buoys, etc.

A. 4. d. (2) The date and level of the most recent Level 1 and Level 2 tests conducted in accordance with this chapter shall be stenciled on the boom or frame in the vicinity of the Label Plate, in a position clearly legible from the buoy deck.

B. CHAIN STOPPERS.

- 1. Mechanical Type Buoy Chain Stoppers.
 - a. Applicability. The following tests are applicable to dumping type, mechanical chain stoppers.
 - b. NDT Testing. NDT testing shall be conducted as part of Level 2 inspections. May be performed as part of Level 1 inspections, based on results of visual inspection. The structure of the stopper and attachment to the vessel shall be tested by non-destructive (NDT) means in conjunction with the following tests.
 - c. Operational Test. Units shall conduct an annual operational test to ensure proper operation of the stopper. The test load shall be externally applied (by crane) to the chain stopper using chain. The test weight shall be suspended and held for several minutes, and the test load shall be released using the normal release mechanism.
 - (1) Units with a nominal 1-1/2 inch or larger mechanical chain stopper shall utilize a test weight of approximately 25,000 lbs.
 - (2) Units with a nominal 1-1/4 inch or 1-1/8 inch mechanical chain stopper shall utilize a test weight of approximately 15,000 lbs.
 - (3) Units with smaller chain stoppers shall utilize a test weight equivalent to approximately 125 percent of the sum of the maximum sinker and chain which would be suspended from the stopper. Due to the potential for operational area changes, this weight should not be limited by the maximum chain or weight which an individual cutter normally handles. The cognizant MLC will provide additional guidance, as necessary.
 - d. Static Test. Static testing of the chain stopper is required only on initial installation or after structural modifications to the chain stopper or changes to its supporting structure.

2. Power Assisted Chain Stoppers.

a. Applicability. The following tests are applicable to the hydraulic power assisted chain stoppers installed on 225 ft WLB and 175 ft WLM class cutters.

- B. 2. b. NDT Testing. NDT testing shall be conducted as part of Level 2 inspections. They may be performed as part of Level 1 inspections, based on results of visual inspection. The structure of the stopper and attachment to the vessel shall be tested by non-destructive (NDT) means in conjunction with the following tests.
 - c. Operational Test. The hydraulic power assisted chain stoppers shall be tested annually, and after major maintenance to or replacement of load bearing parts. The chain stoppers shall be tested in conjunction with tests on the buoy chain winch (at the rated winch load of 16,500 lbs), and shall demonstrate normal operational use of the stopper. The test load shall be applied by picking up the test weight with the chain winch, setting the chain stopper, lowering the load against the stopper, slacking the chain between the winch and stopper, and then retrieving the test load with the chain winch in the normal manner. This test demonstrates normal operational use of the stopper.
 - d. Static Test. Static testing of the chain stopper is required only on initial installation or after structural modifications to the chain stopper or changes to its supporting structure. A test weight of 25,000 LB shall be lifted by crane and suspended on chain in the stopper; the chain shall not be held by the chain winch. After holding for 10 minutes, remove the test weight with the crane.

3. <u>BUSL Chain Stoppers.</u>

- a. Applicability. The following generic tests are applicable to the chain stoppers installed on stern loading utility boats (BUSL). More specific guidance may be promulgated in applicable BCMPs or ESPs.
- b. NDT Testing. NDT testing shall be conducted as part of Level 2 inspections. May be performed as part of Level 1 inspections, based on results of visual inspection. The structure of the stopper and attachment to the vessel shall be tested by non-destructive (NDT) means in conjunction with the following tests.
- c. Operational Test. Units shall conduct an Operational Test at 110% of Rated Load to ensure proper operation of the stopper. This test shall be conducted annually, or after any maintenance or replacement of load bearing components. A test load of 5000 lbs. shall be suspended from the stopper for 10 minutes, and then the stopper released using the normal release mechanism.
- d. Static Load Test. Units shall conduct a Static Load test using a test load equivalent to 125% of Rated Load at least once every four years, or after overhaul of the stopper, whichever comes first. The test load shall be externally applied, held for 10 minutes, and then removed by crane.

C. PADEYES, CHOCKS, CLEATS AND BITTS.

1. <u>Inspections</u>:

- a. Conduct annual visual inspection of all deck and bulkhead padeyes, links, chocks, cleats, bitts, flag blocks, rolling chock foundations and mounting bolts. Where inspection indicates possible fractures, excessive wear, deformation or corrosion, a more detailed inspection shall be conducted.
- b. Deck and bulkhead mounted padeyes shall be examined by non-destructive methods at intervals not to exceed 2 years. NDT includes the use of magnetic particle, dye penetrant, eddy current or other method deemed suitable by the cognizant MLC. Padeyes shall be load tested to 150% of rated load during Level 2 inspections, or more frequently based on condition. If padeyes are installed or repaired, padeyes shall be proof load tested to 200% of rated load.
 - (1) Coast Guard drawing FL-1204-3 may be used for generic padeye guidance.
 - (2) Guidance on padeye types shall be provided in an ESP or by the cognizant MLC.

TABLE 573-1, INSPECTION AND OVERHAUL

FREQUENCY FOR BOOMS AND FRAMES

VESSEL TYPE	LVL 1	LVL 2	LVL 3	NOTES
WAGB (All)	В	Q	CBM	
180 FT WLB	A	Q	CBM	SEE ESP
133 FT WLM	A	Q	CBM	
WLI	A	Q	CBM	
BUSL	A	Q	CBM	

evel 2 inspections may be accelerated by the MLC based on condition based maintenance.

TABLE 573-2. WORKING LOAD LIMITS AND DYNAMIC TEST WEIGHT CHART FOR BOOMS AND FRAMES

3-PART SINGLE PART 5-PART VESSEL WWI. **TEST TEST** REMARK WIRE ROPE WWL **TEST** WWL **TYPE** 180' WLB 40,000 37,500 12,500 7/8" 6X37 RRL EIP IWRC 50,000 30,000 10,000 SEE NOTE 3 133' WLM 20,000 25,000 8.000 10,000 3/4" 6X37 RRL EIP IWRC 100' WLI 10,000 12,500 6.000 7,500 2,000 2,500 7/16" 6X37 RRL EIP IWRC 65' WLI 1.750 4.000 5.000 **BAYBERRY** 3/8" 6X37 RRL EIP IWRC 1,400 **BUOY BOATS** 5,000 BOTH WHIPS. 3/8" 6X37 RRL/LRL EIP. IWRC 49' BUSL 4.500 (SERIES) NOTE 4 2,250 EACH WHIP. (cont.) 2,500 NOTE 4 3/8" 6X37 RRL EIP. IWRC BUSL 4.000 5,000 **BOTH WHIPS** 46301-46315 2,000 2,500 **EACH WHIP** (cont.)

- **NOTE 1:** Wire rope grade shall not be upgraded without ELC (01) authorization. For wire rope discrepancies between original drawings and this table, this table shall be used. Wire rope procurement reference is API SPEC 9A.
- NOTE 2: USCG marine boom and frame ratings are at a maximum (or identified) working radius for that installation. The ratings take into account the effect of ships motions; see applicable technical publication or arrangement drawing. Typical OEM commercial ratings are dependent on boom and frame angle, outreach, boom or frame extension and wire strength; maximum SWL is typically at minimum working radius and/or minimum boom and frame extension, unless the arrangement is limited by wire rope strength. Commercial ratings shall not be used unless directed by ELC (01).
- NOTE 3: Annual weight tests of the 5-Part Rig no longer required unless specific cutter is required to rig the 5-Part to fulfill operational commitments. See 180' WLB Equipment Support Plan.
- NOTE 4: Dynamic Load Testing is at 110% of Working Load Limit. Static load testing at 125% of RL is required at 4 year intervals.

 EIP = Extra improved plow steel, RRL = Right Regular Lay, LRL = Left Regular Lay

 IWRC = Independent Wire Rope Core, SC = Solid Core, FC = Fiber Core

Table 573-3 SCIENCE FRAME RATINGS AND TEST REQUIREMENTS

VESSEL TYPE	FRAME LOCATION	TEST REQUIREMENT
420 FT WAGB	STBD A FRAME	(TBD)
	AFT A FRAME	(TBD)
400 FT WAGB	PORT J FRAME	(TBD)
	AFT J FRAME	(TBD)

NOTE: Frames are used to deploy science packages using various oceanographic research winch wires from independent science research winches. Frames are rated for structural capability to resist vertical overloads, and to resist towing loads when in the fully deployed position. Frames also have the capability to rotate lighter loads between inboard assembly and outboard working positions. Testing of science wires and sheaves attached to the frames are independent of the frame testing.

CHAPTER 581. ANCHOR(S) AND ANCHOR CHAIN MAINTENANCE

A. GENERAL. Each MLC shall develop and promulgate detailed guidance on the inspection, overhaul, replacement, and preservation of anchor(s) and anchor chain. Procedures outlined in NSTM, Chapter 581, and the Coating and Color Manual, COMDTINST M10360.3 (series), may be used for guidance.

B. PERIODICITY.

- 1. <u>Inspection</u>. To ensure that anchor chain is free for running, all anchors shall be lowered (semiannually) until two shots remain on board. This shall be done in anchorage-depth water, with the chain payed out to prevent fouling. While anchor chain is being hoisted aboard, it shall be hosed off and visually inspected.
- 2. <u>Maintenance</u>. Major maintenance of anchor(s) and anchor chain as indicated by CCMP shall be accomplished during the cutter's scheduled drydock.

Page Intentionally Left Blank

CHAPTER 583. LIFE RAFTS, LIFE FLOATS, AND BOAT HOISTING EQUIPMENT

- A. INFLATABLE LIFE RAFTS AND LIFE FLOATS. Procurement, inspection, testing, and maintenance of life rafts, hydrostatic release devices and life floats shall be in accordance with the Coast Guard Rescue and Survival Systems Manual, COMDTINST M10470.10 (series). Annual life raft inspections shall be recorded on the Cutter Engineering Report (CG-4874) or Boat Inspection Report (CG-3022). Requests for removal, installation or alteration to individual life rafts or containers shall be submitted to ELC (01) in the Engineering Change format outlined in Chapter 041.
 - 1. Hydrostatic Releases On Cutter Life Rafts. Hydrostatic releases are depth (pressure) actuated devices that are factory set to activate at a predetermined depth. National Stock devices are set to activate at 10-40 feet of water, where as commercial devices are set to activate at 5-15 feet. Coast Guard cutters below 180 feet are required to carry actuating devices set for 5-15 feet, and shall procure their devices from the commercial vendors listed in Equipment List, COMDTINST M16714.3 (series). Cutters 180 feet and greater may procure hydrostatic release devices from either the National Stock System or from commercial sources listed in Equipment List, COMDTINST M16714.3 (series).
 - Installation Of Hydrostatic Release Devices. A hydrostatic release device shall be installed in such a manner that it can be manually activated in a time of emergency. In order to ensure life raft separation at the proper depth, the hydrostatic release must be preloaded. Illustrations of proper tensioning requirements are outlined in Navigation and Vessel Inspection Circular (NVIC) 4-86.
 - 3. <u>Life Raft Gripes</u>. Authorized life raft gripes shall be of a plastic covered corrosion resistant steel (CRES) cable or a nylon-covered stainless steel strap, installed in accordance with CG Drawing FL-8201-86.
- **B.** TESTS AND INSPECTION OF BOAT HOISTING EQUIPMENT. Structural weaknesses of hoisting fittings and associated equipment may be revealed by periodic test loading and inspection. In general, tests will be conducted with boats that are normally hoisted. These boats include shipboard boats and boats attached to shore facilities that are usually suspended by hoisting fittings or slings. The tests are intended to establish the adequacy of the boat structure, davits, boat crane, rigging, slings, attachments, and hoisting equipment.
 - 1. Frequency of Testing and Inspection of Shore Facilities' Boat Hoisting Equipment.
 - a. In accordance with the Civil Engineering Manual, COMDTINST 11000.11 (series), boat hoisting equipment maintained by shore facilities shall be load tested once every two years, and prior to use after any alteration or repair to the equipment which affects the ability of the equipment to lift.

B. 1. b. The following list gives weights of boats that are occasionally hoisted for repairs. Transshipment hoist tests are not required for these boats. The weight listed is that of the boat with outfit, fuel and water.

Full Load Displacement (lbs)
11,500
30,000
39,500
47,800
43,800
40,000
87,000
70,000
78,400

- 2. Frequency of Testing and Inspection of Shipboard Boat Hoisting Equipment.
 - a. Load tests shall be conducted annually, or after any modifications of hoisting fittings, slings, cranes, booms, or davits and falls that form a part of the boat handling gear. Tests may also be conducted at any other time considered advisable by Commanding Officer/Officer-in-Charge (CO/OIC). A label plate stating the date tested, test facility, and the test load shall be provided for the boat hoisting assembly upon successful completion of load testing.
 - b. Frequently used boat davits and boat cranes shall be scheduled for disassembly, inspection, and overhaul in accordance with MLC Cutter Class Maintenance Plans (CCMPs).
 - c. Units that have PMS procedures for the testing and inspecting of boat davits or cranes shall follow the interval and procedure specified in the PMS. Otherwise, manufacturer recommended procedures shall be followed.
 - d. Boat hoisting equipment shall be visually inspected prior to each use.
- 3. Inspection and Load Test Procedures.
 - a. Inspection. Each MLC shall develop and promulgate detailed guidance on the disassembly, inspection and repair of motor surf boat davits and single point davits.
 - (1) Wire rope falls and wire rope slings shall be thoroughly inspected annually. The falls cable shall be completely removed from the davit or crane assembly for inspection. Visually inspect the entire rope length for worn or abraded wires, broken wires, corroded wires, nicks, cuts, distortion, crushing, heat damage, fraying, bird caging and kinks. NOTE: Any one of the above conditions warrants rope replacement.

- **B.** 3. a. (2) Units with PMS procedures for wire rope inspection and lubrication shall follow the interval and procedure specified. Other units shall use Chapter 613, of this manual, as a guide for wire rope inspection and lubrication.
 - b. Load Test Procedures. In order to minimize strain on the boat, the test load shall be applied to the boat one-half forward and one-half aft (as near to the hoisting fittings as possible). The test load is, in general, equal to 150 percent of the normal hoisting load. TABLE 583-1 provides weight criteria for testing davits and boat lifting gear of frequently hoisted Coast Guard boats. The boat, with test load, shall be lifted by its normal hoisting equipment and suspended for at least 10 minutes (just clear of the water) to minimize damage in the event of failure.
 - 4. <u>Rigid Inflatable Boat (RIB) Lifting Slings and Lifting Points.</u> Upon receipt and prior to use, units shall review the certification and test examination documentation to ensure that both lifting sling and lifting points (transom mounted, deck mounted) have been examined, proof load tested, and determined fit for service life at the safe working load stated. Manufacturer Safe Working Loads shall not be exceeded during operations.
 - a. Visual Inspection. The lifting sling and lifting points shall be visually inspected prior to each use for excessive wear, corrosion, surface cracks, and loose deck mounts. Worn lifting slings shall be replaced by manufacturer or manufacturer recommended lifting slings for the respective RIB.
 - b. Subsequent Proof Load Tests. Subsequent proof load tests shall be conducted whenever the lifting points sustain damage and are repaired, or whenever additional lifting points, modifications to lifting points, or changes to their supporting structures have been completed. Manufacturer recommended procedures and test weights shall be used for proof testing.
 - 5. <u>Responsibility for Tests</u>. The tests, inspections, and maintenance of weight handling equipment are the responsibility of the CO/OIC.
 - 6. Records. A record of the tests and inspections shall be entered in the Inspection Team Comments section of the Boat Inspection Report (CG-3022) for each inspection period. This record shall show the date of the test and inspection, the weights added to the boat, and the total hoisted weight. Comments should be made on any component involved in hoisting that appeared stressed or in need of repair or replacement, and any improper functioning of equipment. Units maintaining a Hull History shall record the test on the boat's history card. (Cmplus for those cutters equipped with Cmplus.)
 - 7. Safety Precautions. The following safety precautions shall be observed during testing:
 - a. Avoid dynamic loading during the test.
 - b. Keep the boat low to reduce damage if the boat drops.
 - c. Do not test-hoist the boat with personnel aboard.

- **B.** 7. d. Do not exceed the specified test weights.
 - e. When hoisting with a sling, use adequate sling length or suitable spreaders to avoid placing excessive stress on the hull.

TABLE 583-1 WEIGHTS FOR TESTING DAVITS AND BOAT LIFTING GEAR

LENGTH	ТҮРЕ	Weight with Outfit, Fuel and Water	Normal Crew During Hoisting	Normal Hoisting Weight	Weight for Weight Test	Weight to Add to Boat for Weight Test
15'9"	Cutter Boat Small (CB-S)	900	0	900	1350	450 ¹
18'6"	Cutter Boat Medium (CB-M)	1500	1	1680	2520	1020 ¹
24'	Cutter Boat Large (CB-L)	3960	3	4500	6750	2790 ¹
19'	6M AVON (RIB)	2300	2	2700	4050	N/A ²
21'	6.4M AVON SEARIDER/ZO DIAC HURRICANE (RIB)	4100	2	4500	7500	N/A ³
21'	TANB	3700	-	3700 ⁴	5550	1850
25'8"	MK-V Motor Surfboat	5000 ⁵	8	7000	10500	5500
25'8"	Motor Cargo Boat	6050 ⁵	3	6600 ⁶	9900	3850

SEE NOTES NEXT PAGE

TABLE 583-1 NOTES

- NOTE 1: The Cutter Boats are the new standard Rigid Inflatable Boats. The length and weight data provided represent the maximum allowances for that Cutter Boat class. The allowable weights are 10% less than the davit capacities to accommodate future weight growth. In no case should the hoisting weight exceed the safe working load of the davit. The actual numbers of the Cutter Boat may be less. Hoisting Test weights should be calculated based on the weight of the specific boat provided. For example: A CB-L weighing 4,000 lbs with fuel and outfit has a hoisting weight with 3 crew of 4,540 lbs, a test weight of 6,810 lbs, therefore it requires 2,810 lbs added for the test.
- **NOTE 2:** In accordance with PMS, when conducting the Load Test, the RIB is to be cradled and replaced by 4050 pounds of weights.
- **NOTE 3:** In accordance with USCG TP 2753A, when conducting the Load Test, the RIB is to be cradled and replaced by 7500 pounds of weights.
- **NOTE 4:** Weight does not include cargo or crew.
- **NOTE 5:** No more than two weeks prior to weight testing the davits, units should determine the actual weight of their MCBs/MSBs to determine loading capacities for actual boat lifting operations and testing.
- **NOTE 6:** Weight does not include 2000 pound cargo.

Page Intentionally Left Blank

CHAPTER 588. HELICOPTER HANDLING

A. HELICOPTER DECK TIE-DOWN FITTING TESTING.

1. <u>Certified Pull Test</u>. Helicopter deck tie-down fittings (Cloverleaf-type, Bar-type) shall be load tested and meet the certification requirements of Air Capable Ship Aviation Facility Bulletin No. 1 (series). Future revisions to the Bulletin No. 1 (series) shall be reviewed by ELC (02) to verify compliance with changes in load testing requirements that would affect tie-down system design strengths on Coast Guard cutters.

NOTE: Tie-down channels on the 400 FT WAGB shall be load tested per the requirements of USCG drawing 400-WAGB-8301-7.

- 2. <u>Certified Pull Test Records</u>. Pull test records shall be maintained as part of a unit's Hull History. (CMplus for those cutters equipped with CMplus.) The certified pull test record shall be made available to the helicopter deck certification team at their request. The test record shall contain the following information:
 - a. Date, name, and location of testing facility
 - b. Test procedure
 - c. Equipment used
 - d. Load to which each tie-down fitting was tested
 - e. Time period the load was held on each fitting
 - f. Date of the last certification of the load measuring device
- 3. <u>Additional Pull Testing Requirements</u>. If there are cracks present or if the fitting is distorted such that structural integrity is suspect the a certified pull test should be performed in accordance cutter PMS.

Page Intentionally Left Blank

CHAPTER 589. CRANES

A. GENERAL.

1. Applicability.

- a. This section describes the full rated capacities and Working Load Limits (WLL) of power driven cranes on Coast Guard cutters, boats and barges. It also defines the purpose and extent of tests, inspections and safety precautions for this equipment.
- b. USCG References. All cutters, boats and barges having cranes shall comply with the requirements of this chapter, except as noted herein.
 - (1) Maintenance and Logistics Commands (MLC) are authorized to provide instructions for miscellaneous barge cranes not listed.
 - (2) Naval Engineering Manual, COMDTINST M9000.6 (series) Chapter 505 provides inspection and replacement requirements for hoses.
 - (3) Naval Engineering Manual, COMDTINST M9000.6 (series) Chapter 583 provides information concerning boat handling gear (including davits and cranes).
 - (4) Naval Engineering Manual, COMDTINST M9000.6 (series) Chapter 613 provides information on wire rope maintenance.

c. U.S. NAVY References.

- (1) The following chapters of Naval Ships Technical Manuals (NSTM) may be used for guidance: Chapter 589 Cranes
- (2) If a conflict exists between this document and referenced documents, this document shall take precedence.

2. Policy Changes.

- a. Cranes have been separated from booms and frames. See Naval Engineering Manual, COMDTINST M9000.6 (series) Chapter 573 for booms and frames.
- b. Many inspection, overhaul and test practices have been based on fixed time schedules which were driven by relatively frequent dry-dockings and have become dated. Many of these practices were written with the presumption of higher manning levels. It is recognized that frequent overhauls of certain components, particularly hydraulic systems, have led to increased damage to systems and increased maintenance costs. Changes to dry-docking schedules and general reductions in personnel levels have led to review of inspection and test practices.

- A. 2. c. Individual policy changes will be documented to the fleet by the promulgation of Equipment Support Plan (ESP), Preventive Maintenance System (PMS), or Boat Class Maintenance Plan (BCMP) documents to provide direction regarding specific equipment or cutter classes. If a conflict exists between directions, the order of precedence shall be ESP, PMS then this chapter.
 - d. Development of ESP documents will require a team approach to changes in inspection requirements, logistics support, maintenance practices and testing requirements in order to reduce total support costs and improve operational reliability without degradation of safety. The team will include ELC, MLC and deck plate representation. ESP documents will be promulgated by ELC. In general, ESPs will increase Level 1 and Level 2 inspection requirements, decrease the frequency of Level 2 inspection and overhaul requirements, eliminate Level 3 inspections in favor of overhauls based on inspection recommendations, and increase the use of condition based maintenance. Reduction in testing frequency without thorough review and adjustment of inspection requirements may lead to a reduction in equipment safety and reliability.

3. Definitions.

- a. Crane: A machinery arrangement or self-contained structure, with associated reeving suitable for lifting loads through several dimensions of motion.
- b. Working Load Limit (WLL): This is the maximum weight to be handled by the purchases with the authorized number of parts as listed in Table 589-2.
- **B.** CRANE INSPECTIONS. Unless more specific guidance is provided, inspections and overhauls shall be conducted using guidance contained herein.
 - 1. <u>Inspection Schedule</u>. Inspection frequency shall be in accordance with Table 589-1, or as directed by the cognizant MLC. Where ESP or PMS documentation exists, it shall take precedence.

2. Level 1 Inspection and Test Requirements.

- a. General. The intent of this inspection is to ascertain the safety of the rigging and other critical equipment parts that could result in loss of life or equipment damage if failure occurs.
 - (1) In general, the inspection shall include all wire rope and fittings, block fittings, hooks, links, shackles and associated pins, swivels, boom padeyes, hydraulic controls and fittings, hydraulic hoses, hydraulic rams, wear pucks, bearings, motors,, and brake springs and linkages.
 - (2) Any visible permanent set of deformation, in the form of bent pins, elongated holes, bent or distorted staples and padeyes, are clear indications of overload or improper rigging. Their incidence should be reported, and the rig should not be used until the

- **B.** 2. a. (2) cause is found and corrected. Both the inspector and the operator should also be aware of recurring cracks in paint, particularly in areas of high stress corrosion. To inspect for surface cracks, paint shall be removed and surfaces wire brush cleaned.
 - (3) Visually inspect all foundation welds, gears and bolts for cracks, tightness, wear, deformation and corrosion.
 - b. Inspection. The following requirements are generic in nature, and shall be included in inspections as applicable. Specific guidance in an ESP or PMS shall take precedence.
 - (1) Inspect the wire rope and fitting in accordance with Chapter 613.
 - (2) Visually inspect all sheaves, swivels, blocks, block hangers, padeyes, connecting links, shackles, hooks, winches and associated pins for corrosion, wear, deformation, cracks and any other condition that may lead to failure. Inspection of sheaves shall include sheave gauge wear measurement.
 - (3) Do not disassemble blocks, topping lift, hydraulic cylinders or equivalent devices unless there is reason to suspect damage, wear, corrosion or marginal condition when last overhauled.
 - (4) Inspect winch and rotating gear brake springs and linkage, where appropriate. Carefully check brake springs for permanent set and compression, and replace if necessary.
 NOTE: Failure of brake springs in service can result in loss of control or release of load.
 - (5) Inspect hydraulic or pneumatic hoses for ballooning, cracking and corrosion. Inspect electrical wiring and connections for corrosion. Inspect brake solenoids and switches for corrosion and contact wear.
 - (6) Lubricate all moving parts and wire rope in accordance with PMS and Chapter 613 of this manual, as applicable.
 - (7) Self contained reservoir gearboxes with less than five gallons of lube oil shall have the gear lube replenished. If possible, drains will be opened and the boxes checked for condensation at the bottom of the tanks. Check any magnetic plugs, if equipped, for particles. Gearboxes with capacities in excess of five gallons shall have oil samples drawn for analysis in accordance with Chapter 262 of this manual.

3. <u>Level 2 Inspection and Overhauls</u>.

a. General. The intent is to accomplish the Level 1 inspection above, and concurrently disassemble, inspect and overhaul all major components whose performance or mechanical condition may have deteriorated. Disassembly shall also be carried out to inspect other components whose performance is not affected by normal wear but whose failure could result in damage, injury or

loss of life. Examples of these are boom, winch, luffing cylinder, topping fittings, and sheave pins. Disassembly of such items need be

- **B.** 3. a. carried out only to the extent required to conduct the inspection. Outside appearance is not necessarily indicative of the mechanical condition of the equipment and, as such, disassembly for the purpose of recoating is prohibited.
 - b. Inspection. The following requirements are generic in nature, and as such shall be included in inspections as applicable. Specific guidance in an ESP or PMS shall take precedence.
 - (1) Unship the boom to inspect wear pucks, hydraulics, pins and other wear components. Overhaul luffing cylinders.
 - (2) Remove winches for inspection of brakes, drum, gears and couplings. Overhaul of hydraulic motors should be condition based.
 - (3) Disassemble and inspect topping lifts, swivels, and all blocks. Inspect slewing gear, and bearings. All pin, bearings, gears and sheaves shall be checked for compliance with dimensional tolerances shown on the original equipment drawings.
 - (4) Renew "O" rings. Renew hoses as required.
 - (5) Replace wire rope, as required. See Chapter 613..
 - c. Overhauls: Components shall be overhauled based on equipment condition or evidence of problems.
 - d. Conduct Weight Tests.
 - 4. Level 3 Inspection and Overhaul.
 - a. Policy Change.
 - (1) This level of inspection and testing may be waived, on a case by case basis, by the cognizant MLC, provided that the condition of the systems are evaluated by diagnostic means.
 - (2) The development of Equipment Support Plans will typically eliminate this inspection and testing in favor of increased maintenance, increased inspections, condition based maintenance, and overhauls based on inspection recommendations.
 - b. General. This level is to accomplish the requirements of the Level 1 inspection and Level 2 inspection and overhaul, plus the requirements listed herein.
 - c. Inspection. In addition to Level 1 inspection, and Level 2 inspection and testing, inspect and overhaul the following items, as applicable based on condition. Disassemble and overhaul all hydraulic components to include pumps, motors, control valves, accumulators, rams, etc.
 - d. Tests: Conduct weight tests

C. CRANE TESTS.

1. General.

- a. Historically, Coast Guard weight testing requirements for cranes have been developed based on an extension of boom technology and requirements. Typical weight tests have been a dynamic demonstration of the equipment at 125% of Working Load Limit to verify the safety of the equipment and its ability to handle working loads safely by proving the strength of the structure, rigging and mechanical equipment. Examples of the Dynamic Load Test loads are shown in Table 589-2. These test weights remain valid for cutters and barges identified in Table 589-1.
 - (1) Dynamic Load Tests conducted at the pier will typically utilize a test load equivalent to 125% of the Working Load Limit of the crane, or as shown on Table 589-2. The test shall include rotation of the test load through a range that the equipment is required to perform in service. The weight handling system must be able to stop, start and hold the test load at any position within the service area. The Dynamic test load may be reduced by the ELC or cognizant MLC to address equipment design constraints or limitations. Detailed guidance should be promulgated in an ESP or BCMP.
 - (2) Dynamic Load Tests which are performed while underway, in order to prove the installation of a wire rope fitting or other repair conducted underway, may be reduced to 100% of rated load.
- b. For 225 ft WLB and 175 ft WLM class cranes, ESPs are being developed. Revised testing and testing schedules will be invoked based on current commercial marine and USN crane testing practices. Weight tests will typically include a combination of rated load, dynamic and static test loading. See Table 589-3. Test load levels may be revised by ELC to address equipment design limitations.
 - (1) Rated Load Tests will typically be at 100% of Working Load Limit for the equipment.
 - (2) Dynamic Load Tests will typically be at 125% of Working Load Limit. The test load may be reduced by ELC or cognizant MLC to address equipment design constraints or limitations. Detailed guidance should be promulgated in the ESP, CCMP or BCMP.
 - (3) Dynamic Load Tests which are performed while underway, in order to prove the installation of a wire rope fitting or other repair conducted underway, may be reduced to 100% of Working Load Limit for that particular component or feature.
 - (4) Static Load Tests will typically be at 150% of Working Load Limit for the structure.

C. 2. Testing Frequency.

- a. Cranes (except 225 ft WLB and 175 ft WLM classes)
 - (1) Dynamic weight testing shall be performed on all cranes as part of Level 1, Level 2 and Level 3 inspections. See Table 589-2. Whenever major equipment replacements are made, affected components shall be re-tested in accordance with applicable portions of the test procedure.
 - (2) When a purchase is disassembled and re-rigged with a different number of parts, the rig must be dynamic weight tested.
 - (3) Dynamic weight testing may be used as an indication of equipment condition.
- b. 225 ft WLB, 175 ft WLM class cranes.
 - (1) Rated Load tests at Rated Speeds & Working Load Limits shall be required annually and in conjunction with Level 1 and Level 2 inspections. See Table 589-3. Whenever major equipment replacements are made, affected components shall be re-tested in accordance with applicable portions of the test procedure.
 - (2) Dynamic Load tests shall be required at intervals not exceeding 4 years, or when the equipment is overhauled. Dynamic Load tests are at no specified speed.
 - (3) Static Load tests shall be required at intervals not exceeding 4 years, or when the crane structure or braking system is repaired or overhauled.
 - (4) Dynamic Load Tests may be used as an indication of equipment condition.

c. Tests.

- (1) Rated Load Test. This test is intended to verify that the equipment functions at rated load and rated speeds.
 - (a) The crane shall demonstrate the ability to pick up and move the Test Load through the range that the equipment is required to perform in service, including outreach beyond the cutter hull. Rotation, traversing, luffing, extension and traveling functions, as applicable, shall be demonstrated. At least 10 complete cycles shall be completed to demonstrate proper operation and repeatability of all functions w/o overheating, malfunction or degradation of brakes.
 - (b) Rated speeds of each function shall be verified. Loads shall be accelerated and decelerated smoothly, and slow speed shall be used near the end of each range of motion.

of its Working Load Limit at rated speed.	-

Each individual lifting rig (main, whip, etc.) shall be demonstrated to pick up 100%

(c)

- C. 2. c. (1) (d) Where individual lifting rigs are intended to work together, they shall be demonstrated to pick up 100% of their combined Working Load Limits.
 - (e) During the tests, motor and pump parameters, hydraulic fluid parameters, speeds and test weights shall be recorded.
 - (2) Dynamic Load Test. This test is intended to verify that the equipment can properly function at Working Load capacity while underway. Operation at rated speed is not required.
 - (a) If the crane utilizes hydraulic power, relief valve settings shall be checked prior to conducting dynamic load tests. Relief valve and pressure compensator settings should not require adjustment in order to conduct this test. The cognizant MLC or ELC shall be advised if relief valve or pressure compensator adjustment is required in order to conduct this test.
 - (b) The crane shall demonstrate the ability to pick up and move the Test Load through the range that the equipment is required to perform in service, including outreach beyond the cutter hull. Rotation, traversing, luffing, extension and traveling functions, as applicable, shall be demonstrated. At least three complete cycles shall be completed, at no specified speed. The test load shall be stopped and held during each cycle to demonstrate braking action.
 - (c) Each individual lifting rig (main, whip, etc.) shall be demonstrated to pick up its Dynamic Test Load at no specified speed, to stop and hold the test load for 10 minutes, and to return the Test Load to the deck.
 - (d) Where individual lifting rigs are intended to work together, they shall be demonstrated to pick up their combined Dynamic Test Load at no specified speed, to stop and hold the test load for 10 minutes, and to return the Test Load to the deck.
 - (e) During tests, motor and pump parameters, hydraulic fluid parameters, and test weights shall be recorded.
 - (3) Static Load Test. This test is intended to verify structural integrity of the system, and the ability of the system and its individual components to hold against large loads.
 - (a) The crane shall be placed in the worst structural position; this is typically with the boom or frame fully extended. The Static Test Load shall be lifted and applied by external means to rigging on the crane, boom or frame. The test load shall be held, without damage or slippage, for 10 minutes.

- C. 2. c. (3) (a) **NOTE:** The use of alternative test weights, such as water bags, which can be adjusted in place to reflect the desired weight is acceptable, provided that the test weight is verifiable.
 - (b) Each individual lifting rig (main, whip, etc.) shall be Static Load tested to 150% of Working Load Limit, unless otherwise specified. The test weight shall be externally applied, and the weight held for 10 minutes.

NOTE: If the master test weight for the crane is applied to the main rigging only, this shall be considered a test of the main. Where the master test weight is applied to a combination of lift rigging, each rigging must also be tested individually.

(c) Test weights and rigging configurations shall be recorded.

D. <u>SAFETY</u>.

1. Stability Documentation.

- a. All cutters, boats and barges with cranes shall have vessel stability documentation (Stability and Loading Data Booklet or equivalent) which addresses the stability of the vessel with the weight handling equipment in use. See Chapter 079.
- b. Where the stability of the vessel limits the operational capability of the weight handling equipment, a graphic safety placard shall be prominently displayed at the equipment operator's station to describe the limitation, and graphically show the safe working zone and safe working load while operating at sea. For heavy lift conditions beyond those limits, units shall assess the cutter stability prior to conducting the lift.
- c. When considering a unit's stability characteristics during testing procedures, specified test loads shall be maintained within limits that can be handled safely. If any of the test loads result in an excessive list (generally 15 degrees) or the immersion of the deck edge, the load shall be reduced accordingly to stay within those limits. In such cases, ELC(02) shall be advised by letter or message of the load actually handled and the loading condition of the unit at the time of the test.
- 2. <u>Label Plates</u>. Engraved label plates shall be installed on cranes or crane pedestals to document the safe working load, test weight, and date of certification of the load and corresponding parts of the purchase. The information shall be engraved in such a manner as to prevent eradication when the crane is painted.
- 3. <u>Safety Precautions</u>. The following safety precautions must be observed when conducting weight handling equipment tests.
 - a. Specified Dynamic Test Loads are designed to account for dynamic service conditions.

 Therefore, conditions which would cause sudden application of test loads should be avoided.

- **D.** 3. b. To prevent excessive damage in the event of equipment failure during tests, dunnage shall be placed under test loads and each load shall be kept as close to the deck as possible.
 - c. To prevent loads from moving off center in the event of a casualty, preventer lines or cables shall be rigged athwartships from the test load. At minimum, the breaking strength of the preventers must be greater than or equal to the test load.

4. Documentation of Test Results.

- a. The results of the inspections and tests, including rigging configurations, prescribed shall be entered in the cutter or boat's Hull History record (or CMPlus for CMPlus equiped cutters) and rigging log. The maximum list of the cutter observed during the testing shall also be recorded and posted in the pilothouse for a ready reference to indicate the approximate loading on the boom, crane or frame during unusual operating conditions such as removing mudded-in sinkers, pilings, sunken buoys, etc.
- b. The date of the most recent Level 1 and Level 2 Tests conducted in accordance with this chapter shall be stenciled on the boom, crane or frame in the vicinity of the Label Plate, in a position clearly legible from the buoy deck.

TABLE 589-1, INSPECTION AND OVERHAUL

FREQUENCY FOR CRANES

VESSEL TYPE	LVL 1	LVL 2	LVL 3	NOTES
420 FT WAGB	A*	Q	CBM	*Prior to departure for major deployment.
400 FT WAGB	A*	Q	CBM	*Prior to departure for major deployment.
270 FT WMEC	NA	NA	NA	AFT CRANE/DAVIT SEE 583
225 FT WLB	A	Q	CBM	SEE ESP (DISTRIBUTION PENDING)
175 FT WLM	A	Q	CBM	SEE ESP (DISTRIBUTION PENDING)
160 FT WLIC (1,3)	A	Q	CBM	SEE ESP (DISTRIBUTION PENDING)
WLI/WLIC (3)	A	Q	CBM	
WLR	A	Q	CBM	
ANB (55 FT)	A	Q	CBM	
BARGES (2)	A	Q	CBM	

Level 2 inspection frequency may be increased by the MLC based on condition based maintenance.

- (1): And barges with Weatherford cranes.
- (2): Allied, Appleton and Alaska cranes.
- (3): DELMAG hammer and lead shall be overhauled at 3 year intervals.

TABLE 589-2. WORKING LOAD LIMIT AND DYNAMIC TEST WEIGHT CHART FOR CRANES [Notes 1 & 2]

5-P	PART		4-PA	.RT	3-P	PART	2-PA	RT	SINGLE I	PART		
VESSEL TYPE/CRANE	WLL	TEST	WWW	TEST	WWW	TEST	WWW	TEST	WWW	TEST	REMARK	WIRE ROPE
420' WAGB/TB 60- 65									6,720	8,400	At 65' ext	5/8" 6x37 RRL EIPS IWRC
420' WAGB/TB 100-55					38,000	47,500					Main at 38' ext	7/8" 6x37 RRL EIPS IWRC
					11,200	14,000					Main at 55' ext	
									6,720	8,400	Whip at 55' ext	5/8" 6x37 RRL EIPS IWRC
420' WAGB/KB 40- 55					38,000	47,500					Main at 38' ext	7/8" 6x37 RRL EIPS IWRC
					11,200	14,000					Main at 55' ext	
									6,720	8,400	Whip at 55' ext	5/8" 6x37 RRL EIPS IWRC
420' WAGB/KB 15- 45							11,200	14,000			At 45' ext	5/8" 6x37 RRL EIPS IWRC
400' WAGB/3T									6,600	8,300		1" 6X37 FC IPS
400' WAGB/15T									33,100	41,400		1-1/2" 6X37 FC IPS
400' WAGB/HIAB									4,000	5,000	SEA CRANE	1/2" 6X37 RRL EIP IWRC
290' WAGB			6,720	8,400			4,500	5,625				1/2" 6X37 RRL EIP IWRC
230' WMEC									3,000	3,750		1/2" 6X37 RRL IPS IWRC
160' WLIC							16,500	20,600	8,250	10,300	CRANE 18,000	5/8" 6X25 OR 6X37 RRL EEIP, IWRC
(cont.)											TEST 22,500	SEE ESP
100' WLI fr 26	11,100	13,875	8,900	11,125	6,700	8,375	4,500	5,625	5,300	6,625	BLUEBELL	3/8" 6X37 RRL EIP IWRC
65' WLI					4,000	5,000			1,250	1,562	BLACK/CHOKEBE RRY	3/8" 6X37 RRL EIP IWRC
65' WLI					4,000	5,000			1,400	1,750	ELDERBERRY	3/8" 6X41 RRL EIP IWRC
BUOY BOATS												
ANB 55101-55112									1,000	1,250	SEE NOTE 4	1/2" 6X19 IWRC RRL EIP
ANB 55113-55119									2,000	2,500	SEE NOTE 5	1/2" 6X19 IWRC RRL EIP
ANB 55120-55122									2,000	2,500	SEE NOTE 5	1/2" 6X19 IWRC RRL EIP
BU 45301-45317									4,000	5,000		5/8" 6X19 IWRC RRL EIP
BUSL 44302									3,000	3,750	BOTH WHIPS	1/2" 6X19 IWRC RRL EIP
(cont.)		_							2,000	2,500	EACH WHIP	1/2" 6X19 IWRC RRL EIP
BARGES		_										
CGB 12001-12002			40,000	50,000								MAIN: 3/4" 19 STRAND ROTATION RESISTANT, EEIP

CGB 12001-12002						10,000	12,500		WHIP: ¾6X37 RRL IWRC EIP
CGB 67-77				20,000	25,000	3,000	3,750	SEE NOTE 3	3/4" 6X37 RRL EIP IWRC
CGB 36						2,000	2,500	SEE NOTE 6	5/8" 6X37 RRL IPS IWRC
CGB 60044						3,000	3,750	AT MAX RADIUS	9/16" 6X37 IWRC RRL IPS
CGB 68012-68020				16,500	20,600	8,260	10,300	SEE 160 WLIC	5/8" 6X25 OR 6X37 RRL XXIP
									IWRC
CGB 70018				16,500	20,600	8,260	10,300		5/8" 6X25 OR 6X37 RRL XXIP
									IWRC
CGB 76006-76009		6,000	7,500			2,000	2,500		1/2"
CGB 84001-84002				16,500	20,600	8,260	10,325	SEE 160 WLIC	5/8" SEE CGB 68012-68020
CGB 90013				20,000	25,000	3,000	3,750	SEE NOTE 3	3/4" 6X37 RRL XIP IWRC
CGB 99002-99005				20,000	25,000	3,000	3,750	SEE NOTE 3	3/4" 6X37 RRL XIP IWRC
CGB 99008				20,000	25,000	3,000	3,750	SEE NOTE 3	3/4" 6X37 RRL XIP IWRC

- NOTE 1: Wire rope grade shall not be upgraded without ELC (01) authorization. For wire rope discrepancies between original drawings and this table, this table shall be used. Wire rope procurement reference is API SPEC 9A.
- NOTE 2: USCG marine crane ratings are at a maximum (or identified) working radius for that installation. The ratings take into account the effect of ships motions; see applicable technical publication or arrangement drawing. Typical OEM commercial crane ratings are dependent on boom angle, outreach, boom extension and wire strength; maximum WLL is typically at minimum working radius and/or minimum boom extension, unless the crane arrangement is limited by wire rope strength. Commercial crane ratings shall not be used unless directed by ELC (01).
- **NOTE 3:** 2 Part WLL is 10 ft Max radius, Single Part WLL is 50 ft Max radius.
- **NOTE 4:** Applicable to Husky M45 cranes. SWL and Test Weight are for operating the boom throughout the operating envelop regardless of how far the boom is extended with the exception of directly over the notch at not more 13' outreach calls for a WLL of 2000 and TEST of 2500.
- NOTE 5: Applicable to Husky M60 cranes. WLL and Test Weight are for operating the boom throughout the operating envelop regardless of how far the boom is extended with the exception of directly over the notch at not more 13' outreach calls for a WLL of 3000 and TEST of 3750.
- **NOTE 6:** See manufacturer's documents for test requirements.
- IPS = Improved Plow Steel, EIP = Extra improved plow steel, EEIP = Extra improved plow steel, RRL = Right Regular Lay, LRL = Left Regular Lay
- IWRC = Independent Wire Rope Core, SC = Solid Core, FC = Fiber Core

TABLE 589-3
WORKING LOAD LIMIT & TEST WEIGHTS FOR 225 FT WLB AND 175 FT WLM CRANES

VESSEL TYPE	TWO F	TWO PART		E PART	REMARKS	WIRE ROPE
	WLL	TEST	WLL	TEST		
225 FT A CLASS	40,000	40,000 Rated			Main Hoist, See ESP	1-1/8 inch 6x37
WLB		45,000			(distribution pending)	RRL, XIP, IWRC
		Dynamic (1)				
		60,000 Static				
			10,000	10,000	Whip Hoist	7/8 inch 6x37 RRL,
				RATED		XIP, IWRC
				12,500		
				DYNAMI		
				C		
				15,000		
				STATIC		
175 FT WLM	20,000	20,000 Rated			Main Hoist, See ESP	3/4 inch 6x37 RRL,
		25,000			(distribution pending)	IWRC, Compacted
		Dynamic				Construction
		30,000 Static				
			9,000	9,000	Whip Hoist	5/8 inch 6x37 RRL, IWRC
				Rated		
				11,250		
				Dynamic		
				13,500		
				Static		

(1) Limited due to hydraulic design of system.

Page Intentionally Left Blank

CHAPTER 591. OCEANOGRAPHIC RESEARCH EQUIPMENT

A. GENERAL.

- General information on oceanographic research wires and winch technology can be found in the Handbook of Oceanographic Winch, Wire and Cable Technology, edited by Alan H. Driscoll and available through National Technical Information Service (NTIS), U.S. Department of Commerce. This book, funded by the National Science Foundation (NSF) and U.S. Navy, Office of Naval Research (ONR), is a series of technical chapters authored by experts in their individual fields.
- 2. Oceanographic research weight handling equipment is intended to be used in support of various oceanographic research programs. Typical factors of safety for weight handling type wire rope systems do not apply to science wire systems. It is not uncommon to operate with a factor of safety of 1.5 on science wire systems. It is not unheard of to overload and "snap" science wires.
- 3. As background guidance information, it is G-SEN policy that all science wire handling system components shall, as a minimum, meet the design requirements of 46 CFR Subchapter U Oceanographic Research Vessels, Part 189-35.9. Additional detailed testing criteria is provided herein.
- **B.** STANDARD LOADS. For equipment testing purposes, all loading conditions shall be based upon the nominal Rated Breaking Strength (RBS) of the strongest type of wire rope used by the system. The following definitions shall apply:
 - 1. The Normal Working Load (NWL) of the equipment (e.g. working load typically expected) shall be defined as the application of a load equivalent to 50 percent of the strongest wire RBS.
 - 2. The Safe Working Load (SWL) of the equipment shall be defined as the application of a load equivalent to 70 percent of the strongest wire RBS.
 - 3. The Rated Load of the equipment, for structural design purposes, shall be defined as the application of a load equivalent to 80 percent of strongest wire RBS.
 - 4. The Test Load for the equipment shall be defined as the application of a load equivalent to not less than the RBS of the strongest wire to be used by the system.

C. WEIGHT HANDLING SYSTEM STRUCTURAL DESIGN AND TEST POLICY.

- 1. All structural elements, including cranes, frames and wire rope sheaves shall be statically tested to not less than 125 percent of the Rated Load for the system, or to the Test Load for the system (as defined above). Static load testing shall be conducted prior to initial use of the equipment, and shall be repeated quadrennially. Individual elements may be tested independently.
- 2. All science winches are structurally tested at the factory to loads in excess of the installed system criteria. The winch installation (e.g. foundation attachment) shall be static load tested upon installation, pulling against structural elements of the frame. Removal of installed science wires to static load test against the winch drum after installation is not required.

- C. 3. Static load testing shall be conducted with special test wires which shall not be used for other rigging purposes. Wires shall be new, clean, rust-free, and have no kinks, broken outside wires or other defects. Fittings shall be no less than 90 percent efficient. Test loadings shall be achieved slowly and carefully with appropriately calibrated instrumentation. Under these conditions, test wires may be loaded to 65 percent of the wire RBS; loading levels of 50 percent of wire RBS or less are preferred. Test wires shall not be used for more than one ship test.
- **D. <u>DYNAMIC TEST LOADING.</u>** Dynamic load testing of science wires and of wire reeving elements (sheaves, etc.) shall be conducted with the rigged science wire.
 - 1. Science wires shall be dynamically tested to 70 percent of the reeved wire RBS when a wire is reeved, and if the wire is not changed out it shall be retested at biennial inspections. Testing shall include lifting and deployment (at no specified speed) of a test load for at least 50 feet, holding the load for several minutes and retrieval. Proper sheave rotation and motion shall be verified. To minimize wire damage, more frequent dynamic testing to this level is not encouraged.
 - 2. Science wires shall be dynamically tested to at least 50 percent of the reeved wire RBS when a wire fitting is changed or installed. Testing shall include lifting and deployment (at no specified speed) of a test load for several feet, holding the load for several minutes, then retrieval.

E. <u>SCIENCE WIRES</u>.

- 1. Science wires installed on Coast Guard cutters shall generally meet University National Oceanographic Laboratory System (UNOLS) standards; such standards are typically promulgated by Woods Hole Oceanographic Institute on behalf of UNOLS and NSF. Use of any other wires shall be at the direction of the cognizant MLC, G-OCU, and the ELC.
 - a. Wire identification numbers shall be assigned to all science wires. The identification numbers shall be in the format recommended in the chapter on Cable and Winch Documentation in the Handbook of Oceanographic Winch, Wire and Cable Technology.
- 2. The NWL and SWL for each science wire shall be calculated and noted on cast documentation. These loads are initially 50 and 70 percent of the wire RBS, but may be downgraded as necessary. The winch operator or test director shall calculate (or estimate to the extent practical) the expected static or quasi-static tensile loads, wave induced dynamic loads, zero/slack loads, and snap loads. From these loads, the expected worst loading condition shall be calculated. The predicted static or quasi-static tensile loads shall not exceed the NWL. The predicted worst loading condition shall not exceed the SWL.
- 3. The winch operator shall take all precautions to prevent the wire loading from exceeding SWL. If a problem occurs and higher loads become necessary, in no case shall the load exceed 75 percent of the wire RBS.
- 4. All science wire activity, including tests, casts, wire on-load, wire off-load, and other events (cleaning, lubrication, loss of wire, etc.), shall be documented. The objective is to develop as complete a wire loading history as possible, in order to support effective wire condemnation and replacement.

- **E.** 4. a. The electronic Data Acquisition System (DAS) provided on all WAGB science winch systems shall be utilized for all wire movements other than wire staging for a cast. Cast, test, on/offload and other data shall be post-processed with the DAS software.
 - b. On cutters without a DAS, wire movements and loadings shall be recorded in accordance with the recommendations in the chapter on Cable and Winch Documentation in the Handbook of Oceanographic Winch, Wire and Cable Technology.
 - 5. Science wires which have been utilized shall be pressure washed at the end of each major deployment; the wires shall not be stowed for extended periods in an unwashed condition. Science wires shall generally be pressure lubricated at the same time, or as required, with a special oceanographic service compatible lubricant identical to or compatible with the original factory lubricant.
 - 6. Units fitted with oceanographic equipment shall maintain wire rope documentation and histories in CMplus if equipped. Units shall use the criteria outlined in paragraph D of this chapter and the information outlined in the Handbook of Oceanographic Winch, Wire and Cable Technology as guidance for determining when to request wire rope renewal. Recommendations for renewal shall be forwarded to the MLC for review and approval.

Page Intentionally Left Blank

CHAPTER 593. ENVIRONMENTAL POLLUTION CONTROL SYSTEMS

- **A. GENERAL.** The Coast Guard is fully committed to responsible environmental stewardship. As such, all vessels shall comply with all federal pollution prevention laws, including MARPOL, the Clean Air Act, and the Clean Water Act. Further, sovereign immunity has been waived regarding most state standards. In cases where Federal, Coast Guard, state, or local regulations vary, the most stringent regulations shall be the preferred level of compliance.
- **B.** <u>SHIPBOARD REGULATIONS</u>. Shipboard Regulations Manual, COMDTINST M5000.7 (series) provides shipboard policy and procedures for water pollution and refuse disposal. Hazardous wastes generated aboard ship shall be properly managed in accordance with Hazardous Waste Management Manual, COMDTINST M16478.1 (series).
- CONTRACT PROVISIONS. For vessels undergoing repair by a commercial contractor, at the contractor's facility, the MLCs shall develop contract specifications that specifically state that the disposal (to the end point disposal site) of all hazardous wastes generated as a result of the contract will be performed by the contractor. Furthermore, the contractor shall meet all federal and state requirements including the possession of a state or EPA generator identification number. For vessels undergoing repair by a commercial contractor at a Coast Guard facility, all hazardous wastes generated as a result of the contract will be turned over to the local Coast Guard Hazardous Waste Coordinator for disposal.
- D. POLYCHLORINATED BIPHENYLS (PCB). NAVSEA S95930A1-MAN-0101, Shipboard Management Guide for Polychlorinated Biphenyls, prescribes policies and procedures for handling PCBs and PCB items. Similar to asbestos, PCBs present minimal health risk while they are intact. To date, there have been no known PCB induced adverse health problems for personnel operating and maintaining Coast Guard vessels. When PCBs are burned in air, extremely hazardous decomposition products such as hydrogen chloride, dibenzofurans, and dibenzodioxins are released.
 - 1. Although transformers containing PCBs have been removed from vessels and PCB items are no longer installed on vessels, many older vessels were constructed with materials containing PCBs. Specifically, PCBs have been found on:
 - a. 41' UTB
 - b. 44' MLB
 - c. 65' WYTL
 - d. 75' WLR
 - e. 82' WPB
 - f. 133' WLM
 - g. 180' WLB

- **D.** 2. On these vessels, PCBs were identified in the following material/places:
 - a. Ventilation (felt gasket material)
 - b. Electrical cables
 - c. Di-electric metal insulators
 - d. Lighting ballast
 - e. Insulation (bulkhead, piping, panel, overhead, pipe hangers)
 - 3. Before beginning any hot work on the areas identified above, crews must consult the NAVSEA Manual or request guidance from their respective MLC. Furthermore, PCB containing materials must be disposed of in accordance with local, state, and federal laws. Consult the servicing Civil Engineering Unit for disposal guidance.

E. INCINERATORS.

- 1. <u>General</u>. This sections serves to provide guidance and Coast Guard policy with regards to incinerator operation and maintenance. This policy includes both legal requirements and requirements the Coast Guard has adopted as a matter of policy to enhance protection of the environment, human health, and safety. Manufacturer's instruction manual and cutter specific PMS provides additional guidance on operation and maintenance requirements.
- 2. <u>Policy</u>. The preference of incineration over disposal of garbage at sea supports the Coast Guard's environmental vision statement, "Our business values the environment." Therefore, incinerators shall be used to dispose of garbage at sea to the maximum extent possible, consistent with the guidance below.
- 3. Operation while underway. Operation of incinerators while underway and within 12nm of shore is an activity regulated by non-federal legislation (state, city, local air district, etc). Therefore, operation of incinerators within 12nm of any shore is prohibited unless cutters possess written authorization (typically a permit or written waiver from permit) from the state or nation subject to incinerator operations within 12 nm of its shore. Cutters having an operational necessity to use the incinerator within 12nm of shore should contact MLC(V) for assistance in obtaining authorization. This provision does not apply to cutters operating in the Antarctic region (areas south of 60 degrees south latitude). Use of incinerators for waste disposal while inport is prohibited.
- 4. Test operations while inport. Operation of incinerators while inport for the purpose of maintenance and testing is an activity regulated by non-federal legislation (state, city, local air district, etc). MLC(v) is responsible for establishing, with state and local air quality regulators, a localized incinerator testing policy for cutters while in homeport. MLC shall promulgate that policy to cutters in the form of a message. Should a cutter be inport but away from homeport, they shall comply with the local laws and regulations. Because this may require obtaining a permit or exemption from local regulators, cutters desiring to test in a port away from homeport shall seek the counsel of their MLC Type Desk prior to testing. In the absence of any local test burn requirements, cutters shall follow the policy used at their respective homeports. Cutters should contact their MLC Type Desk with any questions in reference to test burning policy.

- E. 5. Flight Operations. For helo capable cutters, the incinerator may be operated while conducting flight operations. WHEC cutters must operate the incinerator with the spark arrester (p/n 5702) in the flue gas line installed. Using the incinerator during flight ops is not authorized with spark arrester removed or not operating effectively (precluding hot particles from being ingested into aircraft engines). WHEC's must have stainless steel netting in place on the net frame above the incinerator exhaust port in order to conduct incinerator ops and flight ops simultaneously.
 - 6. <u>Incinerator Residue Disposal</u>. Incinerator ash may be treated as a MARPOL Annex V waste and disposed of into the sea in accordance with the following guidelines:
 - a. Inspect ash for plastic clumps commonly referred to as "clinkers," if found separate and retain onboard for disposal ashore. Plastic garbage must be retained on board ship unless reduced to ash by incineration.
 - b. Ash may be disposed of into the sea at distances of 3 nm to 12 nm from the nearest land provided the ash is absent any non-plastic chunks larger than one inch in size.
 - c. Ash and non-plastic chunks (regardless of size) may be disposed of into the sea at distances greater than 12 nm from the nearest land.
 - d. Ash may not be disposed of into the sea in the Antarctic Region (Areas South of 60 Degrees South Latitude).

7. Waste.

- a. Hazardous Waste. The burning of hazardous waste and material normally disposed of via shoreside hazmat receiving service is prohibited with the following exceptions: waste oil, oily rags and oily filters. When incinerating this material, ensure that other, low-heat value waste is commingled before introducing into the combustion chamber, such action will prevent the incinerator from overheating.
- b. Medical waste. Incineration of infectious medical waste is prohibited.
- c. Glass. Incineration of glass is prohibited. Glass will only melt and removal may cause damage to the incinerator.
- d. Pressurized cans. Incineration of pressurized or aerosol cans is prohibited. Such material may explode inside the incinerator posing a safety hazard.
- e. Food waste. Food waste has a low heat value and therefore burns at a slow rate. Food waste also biodegrades at a faster rate than other types of garbage and therefore has little adverse effect on the environment. Processing food wastes through galley and scullery grinders is more efficient and sanitary than using the incinerators. For these reasons, it is recommended that food waste be disposed of overboard in accordance with Part 66 of the Shipboard Regulations Manual, COMDTINST M5000.7 (series). Should a cutter choose to incinerate food waste, best results will be achieved when the food waste is commingled with other waste to compensate for its low heat value.

E. 7. f. Plastics. Only common plastics (domestic waste) may be incinerated. Plastics that are industrial or unique in nature (i.e. insulation, pvc piping, etc) are to be stored onboard and disposed of shore-side. When it is unclear as to whether a plastic is of the "common" type, ships shall err to the side of caution and dispose of it shore-side.

CHAPTER 613 - RIGGING

A. WIRE ROPE.

- 1. <u>General</u>. This section provides guidance for the inspection and maintenance of wire rope used throughout the Coast Guard.
 - a. NSTM Chapter 613 provides additional guidance for wire rope selection, construction, maintenance, inspection, splicing and stowage.
 - b. Wire rope procurements shall reference API Specification 9A Specification for Wire Rope (as applicable), in lieu of reference to Federal Standard RR-W-410. Where special construction wire ropes are used, such as rotation resistant type, the appropriate specification shall be referenced.
 - c. Refer to Chapter 591 of this manual for Science wire applications.
 - d. Aides to Navigation Manual-Seamanship, COMDTINST M16500.21 (series), may be used for additional technical information.
 - e. Definitions. The following definitions apply within this section:
 - (1) Weight Handling Systems: includes cranes, booms, davits, elevators and crossdeck winches.
 - (2) General Purpose lifting equipment: includes fixed and portable hoists, boat slings and lifting slings.
 - (3) Standing Rigging: includes fixed rigging, guys, boom pendants and mooring lines.
 - (4) Life Lines: includes bulwark lifelines, helicopter safety net lines, etc.
- 2. <u>Planned Maintenance System</u>. All wire rope shall be inspected and maintained, where applicable, in accordance with cutter specific PMS, manufacturer's technical publications, and the cognizant MLC Standard Specifications.

3. Use Limitations.

- a. Stainless steel or galvanized wire rope should not normally be used in weight handling systems. The additional expense and reduced strength of these wires to improve corrosion resistance can not typically be justified, since these wires MUST be routinely lubricated in weight handling applications.
 - (1) If stainless steel or galvanized wire rope is provided as part of a new piece of equipment, this initial wire shall be replaced only at the end of its life cycle. Stainless steel and galvanized wire rope in running rigging shall be routinely lubricated.

- **A.** 3. a. (2) Where the use of stainless steel or galvanized wire rope is required in these applications, cutter class specific guidance shall be provided by the cognizant MLC. Stainless steel and galvanized wire rope in running rigging shall be routinely lubricated.
 - b. Galvanized wire rope, where used, shall be of the drawn galvanized type. This process galvanizes the individual wires before the final drawing process and before assembly of wires into individual cables.
 - c. Galvanized wire rope may be used in general purpose lifting equipment, standing rigging, boat ladders and similar applications.
 - d. Stainless steel wire rope may be used for certain standing rigging and lifelines. See NSTM 613.
 - e. Wedge socket type wire terminal assemblies are authorized for use on WEATHERFORD lattice boom crane systems only.
 - f. The essential nature of rotation resistant wire rope designs impose certain limitations on their application and necessitate special handling requirements not encountered with other rope constructions. The use of rotation resistant wire rope shall be limited to applications specified in Chapter 589, and as directed by ELC-01.

4. <u>Inspections</u>.

- a. Inspection Frequency for Weight Handling Wire and General Purpose Lifting Ropes: The following requirements are applicable to wires in weight handling systems and general purpose applications only.
 - (1) Wire ropes shall be visually inspected for obvious deficiencies or defects daily or prior to use if the equipment is not used daily.
 - (2) External Inspections: A qualified person shall perform external inspection of all wire rope in use at least quarterly, and external inspections of all general purpose lifting equipment wire rope at least semi-annually, to determine the condition of the wire and avoid a possible safety hazard.
 - (3) Internal Inspections: Internal inspections of wire ropes shall NOT be performed on a routine basis. Pending revisions to USN technical policy will recommend that internal inspections NOT be performed on a routine basis, and then only by qualified personnel to determine the internal condition of wire rope when damage is suspected.
 - (4) If a weight handling system wire has been idle for more than 30 days, a quarterly inspection shall be conducted.

- **A.** 4. a. (5) Inspection frequencies may be modified, based on operational experience and direction from the cognizant MLC and/or ELC, or promulgation of an Equipment Support Plan for the particular equipment or system.
 - (6) All wire rope associated with weight-handling systems in the weather shall be unshipped annually, or as directed by an Equipment Support Plan, for a more thorough inspection and pressure lubrication.
 - b. Inspection Frequency for Standing Rigging and Lifeline Applications. The following requirements are applicable to wire rope used in standing rigging and lifeline applications.
 - (1) Wire ropes shall be visually inspected for obvious deficiencies or defects on an appropriate routine basis. Wire rope that may come in contact with personnel shall be inspected more frequently.
 - (2) External Inspections: A qualified person shall perform <u>external</u> inspections of all wire rope at least annually to determine the condition of the wire and avoid a possible safety hazard.
 - (3) Internal Inspections: Internal inspections are not required, unless there is evidence of problems.
 - (4) Inspection frequencies may be modified, based on operational experience and direction from the cognizant MLC and/or ELC.
 - c. External Inspection. External inspections shall be conducted to locate deficiencies or defects including but not limited to the following areas:
 - (1) Reduction of rope diameter below the nominal diameter due to wear of outside wires, loss of core support or internal, or external corrosion. The diameter shall be measured in a circumscribing circle in six or more places on the rope. The diameter shall be measured across the largest radial line.
 - (2) The number of broken outside wires and the constriction of the broken wires. Attention should be given to valley breaks where the breaks are at the strand to strand contact point.
 - (3) Worn outside wires.
 - (4) Corroded or broken wires at the end connection. Corroded, cracked, bent, worn, or improperly applied end connections.
 - (5) Kinking, crushing, cutting, un-stranding, bird caging or fishhooks. **NOTE: Heavy** wear and/or broken wires occur in rope sections in contact with certain components of the equipment. Carefully inspect the rope at these points.
 - (6) Areas where the rope travel is limited. As an example, where wire goes over fixed guides or sheaves.

- **A.** 4. c. (7) End connections, including socket and end attachments to running ropes, boom pendants and other standing ropes.
 - (8) Sections of the rope where the rope is continually running over sheaves within the various hoist systems. The inspection is particularly important where boom angle and load block changes are frequent and limited to short distances.
 - (9) At crossover and flange points of the rope on the hoist drums.
 - (10) When wire rope is removed for inspection and lubrication, care must be taken to ensure the rope is temporarily stowed to prevent kinking or damage.
 - (11) When reinstalling wire rope that has been removed for inspection it shall be installed in the same direction it was removed. The practice of swapping ends is not approved.
 - d. Internal Inspection. Internal inspections shall only be accomplished by qualified personnel, and shall be conducted only when then there is evidence of problems. Local commands shall determine which personnel are qualified to open the lay of the rope without nicking the individual wires or disturbing the lay of the strands. Wire can be easily damaged by improper inspection procedures.
 - (1) Wire rope can be opened for internal inspection only when the wire is completely relaxed. To properly relax the wire and perform a thorough internal inspection of the entire rope, the rope must be un-shipped from the equipment. Extreme care must be taken when inspecting areas which are still attached or are in the vicinity of drums to avoid inspecting wire under tension.

(2) Procedure:

- (a) Using care to avoid damaging the strands or core, open the wire rope by working a marlin spike beneath two strands. Carefully rotate the spike to expose the core and underside of the strands.
- (b) Inspect for evidence of internal corrosion, broken wires, or core failure. Particular attention shall be given to the wire rope in areas close to end fittings, wire lengths that pass over sheaves, onto drums, and wire which remains exposed to or immersed in seawater.
- (c) If a wire rope has been opened properly and carefully, and internal condition does not show cause for removal, the strands can be returned to their original working positions without distorting the wire rope or impairing future usefulness.
- (3) Internal inspection of Rotation Resistant wire rope shall be done only in accordance with the wire manufacturer's instructions.

A. 5. Replacement Criteria.

- a. Replacement of the wire rope is required if one or more of the following conditions exist:
 - (1) Where the rope diameter has been reduced below allowable limits:

Max Allowable
Dia Reduction
1/64"
1/32"
3/64"
1/16"
3/32"
1/8"
5/32"

- (2) Six broken wires in one rope lay length or three wires in one strand lay length of weight handling system or general purpose wire. Three broken wires in one rope lay length for all standing rigging wire.
- (3) One broken wire within one rope lay length of any end fitting.
- (4) Wear of 1/3 the original diameter of outside individual wires.
- (5) Evidence of large areas of pitting due to corrosion.
- (6) Evidence of heat damage on an area of the wire where the load is carried. Passing a rope over a frozen or non-turning sheave or contact with structural members of the equipment can generate heat.
- (7) Kinking, crushing, or any other damage resulting in deterioration of the rope structure.
- (8) Evidence of internal corrosion, broken wires on the underside of strands, excessive nicks or core failure.
- (9) The rope construction has been distorted by kinking, crunching, bird-caging or other distortion damage.
- b. Wire rope shall not normally be replaced on a routine scheduled basis more frequently than once every four years for most installations, or more frequently than once every two years on weight handling systems on WLB, WLM, WLI, WLIC, and WLR cutters and related barges.
 - (1) The cognizant MLCs may establish routine wire replacement schedules for particular cutter classes or equipment, based on operational experience.

- **A.** 5. b. (2) Specific guidance for WLB, WLM, WLI and WLIC cutters will be provided in ESPs and individual CCMPs.
 - (3) Units which routinely condemn wire rope on a more frequent basis than the above shall report this to their cognizant MLC for investigation, action and/or direction.
 - (4) Condemnation of wire rope based on inspection criteria above shall supercede scheduled replacement cycles.
 - c. Diligent use of pressure type lubrication systems can increase the service life of wire rope.

6. <u>Cleaning</u>.

- a. The use of a wire rope maintenance system which includes a scraper assembly is preferred. This minimizes the need for cleaning and the hand application of solvents.
- b. Wire ropes shall be hand cleaned, if necessary, before lubrication in order to reduce the amount of residual contaminant forced between the wires. Hand cleaning includes use of pressure wash systems, compressed air systems, and application of manufacturer approved wire cleaning solvent using a wire brush.
 - (1) The use of environmentally friendly solvents is strongly recommended. Solvents should be compatible with the selected lubricant. The lubricant manufacturer should be consulted.
 - (2) After the use of any solvent, wire rope shall be pressure washed to ensure the solvent is removed.
- c. Wire shall not be soaked in solvent. The objective is to loosen or soften contaminated lubricant on the outside of the wire to ease removal. Over application of solvent, or soaking, may remove internal wire lubrication and may lead to accelerated wire rotting.
- d. Wire rope that is received coated with Cosmoline, shall be cleaned and lubricated before being placed into service.

7. Lubricants.

- a. Type/Grade.
 - (1) Wire rope lubricant shall be a commercial, marine grade, wire rope lubricant which is compatible with salt water applications, and is compatible with the pressure lubrication equipment which will be used for standard application. Environmentally friendly lubricants are preferred.
 - (2) Use of MIL-G-18458 Grease, Wire Rope and Exposed Gear, as recommended by USN documentation, may provide a generic grade lubricant which contains lead products. USN studies on acceptable replacement wire rope lubricants are in

- A. 7. a. (2) progress. The current document is frequently used as a baseline for saltwater performance comparison, and lubricants which are both more environmentally friendly and radically exceed MIL-G-18458 rev B performance requirements are commercially available. MIL-G-18458 grease shall not be used; this restriction does not apply to commercial grade grease which exceeds the performance of the military specification.
 - (3) Dynagard Blue[™] and Dynagard E[™], as distributed by The Kirkpatrick Group, are known to be more environmentally friendly, exceed MIL-G-18458 performance requirements, and have a history of use on Coast Guard cutters. Superior performance of these lubricants has been documented by Carderock Division Naval Surface Warfare Center study NSWCCD-63-TR-1999/32 December 1999: Environmentally Preferable Wire Rope Lubricants.
 - (4) Use of canned, spray type cleaner/lubricants is prohibited.

b. Lubricant Application.

- (1) Surface or topical application of wire rope lubricant, by hand, shall be limited to coating renewal between pressure lubricant applications; this process shall not be the primary source of wire lubrication. It does not ensure lubrication to the inner, working core of the wire rope.
 - (a) Where lubricant is hand applied, it shall be worked into the valleys and between strands. Sufficient lubricant shall be used to coat the outer wires, but the wires shall not be excessively greased.
 - (b) Wire rope shall be thoroughly lubricated at the base of end fittings and in other areas subject to high working stresses. Wire is not necessarily lubricated internally when the outside appears greasy.
- (2) Wire rope lubricant shall normally be applied with a pressure type lubrication system. The system shall include (at least) a groove cleaner, a scraper, an applicator w/seals, and a pressure pump. The seals shall be specifically sized for use with individual wire sizes to ensure pressure buildup within the applicator and to minimize waste products. The system shall scrape excess lubricant from the incoming cable, shall inject lubricant under pressure into the core of the wire rope, and shall minimize excess lubricant on the wire as it exits the lubricator.
 - (a) Pressure lubrication systems should be modular in design, to provide for different scraper and cleaner systems as necessary to support different wire rope constructions.
 - (b) Wire rope pressure lubrication systems with a proven history of performance in Coast Guard applications include systems distributed by The Kirkpatrick Group, Dallas Texas; www.thekirkpatrickgroup.com. These systems are available on the open market and through the Federal stock system.

- **A.** 7. b. (3) Wire rope pressure type lubrication systems may be maintained at the unit level, at maintenance facilities servicing multiple cutters, and at other facilities as directed by the cognizant MLC.
 - (a) Cutters with major weight handling equipment [WLB, WLM, WLI, WLIC] and cutters with long deployment cycles [WAGB] can typically justify ownership of a lubrication system. Other cutters shall share usage of a system at their home port, or shall seek support guidance from their cognizant MLC.
 - (b) Lubrication system owners shall ensure that consumable components, such as wire seals, are replaced as needed and that the equipment is maintained in good working order with accessory components for all sizes of wire on the cutter.
 - (c) Use of a lubrication system with seals which are worn or have failed may result in development of lower lubricant injection pressure and failure of the lubricator to properly lubricate the inner core of the rope.
 - (d) Lubrication system owners shall maintain copies of the Technical Operating Instructions both WITH the equipment (for immediate use by any personnel using the equipment), and with other documentation aboard the cutter.
 - (3) Lack of access to a pressure type lubrication system in good repair will not be accepted as sufficient reason for non-compliance with the requirement below to pressure lubricate wire ropes.
 - c. Lubrication of Weight Handling and General Purpose Wire.
 - (1) Wire rope is initially lubricated by the manufacturer during fabrication. This initial lubrication is compounded with additives to provide lubrication qualities and corrosion protection during storage, shipping, and handling. This factory lubrication alone is inadequate for initial installation without additional lubrication. Units shall pressure lubricate all new wire rope at installation.
 - (a) Contractually requiring wire rope to be "pressure lubricated" by the local vendor prior to delivery may not achieve the desired result. All wire rope lubrication systems are not created equal; some systems slush the outside of the wire rope and do not inject grease under pressure into the wire core. Units shall ensure that the vendor is using a Kirkpatrick Group TM pressure type lubrication system, or equal, and shall inspect the wire rope carefully on delivery.
 - (2) Periodic lubrication is required because wire rope is really a mechanical device with many moving parts. Each time a rope bends or straightens, the wires in the strands and the strands in the rope slide upon each other. A film of lubricant is needed on each moving part. There is no known method to determine the strength of corroded wire. A rusty rope is a liability.

- **A.** 7. c. (3) Wire rope shall be thoroughly lubricated at the base of end fittings and in other areas subject to high working stresses.
 - (4) In addition to being pressure lubricated before installation, wire rope (including stainless steel and galvanized wire rope) shall be lubricated per the following schedule:
 - (b) Specific wire lubrication schedules will be established and promulgated as part of Preventive Maintenance System documentation, and in Equipment Support Plans for weight handling systems on specific cutter classes. The guidance in the ESPs will reflect operational conditions of the cutter and equipment usage. The following is generic guidance:
 - (c) Wire shall be lubricated after quarterly inspections as deemed appropriate. Lubrication type (hand or pressure) shall be locally determined based on condition found.
 - (d) Pressure lubrication of wire rope working areas is encouraged on at least a semi-annual basis.
 - (e) All wire shall be pressure lubricated at least annually.

d. Lubrication of Standing Rigging.

- (1) Galvanized standing rigging wire rope is initially lubricated by the manufacturer during fabrication. This initial lubrication is compounded with additives to provide lubrication qualities and corrosion protection during storage, shipping, and handling. This factory lubrication alone is typically inadequate lubrication for extended service in the weather. Units shall pressure lubricate all new galvanized wire rope at installation.
- (2) Galvanized wire rope shall be top coated or pressure lubricated as dictated by inspection reports. If the surface lubricant has seriously deteriorated, the wire shall be unshipped and shall be pressure lubricated with the lubrication system.
- (3) Galvanized wire rope shall be unshipped and pressure lubricated at least every five years.

8. Stowage.

- a. When wire is received, and it is not placed in service immediately, it shall be stored in an area protected from the weather and from possible contact with acid or acid fumes. Do not store wire rope in areas where acid is kept. The slightest trace of acid is apt to damage wire rope at the point of contact.
- b. To afford protection from acid or other corrosive elements, coat the outside layer of wire rope on a reel or coil with a lubricant.

A. 8. c. Before placing any wire rope into service a thorough inspection of the rope shall be conducted, and the wire shall be pressure lubricated.

9. Record Keeping.

- a. Wire rope measurements shall be recorded for all new wire rope, prior to installation to establish baselines for future inspections.
- b. Inspection record files shall be maintained for all wire ropes until the wire rope is condemned or replaced. Written, signed and dated inspection reports shall be maintained in the files to document all inspections, note deterioration and maintenance actions, and provide historical data for trend analyses.
- c. 'Wire rope deterioration shall also be noted in the hull/machinery history card or approved maintenance record logs for the appropriate piece of equipment.

B. WIRE ROPE FITTINGS.

- 1. <u>Spelter Socket Fittings</u>. It is becoming increasing difficult to obtain RR-S-550D (or equal) poured zinc spelter socket wire rope fittings due to material issues and the availability of qualified personnel to make the casts. USN documentation, which is pending distribution, will authorize the use of WIRELOCKTM and SOCKETFASTTM poured resin socket assemblies using CROSBYTM G-416 and G-417 spelter sockets as an accepted alternative to poured zinc spelter socket wire rope fittings. These resin materials are commercially available in kit form for onsite application. Manufacturer's instructions for installation shall be followed. Where the wire and fitting are procured as an assembly, they shall be pull tested and provided with a test certificate.
- 2. <u>Swaged Socket Fittings</u>. Cold swaged wire rope fittings, such as Crosby / National[™] S-501 and S-502 series, or equal, are an acceptable wire rope fitting for weight handling systems, provided that the fittings are supplied as part of a wire assembly which has been hydraulically swaged. Assemblies shall be pull tested and provided with a test certificate.
- 3. <u>Fiege Socket Fittings</u>. ELECTROLINE™ fiege type threaded compression fittings which utilize tapered wire rope plugs are an acceptable fitting which can be field installed. Per NSTM 613, these fittings have a typical efficiency of 85% of the wire rope, and this efficiency shall be accounted for in the wire rope system design. These fittings have typically been used in ATON weight handling applications, and in safety and lifeline applications.
- 4. <u>Wedge Socket Fittings</u>. These fittings are currently authorized for use only on WLIC cutters and barges with lattice boom cranes.
- 5. <u>All wire rope assemblies</u> shall be inspected, and factory or field weight tested before handling working loads, to ensure the fitting has been properly installed.

C. SHEAVES.

- 1. <u>Sheaves</u> shall be sized and grooved for the wire rope which will be carried. Improperly sized sheaves can lead to premature wire rope wear and failure.
 - a. Sheave diameters of at least 20 times the wire diameter [D/d ratio] are generally preferred on new construction running rigging with 6x37 classification wire; sheave diameters with a D/d ratio smaller than 20 will impact on wire stress levels and the service life of the wire. Some installations may require smaller diameter sheaves to address existing space limitations. On systems with sheaves with a D/d ratio of less than 20, wire rope inspections shall pay particular attention to areas which may receive excessive working over these sheaves.
 - b. Manufacturing tolerances for new sheaves are distinctly different from acceptable wear tolerances for sheaves in use. Sheave "wear" gage tools are typically dimensioned to gage the acceptability of worn sheaves. Use of a "wear" gage to inspect a new sheave is a misapplication. A gage may be used to verify that a "new" sheave is of the correct size, but shall NOT be used to inspect "new" sheave tread clearances.
- 2. <u>Sheave inspections</u> shall be conducted using USCG drawing FL 1702-11, Inspection of Sheaves, as a reference.
 - a. New sheaves, and sheaves with less than several hundred hours of service may be inspected for deformities, but shall NOT be inspected for "wear" using a sheave gage.
 - b. Sheaves manufactured by roll forging methods may initially appear to have a rougher groove surface than sheaves with a machined groove, but are fully acceptable.

Page Intentionally Left Blank

CHAPTER 630. PRESERVATIVES AND COVERINGS

- A. PAINT. Coatings and Color Manual, COMDTINST M10360.3, prescribes Coast Guard policies and procedures for surface preparation and paint application for Coast Guard cutters and boats. All units shall comply with the requirements of COMDTINST M10360.3 unless otherwise authorized by G-SEN. G-SEN may authorize variance from COMDTINST M10360.3 for color, prototype, and material substitution issues. ELC may authorize variance from COMDTINST M10360.3 for prototype evaluation purposes only. NSTM Chapter 631 and industry publications such as the Steel Structures Painting Manual, Volumes I and II published by the Society for Protective Coatings (SSPC), formerly known as the Steel Structures Painting Council) may be used for additional guidance. Units are required to comply with Federal, State, and local Clean Air and Clean Water regulations, in addition to applicable Volatile Organic Compound (VOC) restrictions.
- B. CATHODIC PROTECTION. Two methods of hull cathodic protection systems are currently in use on Coast Guard vessels: an impressed current or automatically controlled system (commonly referred to as CAPAC) is installed on all 110 , 225' WLB and 420' WAGB cutters; corrosion preventive zinc anodes are installed on all other cutter and boat classes. Each MLC shall develop and promulgate specifications for the inspection, maintenance, and renewal of the aforementioned systems. Information on the equipment, design, installation, and maintenance of zinc anode systems is available in NSTM Chapter 633. Equivalent information for CAPAC systems is available in Coast Guard technical publications for the respective 110' WPB, 225' WLB and 420' WAGB cutter classes. Cathodic protection systems shall be evaluated annually in conjunction with either routine drydockings (underwater body inspections) or during diver inspections every non-drydocking year. Findings shall be documented on the Drydocking and Underwater Body Inspection Worksheet (CG-2926) or a letter, and forwarded to the respective MLC.

Page Intentionally Left Blank

CHAPTER 634. DECK COVERINGS

- **A. GENERAL.** Each MLC shall develop and promulgate detailed guidance for the removal of existing deck coverings, surface preparation (cleaning and priming), and the installation of new deck coverings. Application, maintenance, and safety procedures outlined in NSTM Chapter 634 and Coatings and Color Manual, COMDTINST M10360.3 (series), may be used for guidance.
- **B.** <u>AUTHORIZED MATERIALS</u>. The following table is a list of authorized, interior deck covering materials, applicable conformance standards, and respective areas of use on Coast Guard cutters and boats. NSTM Chapter 634 provides a comprehensive listing of deck-covering materials for specific shipboard areas. All systems must meet the fire performance and specification requirements of MIL-STD-1623, unless specified otherwise herein.

TABLE 634-1 AUTHORIZED DECK COVERING MATERIAL

SYSTEMS	SPECIFICATION	LOCATION
*Cosmetic Polymeric	MIL-D-24613 Type I Epoxy	Interior passageways, wash, head, shower areas.
Cosmetic Polymeric	MIL-D-24613 Type III Epoxy	Interior passageways, wash, head, shower areas, AFFF stations, galley, laundry, scullery, berthing area, lounges, offices.
Latex Terrazzo	MIL-D-3134	Wash, head, and shower areas, AFFF stations.
Ceramic Tile: Mosaic, quarry, porcelain paver.	ANSI-A137.1	Galley, laundry and scullery
Vinyl Tile/Sheet	ASTM F1066	Interior passageways, berthing areas, lounges, and offices.
**Vinyl Tile **Vinyl Sheets **Rubber Tiles/Sheets	ASTM F1066 ASTM F1303 ASTM F1344, Class A	Interior passageways, berthing areas, lounges, and offices.
Electrical Insulating	MIL-DTL-15562, Type I, II, or III	*
****Carpeting	Commercial Spec: wool or velvet, woven through the back.	Officer, CPO and crew lounge areas.

- *Application of MIL-D-24613, Type II and Type III, polyurethane is no longer authorized. Repair and resealing of existing polyurethane decks shall be accomplished by a licensed contractor. Ships' crews are **NOT** authorized to handle Type II and Type III polyurethane
- **Must contain no asbestos; flammability >=0.45 w/cm2 (ASTM E 648)
- ***Electrical grade (Dielectric) sheet, MIL-M-15562 Type I shall be used to insulate the entire space. When insulated deck covering is not required to insulate an entire space, Portable Mat, MIL-M-15562 Type II (smooth) or Type III (diamond tread pattern) may be used
- **** Conforming to FED Spec DDD-C-95, type II, class 1, 2, or 4 and meeting the fire requirements of MIL-STD-1623. Maximum opake density: 450 (ASTM E 662: flammability >=0.45 w/cm2 (ASTM E 648)). Use a water-based adhesive conforming to MIL-A-2106 for bonding.
- ***** Insulated deck covering is necessary to prevent electric shock to persons who may come in contact with energized, nongrounded circuits while standing on bare decks. Insulated matting conforming to MIL-M-15562 is required in the following areas: in the '**front, rear, and sides**" of propulsion-control consoles/booths, power and lighting switchboards, interior communication switch boards, test switchboards, fire-control switchboards, shipboard announcing systems, electronic and radio equipment on the bridge, radio room, and Combat Information Center, and in the area around workbenches in electrical and electronic shops where electrical or electronic equipments are tested and repaired.

CHAPTER 670. STOWAGE, HANDLING, AND DISPOSAL OF HAZARDOUS MATERIALS

- A. GENERAL POLICY. Hazard Communication for Workplace Materials, COMDTINST 6260.21 (series), requires Commanding Officers/Officers-in-Charge (CO/OIC) to develop and maintain a hazard communication program. Units are responsible for designating a hazardous materials coordinator, who is responsible for developing and maintaining a hazardous materials inventory list and Material Safety Data Sheets (MSDS) for all hazardous materials (general use consumables) in the workplace. Hazardous material coordinators are also responsible for training crew members in the proper stowage, handling, and disposal of hazardous materials. Asbestos Exposure Control Manual, COMDTINST M6260.16 (series) provides the Coast Guard policy and procedures for handling asbestos. Hazardous Waste Management Manual, COMDTINST M16478.1 (series), prescribes polices and procedures for Coast Guard vessels and shore activities to comply with Federal hazardous waste regulations. For state and local guidance, units shall contact their respective MLC Environmental Section, Civil Engineering Unit, U. S. EPA Regional Office, or State Hazardous Waste Management Agency. In cases where state and local regulations conflict from federal and Coast Guard regulations, the most stringent shall be the preferred level of compliance.
- **B.** <u>INVENTORY.</u> A complete inventory list is required for all hazardous materials. At minimum, the list must include unit name, product name, manufacturer and address, FSN, and the location and use of each product. An MSDS shall also be provided for each hazardous material. Whenever possible utilize HAZMIN Centers to purchase hazardous materials and maintain onboard inventories only at levels required to support a deployment or existing maintenance.
- **C. STOWAGE.** Proper hazardous material stowage is essential to cutter and personnel safety. Gasoline shall be stowed in accordance with Chapter 540 of this manual. Additional information on hazardous material stowage may be obtained from Commandant (G-WKS) and MLC (kse). NSTM Chapter 670 provides information concerning stowage requirements for flammable and combustible materials.
- MSDSs, which provide information on proper use, potential hazards, protective measures to be taken, and emergency first aid procedures to be followed. Enclosure (2) to Hazard Communication for Workplace Materials, COMDTINST 6260.21 (series) provides a listing of hazardous materials and by-products which may be found on Coast Guard cutters. Manual I of the Chemical Hazards Response Information System (CHRIS), COMDTINST M164565.12 (series), provides additional information on the compatibility of chemicals, associated hazards, preventive/precautionary measures to be taken, and recommended action responses.
- **E. DISPOSAL.** Hazardous Waste Management Manual, COMDTINST M16478.1 (series), provides guidance on the disposal of hazardous waste materials. Wastes generated while underway shall be turned over for disposal to a supporting shore facility which has an EPA generator identification number. Independently moored vessel with an EPA generator identification number/permit shall dispose of hazardous wastes in accordance with the provisions of the permit.
- **F.** ELECTRONIC RECORDS. Units outfitted with CMplus shall use it as the primary means for managing hazardous materials. CMplus provides an inventory and reporting function for hazardous material. It may also be used to develop an authorized use list that limits the types of hazardous materials used by the unit.

CHAPTER 700. ORDNANCE, GENERAL

- **A.** <u>GENERAL</u>. Ordnance Manual, COMDTINST M8000.2 (series), provides detailed guidance on the administration, operation, training, alteration, maintenance and NESU support of weapon systems used by the Coast Guard.
- **B.** COAST GUARD MODULE TEST AND REPAIR (MTR) PROGRAM. Cutters with major Navy-Owned Ordnance (NAVORD) systems installed and their supporting NESUs have been outfitted with Module Test and Repair equipment to test the condition of circuit cards and electronic assemblies in both NAVORD and HM&E equipment.
 - 1. All suspect cards (HM&E or NAVORD) should be screened by a local MTR facility, if available, prior to removing repair parts from the storeroom or turning in the cards and assemblies for repair. If no local MTR facility exists, the parts should be replaced and the old parts returned without screening.
 - 2. Decisions to repair or return all faulty assemblies shall be in accordance with the assigned Source, Maintainability, and Recovery (SM&R) codes and the ELC Appropriation Purchase Account (APA) Repairable Electronics Program (ELCINST 4401.1 (Series)). Repairs shall not be attempted to assemblies coded for depot repair.
 - 3. All screening actions and repairs shall be reported via the MTR Tracking System (MTRTS). The MTRTS is a database imbedded in the MTR equipment to capture equipment usage. More info on the MTR Program and the MTRTS is contained in Coast Guard Module Test and Repair Program, COMDTINST 4790.2 (Series).
- C. NESU-HELD NAVY-ORDNANCE SUPPORT EQUIPMENT. NESUs supporting NAVORD-equipped cutters have been issued individualized COSAL manuals listing the tools, materials, and support equipment needed to properly support the NAVORD systems installed on their assigned cutters. The NESUs shall maintain and safeguard that equipment to ensure that it is available when needed by or for their assigned cutters.

CHAPTER 834. COMPUTER PROGRAMS

A. COMPUTER PROGRAMS FOR ENGINEERING USE.

- 1. <u>Descriptions</u>. The following software applications are authorized for managing shipboard configuration, maintenance, supply, inventory and stability:
 - a. Shipboard Computer Aided Maintenance (SCAMP). SCAMP is an application for managing a cutter's Preventive Maintenance System (PMS), Current Ship's Maintenance Projects (CSMP), ordering and receipt of parts inventory, annual budget, and inventory usage.
 - b. Configuration Management Plus (CMplus). CMplus will replace SCAMP functionality and will be used to manage unit configuration, supply/inventory, and maintenance. CMplus is an application which provides key information to other Coast Guard maintenance and logistics applications, such as Management Information for Configuration Allowances (MICA) and Fleet Logistics System (FLS). CMplus software is managed by G-SLS with technical support provided by OSC Martinsburg. Questions concerning the installation of the software should be addressed to the servicing MLC. Software technical questions should be addressed to OSC. USE OF CMPLUS IS MANDATORY FOR CUTTERS OUTFITTED WITH THE SYSTEM.
 - c. Fleet Logistics System (FLS). FLS is a web-accessible Oracle database application that provides platform information about planned and corrective maintenance, projects, schedules, inventory (total asset visibility), expenditures, and budgets. One of the key outputs of FLS for cutter maintenance planning is the Naval Engineering Project Listing (NEPL). The NEPL is compiled for each cutter area of responsibility and presented in various formats dependent on the user's requirements.
 - d. Naval Engineering Technical Information Management System (NE-TIMS). NE-TIMS provides authorized personnel access, through CD-ROM and/or the Coast Guard Intranet, to engineering technical data such as drawings and technical publications. Hardware requirements are SWSIII with either CD-ROM or CGDNT access. No special software is required to view the documents. NE-TIMS is managed by the Technical Information Branch of the Engineering Logistics Center. CD-ROM distribution is automatic and access via the Coast Guard Intranet is password controlled for any activity other than for viewing.
 - e. Flooding Casualty Control Software. FCCS provides shipboard and shore based personnel with the ability to quickly evaluate a ship's intact, damaged, and grounded stability. It is described in detail in Chapter 079 of this manual.
- **B.** <u>INSTALLATION AND UTILIZATION REQUIREMENTS</u>. SCAMP shall be maintained and utilized by all units until replaced by CMplus. Upon installation, cutters shall use CMplus for all their configuration, supply, inventory, and maintenance actions.
- **C. <u>DISTRIBUTION OF SOFTWARE.</u>** Commandant (G-SLS) will distribute CMplus via the Configuration Management project.

CHAPTER 997. DOCKING INSTRUCTIONS FOR CUTTERS AND BOATS

A. CUTTERS.

1. <u>Docking Intervals</u>. The cognizant MLC and operational commander shall coordinate and schedule cutter repair availabilities. Cutter Employment Standards, COMDTINST 3100.5 (series) and Chapter 081 of this manual shall be used for guidance.

2. <u>Drydock Certification</u>.

- a. Using MIL-STD-1625C, Safety Certification Program for Drydocking Facilities and Shipbuilding Ways for U. S. Navy Ships as a guide, MLCs shall ascertain job qualifications of the Dockmaster and workforce of prospective drydock facilities, and assess the capacity, physical condition, and operation of these facilities in regard to their foundation, structure, and supporting auxiliary systems. For facilities where compliance with all the requirements of MIL-STD-1625C is impractical, MLCs shall develop and promulgate alternative compliance and acceptance criteria.
- b. The intact stability criteria of MIL-STD-1625C are extremely important and should be strictly adhered to. Floating drydocks should be able to sustain damage to two adjacent tanks without deck immersion or excessive list and have adequate reserve buoyancy to achieve 12" of freeboard. Marine railways should have adequate stabilizing moment to offset the overturning moment and leave a margin for safety. In addition, prospective drydock facilities shall be certified by a naval architect (professional engineer), tasked with addressing the stability (as described above), drydock strength and material condition along with certification of insurance and classification (i.e. in accordance with ABS, etc.).
- 3. <u>Availability Guidelines</u>. MLCs shall develop and promulgate detailed guidance for planning and executing commercial availabilities. Guidance shall include procedures for safely docking and undocking cutters, specifications for conducting maintenance, tests and inspections, and general administrative procedures to be followed.

4. Underwater Body Hull Inspection Board.

a. Convening Authority:

- (1) MLCs shall designate either an administering NESU representative or the appropriate MLC representative as the Underwater Body Hull Inspection Board convening authority for each drydocking of cutters within their respective AOR. Inspection boards shall consist of a MLC/NESU representative, the Commanding Officer/Officer-in-Charge (CO/OIC), the 1ST Lieutenant, and the Engineer Officer/Engineer Petty Officer (EO/EPO).
- (2) The administrating NESU shall serve as the convening authority for "active" cutters drydocked at the Coast Guard YARD (CG YARD). The CO of the CG YARD shall serve as the convening authority for "inactive" cutters drydocked at the CG YARD. The CO of the YARD shall designate appropriate CG YARD personnel to serve on Hull Inspection Boards for inactive cutters.

- A. 4. b. Inspection Procedures. The board shall make an initial survey as soon as possible after the cutter is drydocked and before any work is done on the underwater body or appendages. Guidelines for conducting inspections are outlined in the Drydocking and Underwater Body Inspection Work Sheet (CG-2926) and the Underwater Body Paint Report (CG-4815). Completed reports shall be forwarded to the cognizant MLC. Copies shall be retained on board the cutter as part of the Hull History File.
 - 5. <u>Cutter Responsibility</u>. Prior to docking, CO/OICs are responsible for ensuring that block arrangements are in accordance with the docking plan. Operational control of cutters shall be shifted to the Dock master as specified in NSTM Chapter 997. While docked, there shall be no shifting of weights, fuel, fresh water or ballast without the express permission of the Dock master. CO/OICs are responsible for keeping an accurate account of all changes and shifts in weight.

B. BOATS.

- 1. <u>Boat Inspection Interval</u>. Boats shall be hauled out of the water, annually, to conduct a thorough boat inspection. Guidelines for conducting inspections are specified in NEM Chapter 090 and the Boat Inspection Report (CG-3022).
- 2. <u>Boat Availabilities</u>. The annual boat inspection and required report should be performed in conjunction with the annual boat availability. Groups shall coordinate specific repairs and districts shall coordinate availability scheduling. Procedures for planning and executing boat availabilities are documented within the MLC Standard Operating Procedures.

APPENDIX A

COAST GUARD CUTTER STABILITY TEST PROCEDURES

A. STABILITY TEST PROCEDURE. This appendix prescribes a procedure to ensure the accuracy and uniformity of the stability test performed on Coast Guard cutters. The data obtained from the stability test is used to accurately determine the cutter's light ship center of gravity and displacement. These results are then used to prepare a Stability Test Report, which documents the stability test and presents loading conditions other than light ship. Any departure from this procedure must be approved by ELC (023).

B. <u>PREPARATION FOR TESTING</u>.

- 1. <u>Procedures Review</u>. At least two weeks before the stability test, the NESU Representative, the Stability Test Officer (STO), and the Commandant Representative shall discuss the preparation for and conduct of the stability test. The following information shall be reviewed:
 - a. Identification of the vessel
 - b. Date and location of test
 - c. Verification of Draft Marks
 - d. Stability test weight data
 - (1) Type
 - (2) Amount
 - (3) Certification
 - (4) Method of handling
 - e. Pendulums, including approximate location and length
 - f. Anticipated maximum angle of ship's heel to each side
 - g. Approximate trim and, if necessary, use of trimming weights
 - h. Condition of tanks
 - i. Estimated weights to deduct, to complete, and to relocate
 - j. Ship mooring for test

B. 1. k. Other ship preparation, for example, deck shoring

- 1. Copies of the cutter's line drawings, curves of form, midship section drawings, general arrangements, and tank capacity tables
- m. Variable loads for loading conditions
- n. Stability Test Team personnel (assignments and communication with)

2. General Condition of Cutter.

- a. The cutter shall be as nearly ready for service as possible, including outfit, spares, and repair parts. If the cutter is undergoing construction or major renovation, work shall be completed or as close to completion as schedules permit.
- b. The cutter shall be in a good state of cleanliness. Such items as shipyard gear, equipment, workmen's tool boxes, scaffolding, scrap, and construction debris shall be removed from the cutter.
- c. Movable weights shall be lashed in place.
- d. Bilges shall be dry and decks free of liquids.
- e. Liquids in boilers, wet machinery, and piping shall be at the operating level; and the sewage tanks shall be at low suction.
- f. Keys to all locked compartments shall be available.
- g. A minimum number of personnel shall be on board during the test. No other work shall be in progress during the test.
- h. Draft marks shall have been verified while the cutter was in dry dock.

3. List of Weights.

- a. A list of weights shall be prepared. It shall identify all items that need to be added to, removed from, or shifted on board the cutter to determine the Light Ship Condition from the condition "As Inclined". The Light Ship Condition is the cutter complete in all respects but without any items of variable load.
- b. The centers of gravity shall be referenced to the cutter's baseline, midships, and centerline. Sign conventions shall be positive values above baseline, aft midship and starboard of centerline.
- c. If transverse weights are needed, they shall be reported, with their accompanying transverse moment referenced to the centerline plane.

B. 4. Tankage.

- a. General.
 - (1) The liquid loading for the test shall be determined before the date of the test. The number of tanks containing liquids shall be at a minimum to reduce free surface effects.
 - (2) Because diesel oil tanks might overflow during the test, they shall not be pressed full. They shall be filled at a level such that the free surface effect can be accurately determined.
 - (3) Within the framework of the above requirements, the cutter's liquid loading must ensure adequate stability for the test.
- b. Slack Tanks. Slack tanks shall be avoided if possible. Otherwise, they shall be as follows:
 - (1) Slack tanks shall be limited to tanks with essentially a rectangular cross section and fuel oil tanks.
 - (2) Water tanks shall be either full and pressed up, or empty. Slack water tanks can only be allowed if approved by a Commandant Representative.
 - (3) Deep tanks shall be 20 to 80 percent full.
 - (4) Double-bottom tanks shall be 40 to 60 percent full. These tanks may be slack, although sounding indicates a full tank. See Figure 1.
 - (5) The percentages in paragraphs B.4.b.(3) & (4) are intended to prevent pocketing of the liquid, or a change in the dimensions of the free surface throughout the range of heel angles during the stability test. If the tank is of an irregular shape and must contain liquid, then the liquid level shall be such that an accurate free surface determination can be made throughout the range of inclinations.
 - (6) Slack tanks containing highly viscous liquids that resist free movement as the cutter is inclined shall be avoided because their free surface effect is difficult to determine. Such liquids include heavy lube oils or Navy Special fuel oil at room temperature. Liquids in tanks may be heated to reduce the viscosity.
 - (7) Cross connections, including those through manifolds, must be closed. Unequal liquid levels in slack tank pairs can be used as a check against open cross connections.

B. 4. c. Pressed Up Tanks.

- (1) "Pressed up" means completely full with no pockets or voids caused by trim or inadequate venting.
- (2) Anything less than 100 percent full, as for example the 95 percent condition regarded as full for operational purposes, is not acceptable.
- (3) The cutter shall be rolled from side to side to eliminate entrapped air before taking final soundings.




Figure 1 Double Bottom Tank Soundings

Sketch showing how double bottom tank may be slack although sounding indicates a full tank.

d. Empty Tanks.

- (1) All empty tanks, cofferdams, and void spaces shall be inspected. Therefore, all manholes shall be opened and the tanks, cofferdams, and void spaces made "safe for men" in accordance with Navy Publication NAVSEA 0901-LP-920-003.
- (2) It is generally not sufficient to simply pump tanks until suction is lost. The exceptions are very narrow tanks or tanks where there is a sharp deadrise, where free surface would be negligible. Otherwise, tanks shall be entered, stripped with portable pumps, and wiped dry.
- e. Identification of Liquids. Liquids in tanks shall be identified by their specific gravity.

5. Trim, Hog and Sag.

- **B.** 5. a. If no tanks are pressed up, a level or nearly level trim is desirable. If tanks are to be pressed up, some trim by the stern will aid in venting and eliminating air pockets. It will also facilitate emptying those tanks that are required to be empty. Where a number of tanks are permitted to be full, press up the aftermost tanks first to provide a favorable stern trim.
 - b. It is preferred that either the cutter have an even trim or that trim aft shall not exceed 1 percent length between perpendiculars (LPB).
 - c. For cutters with the trim aft not exceeding 1 percent LBP, hydrostatic properties for the cutter "As Inclined" may be taken from the Curves of Form for the draft, at the longitudinal center of flotation, corrected for hog or sag.
 - d. For cutters trimmed aft in excess of 1 percent LBP, hydrostatic properties for the "As Inclined" condition must be calculated for the actual trimmed waterline at test. Hydrostatic calculation, if necessary shall be performed utilizing the SHCP program or the GHS program (for boats and cutters up to 120 feet in length based on the hull description provided by ELC (02). Hog or sag and appendages shall be taken into account.
 - e. Hog or sag is determined by taking freeboard measurements along the length of the cutter, starting at midships and working toward both ends, and plotting them on the outboard profile drawing. The corrections for hog and sag are:
 - (1) Hog: Subtract two-thirds of the total hog value.
 - (2) Sag: Add two-thirds of the total sag value.
 - f. For cutters that have designed drag, special attention shall be given to ensure that the "as inclined" condition waterline corresponds to the waterlines used as the basis for the Curves of Form.

6. List.

- a. With stability test weights in the initial position, up to, but not more than, one-half degree of list is acceptable for cutters of usual form.
- b. Leveling weights may be used to correct list. These weights must be certified by a STO's master weight document before the test is conducted.

7. Mooring Arrangements.

a. The importance of a good mooring arrangement cannot be overemphasized. The location will depend on many factors. Among the most important are depth of water and wind and current effects. The cutter shall be moored in a quiet, sheltered area and be free of extraneous forces such as propeller wash from passing ships or sudden discharges from shoreside pumps.

- B. 7. b. The depth of water under the hull shall be sufficient to ensure that the hull will be entirely free of the bottom. The tide conditions and the trim and list of the cutter during the test must be considered. Before the test, the depth of water shall be measured and recorded in as many locations as necessary to satisfy this requirement. If marginal, the depth of water shall be spot checked after the test.
 - c. Cutters shall be moored as shown in Figure 2. In this case, the lines can be kept taut, holding the cutter in place, yet allowing unrestrained heeling. Note, however, that wind or current may cause a superimposed heeling moment to act on the cutter throughout the test. For steady conditions, this will not affect the results. Gusty wind or uniformly varying wind or current will cause these superimposed heeling moments to change, so that additional test points are required to obtain a valid test. The test validity can be determined by plotting test points as they are obtained.
 - d. Mooring pad eyes shall be installed as illustrated in Figure 2.
 - e. If the mooring arrangement shown in Figure 2 is unattainable, then an alternative mooring arrangement as described in B.7.f below may be used. Use of the alternative mooring arrangement must be acceptable to the STO and NESU Representative and must not jeopardize the stability test results per the Commandant Representative.

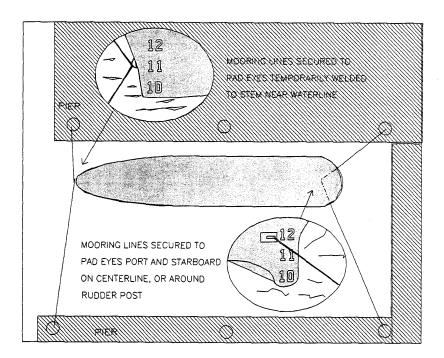


Figure 2 Sketch of Mooring

- **B.** 7. f. When a cutter can only be moored to one side, it is generally necessary to supplement bow and stern lines with two spring lines to maintain positive control of the vessel, as shown in Figure 3. The leads of the spring lines shall be as long as practicable. Cylindrical camels shall be provided between the cutter and the dock. If conditions allow, all lines shall be slack, with the cutter free of the pier and camels, when taking readings.
 - (1) If the vessel is held off the pier by the combined effect of wind and current, and the bow and stern lines are secured at centerline near waterline, they can be taut. This is essentially the same as the preferred arrangement in B.7.c. As in B.7.c above, varying wind and/or current will cause some distortion of the plot.
 - (2) If a vessel is pressed against the camels by wind and/or current, all lines shall be slack. The cylindrical camels will prevent binding but, again, there may be an unavoidable superimposed heeling moment due to the ship bearing against the camel. This factor must be watched carefully to avoid erroneous test results.




Figure 3 Line Arrangement

- g. If a floating crane is used to handle the stability test weights, it shall not be moored to the cutter undergoing the stability test.
- h. The brow shall be removed. Power lines, hoses, and other items connected to the shore shall be at a minimum. Shoreside services required during the stability test shall be kept slack at all times.

8. Personnel.

- a. Sufficient personnel shall be available to handle mooring lines and to assist in shifting the stability test weights. Personnel shall remain in their designated area when readings are being taken during the stability test.
- b. No one shall be allowed to board or depart from the cutter once the stability test begins. Once the stability test has begun, it shall be completed without interruption.

- **B.** 8. c. Sufficient personnel shall be provided to record the pendulum readings and to collect all data relative to the experiment. Before the stability test, those recording the pendulum deflections shall become thoroughly familiar with the procedure described in this chapter.
 - d. Knowledgeable personnel shall be provided to assist in sounding all tanks, bilges, cofferdams, and voids the day of, and just before, the actual experiment.
 - e. All personnel on board must be directed to a convenient location, preferably on the centerline at the start of the test, and must remain in that position when readings are taken.

9. Weather.

- a. The combined adverse effects of wind, current, and sea may result in difficult or even invalid test results because of:
 - (1) Inability to accurately record drafts and freeboards.
 - (2) Excessive or irregular oscillations of pendulums.
 - (3) Variations in unavoidable superimposed heeling moments.
- b. The stability test may have to be delayed or postponed until weather conditions improve or until the cutter is moved to a sheltered area where weather and environmental conditions are acceptable. Pre-test planning shall provide for this contingency.
- c. Rain, snow, and ice shall be removed from the cutter to the satisfaction of the STO, NESU representative, and Commandant representative.

C. <u>CONDUCT OF TEST.</u>

- 1. Stability Test Officer (STO) and Commandant representative:
 - a. The STO shall conduct the stability test in accordance with the stability test specifications. Where the specifications are silent, the procedures within this chapter shall apply.
 - b. The Commandant representative shall advise the NESU representative if valid stability test results are subject to error or are in jeopardy of being invalid due to improper preparation of the cutter or conduct of the stability test.
 - c. The Commandant representative will:
 - (1) Check the adequacy of cutter preparation by conducting a general inspection of the cutter.

- C. 1. c. (2) Ensure that the mooring arrangement is satisfactory and compatible with weather conditions.
 - (3) Witness the measurement of the pendulums, the soundings of tanks containing liquids, and inspect all dry tanks just before the test.
 - (4) Witness the reading of draft marks, measurement of freeboards, specific gravity and temperature of the flotation water.
 - (5) Verify accuracy and acceptability of the test data recorded.

2. <u>Test Weights</u>.

- a. The total weight used shall be enough to give an inclination of 1 to 3 degrees to each side, with the larger inclinations necessary to get sufficient deflection of the pendulum on smaller cutters. The inclination shall never exceed 4 degrees.
- b. The weights shall be solid, compact, and of such configuration that the center of gravity location may be accurately determined. (Personnel used to sally ship are not acceptable weights.)
- c. Each stability test weight shall be marked with an identification number and weight. The weight shall be certified by either a weight-master's document or a Coast Guard Inspector. Steel weights are preferred. Weights, such as porous concrete, that will absorb significant amounts of moisture, shall be avoided. If concrete is used, it would be weight certified before and after the stability test, be wrapped in plastic film, and be symmetrical in shape.
- d. It must be possible to move the weights rapidly once the test is started, to reduce the likelihood of encountering changing wind and current conditions.
- e. Use of the cutter's own weight handling equipment is not permitted. Decks shall be protected with wood dunnage in way of the weights.
- f. Precautions shall be taken to ensure that the decks are not overloaded during the weight movements.

3. Pendulums.

- a. Figure 4 shows a satisfactory pendulum arrangement. The pendulums do not have to be on centerline.
- b. Three pendulums shall be used to increase the confidence level of accuracy of the average pendulum deflections. The pendulums shall be located in an area protected from the wind. An alternative device such as an electronic digital level, micrometer level, or suitably arranged water tubes may be substituted for

- C. 3. b. one of the three required pendulums upon approval by ELC (02). The device shall be demonstrated to have a precision better than a tangent of 0.001 (one tenth of one percent of slope or three minutes of arc). The detailed procedure for using the device shall be submitted for approval. Alternatives to all three pendulums including digital devices, visual sighting with instruments or inclining in air may be specifically approved by ELC (02) for boats where conventional pendulums or procedures are impractical due to considerations such as small size, arrangements or other encumbrances.
 - c. The pendulums shall be as long as possible. A minimum deflection of 6 inches at the maximum inclination is desirable.
 - d. The pendulum damping boxes shall be large enough to prevent the bobs from hitting the sides. The boxes shall be filled with new SAE 30, SAE 40, or equivalent oil or detergent solution with sufficient viscosity to damp the pendulum. Water may be used for boats provided that the size and shape of the damping trough and weight provide adequate damping and that it is approved prior to the experiment by ELC (02). Note that water may require a circular bucket as rectangular troughs sometimes do not damp adequately because the shape of the trough does not suppress sloshing well. The oil level shall be just below the top of the bob.
 - e. The batten support shall be rigid and able to withstand a severe kick without moving.
 - f. The batten, shown in Figure 4, shall be marked off in tenths of an inch in such a way that inch and half inch-marks are distinguishable from other one-tenth inch marks. The full inch marks will be numbered sequentially from port to starboard.
 - g. The bobs shall be suspended by a thin line (fish line) from a washer supported by a knife edge fulcrum; for example, a small triangular file. The line shall be free of knots, kinks, etc. The length from the fulcrum to batten shall be recorded.
 - h. A pendulum deflection reading shall be recorded when the central control station gives the order to proceed. This order shall be given when all pendulums oscillations are damped and no sooner than 3 minutes after the test weights are positioned.
 - i. The pendulum deflection value shall be computed by subtracting the reading per test from the average of the readings for the test weight settings, which represent zero heeling moment.
 - j. Adequate lighting must be provided at each pendulum.

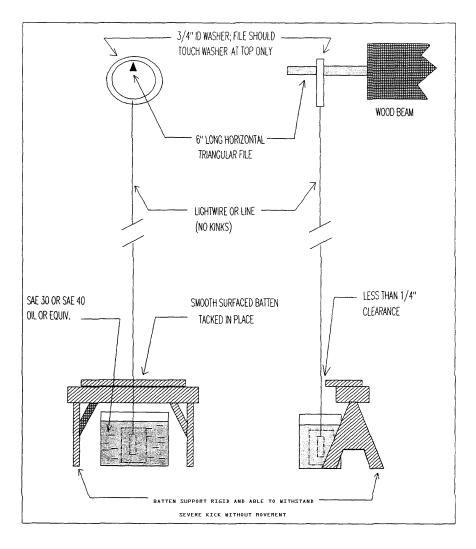


Figure 4 Satisfactory Pendulum Arrangement

C. 4. Drafts and Freeboards.

- a. Drafts and freeboards shall be read immediately before or immediately after the stability test. All personnel who will be on board during the test shall be on board and in location during these readings. This is particularly important on small cutters and boats. If the readings are taken after the stability test is completed, the cutter must be maintained in the same condition as during the test. Freeboards will be measured amidships on the port and starboard side. If the forward and aft draft marks appear to be unreliable, freeboards shall be taken as a check. For cutters and boats up to 120 feet in length, additional freeboards shall be read port and starboard near the forward and aft perpendiculars from points on the deck or hull surface that can be accurately located, at a minimum. Reading freeboards at additional points along the length is preferred if feasible. A statistical analysis shall be performed on these freeboards using the least squares technique to determine draft, trim and sag or hog from this data.
- b. Drafts shall be read at the forward and aft draft marks and amidships. All readings shall be taken both port and starboard.
- c. The bow and stern freeboards, when required, may be measured on centerline. The fore and aft distance of the readings from fixed reference points on the centerline shall be recorded.
- d. For small cutters and boats, it may be necessary to counterbalance the list and trim effect of freeboard measuring parties. When possible, all readings shall be taken from a boat; however, all persons, or equivalent weights, who will be on board for the stability test shall be on board when draft and freeboard readings are taken.
- e. A small boat shall be available for use when taking drafts and freeboards. The boats shall have a low freeboard to permit accurate observation of the readings.
- f. The specific gravity and temperature of the flotation water shall be measured when the drafts are measured, at several locations and depths around the tested cutter.

5. Communications and Control.

- a. The STO, stationed at a central control station, shall have complete control over all personnel involved in the stability test.
- b. There shall be efficient two-way communications between the central control station and:
 - (1) The weight handlers
 - (2) Each pendulum station

- C. 5. c. The central control station shall be sheltered from the elements, have adequate lighting, a desk or table, and a chair, so that a plot of tangents versus heeling moments can be made during the stability test. It is desirable that the weight handlers be directly observable from the control station.
 - d. The order to start recording pendulum readings for each trial shall be loud, clear, and concise to prevent unnecessary restarts.

6. Weight Movements.

- a. The standard test employs eight weight movements after initial placing of the weights (Position 1). The fourth and eighth weight movements (Position 5 & 9, respectively) shall return the weights to their initial position which corresponds to zero heeling moment. If conditions change during the test, such as a wind shift, it may be necessary to repeat the earlier moves to eliminate test plot distortion.
- b. The weight movements shown in Figure 5 give a good spread of points on the test plot.
- c. The moment arm for each weight movement shall be measured to provide for more accurate results if the placement of the weight is changed from the previous set location.
- d. After each weight movement, and just before the pendulum locations are recorded, a check must be made to ensure that all personnel are in location and that all lines that shall be slack are, in fact, slack.
- e. Weight movements must be made directly athwartship to avoid a change in the trim of the cutter.

7. Test Plot.

- a. The test plot shall be made after all weight movements have been completed.
- b. Using the deflection and the length of the respective pendulum, the tangent may be calculated and plotted against the test moment, as shown in Figure 5.
- c. The test plot shall be large enough to determine if stability test results are acceptable and if any unacceptable errors are present.
- e. d. It is advisable to perform a least squares analysis of the moment-tangent data to determine the slope of the moment tangent line and to gauge its accuracy.

C. 7.

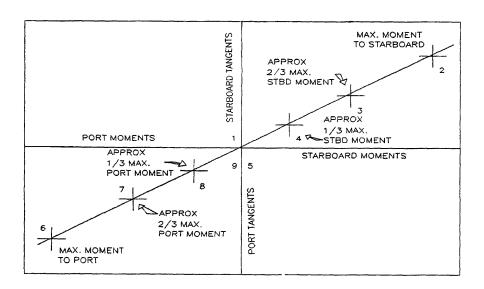


Figure 5 Tangent Plot

8. Period of Roll Test.

- a. The period of roll test will be performed after the test plot has been found acceptable. At least three people shall time three full roll periods induced by a sufficient weight movement.
- b. All stability test weights must be placed back in their initial position before the period of roll test is conducted.
- c. Rolling is induced by placing a weight off center, then removing it. If a stability test weight is used to induce rolling, the rolls shall be timed only after the weight is returned to its original position.

D. TEST RESULTS.

- 1. <u>After Test Actions</u>. The following actions will be taken after the test:
 - a. On the day of the test after completion of the stability test, the Commandant Representative shall be provided with a copy of all test data. This data shall provide a clear accounting of the condition of the cutter before and during the test and of all test measurements made.
 - b. Prior to departing the cutter, the STO, the NESU Representative, and the Commandant Representative shall initial each sheet of the stability test record to indicate their

- **D.** 1. b. concurrence with the acceptability of the stability test conditions and performance. This signature does not pre-approve the Stability Test Report to be developed and submitted by the STO and finally approved by ELC (02).
 - 2. <u>Use</u>. The test results will be used for the following:
 - a. The test results shall constitute a complete record of all stability test information gathered and data recorded.
 - b. The results of the stability test shall be used to calculate the loading conditions outlined below. The first four conditions are defined in the Naval Ships Technical Manual (NSTM), Chapter 096.
 - (1) As Inclined
 - (2) Light ship (A)
 - (3) Minimum Operation Condition (B)
 - (4) Full Load (D)
 - (5) Any other loading condition specified in the contract specifications.
 - 3. Format. Reports shall be in the format specified below.
 - a. The data shall be presented in a Stability Test Report using Coast Guard Form CG-993 (rev. 7-67). If it was determined before the stability test that the transverse center of gravity is required, then the modified Coast Guard Form CG-993 will be used. Presentation of stability test data in any other formats requires prior approval by ELC (02). Format directly output by the HEC stability program is approved and may be used. Both the input file and output file from computer programs, if used, shall be submitted on 3-1/4" 1.44 Mbyte MS DOS format magnetic diskette as well as on paper. For boats and cutters up to 120 feet in length, GHS or the output of spreadsheets such as Excel or combinations of these containing substantially the same information may be used if approved prior to the experiment by ELC (02).
 - b. Tank inertia calculations for free surface effect shall accompany the Stability Test Report. Tank inertia data shall be calculated in accordance with a methodology that is comparable to the methodology in the book Principles of Naval Architecture version edited by John P. Comstock.