


# Introduction to Wireless Sensor Networks

Rick Stevens

[Stevens@cs.uchicago.edu](mailto:Stevens@cs.uchicago.edu)


Pete Beckman

[Beckman@mcs.anl.gov](mailto:Beckman@mcs.anl.gov)

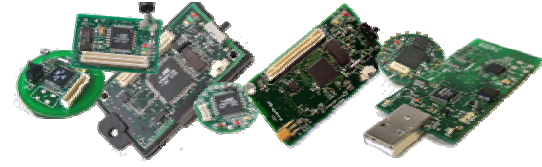


# The Big Picture

- Change the practice of environmental sciences, civil engineering, historical preservation, ...
  - Ecosystem monitoring and world heritage sites surveillance
- Enable built environments that observe and respond to what is going on within them
  - Active Spaces
- Fundamental enhancement to manufacturing processes
  - Smart processes, smart spaces
- Enable information technology throughout the 3rd world
  - Low cost self-deployable infrastructures
- Rethink the many levels of networked system design with a focus on constrained resources, uncertainty, and robustness despite noise and failure

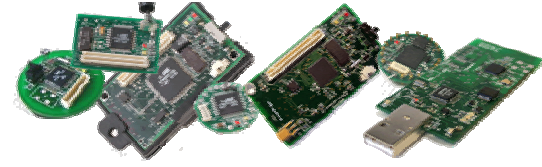


# Overview of this talk

- Trends and Applications
- Mote History and Evolution
- Design Principles
- Telos/Mica2/MicaZ

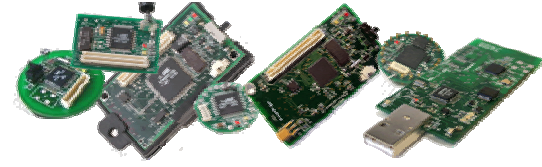

# Course related stuff


- General plan for lectures and labs
- Readings and Discussion
- Field work and deployment plans
- Schedule
- Summer 05 program

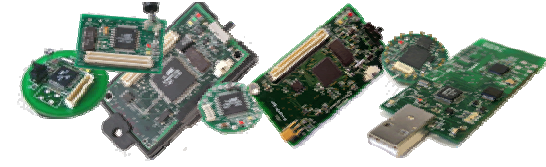

# Faster, Smaller, Numerous


## ■ Moore's Law

- "Stuff" (transistors, etc) doubling every 1-2 years

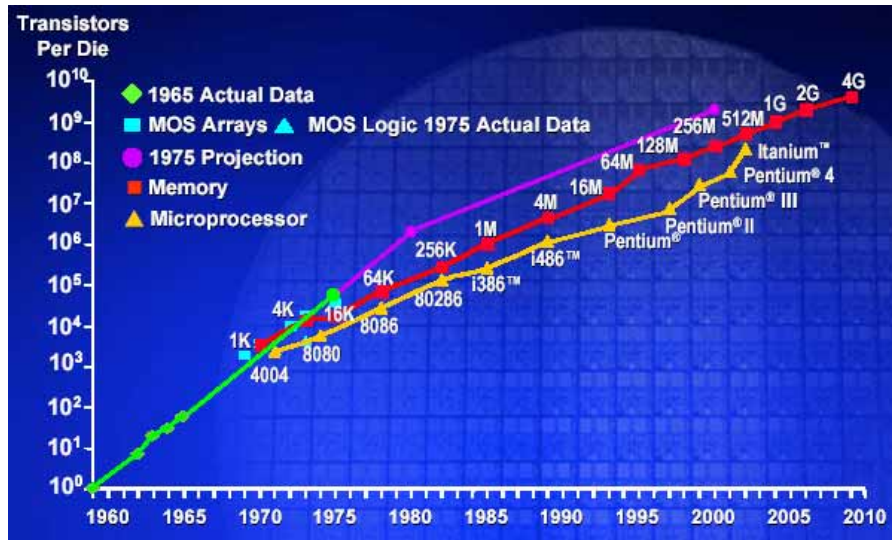


## ■ Bell's Law

- New computing class every 10 years

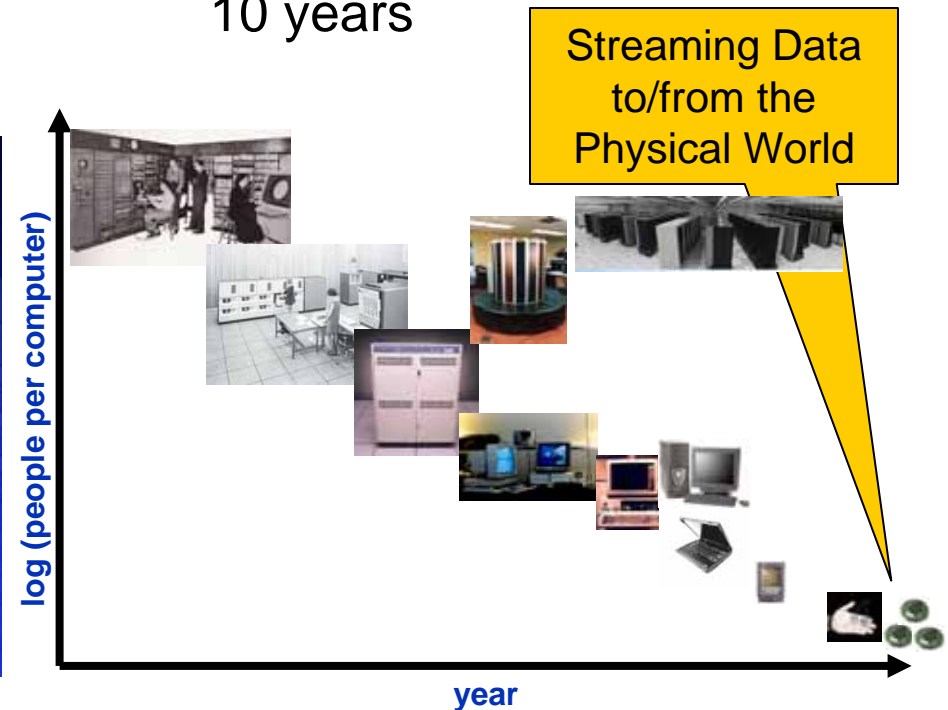

# Applications

Density & Scale  
Sample Rate & Precision  
Disconnection & Lifetime  
Mobility  
Low Latency


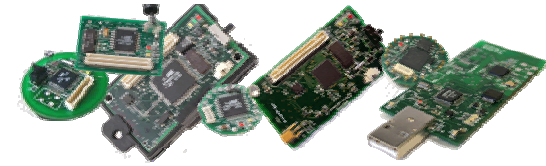


## ■ Environmental Monitoring



- Habitat Monitoring
- Integrated Biology
- Structural Monitoring

## ■ Interactive and Control


- Pursuer-Evader
- Intrusion Detection
- Automation

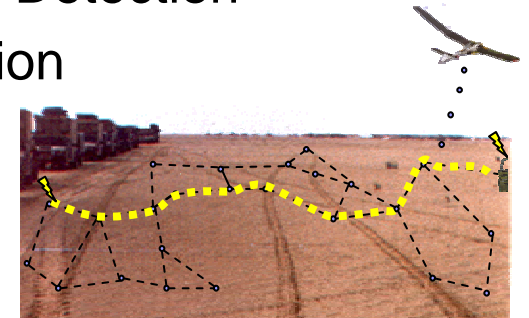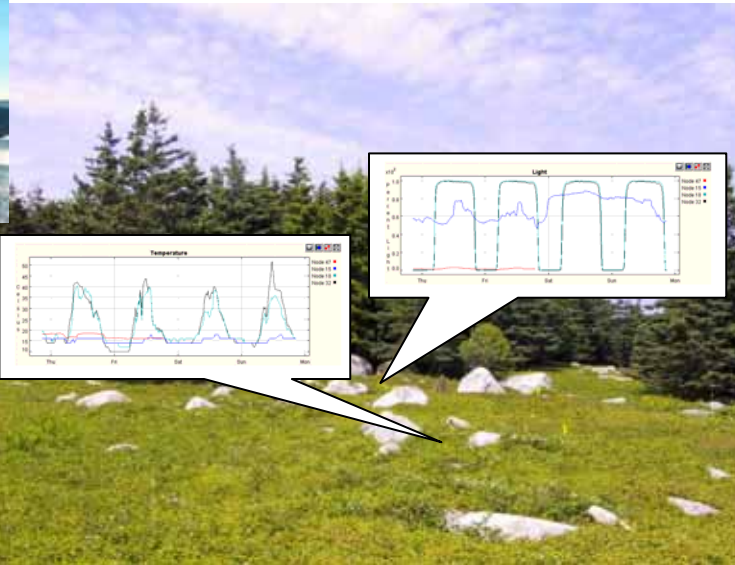

# Monitoring Space

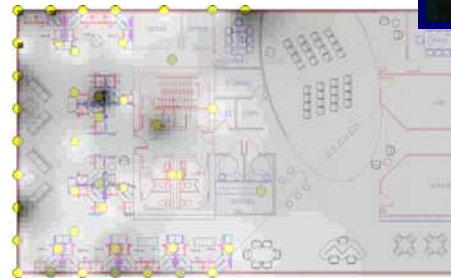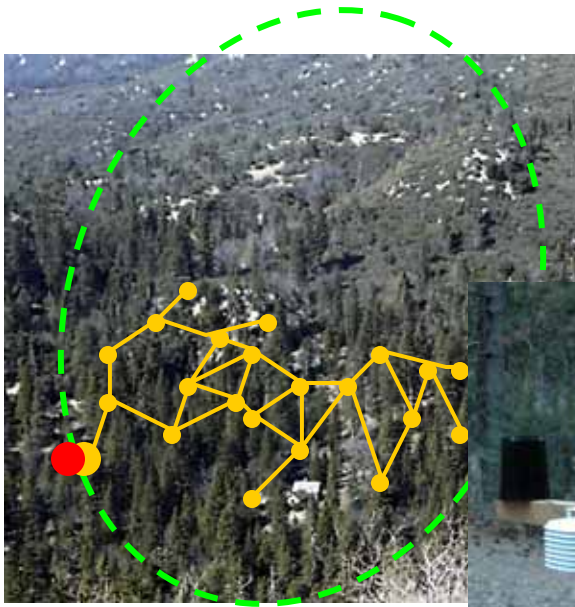


Building Comfort,  
Smart Alarms

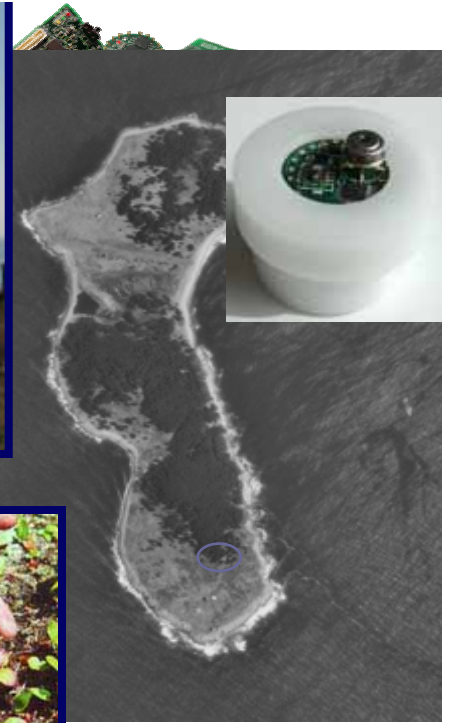

Great Duck Island



Vineyards  
BC

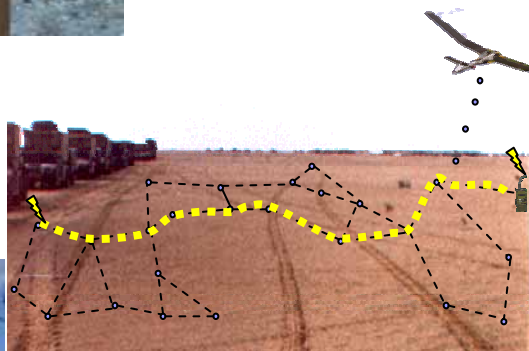


Sentries, UVA, OSU





Ecophysiology of  
Redwoods

# Monitoring Things

Earthquake Response, Glaser et al.

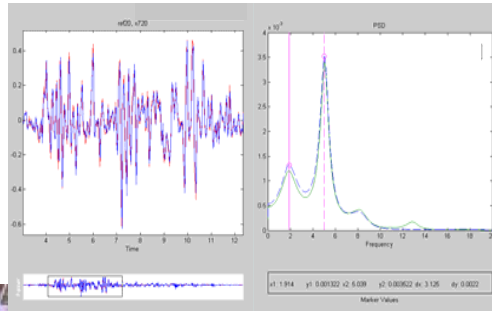

Wind Response Of Golden Gate Bridge

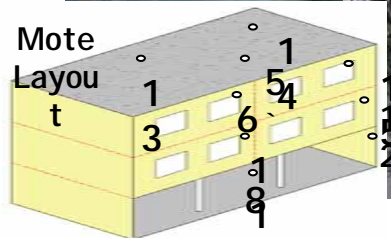

UCLA Factor Bldg  
72 channels



Intel Research



Condition-Based Maintenance



# Interactions of Space and Things

ElderCare



Sensor Augmented Fire Response

Clinical Management







Asset Management


Manufacturing





Shooter Localization - Vanderbilt, BBN

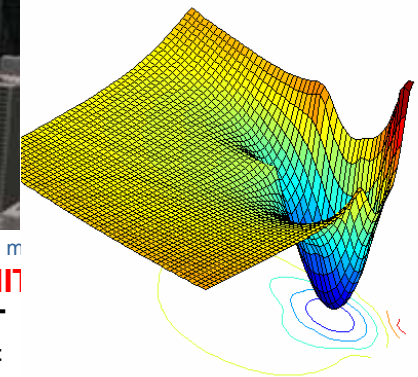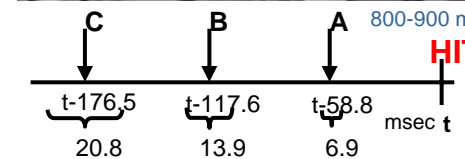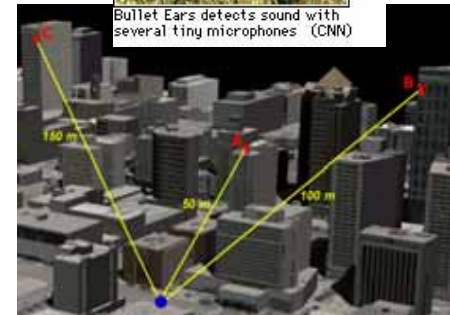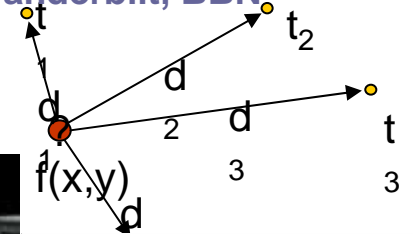


# The Systems Challenge

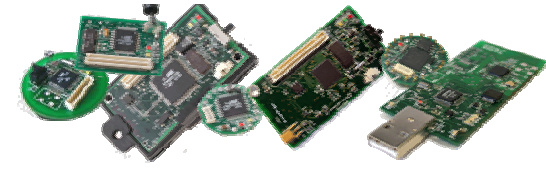


## Monitoring & Managing Spaces and Things

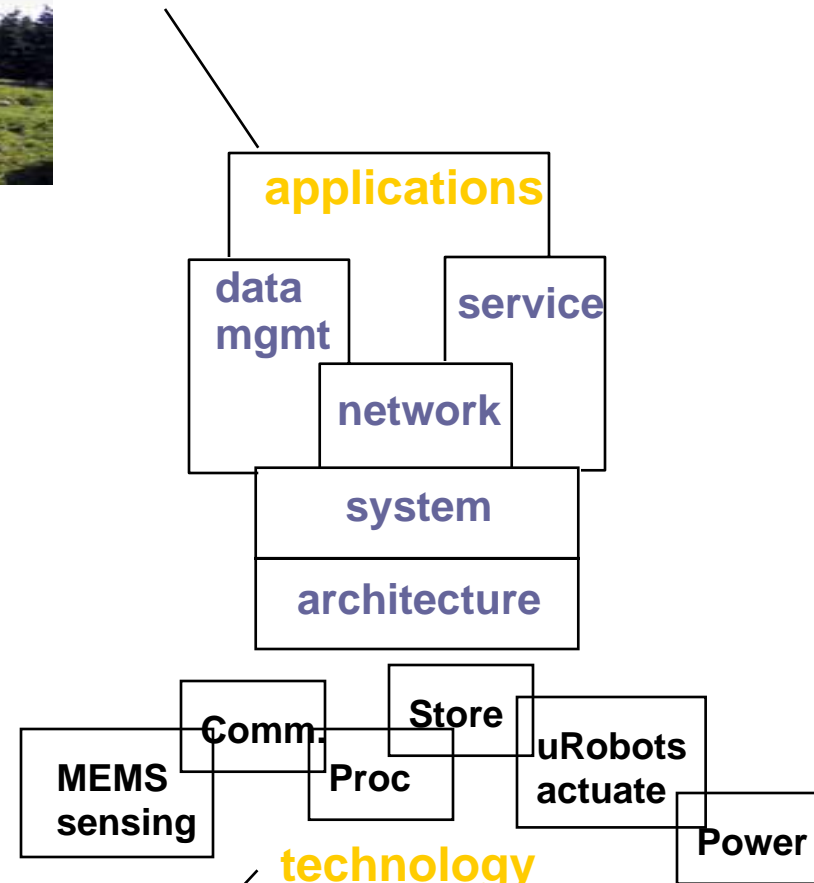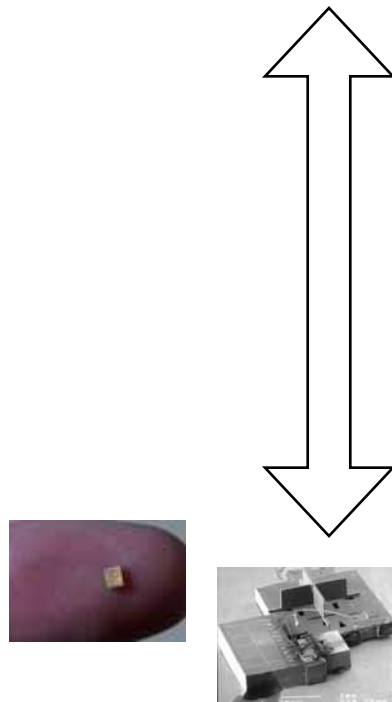


Miniature, low-power connections to the physical world

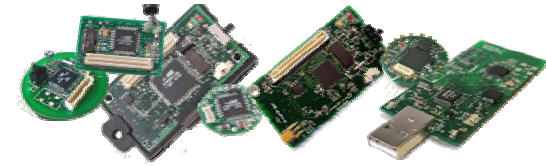



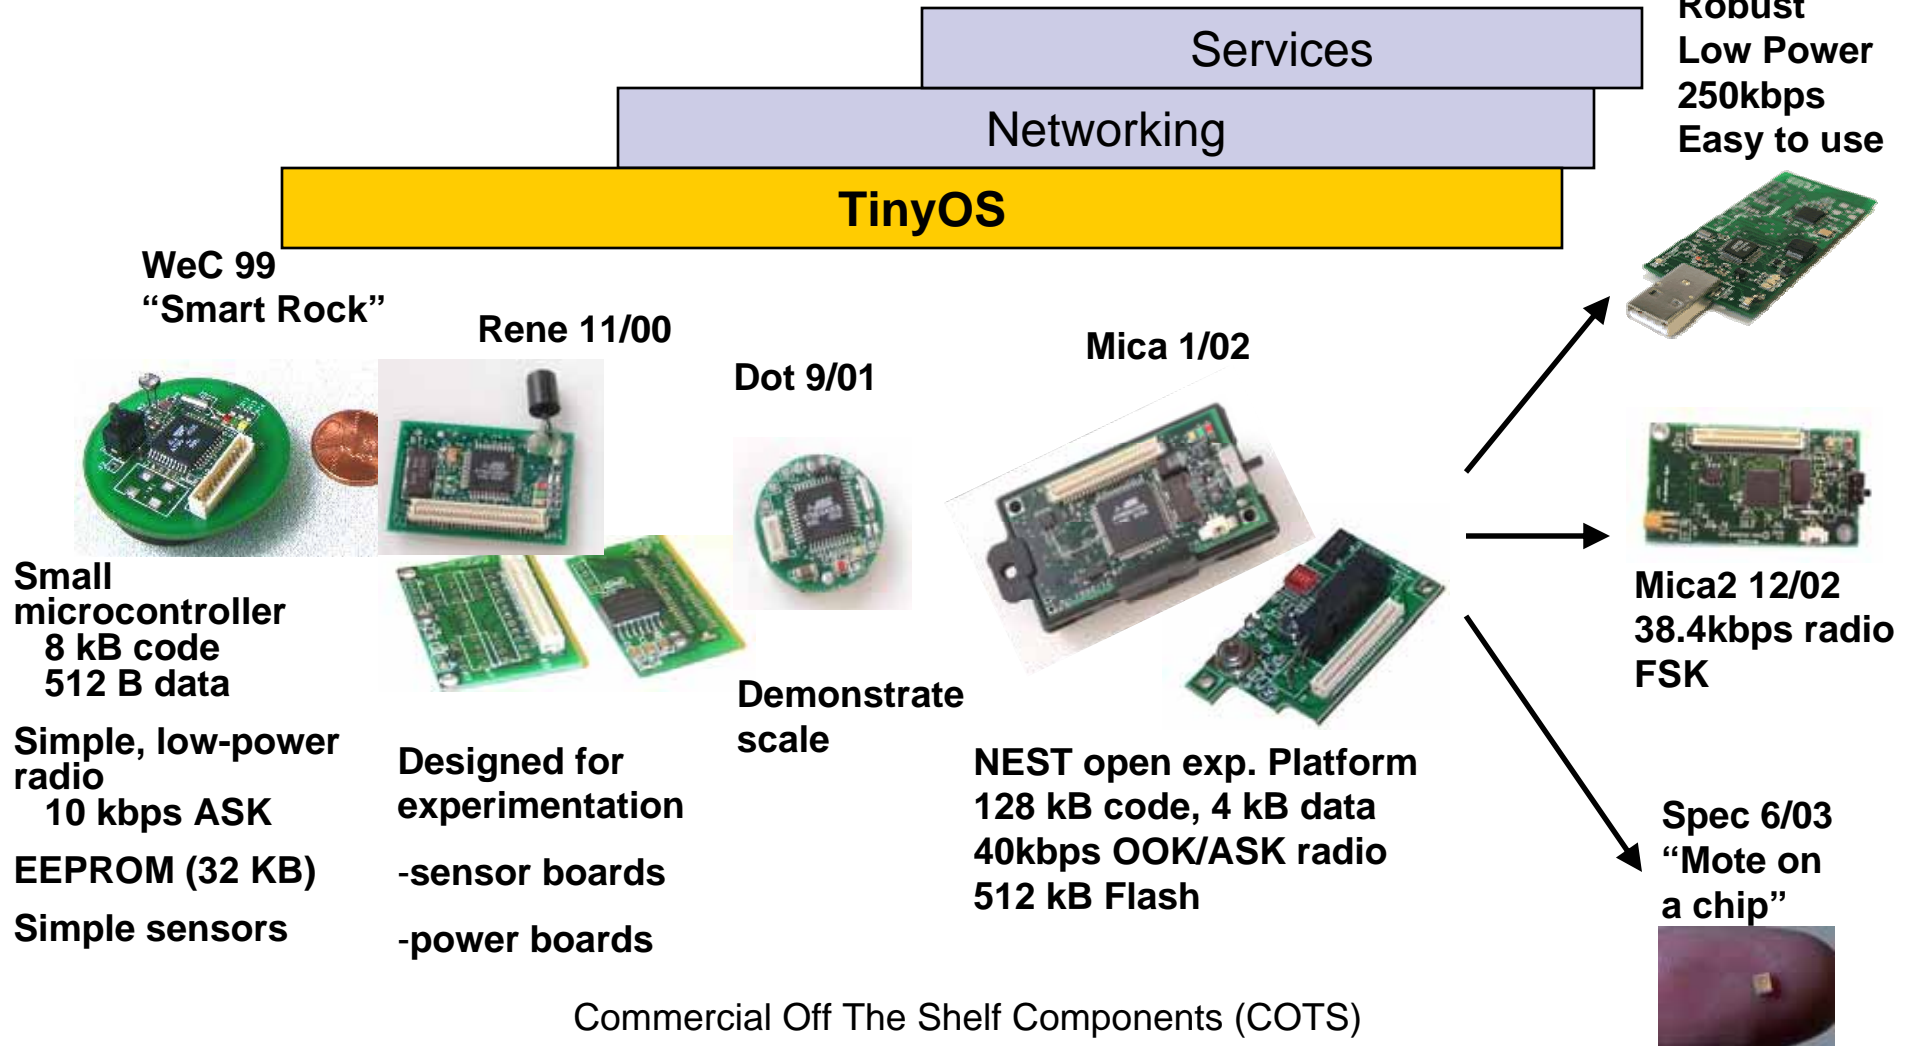

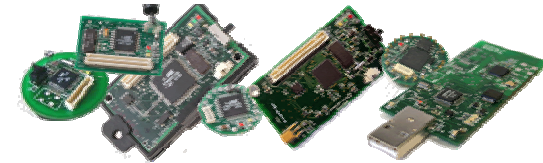


# Open Experimental Platforms



# Mote Evolution



Mote Type Year	<i>WeC</i> 1998	<i>René</i> 1999	<i>René 2</i> 2000	<i>Dot</i> 2000	<i>Mica</i> 2001	<i>Mica2Dot</i> 2002	<i>Mica 2</i> 2002	<i>Telos</i> 2004	
									
Microcontroller									
Type	AT90LS8535		ATmega163		ATmega128			TI MSP430	
Program memory (KB)	8		16		128			60	
RAM (KB)	0.5		1		4			2	
Active Power (mW)	15		15		8		33	3	
Sleep Power ( $\mu$ W)	45		45		75		75	6	
Wakeup Time ( $\mu$ s)	1000		36		180		180	6	
Nonvolatile storage									
Chip	24LC256			AT45DB041B			ST M24M01S		
Connection type	I <sup>2</sup> C			SPI			I <sup>2</sup> C		
Size (KB)	32			512			128		
Communication									
Radio	TR1000			TR1000	CC1000		CC2420		
Data rate (kbps)	10			40	38.4		250		
Modulation type	OOK			ASK	FSK		O-QPSK		
Receive Power (mW)	9			12	29		38		
Transmit Power at 0dBm (mW)	36			36	42		35		
Power Consumption									
Minimum Operation (V)	2.7		2.7		2.7		1.8		
Total Active Power (mW)	24			27		44	89	41	
Programming and Sensor Interface									
Expansion	none	51-pin	51-pin	none	51-pin	19-pin	51-pin	10-pin	
Communication	IEEE 1284 (programming) and RS232 (requires additional hardware)							USB	
Integrated Sensors	no	no	no	yes	no	no	no	yes	



# Low Power Operation

## ■ Efficient Hardware

- Integration and Isolation
  - Complementary functionality (DMA, USART, etc)
- Selectable Power States (Off, Sleep, Standby)
- Operate at low voltages and low current
  - Run to cut-off voltage of power source


## ■ Efficient Software


- Fine grained control of hardware
- Utilize wireless broadcast medium
- Aggregate



# Typical WSN Application

- Periodic
  - Data Collection
  - Network Maintenance
  - *Majority of operation*
- Triggered Events
  - Detection/Notification
  - *Infrequently occurs*
    - *But... must be reported quickly and reliably*
- Long Lifetime
  - Months to Years without changing batteries
  - Power management is the key to WSN success

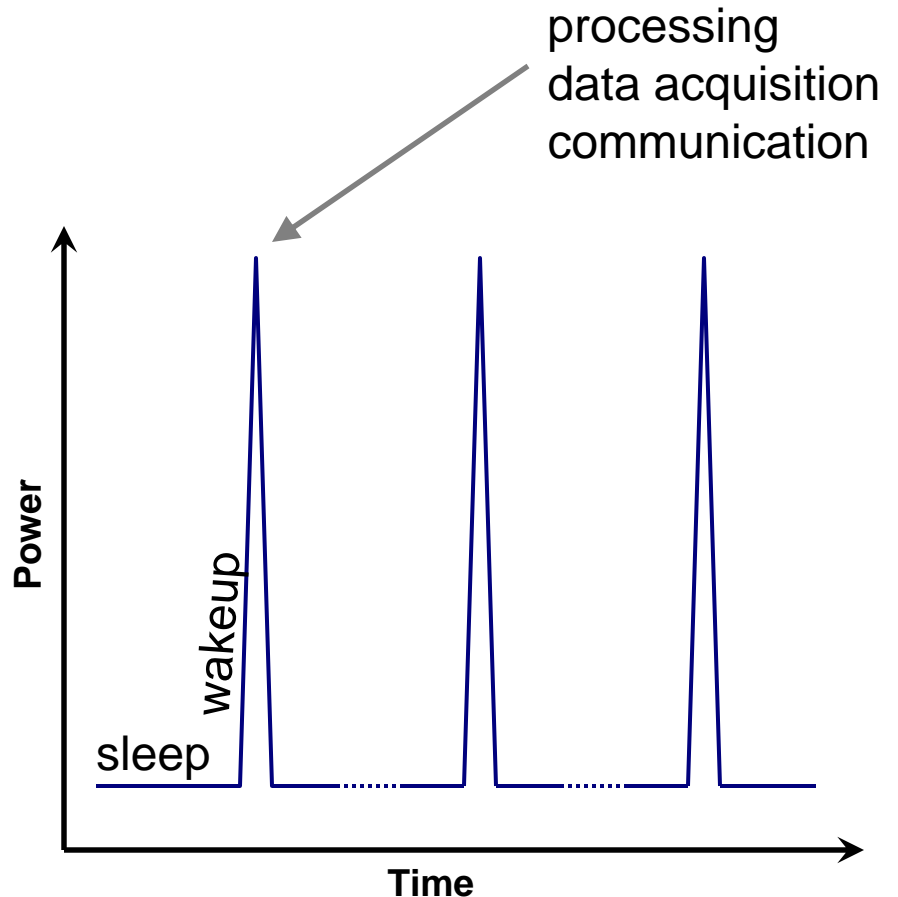

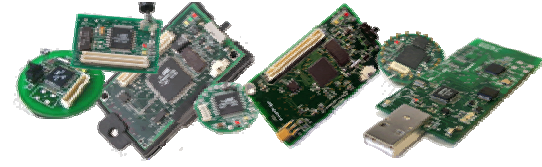

# Design Principles


- Key to Low Duty Cycle Operation:
  - Sleep – majority of the time
  - Wakeup – quickly start processing
  - Active – minimize work & return to sleep



# Sleep



- Majority of time, node is asleep
  - >99%
- Minimize sleep current through
  - Isolating and shutting down individual circuits
  - Using low power hardware
    - Need RAM retention
- Run auxiliary hardware components from low speed oscillators (typically 32kHz)
  - Perform ADC conversions, DMA transfers, and bus operations while microcontroller core is stopped




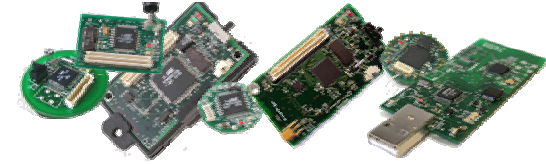

# Wakeup


- Overhead of switching from Sleep to Active Mode
- Microcontroller
- Radio (FSK)

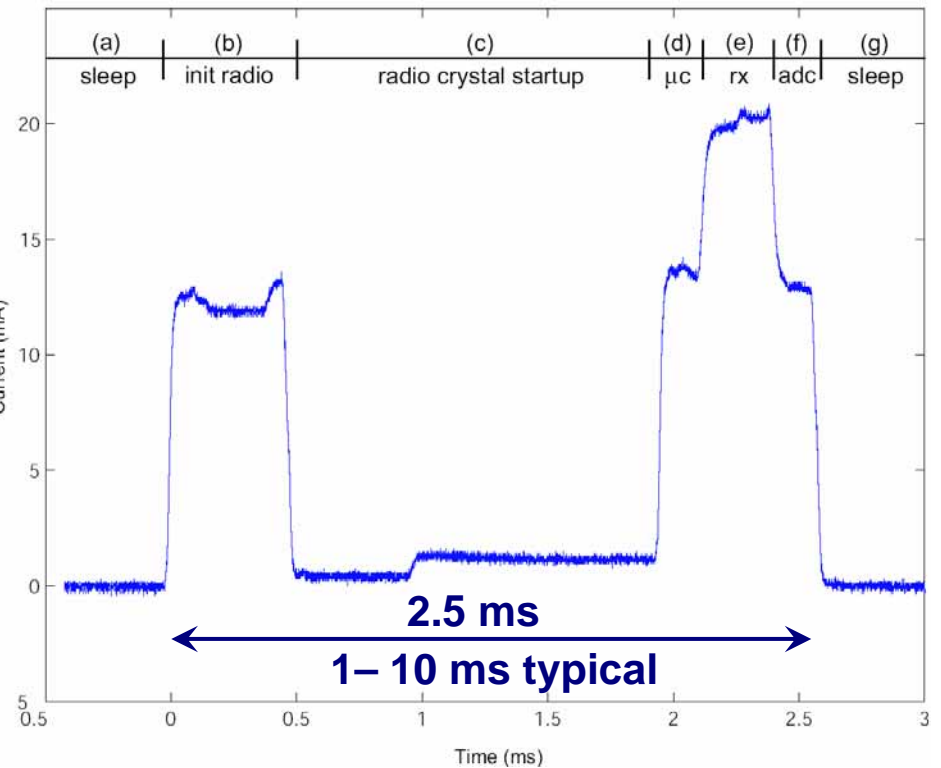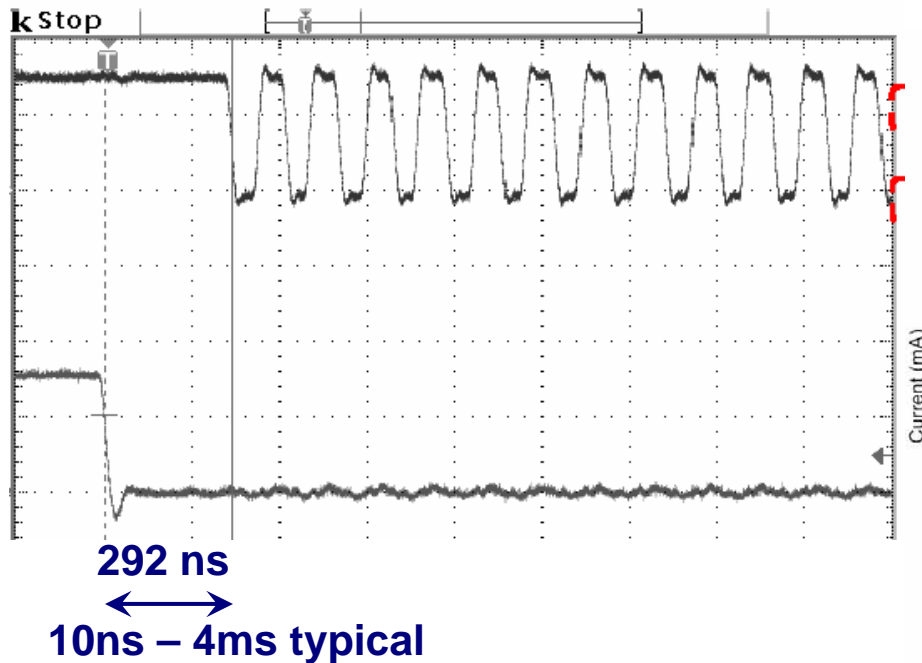

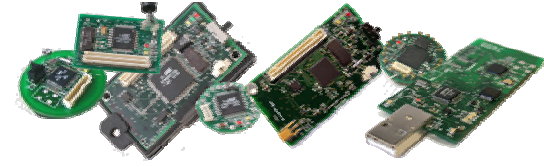

# Active

- Microcontroller
  - Fast processing, low active power
  - Avoid external oscillators
- Radio
  - High data rate, low power tradeoffs
  - Narrowband radios
    - Low power, lower data rate, simple channel encoding, faster startup
  - Wideband radios
    - More robust to noise, higher power, high data rates
- External Flash (stable storage)
  - Data logging, network code reprogramming, aggregation
  - High power consumption
  - Long writes
- Radio vs. Flash
  - 250kbps radio sending 1 byte
    - Energy :  $1.5\mu\text{J}$
    - Duration :  $32\mu\text{s}$
  - Atmel flash writing 1 byte
    - Energy :  $3\mu\text{J}$
    - Duration :  $78\mu\text{s}$

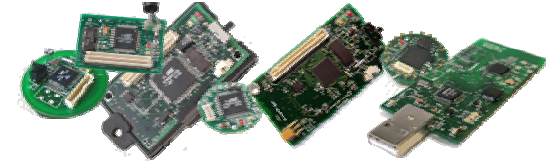


# Telos Platform

- A new platform for low power research
  - Monitoring applications:
    - Environmental
    - Building
    - Tracking
- Long lifetime, low power, low cost
- Built from application experiences and low duty cycle design principles
- Robustness
  - Integrated antenna
  - Integrated sensors
  - Soldered connections
- Standards Based
  - IEEE 802.15.4
  - USB
- IEEE 802.15.4
  - CC2420 radio
  - 250kbps
  - 2.4GHz ISM band
- TI MSP430
  - Ultra low power
    - 1.6 $\mu$ A sleep
    - 460 $\mu$ A active
    - 1.8V operation




Open embedded platform with open source tools, operating system (TinyOS), and designs.

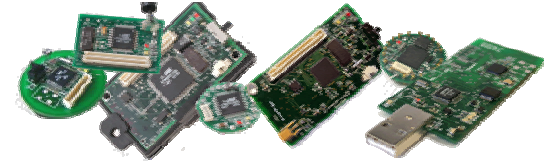

# Low Power Operation

- TI MSP430 -- Advantages over previous motes
  - 16-bit core
  - 12-bit ADC
    - 16 conversion store registers
    - Sequence and repeat sequence programmable
  - < 50nA port leakage (vs. 1μA for Atmels)
  - Double buffered data buses
  - Interrupt priorities
  - Calibrated DCO

- Buffers and Transistors
  - Switch on/off each sensor and component subsystem

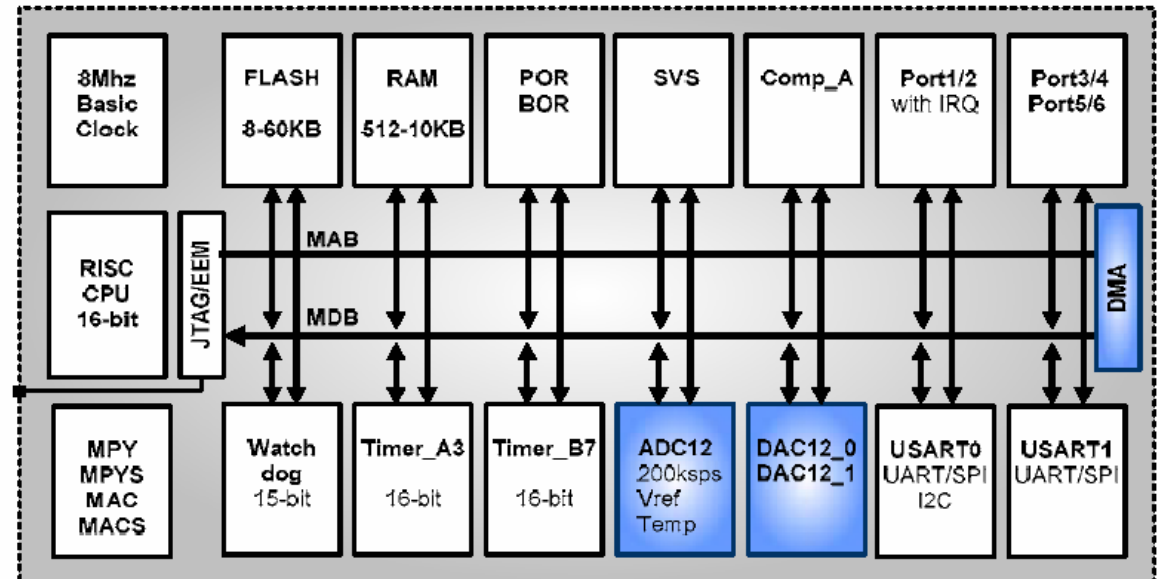



# Minimize Power Consumption

- Compare to MicaZ: a Mica2 mote with AVR mcu and 802.15.4 radio
- Sleep
  - Majority of the time
  - Telos:  $2.4\mu\text{A}$
  - MicaZ:  $30\mu\text{A}$
- Wakeup
  - As quickly as possible to process and return to sleep
  - Telos: 290ns typical,  $6\mu\text{s}$  max
  - MicaZ:  $60\mu\text{s}$  max internal oscillator, 4ms external
- Active
  - Get your work done and get back to sleep
  - Telos: 4-8MHz 16-bit
  - MicaZ: 8MHz 8-bit





# CC2420 Radio

## IEEE 802.15.4 Compliant

### ■ CC2420

- Fast data rate, robust signal
  - 250kbps : 2Mchip/s : DSSS
  - 2.4GHz : Offset QPSK : 5MHz
  - 16 channels in 802.15.4
  - -94dBm sensitivity
- Low Voltage Operation
  - 1.8V minimum supply
- Software Assistance for Low Power Microcontrollers
  - 128byte TX/RX buffers for full packet support
  - Automatic address decoding and automatic acknowledgements
  - Hardware encryption/authentication
  - Link quality indicator (assist software link estimation)
    - samples error rate of first 8 chips of packet (8 chips/bit)

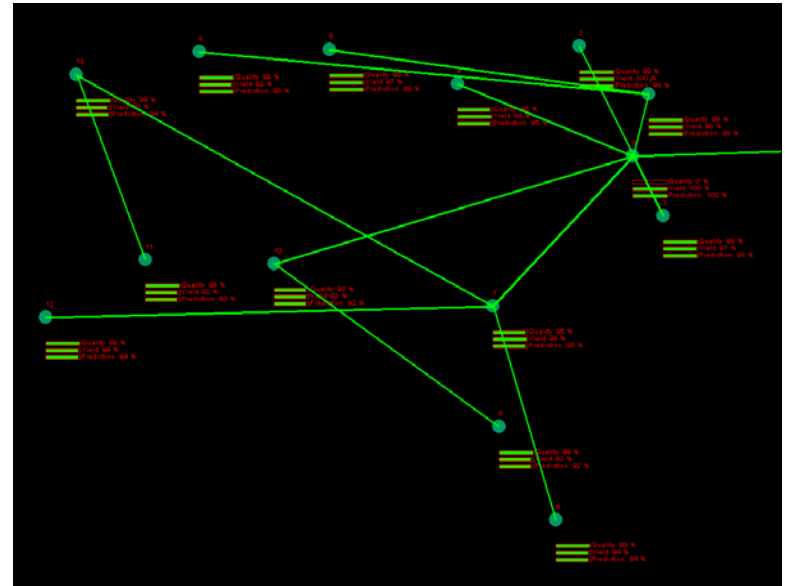

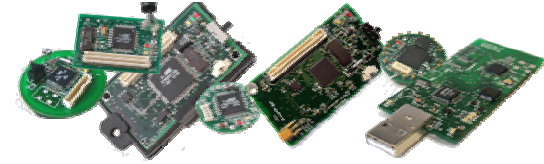

# Power Calculation Comparison

Design for low power

## ■ Mica2 (AVR)

- 0.2 ms wakeup
- 30  $\mu$ W sleep
- 33 mW active
- 21 mW radio
- 19 kbps
- 2.5V min
  - 2/3 of AA capacity

## ■ MicaZ (AVR)

- 0.2 ms wakeup
- 30  $\mu$ W sleep
- 33 mW active
- 45 mW radio
- 250 kbps
- 2.5V min
  - 2/3 of AA capacity

## ■ Telos (TI MSP)

- 0.006 ms wakeup
- 2  $\mu$ W sleep
- 3 mW active
- 45 mW radio
- 250 kbps
- 1.8V min
  - 8/8 of AA capacity

Supporting mesh networking with a pair of AA batteries reporting data once every 3 minutes using synchronization (<1% duty cycle)


453 days

328 days

945 days





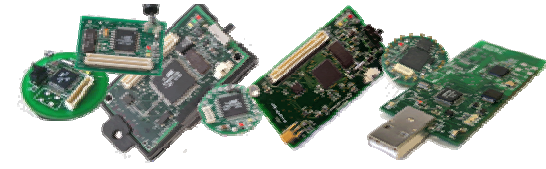

# Sensors

## ■ Integrated Sensors

- Sensirion SHT11
  - Humidity (3.5%)
  - Temperature (0.5°C)
  - Digital sensor
- Hamamatsu S1087
  - Photosynthetically active light
  - Silicon diode
- Hamamatsu S1337-BQ
  - Total solar light
  - Silicon diode

## ■ Expansion

- 6 ADC channels
- 4 digital I/O
- Existing sensor boards
  - Magnetometer
  - Ultrasound
  - Accelerometer
  - 4 PIR sensors
  - Microphone
  - Buzzer





# Conclusions

- New design approach derived from experience with resource constrained wireless sensor networks
  - Active mode needs to run quickly to completion
  - Wakeup time is crucial for low power operation
    - Wakeup time and sleep current set the minimal energy consumption for an application
  - Sleep most of the time
- Tradeoffs between complexity/robustness and low power radios
- Careful integration of hardware and peripherals

# Mote Kits

QuickTime™ and a  
TIFF (Uncompressed) decompressor  
are needed to see this picture.

QuickTime™ and a  
TIFF (Uncompressed) decompressor  
are needed to see this picture.

QuickTime™ and a  
TIFF (Uncompressed) decompressor  
are needed to see this picture.

The Professional Kit, MOTE-KIT5040, is a combination 8 node kit for Mote Development. It features Crossbow's latest generation MICA2 and MICA2DOT Motes. Both Motes are compatible with TinyOS. The Kit includes:

- 4 MICA2 Processor/Radio Boards
- 4 MICA2DOT Quarter-Sized Processor Radio Boards
- 3 MTS310 Sensor Boards (Acceleration, Magnetic, Light, Temperature, Acoustic, and Sounder)
- 2 MTS510 Sensor Boards (Acceleration, Light, Microphone)
- 2 MDA500, MICA2DOT Prototype and Data Acquisition Boards
- 1 MIB510 Programming and Serial Interface Board
- Mote-Test Software
- Hardware User's Manuals
- TinyOS Getting Started Guide • Available in 315MHz, 433MHz and 868/916MHz options
- **NEW!** Indoor Injection Molded Housing is available for MICA2 and MTS300/MTS310 Combination. View [Picture](#) and [Flash Animation](#) of Housing

# Processor Radio Modules

QuickTime™ and a  
TIFF (Uncompressed) decompressor  
are needed to see this picture.

- Crossbow ships three Mote Processor/Radio module families – MICAz (MPR2400), MICA2 (MPR400), and MICA2DOT (MPR500). The MICAz radio works on the global 2.4GHz ISM band and supports IEEE802.15.4 and ZigBee. The MICA2 and MICA2DOT family is available in 315,433,868/900MHz configurations and support frequency agile operation.

# MCS Cricket Series

QuickTime™ and a  
TIFF (Uncompressed) decompressor  
are needed to see this picture.

- MICA2 location system
- Ultrasound transmitter and receiver for time of flight ranging
- Centimeter level accuracy

# Sensor and Data Acquisition Boards

MTS101 - precision thermistor, light sensor, and general prototyping area.

- MTS300/MTS310 - supports a variety of sensor modalities for the MICA and MICA2
- MDA500 - sensor and data acquisition board provides a flexible user-interface for connecting external signals to the MICA2DOT mote
- MTS400/420 - supports environmental monitoring for the MICA2 with built-in sensors and an optional GPS
- MDA300 - supports data acquisition and environmental monitoring for the MICA2
- MTS510 - Light/Accel/Microphone Sensor Board for MICA2DOT

QuickTime™ and a TIFF (Uncompressed) decompressor are needed to see this picture.

QuickTime™ and a TIFF (Uncompressed) decompressor are needed to see this picture.

QuickTime™ and a TIFF (Uncompressed) decompressor are needed to see this picture.