

**TMDLS FOR SEDIMENT/SILTATION,
TURBIDITY, AND TDS FOR
SUBSEGMENTS 100701 AND 100704
IN THE RED RIVER BASIN, LOUISIANA**

**FINAL
MARCH 26, 2007**

TMDLS FOR SEDIMENT/SILTATION, TURBIDITY, AND TDS FOR
SUBSEGMENTS 100701 AND 100704
IN THE RED RIVER BASIN, LOUISIANA

Prepared for

US EPA Region 6
Water Quality Protection Division
Oversight and TMDL Team
1445 Ross Avenue, Suite 1200
Dallas, TX 75202-2733

Contract No. 68-C-02-108
Task Order 96

Prepared by

FTN Associates, Ltd.
3 Innwood Circle, Suite 220
Little Rock, AR 72211

FINAL
March 26, 2007

EXECUTIVE SUMMARY

Section 303(d) of the Federal Clean Water Act requires states to identify water bodies that are not meeting water quality standards, and to develop total maximum daily loads (TMDLs) for those water bodies. A TMDL is the amount of pollutant that a waterbody can assimilate without exceeding the established water quality standard for that pollutant. Through a TMDL, pollutant loads can be allocated to point sources and nonpoint sources discharging to the waterbody. This report presents TMDLs that have been developed for turbidity, sediment/siltation, and total dissolved solids (TDS) for Black Lake Bayou (subsegment 100701); and TDS for Kepler Creek (subsegment 100704).

These subsegments are located in the Red River basin in northwestern Louisiana. Subsegment 100701 begins at the headwaters of Black Lake Bayou, near Minden, Louisiana and ends at the Webster-Bienville Parish Line. The drainage area for this subsegment is 123 mi², and is primarily forested. Kepler Creek is a tributary to Kepler Creek Lake, located near Bienville, Louisiana. The drainage area for Kepler Creek (subsegment 100704) is approximately 26 mi², and is also primarily forest land.

Both of these water bodies were included on the Louisiana Department of Environmental Quality (LDEQ) final 2004 303(d) list as not supporting their fish and wildlife propagation designated use, and were ranked as priority #1 for TMDL development. No suspected sources of impairment were identified for these water bodies.

LDEQ historical water quality data at monitoring locations located in the subsegments were analyzed for long term trends, seasonal patterns, relationships between concentration and stream flow, and relationships between turbidity and total suspended solids (TSS). No historical trends, seasonal patterns, nor relationships with flow were apparent in these data.

Because turbidity cannot be expressed as a mass load, the turbidity TMDL was expressed using TSS as a surrogate for turbidity. A regression between TSS and turbidity was developed for the water quality station in subsegment 100701. This regression relationship was used to estimate a target TSS concentration of 13 mg/L, based on the numeric turbidity criterion of 25 NTU in the Louisiana water quality standards.

All four TMDLs (one sediment/siltation, one turbidity, and two TDS) were developed using the load duration curve methodology. This method determines allowable loading at a wide range of stream flow conditions. The steps for applying this methodology for the TMDLs in this report were:

1. Developing a flow duration curve,
2. Converting the flow duration curve to load duration curves,
3. Plotting observed loads with load duration curves,
4. Calculating the TMDL components, and
5. Calculating percent reductions.

For the turbidity and sediment/siltation TMDLs, an implicit margin of safety (MOS) was incorporated through the use of conservative assumptions. The primary conservative assumption was to treat TSS as a conservative parameter that does not settle out of the water column. For the TDS TMDLs, an explicit MOS was established as 10% of the TMDL. Both the TDS and TSS TMDLs had an explicit future growth (FG) that was set equal to 10% of the TMDL.

Because point sources were considered to have a negligible effect on existing impairments for sediment, turbidity, and TDS, all of the load reductions were assigned to nonpoint sources. The wasteload allocation (WLA) for point sources, the load allocation (LA) for nonpoint sources, and the nonpoint source percent reduction needed for each TMDL are summarized in Tables ES.1 and ES.2.

Table ES.1. Turbidity and sediment/siltation TMDLs for subsegment 100701.

Subsegment Number	Stream Name	Loads (tons/day of TSS)					Percent Reduction Needed
		WLA	LA	MOS	FG	TMDL	
100701	Black Lake Bayou	0.01	4.47	0	0.50	4.98	69%

Table ES.2. Summary of TDS TMDLs.

Subsegment Number	Stream Name	Loads (tons/day of TDS)					Percent Reduction Needed
		WLA	LA	MOS	FG	TMDL	
100701	Black Lake Bayou	0	24.20	3.02	3.02	30.24	45%
100704	Kepler Creek	0	4.12	0.52	0.52	5.16	57%

TABLE OF CONTENTS

1.0	INTRODUCTION	1-1
2.0	BACKGROUND INFORMATION	2-1
2.1	General Information.....	2-1
2.2	Topography.....	2-1
2.3	Soils.....	2-1
2.4	Land Use	2-2
2.5	Description of Hydrology	2-3
2.6	Water Quality Standards.....	2-3
2.7	Nonpoint Sources.....	2-4
2.8	Point Sources	2-4
2.9	Previous Water Quality Studies.....	2-5
3.0	EXISTING WATER QUALITY FOR TURBIDITY AND TSS	3-1
3.1	General Description of Data	3-1
3.2	Seasonal Patterns	3-1
3.3	Relationships For Turbidity and TSS vs. Flow.....	3-1
3.4	Relationships Between TSS and Turbidity.....	3-2
4.0	EXISTING WATER QUALITY FOR TDS.....	4-1
4.1	General Description of Data	4-1
4.2	Seasonal Patterns	4-1
4.3	Relationships Between Concentration and Flow	4-2
5.0	TMDL DEVELOPMENT.....	5-1
5.1	Seasonality and Critical Conditions.....	5-1
5.2	Water Quality Targets.....	5-1
5.3	Methodology for TMDL Calculations	5-2
5.4	Flow Duration Curve	5-2
5.5	Load Duration Curves.....	5-3
5.6	Observed Loads	5-3
5.7	TMDL, MOS, and FG.....	5-4
5.8	Point Source Loads	5-4
5.9	Nonpoint Source Loads.....	5-5
5.10	Percent Reductions.....	5-5

TABLE OF CONTENTS (CONTINUED)

6.0	OTHER RELEVANT INFORMATION	6-1
7.0	PUBLIC PARTICIPATION	7-1
8.0	REFERENCES	8-1

LIST OF APPENDICES

APPENDIX A:	Maps
APPENDIX B:	Plots of Turbidity and TSS
APPENDIX C:	Plots of TDS
APPENDIX D:	Calculations for subsegment 100701 TSS TMDL
APPENDIX E:	Calculations for subsegment 100701 TDS TMDL
APPENDIX F:	Calculations for subsegment 100704 TDS TMDL
APPENDIX G:	Electronic Copy of TMDL Calculations (on CD inside back cover)

LIST OF TABLES

Table ES.1	Turbidity and sediment/siltation TMDLs for subsegment 100701	ii
Table ES.2	Summary of TDS TMDLs	iii
Table 1.1	Subsegments and parameters for impairments addressed in this report	1-2
Table 2.1	Soil textures for subsegment 100701	2-2
Table 2.2	Land use percentages for subsegments 100701 and 100704	2-2
Table 2.3	Point sources located in the study area	2-5
Table 3.1	Summary of available turbidity and TSS data from station 1186.....	3-1
Table 4.1	Summary of TDS data at stations 283 and 1186.....	4-1
Table 5.1	Turbidity and sediment/siltation TMDLs for subsegment 100701	5-6
Table 5.2	Summary of TDS TMDLs	5-6

LIST OF FIGURES

Figure 2.1	Average monthly precipitation at Minden, Louisiana	2-3
------------	--	-----

1.0 INTRODUCTION

This report presents total maximum daily loads (TMDLs) for sediment/siltation, turbidity, and total dissolved solids (TDS) for two subsegments in the Red River basin in northwestern Louisiana. These two subsegments are Black Lake Bayou (100701) and Kepler Creek (100704). Both of these subsegments were included on the Louisiana Department of Environmental Quality (LDEQ) final 2004 303(d) list (LDEQ 2005a) as not supporting their designated use of fish and wildlife propagation. The suspected sources of contamination and causes of impairment from the LDEQ 303(d) list are shown in Table 1.1. The TMDLs in this report were developed in accordance with Section 303(d) of the Federal Clean Water Act and the Environmental Protection Agency's (EPA) regulations in 40 CFR 130.7.

The purpose of a TMDL is to determine the pollutant loading that a waterbody can assimilate without exceeding the water quality standard for that pollutant, and to establish the load reduction that is necessary to meet the water quality standard in a waterbody. The TMDL is the sum of the wasteload allocation (WLA), load allocation (LA), future growth (FG), and a margin of safety (MOS). The WLA is the load allocated to point sources of the pollutant of concern, and the LA is the load allocated to nonpoint sources, including natural background. The MOS is a percentage of the TMDL that takes into account any lack of knowledge concerning the relationship between pollutant loadings and water quality and the FG component allows for future increases in loads to the waterbody.

Table 1.1. Subsegments and parameters for impairments addressed in this report.

Subsegment number	Subsegment name	Source of information ¹	Impaired use ²	Suspected causes of impairment							Suspected sources of impairment	TMDL priority (1 = highest)	
				Chloride	Sulfate	TDS	Sediment/Siltation	TSS	Turbidity	Fecal Coliforms			
100701	Black Lake Bayou	LDEQ 303(d)	FWP			X	X			X		Source unknown (Sediment, turbidity). Natural conditions (TDS).	1
100704	Kepler Creek	LDEQ 303(d)	FWP			X						Source unknown	1

Notes:

1. Source of information is the final 2004 LDEQ 303(d) list.
2. FWP=Fish and Wildlife Propagation

2.0 BACKGROUND INFORMATION

2.1 General Information

The study area for this project consists of the headwaters of Black Lake Bayou (subsegment 100701) and Kepler Creek (subsegment 100704) in the Red River Basin in northwest Louisiana (Figure A.1 in Appendix A). The headwaters of Black Lake Bayou begin northeast of Minden, Louisiana. Kepler Creek is a tributary of Black Lake Bayou, with headwaters just west of Bryceland, Louisiana. The Black Lake Bayou subsegment (100701) is bounded on the north and northwest by Bayou Dorcheat, on the west by Lake Bistineau, on the south by Black Lake Bayou (subsegment 100702), on the east by Leatherman Creek (which is in subsegment 100702), and on the northeast by Lake Clabourne. Kepler Creek is bounded on the north and west by Black Lake Bayou (subsegment 100702), on the south by Kepler Lake, and on the east by Saline Bayou. Black Lake Bayou and its tributaries (including Kepler Creek) are included in the United States Geological Survey (USGS) Hydrologic Unit 11140209. Subsegment 100701 encompasses approximately 123 mi², and subsegment 100704 encompasses approximately 26 mi².

2.2 Topography

Topography of the Black Lake Bayou watershed is characterized by gently to strongly sloping dissected coastal plain, underlain by unconsolidated sand, silts, and clays (CLIWS 1990).

2.3 Soils

Soil textures for subsegment 100701 (Table 2.1) were compiled from the STATSGO database, which is maintained by the United States Department of Agriculture (USDA) Natural Resources Conservation Service (NRCS). Soil textures for subsegment 100704 are not included here because that subsegment is not impaired by total suspended solids (TSS), turbidity, or sediment.

Table 2.1. Soil textures for subsegment 100701.

Soil Texture	Percentage of subsegment
Fine sandy loam	48%
Gravelly loamy fine sand	19%
Loamy fine sand	9%
Silt loam	16%
Other textures	8%
Total	100%

2.4 Land Use

Land use characteristics for the study area were compiled from the USGS 2001 National Land Cover Database (USGS 2006). These data are the most recent land use data that are currently available for this area. The spatial distribution of these land uses is shown on Figure A.2 (located in Appendix A) and land use percentages are shown in Table 2.2. These data indicate that forest and shrubland/grassland combined account for approximately 76% of each subsegment.

Table 2.2. Land use percentages for subsegments 100701 and 100704.

Land Use	Percent Coverage	
	100704	100701
Water	0.5%	0.2%
Urban/Transportation	5.7%	6.3%
Barren	0.1%	0.0%
Forest	61.0%	66.6%
Shrubland/Grassland	15.3%	19.9%
Pasture/Hay	6.8%	2.1%
Cultivated Crops	0.4%	0%
Wetlands	10.2%	4.9%
Total	100.0%	100.0%

2.5 Description of Hydrology

Average precipitation for the study area is about 55 inches per year (www.nationalatlas.gov). Average monthly precipitation values for Minden, Louisiana are shown on Figure 2.1; these values are highest during winter and spring and lowest during summer and early fall (July through October).

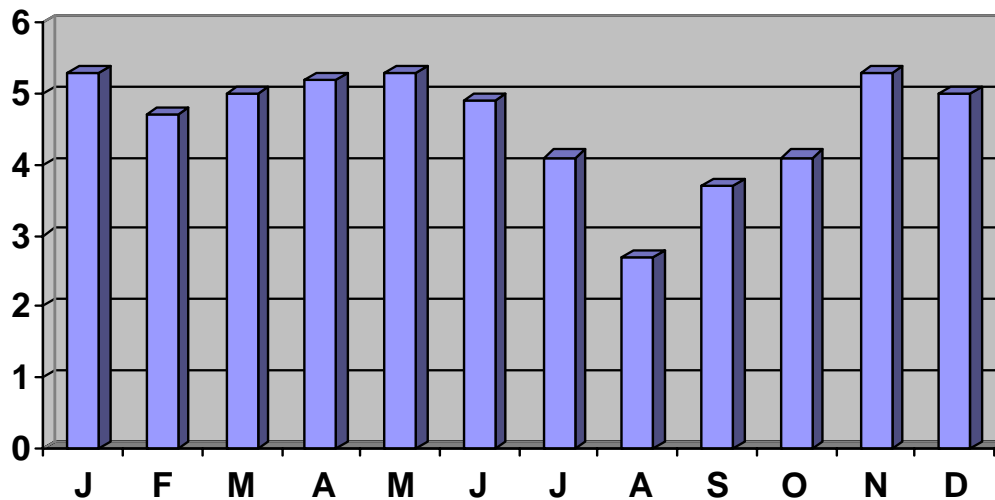


Figure 2.1 Average monthly precipitation at Minden, Louisiana (from <http://www.city-data.com/city/Minden-Louisiana.html>).

There is no current USGS flow gaging station located on Black Lake Bayou or Kepler Creek. The nearest USGS flow gaging station with recent data is Saline Bayou near Lucky (07352000), which is approximately 7 miles south of Bienville. Flows for Black Lake Bayou and Kepler Creek were estimated from Saline Bayou flows per unit of watershed area.

2.6 Water Quality Standards

Water quality standards for Louisiana are included in the Title 33 Environmental Regulatory Code (LDEQ 2005b). Designated uses for the Black Lake Bayou and Kepler Creek subsegments are primary and secondary contact recreation, fish and wildlife propagation, and agriculture. The numeric criterion for TDS for both Black Lake Bayou and Kepler Creek is 79 mg/L.

The Title 33 Environmental Regulatory Code does not include turbidity criteria for freshwater creeks and bayous that are not designated as scenic or outstanding natural resource waters. Black Lake Bayou downstream of the Webster-Bienville parish line (subsegment 100702) is designated as outstanding natural resource water and has a turbidity criterion of 25 NTU. LDEQ assesses the turbidity of subsegments just upstream of outstanding natural resource waters using the outstanding natural resources waters criterion, since a downstream receiving waterbody could not be expected to meet a lower criterion than the upstream waterbody that flows into it. Therefore, the value of 25 NTU will be used as the turbidity criterion for subsegment 100701 (Black Lake Bayou). A turbidity criterion was not established for subsegment 100704 because that subsegment was not impaired by turbidity, TSS, or sediment/siltation.

2.7 Nonpoint Sources

No suspected sources of pollutants are specified in the 303(d) listings for subsegments 100701 and 100704 for TDS, turbidity, and sediment/siltation. However, there is silviculture activity in these subsegments, which has the potential to contribute these pollutants (Personal communication July 2005, T. Hardaway, LDEQ Northwest Regional Office).

2.8 Point Sources

A list of point source discharges in the study area was generated by LDEQ using their TEMPO and PTS databases. Based on this list, there is only one permitted point source discharge located in subsegment 100701 (Table 2.3), and there are no permitted point source discharges in subsegment 100704. Information for the permitted discharger in the study area was obtained by FTN Associates, Ltd. (FTN) from LDEQ's Electronic Document Management System (EDMS). Because the one permitted discharger in subsegment 100701 does not have permit limits for TDS, it was assumed to not have a source of TDS; therefore it was not included in the TDS TMDL. Because this facility does have permit limits for TSS (25 mg/L monthly average), it was included in the turbidity and sediment/siltation TMDLs. However, stormwater runoff from the facility drains into a large pond from which water is pumped back to the plant and re-used.

Because of this operational procedure, discharges are infrequent. The facility has not had a discharge in over 12 months.

Table 2.3. Point sources located in the study area.

Subsegment	File Number	Facility Name	Location	Outfall	Expected Flows	Receiving Water	Included in TMDL?
100701	LA0051098	U.S. Silica Co. Dubberly Plant	Dubberly, 4 m SE on Ph. Rd 168	002	Intermittent	Natural Drainage – Black Lake Bayou	TSS – Yes TDS – No

2.9 Previous Water Quality Studies

One previous water quality study was found for subsegment 100701. The LDEQ 1990 Black Lake Bayou Survey Report included this subsegment. The purpose of the survey was to document water quality and uses of Black Lake Bayou as part of an evaluation of the bayou for use as a “least impacted stream” for the Red River Basin and the South Central Plains ecoregion (CLIWS 1990).

There are no known previous water quality studies for subsegment 100704.

3.0 EXISTING WATER QUALITY FOR TURBIDITY AND TSS

3.1 General Description of Data

Within the study area, only one subsegment (100701) was impaired for sediment/siltation and turbidity. Turbidity and TSS data have been collected by LDEQ at one station (1186) in this subsegment. The location of the sampling site is shown on Figure A.1 (located in Appendix A). Table 3.1 shows a summary of the data, including percentages of values above the turbidity criterion of 25 NTU. TSS data are included in this summary because TSS is needed as a surrogate parameter for expressing the sediment/siltation and turbidity TMDLs. Time series plots of data for the entire period at the station are shown on Figure B.1 for turbidity and Figure B.2 for TSS (located in Appendix B). These data were obtained from LDEQ.

Table 3.1. Summary of available turbidity and TSS data from station 1186.

Description	Turbidity (NTU)	TSS (mg/L)
Period of Record	1/14/02 – 12/9/02	1/14/02 – 12/9/02
No. of Values	12	11
Minimum	2.2	4.0
Maximum	60.0	37.0
Median	26.5	21.3
No. Values > 25 NTU	6	NA
% Values > 25 NTU	50%	NA

3.2 Seasonal Patterns

A slight seasonal pattern may exist at station 1186. Based on the one year of data available for turbidity and TSS, it appears that the turbidity and TSS measurements are both higher in the summer months than in the winter months (Figures B.1 and B.2 in Appendix B). However, additional years of data would be needed to confirm a seasonal pattern.

3.3 Relationships For Turbidity and TSS vs. Flow

Plots of turbidity and TSS versus estimated stream flow were also developed to examine any correlation between these water quality parameters and stream flow rates (Figures B.3 and

B.4 in Appendix B). Stream flow data from Saline Bayou near Lucky were used for these plots. Generally these plots show little or no correlation between turbidity or TSS and stream flow.

3.4 Relationships Between TSS and Turbidity

A plot of TSS versus turbidity for this station (Figure B.5 in Appendix B) shows a noticeable correlation, with higher turbidity levels tending to correspond with higher TSS concentrations. Linear regression was performed on the natural logarithms of turbidity and TSS and yielded the following relationship: $\text{Turbidity} = 5.92 * (\text{TSS})^{0.5695}$. The regression was performed using the natural logarithms of the data (rather than the raw data values) because turbidity and TSS usually fit a lognormal distribution better than a normal distribution.

The strength of the linear regression relationship is measured by the coefficient of determination (R^2) calculated during the regression analysis (Zar 1996). The R^2 value is the percentage of the total variation in turbidity that is explained or accounted for by the fitted regression (TSS). For station 1186, 87% of the variation in turbidity is accounted for by TSS, and the remaining 13% of variation in turbidity is unexplained. The unexplained portion is attributed to factors other than turbidity. At station 1186, the correlation between TSS and turbidity was determined to be good with an R^2 value of 0.87.

The statistical significance for the regression was evaluated by computing the “P value” for the slope of the regression line. The P value is essentially the probability that the slope of the regression line is really zero. Thus, a low P value indicates that a non-zero slope calculated from the regression analysis is statistically significant. For station 1186, the P value of the regression was 2.42E-05, which is considered statistically significant.

4.0 EXISTING WATER QUALITY FOR TDS

4.1 General Description of Data

Within the study area, both subsegments (100701 and 100704) were impaired for TDS. TDS data have been collected by LDEQ at one site in each subsegment (Table 4.1). Locations of these sampling sites are shown on Figure A.1 (Appendix A). Table 4.1 shows summaries of these data, including percentages of values above the criterion. Time series plots of TDS data for the entire period of record at each station are shown on Figures C.1 and C.2 (Appendix C).

Table 4.1. Summary of TDS data at stations 283 and 1186.

	Station 283	Station 1186
Station Description	Kepler Creek west of Bienville, Louisiana	Black Lake Bayou at Highway 793, southeast of Dubberly, Louisiana
Period of Record	2/13/90 – 4/13/98, 1/14/02 – 12/9/02	1/14/02 – 12/9/02
No. of Values	62	12
Minimum (mg/L)	10	38
Maximum (mg/L)	146	114
Median (mg/L)	67	84
No. Values > 79 mg/L	23	6
% Values > 79 mg/L	37%	50%

4.2 Seasonal Patterns

The TDS data were examined for seasonal patterns at both stations. Because multiple years of data were available for station 283, a seasonal plot was developed for those data (Figure C.3). On the plots of the one year of data available for TDS at station 1186 (subsegment 100701) and the multiple years of data available at station 283 (subsegment 100704), some of the TDS measurements at both stations were higher in the summer months than in the winter months. Black Lake Bayou in subsegment 100701 and Kepler Creek in subsegment 100704 tend to get very dry in the summer. Evaporation of the water from these streams during the dry summer period could result in slightly increased concentrations of TDS in the remaining water (T. Hardaway, LDEQ Northwest Regional Office, personal

communication, July 2005). This could explain the tendency for slightly higher TDS concentrations during summer since there are no point sources contributing elevated concentrations of TDS.

4.3 Relationships Between Concentration and Flow

Plots of TDS versus estimated stream flow were also developed to examine any correlation between concentration and flow (Figures C.4 and C.5 in Appendix C). These plots do not indicate a consistent relationship between TDS concentration and estimated stream flow. However, the highest TDS concentrations do occur during low flow conditions.

5.0 TMDL DEVELOPMENT

5.1 Seasonality and Critical Conditions

EPA regulations at 40 CFR 130.7 require the determination of TMDLs to take into account critical conditions for stream flow, loading, and water quality parameters. Also, both Section 303(d) of the Clean Water Act and regulations at 40 CFR 130.7 require TMDLs to consider seasonal variations for meeting water quality standards. Therefore, the historical data and analyses discussed in Sections 3.0 and 4.0 were used to evaluate whether there were certain flow conditions or certain periods of the year that could be used to characterize critical conditions.

For turbidity, no significant relationships were found between turbidity and estimated stream flow. Although turbidity (and TSS) values appeared to be slightly higher during the summer months, there were not enough data to confirm the pattern. For TDS, some of the high concentrations occurred at low stream flows and during the summer months, but there was not a strong, consistent relationship between concentration and flow, or between concentration and season. Based on these analyses, the TMDLs in this report were not developed on a seasonal basis. The methodology used to develop these TMDLs (load duration curve) addresses a wide range of flow conditions.

5.2 Water Quality Targets

Turbidity is an expression of the optical properties in a water sample that cause light to be scattered or absorbed and is caused by suspended matter, such as clay, silt, finely divided organic and inorganic matter; soluble colored organic compounds; and plankton and other microscopic organisms (Standard Methods 1999). Turbidity cannot be expressed as a load as preferred for TMDLs. To achieve a load-based value, the numerical criterion for turbidity is often correlated with a surrogate parameter, such as TSS, that can be expressed as a load. For the turbidity and sediment/siltation TMDLs for subsegment 100701, the relationship between turbidity and TSS presented in Section 3.4 was used to develop a target TSS concentration (i.e., numeric endpoint

for the TMDL). The target TSS concentration calculated from the turbidity criterion of 25 NTU was 13 mg/L.

The water quality targets for TDS were simply the water quality criterion shown in Table 2.3 (79 mg/L TDS for both Kepler Creek and Black Lake Bayou). TDS can easily be expressed as mass, so there was no need to use surrogate parameters.

5.3 Methodology for TMDL Calculations

The methodology used for all of the TMDLs in the report is the load duration curve. Because loading capacity varies as a function of the flow present in the stream, these TMDLs represent a continuum of allowable loads over all flow conditions, rather than fixed at a single value. The basic elements of this procedure are documented on the Kansas Department of Health and Environment (KDHE) web site (2005). This method was used to determine allowable loadings for a wide range of flows. The steps for how this methodology was applied for the TMDLs in this report can be summarized as follows:

1. Develop a flow duration curve (Section 5.4);
2. Develop target load duration curves from the flow duration curve (Section 5.5);
3. Plot observed loads with target load duration curves (Section 5.6);
4. Calculate TMDL, MOS, FG, WLA, and LA (Sections 5.7 – 5.10); and
5. Calculate percent reductions required to meet water quality standards (Section 5.11).

5.4 Flow Duration Curve

A flow per unit area duration curve was developed for each subsegment. Daily streamflow measurements from Saline Bayou near Lucky (USGS Gage Number 07352000) were sorted in increasing order and the percentile ranking of each flow was calculated. The data from the Saline Bayou gage were used because the load duration methodology requires that the same flow data be used for developing the flow duration as for calculating observed loads from sampling data. The Saline Bayou gage was the closest flow gage with data during the years that water quality sampling occurred.

5.5 Load Duration Curves

For each TMDL parameter (TSS and TDS), the flows per unit area from the flow duration curves were multiplied by the appropriate target concentration (from Section 5.2) to make an allowable load per unit area duration curve. Each load duration curve is a plot of pounds per day per mi² of drainage area versus the percent exceedances from the flow duration curves. The three load duration curves are presented in the following appendices:

APPENDIX D:	load duration curve for subsegment 100701 for TSS
APPENDIX E:	load duration curve for subsegment 100701 for TDS
APPENDIX F:	load duration curve for subsegment 100704 for TDS

The calculations for these load duration curves are shown in Tables D.1, E.1, and F.1.

The load duration curve is beneficial when analyzing monitoring data plotted as a load with its corresponding flow information. This allows the monitoring data to be plotted in relation to its place in the flow continuum. Assumptions of the probable source or sources of the impairment can often be made from the plotted data.

The load duration curve shows the calculation of the TMDL at any flow rather than at a single critical flow. The official TMDL number is reported as a single number, but the curve is provided to demonstrate the value of the acceptable load at any flow. This will allow analysis of load cases in the future for different flow regimes.

5.6 Observed Loads

For each sampling station, observed loads were calculated by multiplying each observed concentration of TSS or TDS by the flow per unit area on the sampling day. These observed loads were then plotted versus the percent exceedance of the flow per unit area on the sampling day and placed on the same plot as the load duration curve. These plots are shown in the appendices of this report as follows:

Figure D.1:	plot of loads for TSS in subsegment 100701
Figure E.1:	plot of loads for TDS in subsegment 100701
Figure F.1:	plot of loads for TDS in subsegment 100704

These plots provide visual comparisons between observed and allowable loads under different flow conditions. Observed loads that are plotted above the load duration curve (identified as “TMDL – MOS” curve in the legend for the TSS plots and “TMDL – MOS – FG” in the TDS TMDLs) represent conditions where observed water quality concentrations exceed the target concentrations. Observed loads below the load duration curve represent conditions where observed water quality concentrations are less than target concentrations (i.e., not violating water quality standards).

5.7 TMDL, MOS, and FG

Each TMDL was calculated as the area under the load duration curve. Because the load duration curves were expressed in mass per unit drainage area, the area under the curve (lb/day/mi²) was multiplied by the subsegment drainage area.

Both Section 303(d) of the Clean Water Act and regulations at 40 CFR 130.7 require TMDLs to include a MOS to account for uncertainty in available data or in the actual effect that controls will have on the loading reductions and receiving water quality. The MOS may be expressed explicitly as unallocated assimilative capacity or implicitly through conservative assumptions used in establishing the TMDL. For the turbidity, and sediment/siltation TMDL, an implicit MOS was incorporated through the use of conservative assumptions. The primary conservative assumption was calculating the TMDL assuming that TSS was a conservative parameter and did not settle out of the water column. For the TDS TMDLs, an explicit MOS was established as 10% of the TMDL. Both the TSS and TDS TMDLs had a FG set equal to 10% of the TMDL (in addition to the MOS).

5.8 Point Source Loads

For the turbidity and sediment/siltation TMDLs, the WLA for the point source in subsegment 100701 (US Silica Company Dubberly, LA facility) was set equal to the current monthly average permit limit for TSS (25 mg/L) multiplied by an effluent flow rate that was assumed to be reasonable whenever the facility discharged (0.01 MGD). As discussed in Section 2.8, this facility operates to avoid discharges and has not had a discharge during the last

12 months. No reductions in TSS permit limits are proposed for this facility because it is located along the western edge of the subsegment (i.e., a significant distance away from the impaired waterbody) and it rarely has a discharge. Therefore, it appears that this facility is not having any impact on turbidity and sediment/siltation in Black Lake Bayou.

For the TDS TMDLs, there were no point source discharges in either subsegment that had elevated concentrations of TDS. Therefore, the WLAs for TDS were set to zero for both subsegments. New point sources could begin discharging to these subsegments and grow without being limited by these TMDLs as long as their discharge concentrations were at or below the water quality standard for TDS and the TMDL target for TSS.

5.9 Nonpoint Source Loads

For each of the TMDLs in this report, the LA for nonpoint sources was set equal to the TMDL minus the MOS and WLA. For the turbidity and sediment/siltation TMDLs, the LA was effectively the TMDL minus the WLA and FG (because the MOS was implicit). For the TDS TMDLs, the LA was effectively the TMDL minus the MOS and FG (because the WLA was zero).

Calculations for the TMDLs are shown in the appendices of this report as follows:

Table D.2:	calculations for TSS TMDL for subsegment 100701
Table E.2:	calculations for TDS TMDL for subsegment 100701
Table F.2:	calculations for TDS TMDL for subsegment 100704

5.10 Percent Reductions

In addition to calculating allowable loads, estimates were made for percent reductions of nonpoint source loads that would be needed for all of the observed loads to be on or below the load duration curve. The observed loads at each sampling station were reduced until there were no loads above the load duration curve. The results of these percent reduction calculations are shown in Tables 5.1 and 5.2; the detailed calculations are in Tables D.2, E.2, and F.2.

Table 5.1. Turbidity and sediment/siltation TMDL for subsegment 100701.

Subsegment Number	Stream Name	Loads (tons/day of TSS)					Percent Reduction Needed
		WLA	LA	MOS	FG	TMDL	
100701	Black Lake Bayou	0.01	4.47	0	0.50	4.98	69%

Table 5.2. Summary of TDS TMDLs.

Subsegment Number	Stream Name	Loads (tons/day of TDS)					Percent Reduction Needed
		WLA	LA	MOS	FG	TMDL	
100701	Black Lake Bayou	0	24.20	3.02	3.02	30.24	45%
100704	Kepler Creek	0	4.12	0.52	0.52	5.16	57%

6.0 OTHER RELEVANT INFORMATION

This TMDL has been developed to be consistent with the State antidegradation policy (LAC 33:IX.1109.A).

LDEQ will work with other agencies, such as local Soil Conservation Districts, to implement nonpoint source best management practices in the watershed through the 319 programs. LDEQ will also continue to monitor the waters to determine whether standards are being attained.

In accordance with Section 106 of the Federal Clean Water Act, and under the authority of the Louisiana Environmental Quality Act, the LDEQ has established a comprehensive program for monitoring the quality of the state's surface waters. The LDEQ Surveillance Section collects surface water samples at various locations, utilizing appropriate sampling methods and procedures for ensuring the quality of the data collected. The objectives of the surface water monitoring program are to determine the quality of the State's surface waters, to develop a long-term data base for water quality trend analysis, and to monitor the effectiveness of pollution controls. The data obtained through the surface water monitoring program is used to develop the State's biennial 305(b) report (Water Quality Inventory) and the 303(d) list of impaired waters. This information is also utilized in establishing priorities for the LDEQ nonpoint source program.

The LDEQ has implemented a watershed approach to surface water quality monitoring. Through this approach, the entire state is sampled over a 4-year cycle. Long-term trend monitoring sites at various locations on the larger rivers and Lake Pontchartrain are sampled throughout the 4-year cycle. Sampling is conducted on a monthly basis to yield approximately 12 samples per site each year the site is monitored. Sampling sites are located where they are considered to be representative of the waterbody. Under the current monitoring schedule, approximately one half of the State's waters are newly assessed for each 305(b) and 303(d) listing biennial cycle, with sampling occurring statewide each year. The 4-year cycle follows an initial 5-year rotation that covered all basins in the state according to the TMDL priorities. This will allow the LDEQ to determine whether there has been any improvement in water quality

following implementation of the TMDLs. As the monitoring results are evaluated at the end of each year, waterbodies may be added to or removed from the 303(d) list.

7.0 PUBLIC PARTICIPATION

Federal regulations require EPA to notify the public and seek comment concerning TMDLs it prepares. The TMDLs in this report were developed under contract to EPA, and EPA held a public review period seeking comments, information, and data from the public and any other interested parties. The notice for the public review period was published in the Federal Register on July 20, 2006, and the review period closed on August 21, 2006. Additional comments were accepted through October 20, 2006.

Comments were received from LDEQ, the Gulf Restoration Network, and six individuals. Comments and additional information submitted by October 20, 2006 were used to revise this TMDL report. The comments and responses to these TMDLs are included in a separate document that includes comments on similar TMDLs with the same public review period.

EPA will submit the final version of these TMDLs to LDEQ for implementation and incorporation into LDEQ's current water quality management plan.

8.0 REFERENCES

- CLIWS (Center for Louisiana Inland Water Studies, University of Southwestern Louisiana). 1990. Black Lake Bayou Survey Report. Prepared for the Louisiana Department of Environmental Quality.
- KDHE. 2005. "Kansas TMDL Curve Methodology." Web site maintained by Kansas Department of Health and Environment. www.kdheks.gov/tmdl/basic.htm#data
- LDEQ (Louisiana Department of Environmental Quality). 2000. Louisiana's Nonpoint Source Management Program's Annual Report. Louisiana Department of Environmental Quality. Baton Rouge, LA.
- LDEQ. 2005a. Louisiana 2004 Final Integrated Report, Appendix A. Online at www.deq.Louisiana.gov/portal/Portals/0/planning/305b/2004/04IR1-FINAL-Appendix A with FINAL U.S. EPA ADDITIONS-August 17, 2005.pdf.
- LDEQ. 2005b. Title 33 Environmental Quality, Part IX Water Quality. Online at www.deq.Louisiana.gov/portal/Portals/0/planning/regs/title33/33v09.doc.
- Standard Methods. 1999. Standard Methods for the Examination of Water and Wastewater. 20th Edition. Published by American Public Health Association, American Water Works Association, and Water Environment Federation.
- USGS. 2006. National Land Cover Database 2001 (NLCD 2001). Downloaded from United States Geological Survey web site (www.mrlc.gov/mrlc2k_nlcd.asp).
- Zar, J.H. 1996. Biostatistical Analyses, 3rd ed. Prentice Hall. New Jersey.

APPENDIX A

Maps

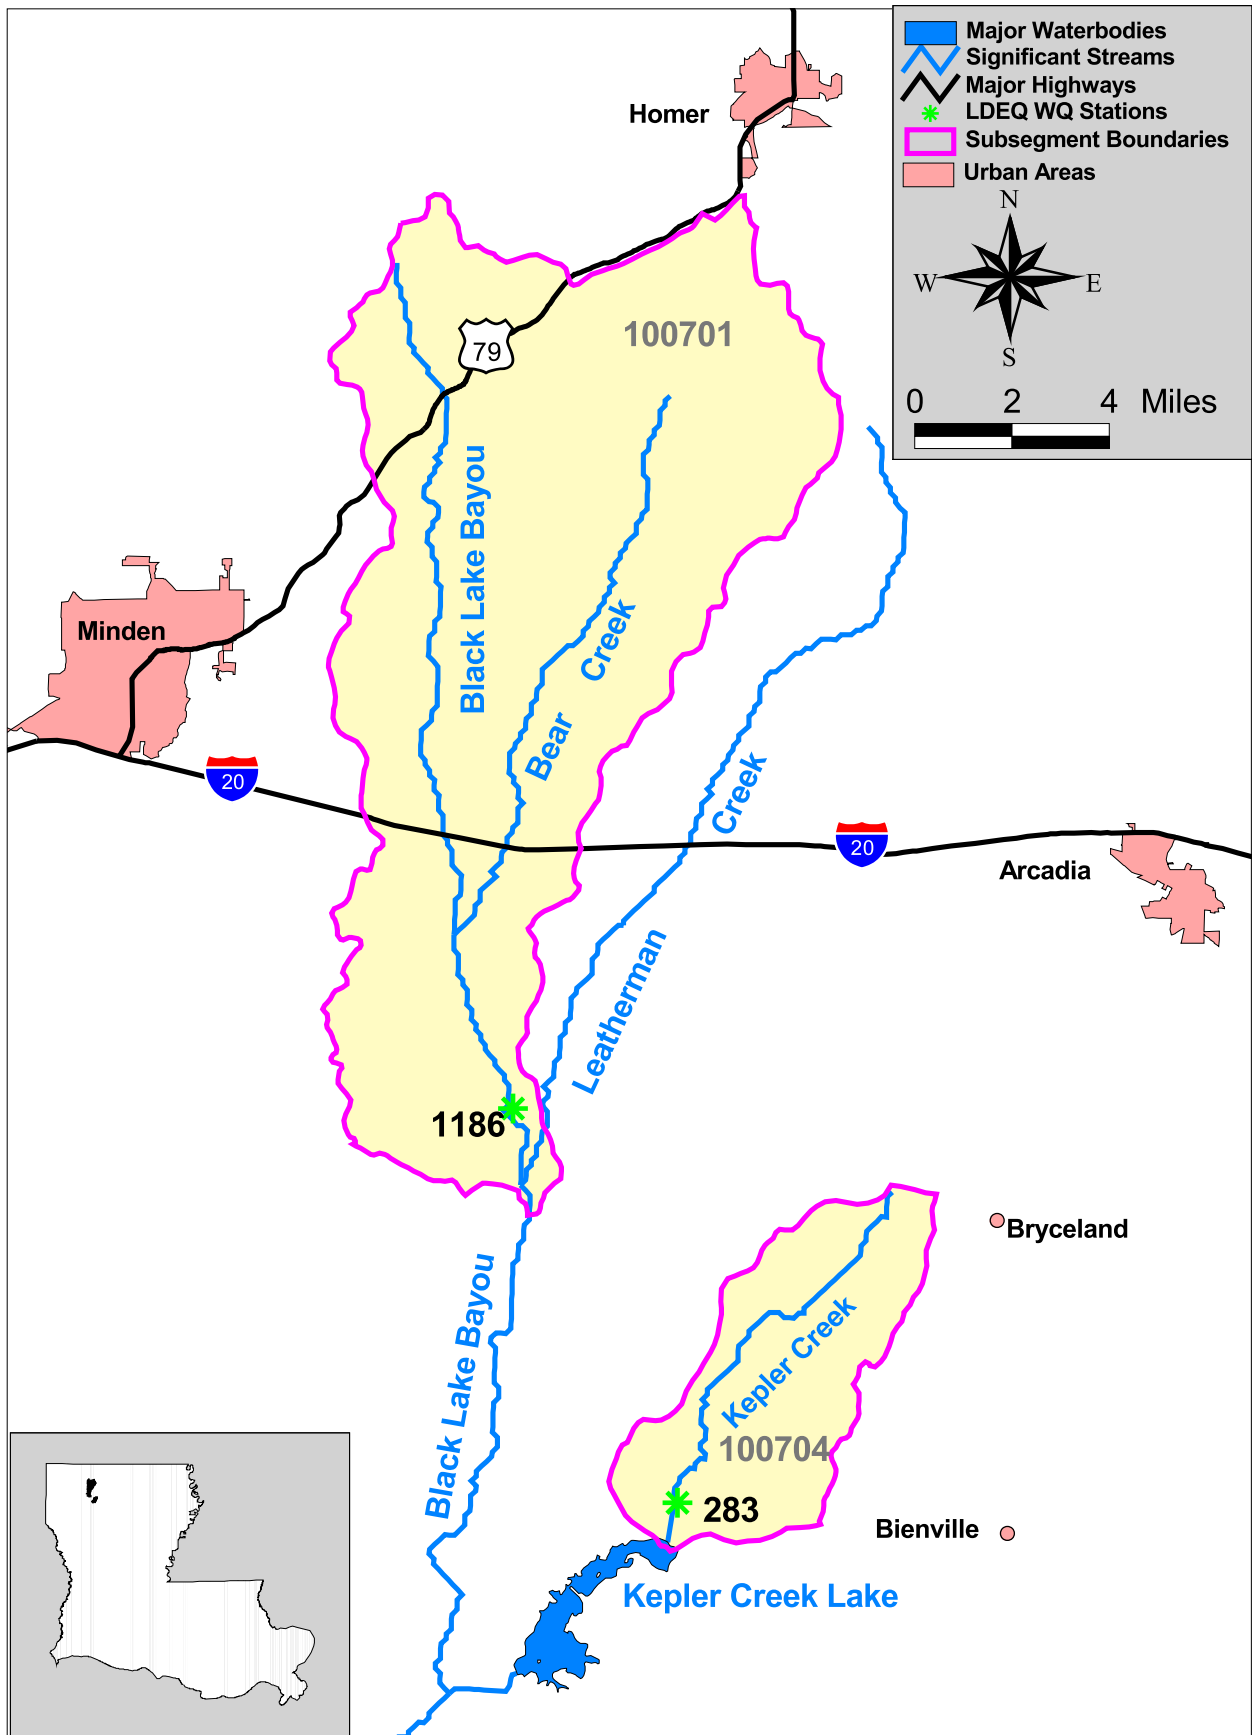


Figure A.1. Watershed map for subsegments 100701 and 100704.

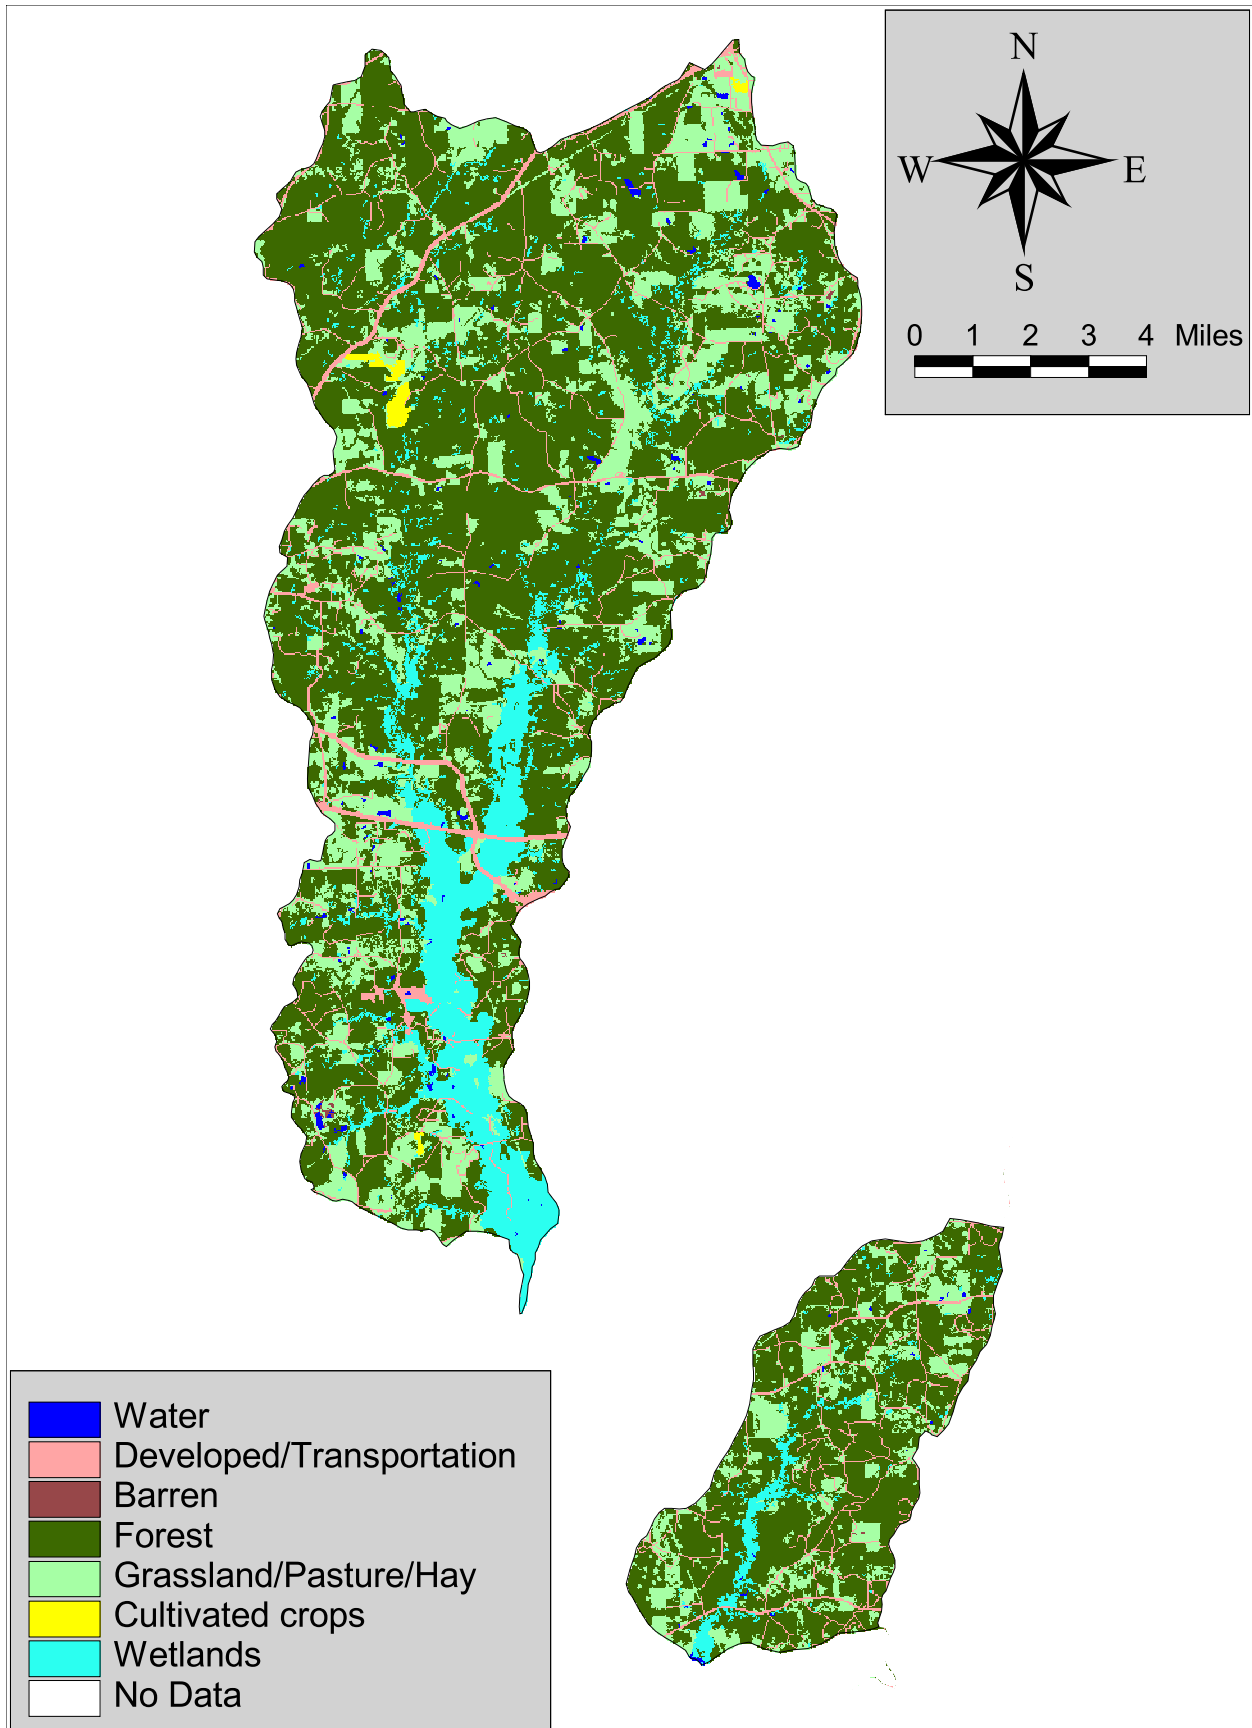


Figure A.2. Land use for subsegments 100701 and 100704.

APPENDIX B

Plots of Turbidity and TSS

Figure B.1 Turbidity for Black Lake Bayou at Highway 793, southeast of Dubberly, LA (1186)

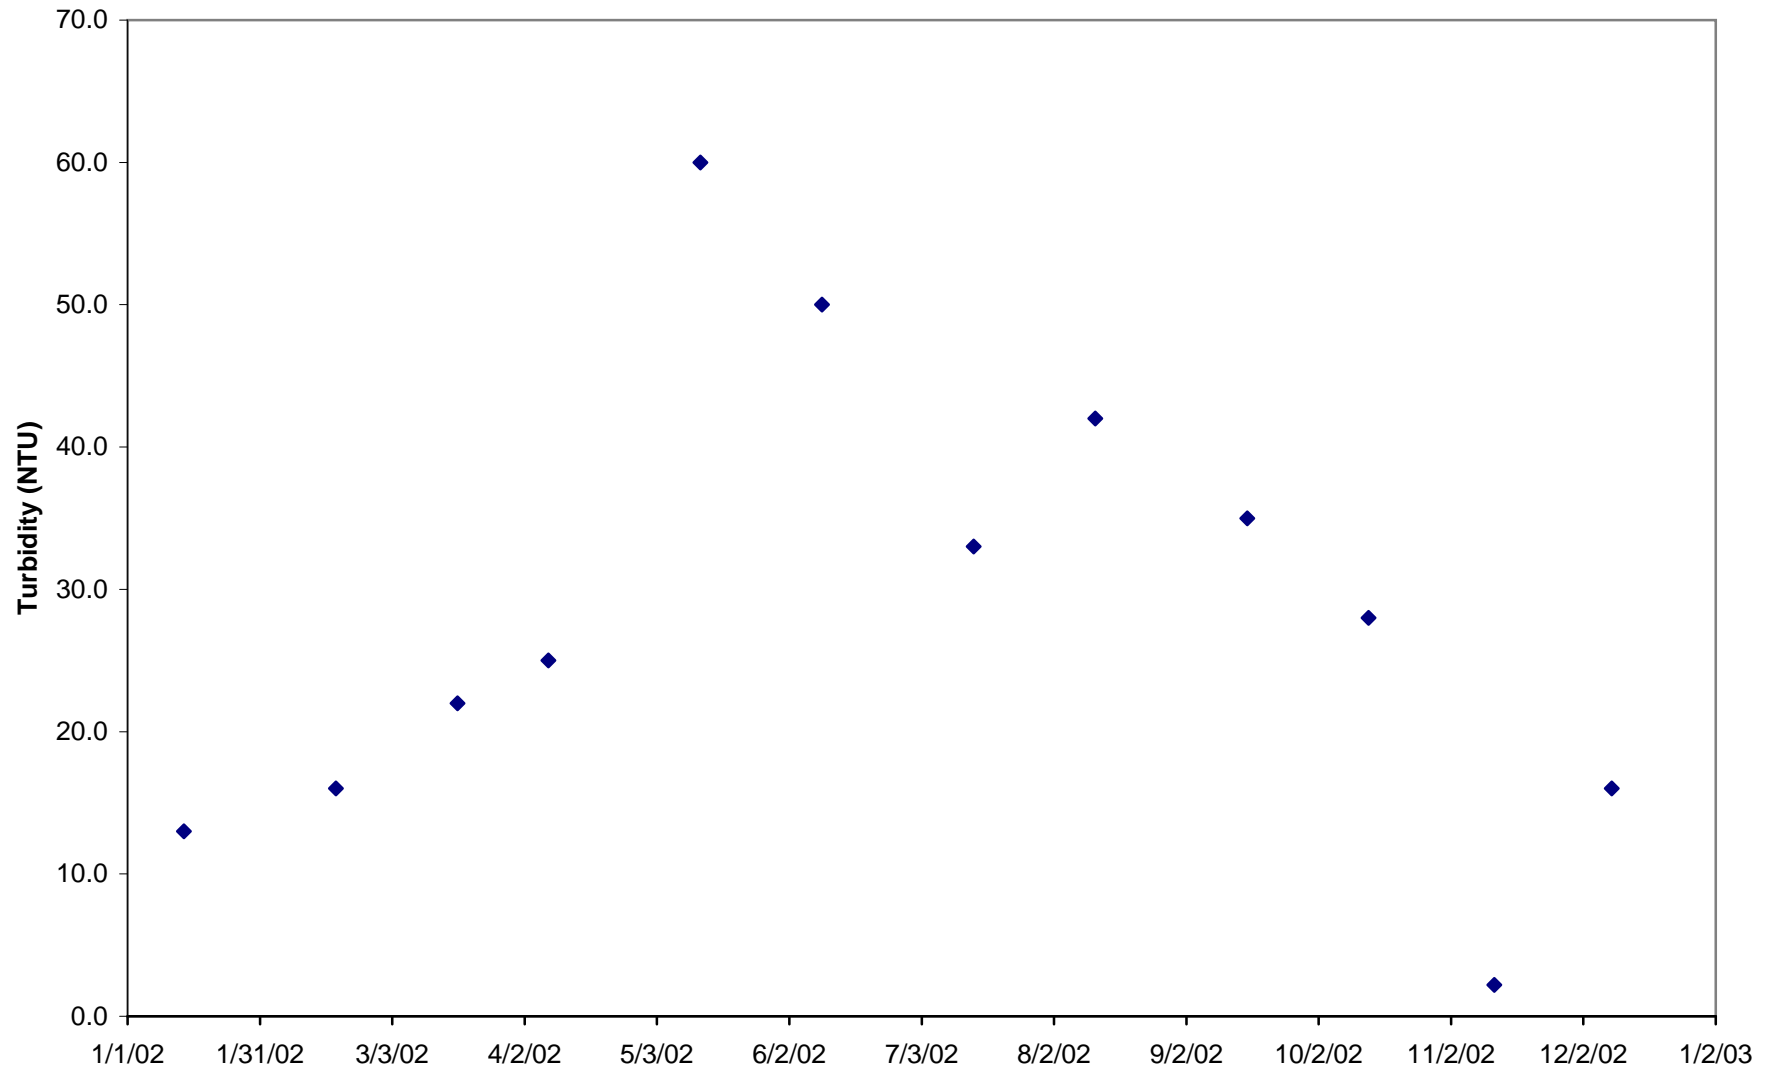


Figure B.2 TSS for Black Lake Bayou at Highway 793, southeast of Dubberly, LA (1186)

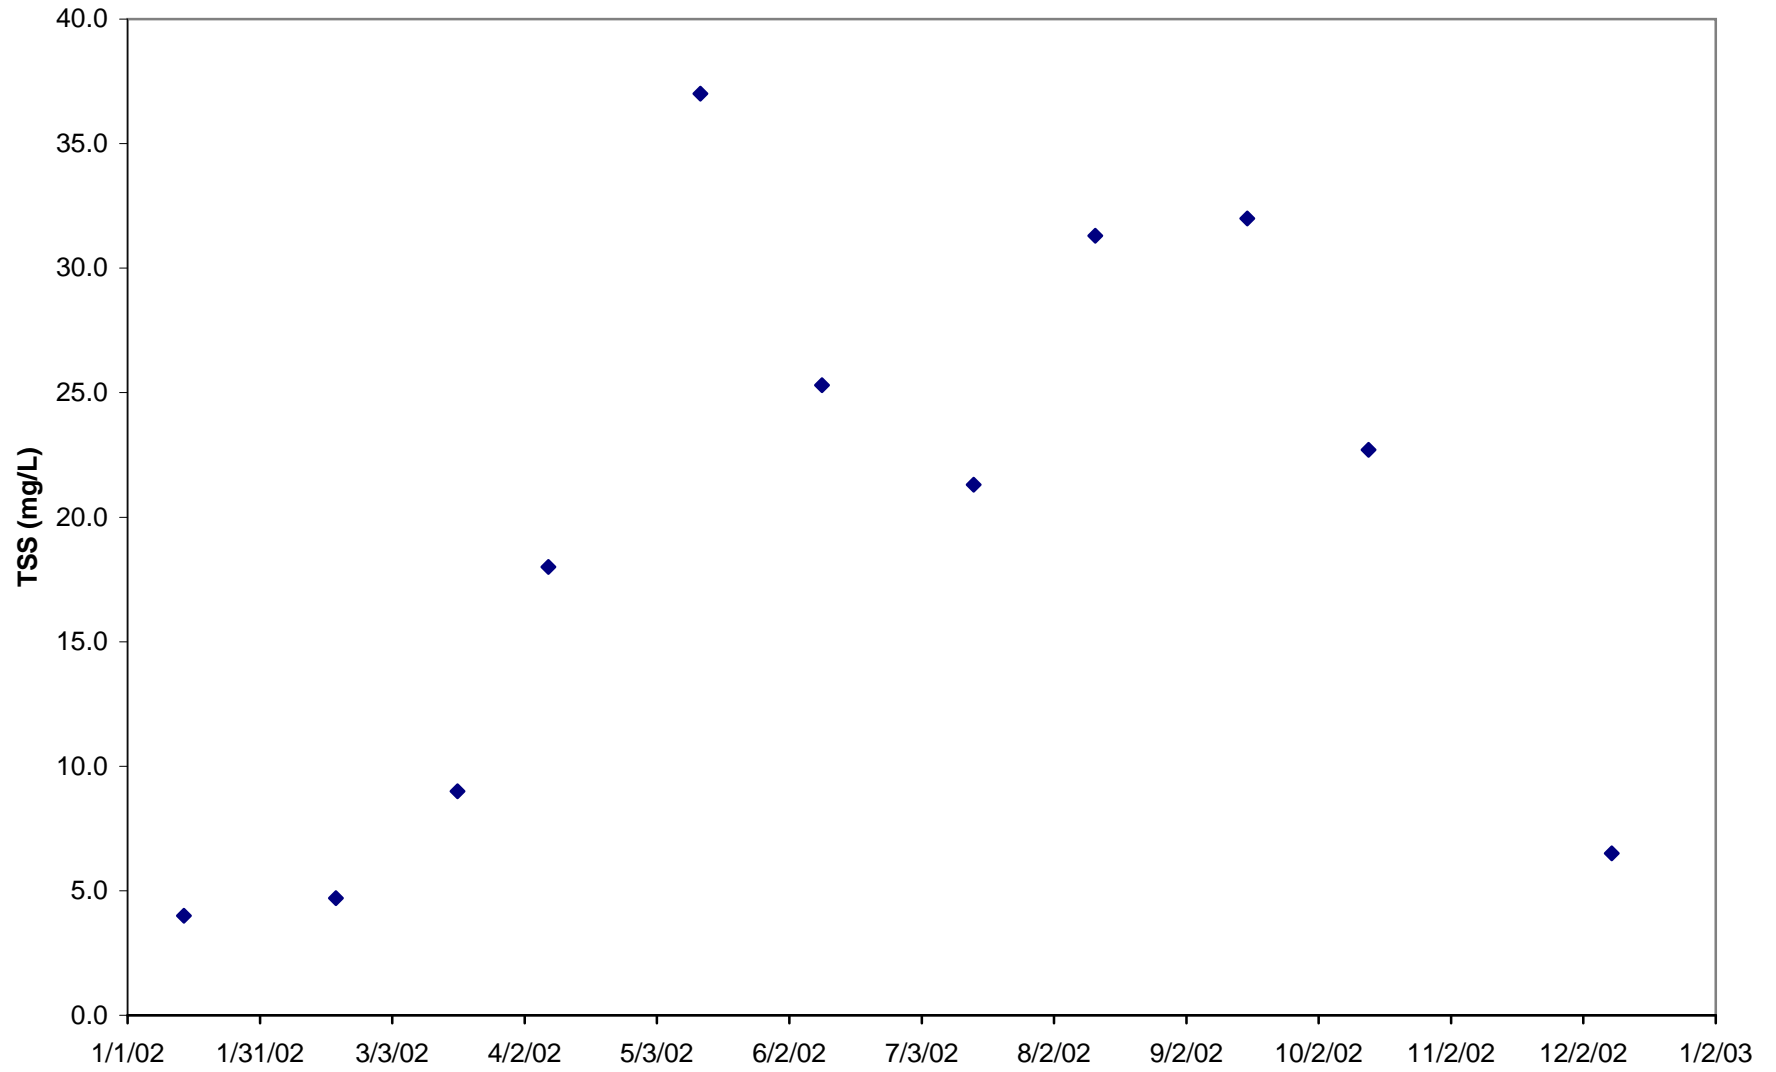


Figure B.3 Turbidity vs Flow for Black Lake Bayou at Highway 793, southeast of Dubberly, LA (1186)

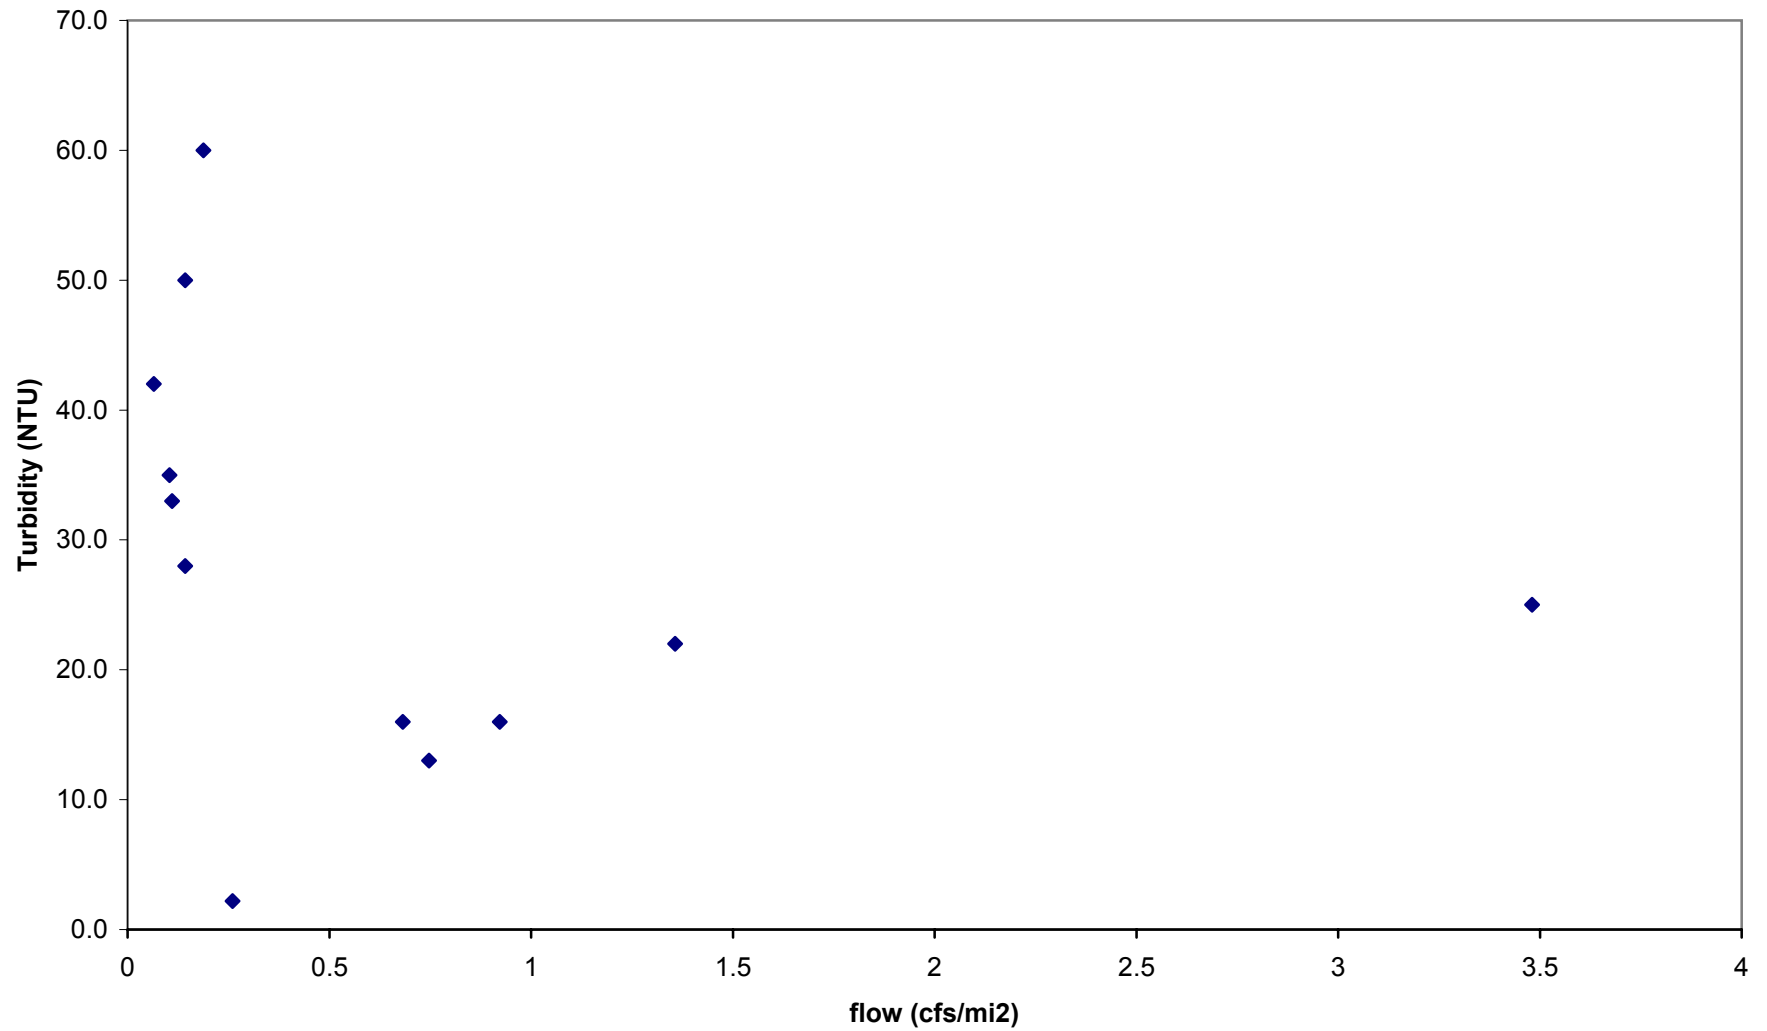


Figure B.4 TSS vs Flow for Black Lake Bayou at Highway 793, southeast of Dubberly, LA (1186)


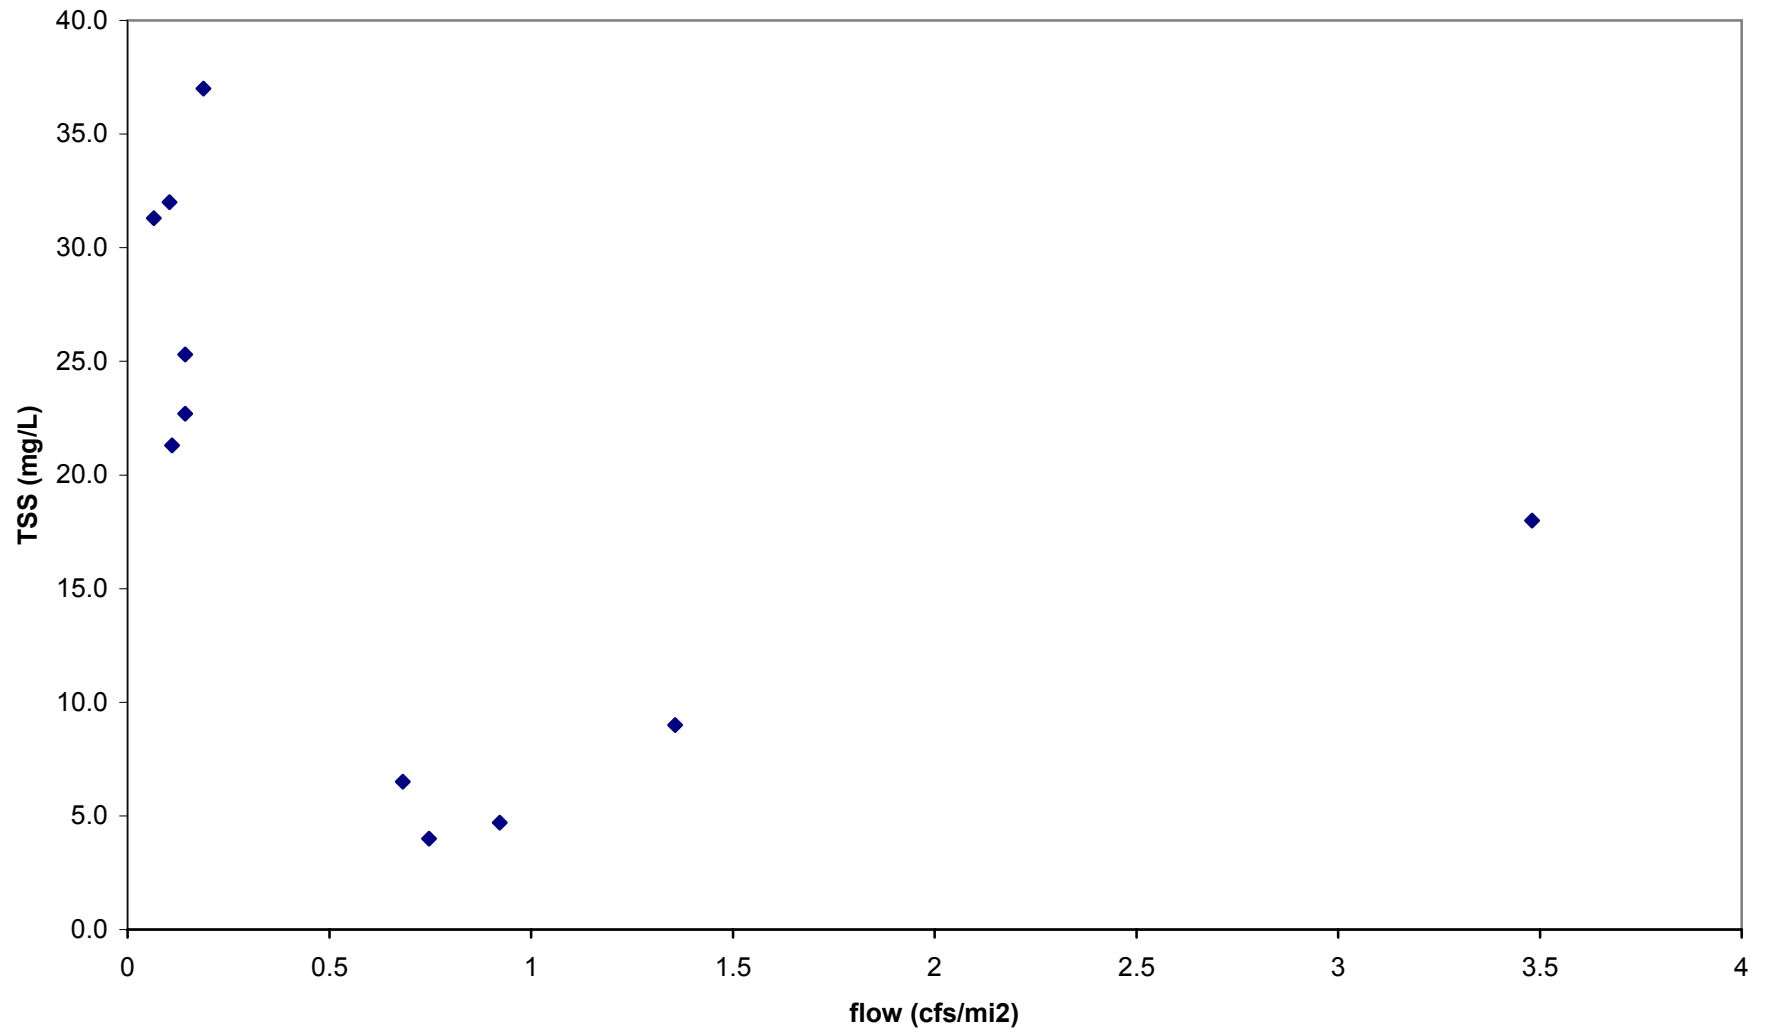


Figure B.5 Turbidity vs TSS for Black Lake Bayou at Highway 793, southeast of Dubberly, LA (1186)

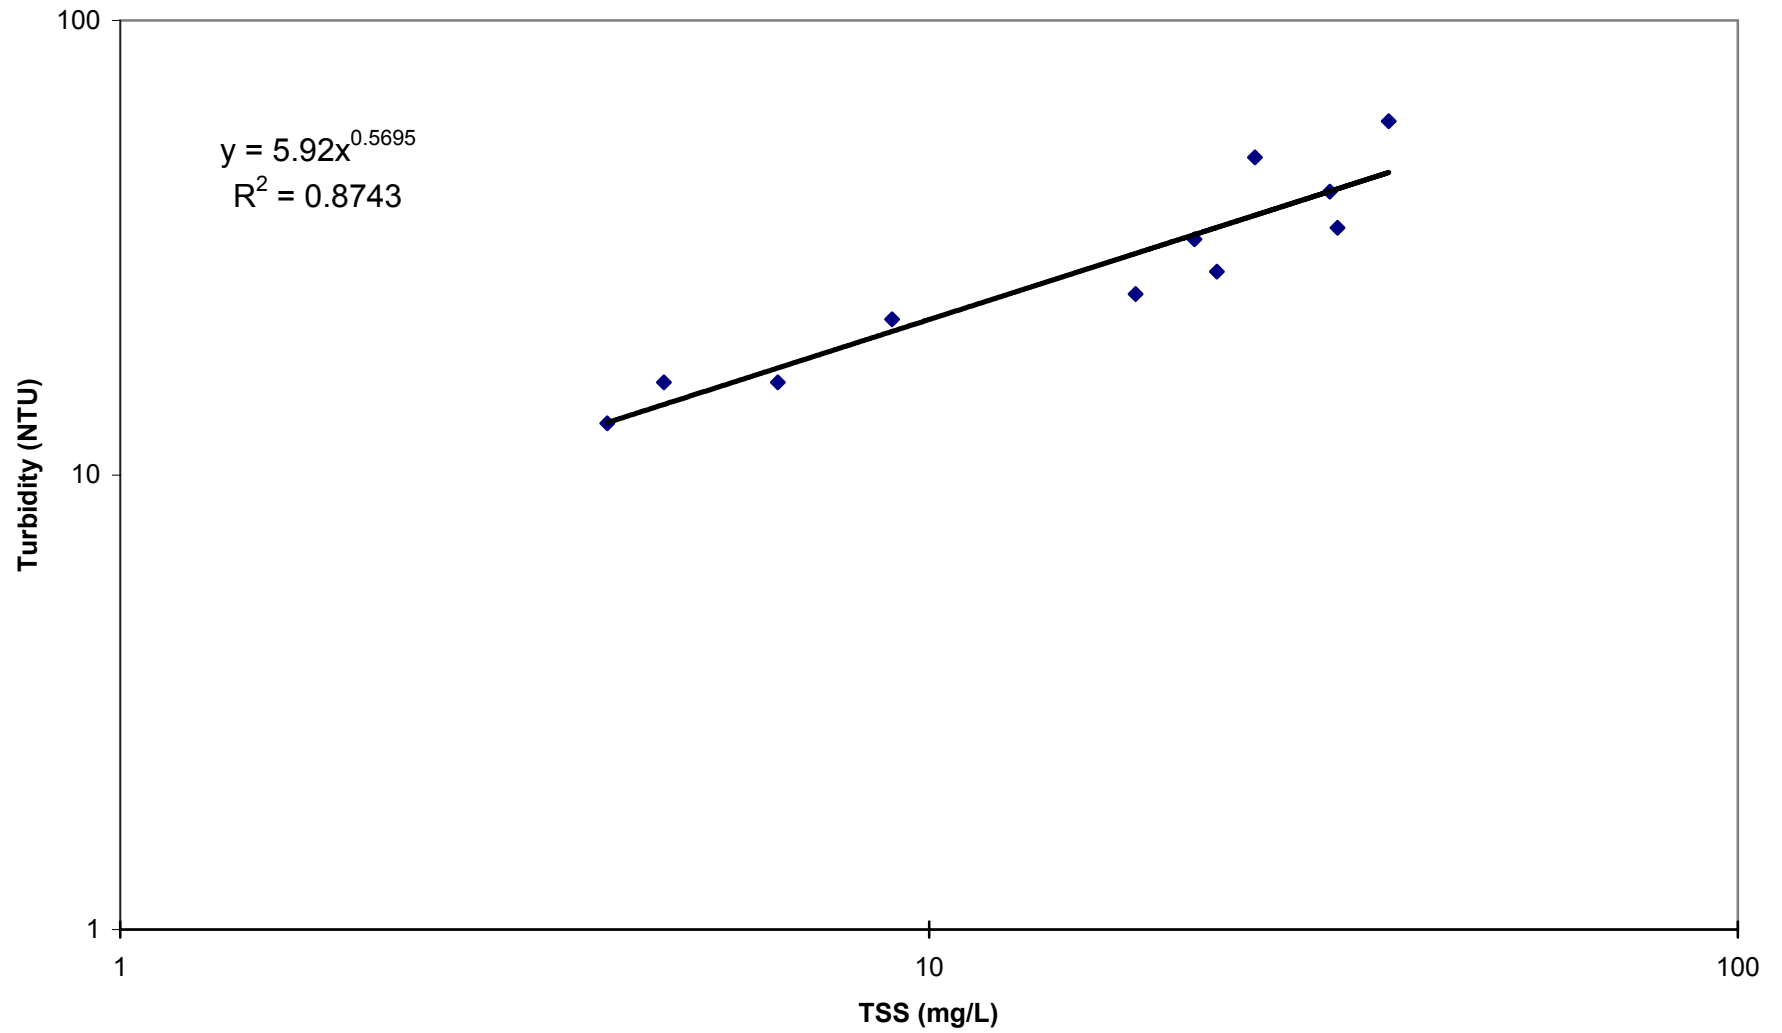

APPENDIX C

Plots of TDS

Figure C.1 TDS for Kepler Creek west of Bienville, LA (0283)

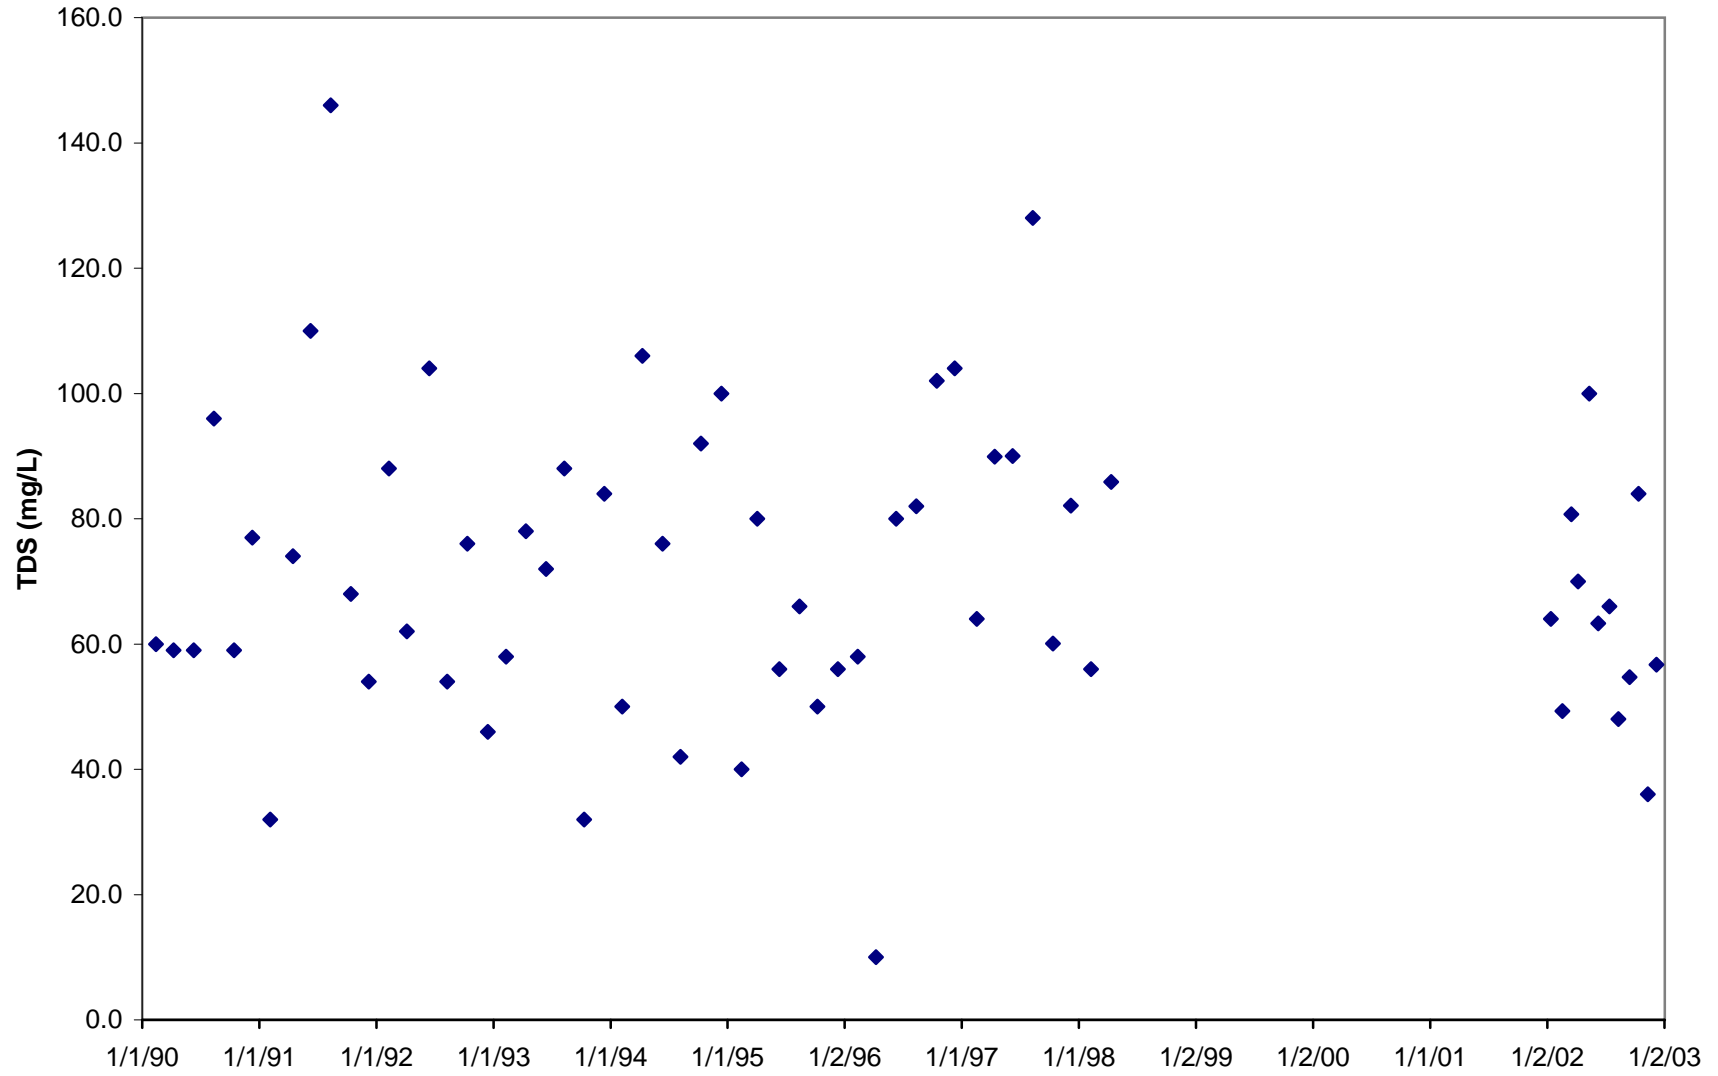


Figure C.2 TDS for Black Lake Bayou at Highway 793, southeast of Dubberly, LA (1186)

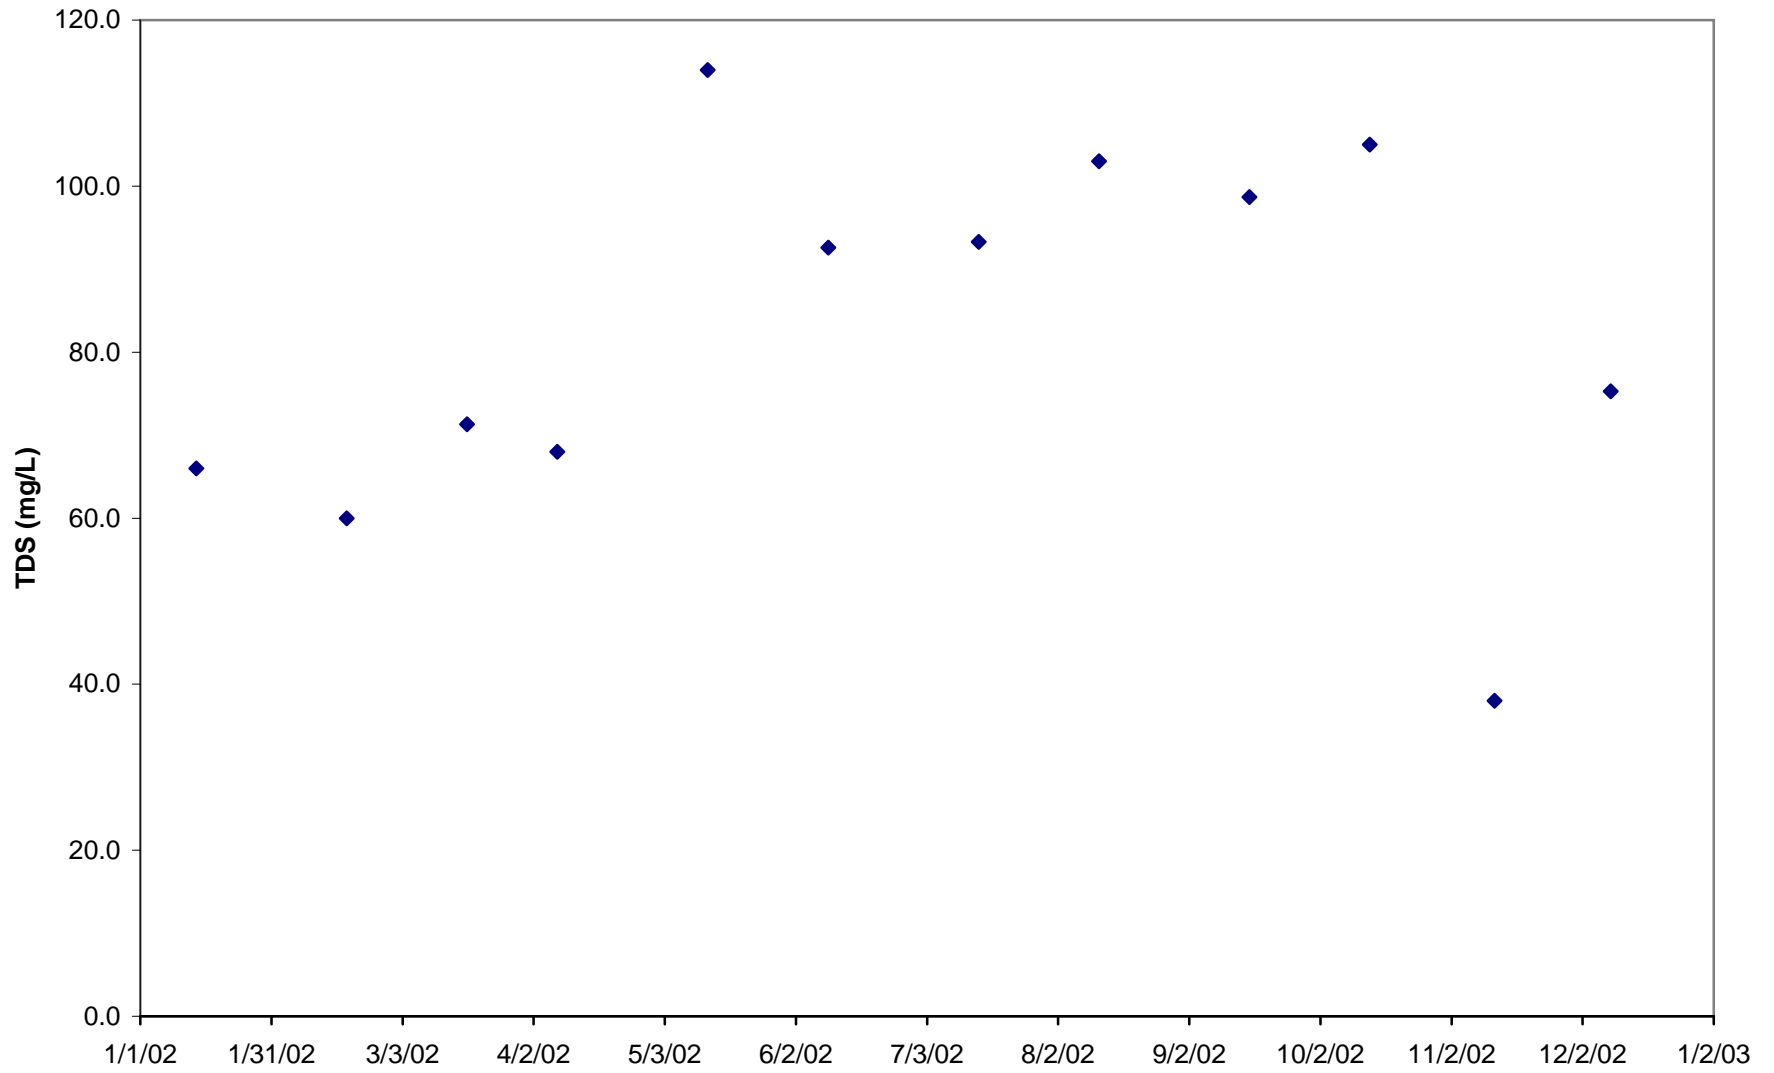


Figure C.3 Seasonal Plot of TDS for Kepler Creek west of Bienville, LA (0283)

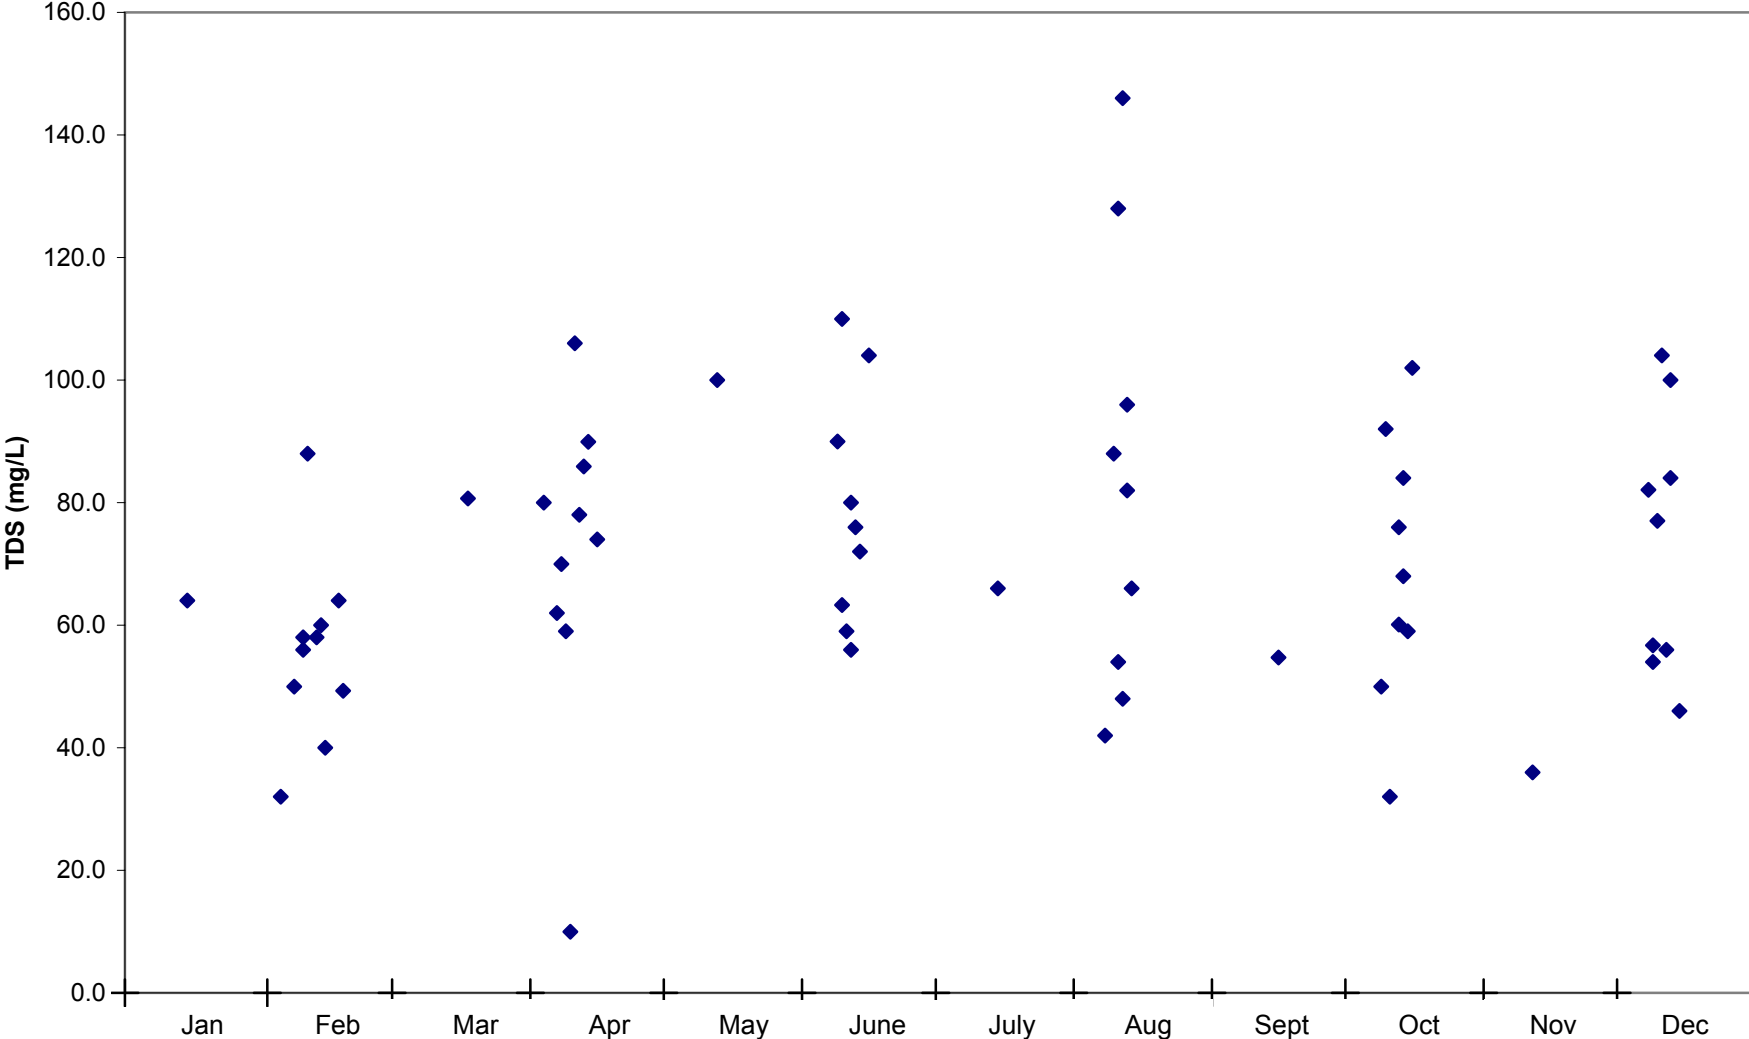


Figure C.4 TDS vs Flow for Kepler Creek west of Bienville, LA (0283)


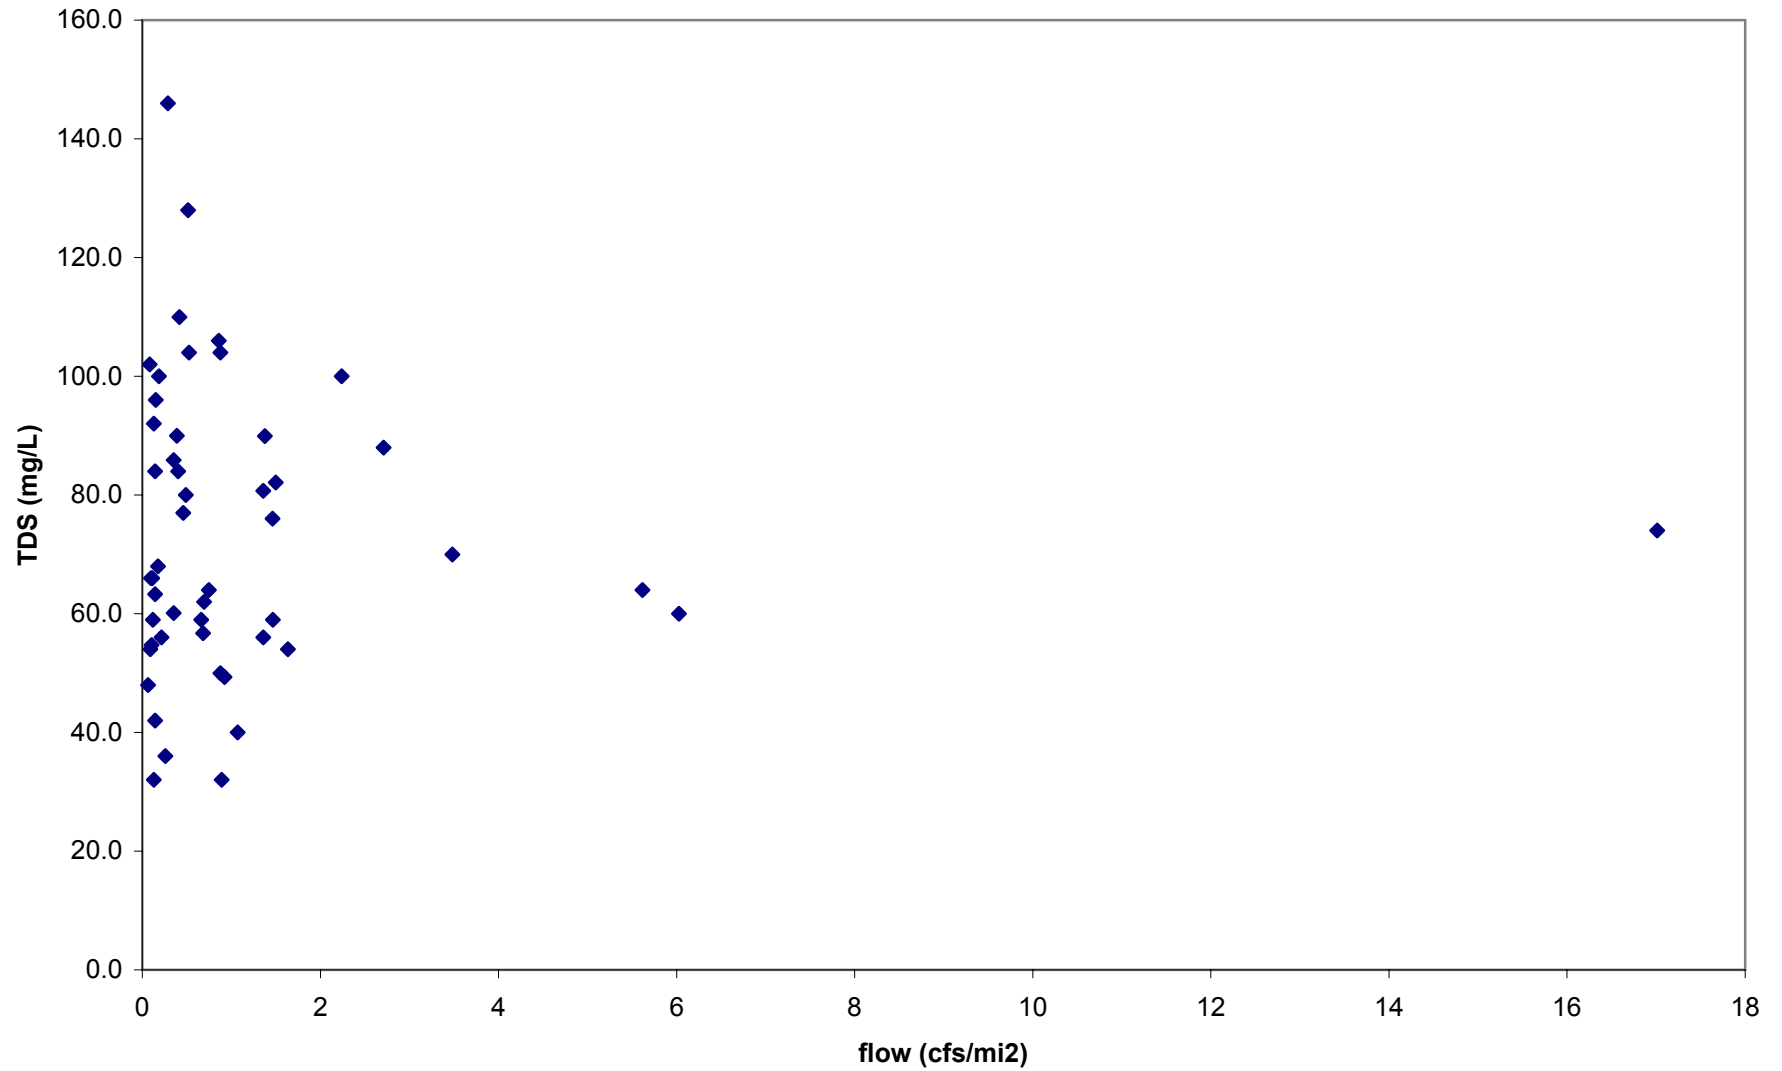


Figure C.5 TDS vs Flow for Black Lake Bayou at Highway 793, southeast of Dubberly, LA (1186)

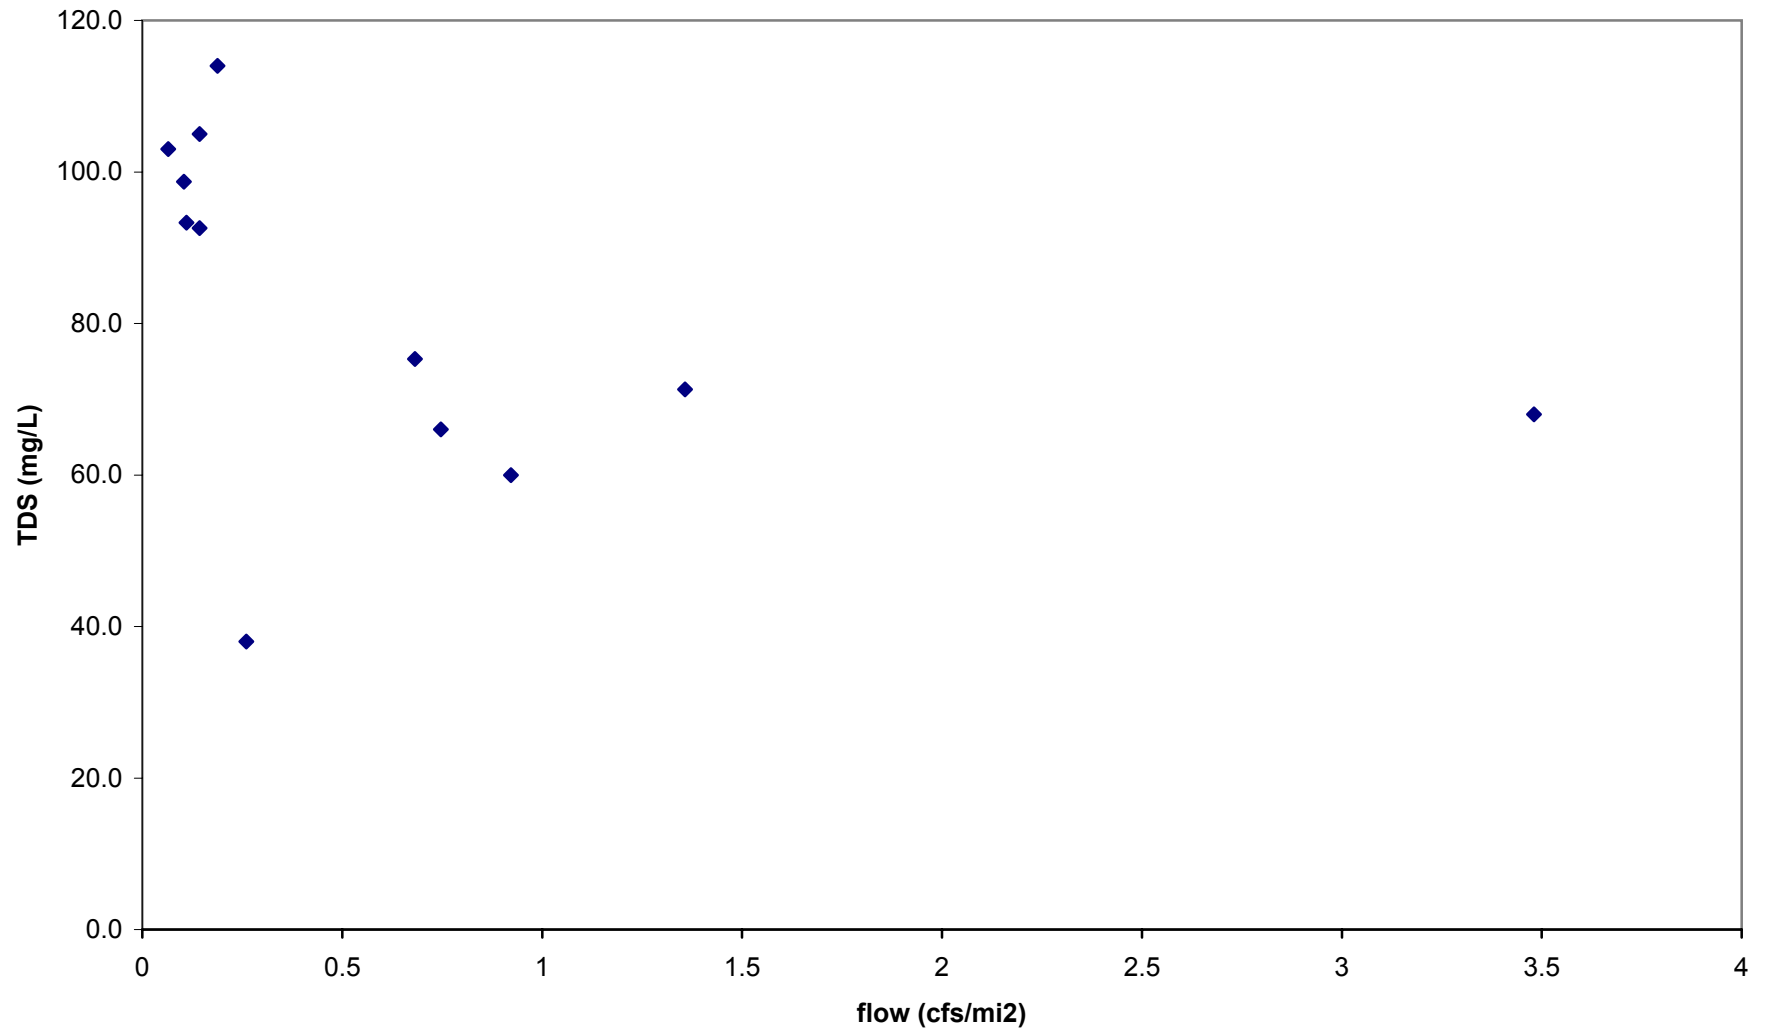

APPENDIX D

Calculations for subsegment 100701

Figure D.1 TSS Load Duration Curve for Black Lake Bayou (Subsegment 100701)

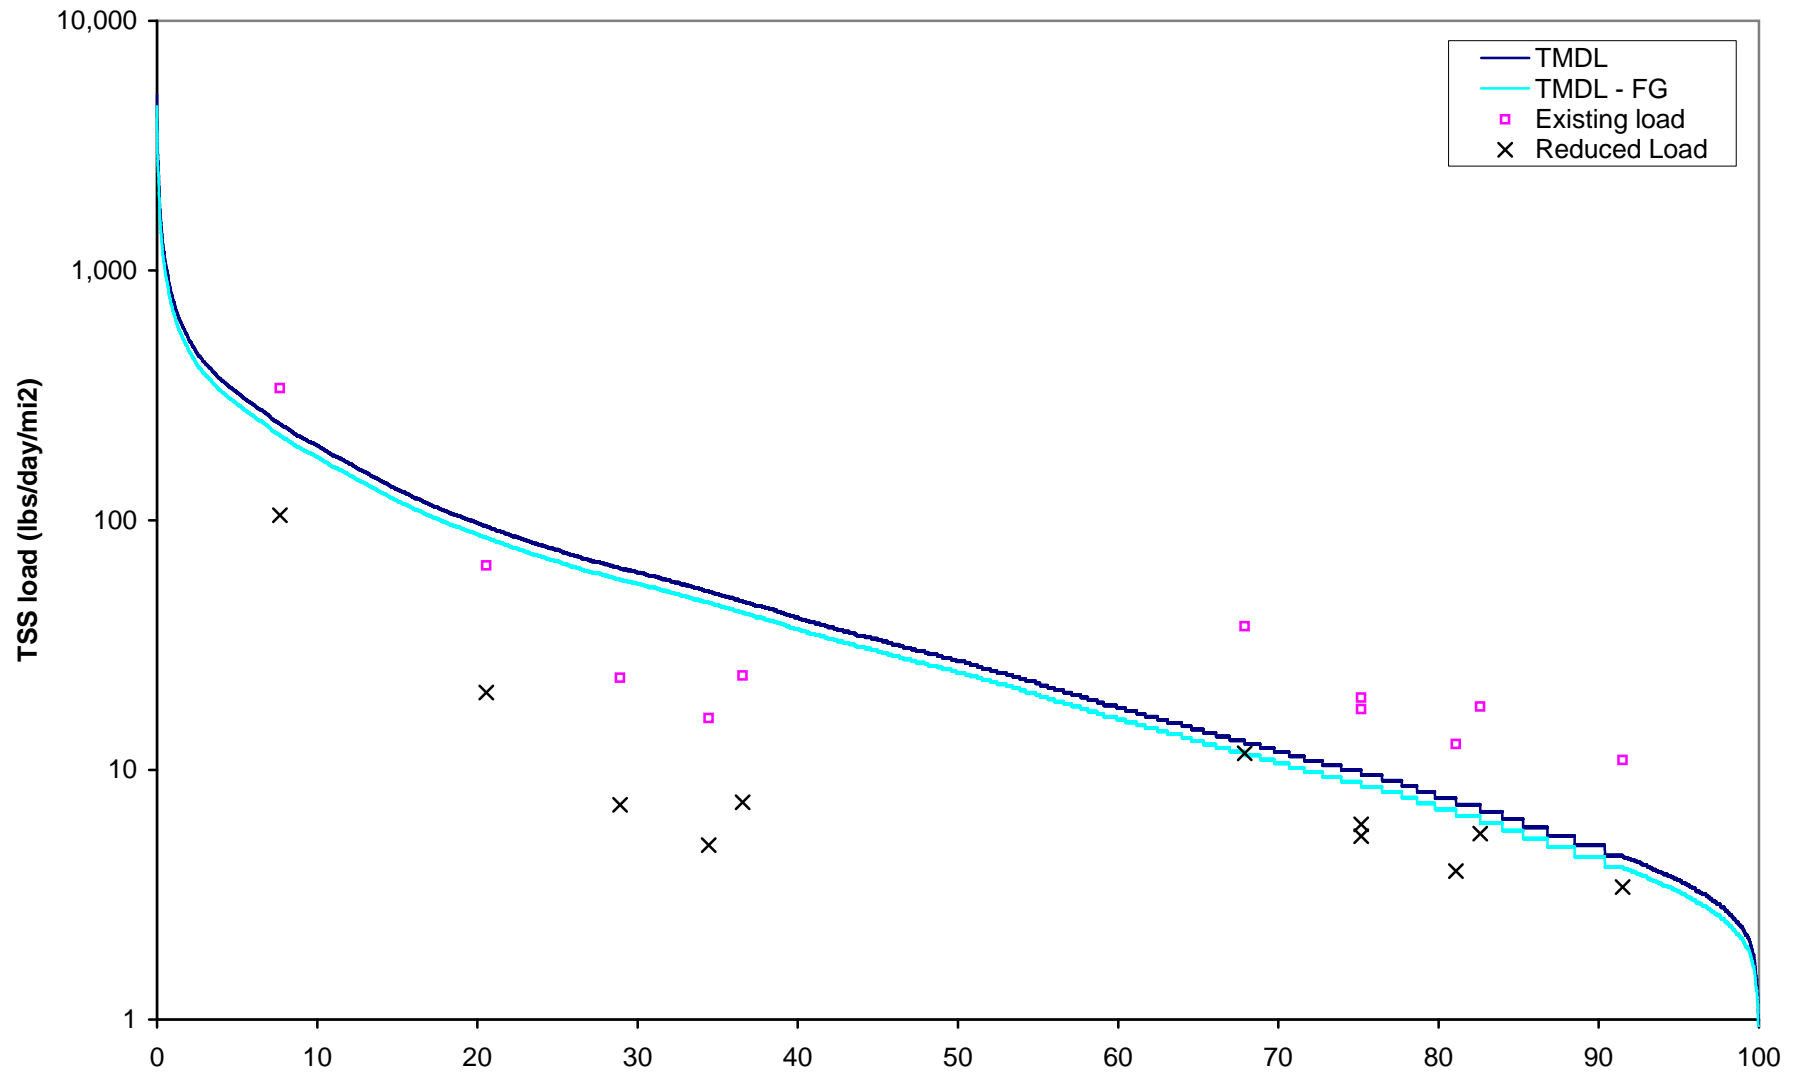


TABLE D.1 ALLOWABLE LOAD FOR TSS FOR BLACK LAKE BAYOU AT HIGHWAY 793, LA (1186)

drainage 154 mi2, of gage
123.38 mi2, of watershed (100701)

Turbidity Criterion = 25 NTU
TSS target = 13 mg/L

TSS Target = 80.65 lbs/day/mi2

Date	Saline Bayou flow (cfs)	Percent non exceed-ance	Percent exceed-ance	Flow per unit area (cfs/mi2)	Flow per unit area (cms/mi2)	Width on plot between data points (unitless)	TSS TMDL load (lbs/day/mi2)	TSS TMDL - FG load (lbs/day/mi2)	TMDL curve (width times TMDL load) (lbs/day/mi2)
9/6/2000	1.4	0.00	100.00	9.0909E-03	2.5739E-04	0.00449	0.64	0.57	2.86E-05
8/31/2000	1.8	0.01	99.99	1.1688E-02	3.3093E-04	0.00449	0.82	0.74	3.68E-05
9/1/2000	1.8	0.01	99.99	1.1688E-02	3.3093E-04	0.00449	0.82	0.74	3.68E-05
8/30/2000	2.0	0.02	99.98	1.2987E-02	3.6770E-04	0.00449	0.91	0.82	4.09E-05
9/5/2000	2.0	0.02	99.98	1.2987E-02	3.6770E-04	0.00449	0.91	0.82	4.09E-05
8/16/2000	2.1	0.02	99.98	1.3636E-02	3.8608E-04	0.00449	0.96	0.86	4.29E-05
9/2/2000	2.1	0.03	99.97	1.3636E-02	3.8608E-04	0.00449	0.96	0.86	4.29E-05
9/4/2000	2.1	0.03	99.97	1.3636E-02	3.8608E-04	0.00449	0.96	0.86	4.29E-05

For brevity, most of the rows in this spreadsheet have been hidden (between the 99.98% and the 0.02% exceedances).

12/13/2001	6,970	99.97	0.03	45.26	1.28	0.00449	3,173.04	2,855.74	1.42E-01
5/19/1942	7,380	99.97	0.03	47.92	1.36	0.00449	3,359.69	3,023.72	1.51E-01
5/17/1953	7,730	99.98	0.02	50.19	1.42	0.00449	3,519.02	3,167.12	1.58E-01
5/19/1989	8,050	99.98	0.02	52.27	1.48	0.00449	3,664.70	3,298.23	1.64E-01
4/2/1945	8,300	99.98	0.02	53.90	1.53	0.00449	3,778.51	3,400.66	1.70E-01
1/30/1999	8,590	99.99	0.01	55.78	1.58	0.00449	3,910.53	3,519.48	1.76E-01
4/23/1995	9,730	99.99	0.01	63.18	1.79	0.00449	4,429.51	3,986.56	1.99E-01
1/1/1945	11,100	100.00	0.00	72.08	2.04	0.00337	5,053.19	4,547.87	1.70E-01
								TOTAL =	80.65

FILE: R:\PROJECTS\2110-617\TECH\TMDL\FTN\RED\FINAL TMDL BLACK LAKE BAYOU AT HIGHWAY 793, LA 1186.XLS

TABLE D.2 EXISTING TSS LOAD AND PERCENT REDUCTION FOR BLACK LAKE BAYOU AT HIGHWAY 793, LA (1186)

WQ target for TSS = 13 mg/L Error check for reduction is / is not needed: ok
 Percent reduction = 69% Error check for less or more reduction needed: ok

Date	Observed TSS at 1186 (mg/L)	Flow per unit area on sampling day (cms/mi2)	Percent exceedance for flow on sampling day	Current TSS load (lbs/day)/mi2	Reduced TSS load (lbs/day)/mi2	Allowable TSS load with MOS and FG incorporated (lbs/day)/mi2	Reduced load less than or equal to allow. load?	Is load reduced by 68% still at or below allowable load?
1/14/02	4.0	0.0211	34.44	16.11	4.99	47.12	Yes	Yes
2/18/02	4.7	0.0261	28.91	23.37	7.25	58.18	Yes	Yes
3/18/02	9.0	0.0384	20.56	65.87	20.42	85.63	Yes	Yes
4/8/02	18.0	0.0985	7.67	337.86	104.74	219.61	Yes	Yes
5/13/02	37.0	0.0053	67.90	37.58	11.65	11.88	Yes	No
6/10/02	25.3	0.0040	75.17	19.49	6.04	9.01	Yes	Yes
7/15/02	21.3	0.0031	81.09	12.68	3.93	6.97	Yes	Yes
8/12/02	31.3	0.0018	91.49	10.96	3.40	4.10	Yes	Yes
9/16/02	32.0	0.0029	82.60	17.93	5.56	6.56	Yes	Yes
10/14/02	22.7	0.0040	75.17	17.49	5.42	9.01	Yes	Yes
12/9/02	6.5	0.0193	36.55	23.90	7.41	43.02	Yes	Yes

Total number of values = 11
 Allowable % of exceedances = 0%
 Allowable no. of exceedances = 0
 No. of exceedances before reductions = 7
 No. of exceedances after reductions = 0

Total allowable loading per unit area to meet TSS target (from Table D.1) = 80.65 lbs/day/mi2
 Total allowable loading for Subsegment 100701 TMDL = 80.65 * 123 mi2 = 4.98 tons/day

Explicit MOS for TSS for Subsegment 100701 (implicit) = 0.00 tons/day
 Future growth for TSS for Subsegment 101701 (10% of TMDL) = 0.50 tons/day

Sum of design flows for point sources of TSS for Subsegment 100701 = 4.381E-04 cms
 Assumed effluent TSS concentration for point sources = 25 mg/L

Existing point source TSS load for Subsegment 100701 =	0.01 tons/day
WLA for TSS for Subsegment 100701 (same as existing Point Source load) =	0.01 tons/day
LA for TSS for Subsegment 100701 = total - MOS - WLA - FG =	4.47 tons/day

FILE: R:\PROJECTS\2110-617\TECH\TMDL\FTN\RED\FINAL TMDL BLACK LAKE BAYOU AT HIGHWAY 793, LA 1186.XLS

APPENDIX E

Calculations for subsegment 100701 TDS TMDL

Figure E.1 TDS Load Duration Duration Curve for Black Lake Bayou at (Subsegment 100701)

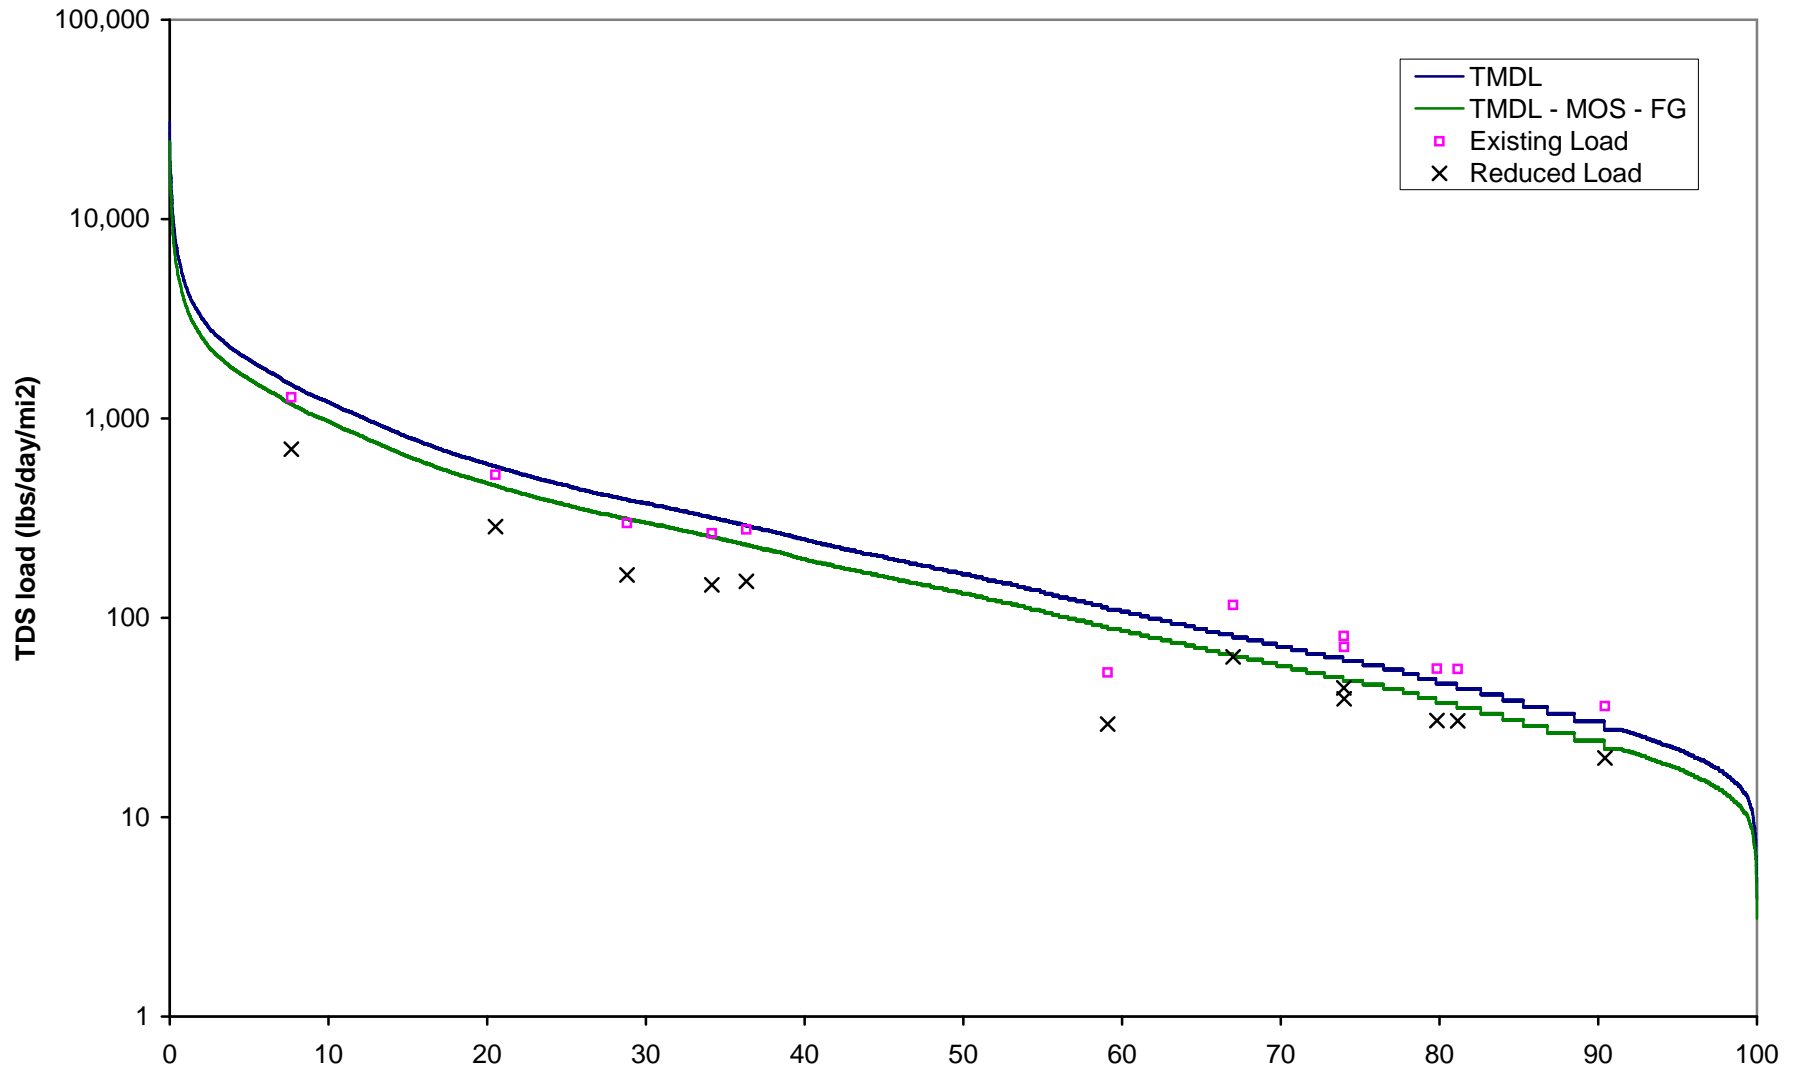


TABLE E.1 ALLOWABLE LOAD FOR TDS FOR BLACK LAKE BAYOU AT HIGHWAY 793, LA (1186)

drainage 154 mi2, of gage TDS Std 79 mg/L
 123.38 mi2, of watershed (100701)

TDS target = 490 lbs/day/mi2

Date	Saline Bayou flow (cfs)	Percent non exceed-ance	Percent exceed-ance	Flow per unit area (cfs/mi2)	Flow per unit area (cms/mi2)	Width on plot between data points (unitless)	Allowable TDS TMDL load to meet standard (lbs/day/mi2)	Allowable TDS TMDL - FG and MOS load to meet standard (lbs/day/mi2)	area under TMDL curve (lbs/day/mi2)
9/6/2000	1.4	0.00	100.00	9.0909E-03	2.5739E-04	0.00449	3.87	3.10	1.74E-04
8/31/2000	1.8	0.01	99.99	1.1688E-02	3.3093E-04	0.00449	4.98	3.98	2.24E-04
9/1/2000	1.8	0.01	99.99	1.1688E-02	3.3093E-04	0.00449	4.98	3.98	2.24E-04
8/30/2000	2.0	0.02	99.98	1.2987E-02	3.6770E-04	0.00449	5.53	4.43	2.48E-04
9/5/2000	2.0	0.02	99.98	1.2987E-02	3.6770E-04	0.00449	5.53	4.43	2.48E-04
8/16/2000	2.1	0.02	99.98	1.3636E-02	3.8608E-04	0.00449	5.81	4.65	2.61E-04
9/2/2000	2.1	0.03	99.97	1.3636E-02	3.8608E-04	0.00449	5.81	4.65	2.61E-04
9/4/2000	2.1	0.03	99.97	1.3636E-02	3.8608E-04	0.00449	5.81	4.65	2.61E-04

For brevity, most of the rows in this spreadsheet have been hidden (between the 99.97% and the 0.03% exceedances).

12/13/2001	6,970	99.97	0.03	45.26	1.28	0.00449	19,282.31	15,425.85	0.87
5/19/1942	7,380	99.97	0.03	47.92	1.36	0.00449	20,416.57	16,333.25	0.92
5/17/1953	7,730	99.98	0.02	50.19	1.42	0.00449	21,384.83	17,107.87	0.96
5/19/1989	8,050	99.98	0.02	52.27	1.48	0.00449	22,270.10	17,816.08	1.00
4/2/1945	8,300	99.98	0.02	53.90	1.53	0.00449	22,961.72	18,369.38	1.03
1/30/1999	8,590	99.99	0.01	55.78	1.58	0.00449	23,764.00	19,011.20	1.07
4/23/1995	9,730	99.99	0.01	63.18	1.79	0.00449	26,917.78	21,534.22	1.21
1/1/1945	11,100	100.00	0.00	72.08	2.04	0.00337	30,707.85	24,566.28	1.03
								TOTAL =	490.12

FILE: R:\PROJECTS\2110-617\TECH\TMDL\FTN\RED\FINAL TMDL BLACK LAKE BAYOU AT HIGHWAY 793, LA 1186.XLS

TABLE E.2 EXISTING TDS LOAD AND PERCENT REDUCTION FOR BLACK LAKE BAYOU AT HIGHWAY 793, LA (1186)

WQ standard for TSS = 79 mg/L Error check for reduction is / is not needed: ok
 Percent reduction = 45% Error check for less or more reduction needed: ok

<u>Date</u>	<u>Observed TDS at 1186 (mg/L)</u>	<u>Flow per unit area on sampling day (cms/mi2)</u>	<u>Percent exceedance for flow on sampling day</u>	<u>Current TDS load (lbs/day)/mi2</u>	<u>Reduced TDS load (lbs/day)/mi2</u>	<u>Allowable TDS load with MOS and FG incorporated (lbs/day)/mi2</u>	<u>Reduced load less than or equal to allow. load?</u>
1/14/02	66.0	0.021	34.15	265.79	146.19	254.52	Yes
2/18/02	60.0	0.026	28.81	298.36	164.10	314.27	Yes
3/18/02	71.3	0.038	20.51	521.84	287.01	462.56	Yes
4/8/02	68.0	0.099	7.66	1,276.37	702.00	1,186.27	Yes
5/13/02	114.0	0.005	66.99	115.77	63.67	64.18	Yes
6/10/02	92.6	0.004	73.99	71.34	39.24	48.69	Yes
7/15/02	93.3	0.003	79.84	55.54	30.55	37.62	Yes
8/12/02	103.0	0.002	90.42	36.07	19.84	22.13	Yes
9/16/02	98.7	0.003	81.15	55.30	30.42	35.41	Yes
10/14/02	105.0	0.004	73.97	80.89	44.49	48.69	Yes
11/12/02	38.0	0.007	59.10	53.23	29.28	88.53	Yes
12/9/02	75.3	0.019	36.33	276.88	152.28	232.38	Yes

Total number of values = 12
 Allowable % of exceedances = 0%
 Allowable no. of exceedances = 0
 No. of exceedances before reductions = 6
 No. of exceedances after reductions = 0

Total allowable loading per unit area to meet stds (from Table E.1) = 490.12 lbs/day/mi2
 Total allowable loading for Subsegment 100701 TMDL = 490.12 * 123 mi2 = 30.24 tons/day

Explicit MOS for TDS for Subsegment 100701 (10% * 30.24) = 3.02 tons/day
 Future Growth for TDS for Subsegment 100701 (10% * 30.24) = 3.02 tons/day

Sum of design flows for point sources of TDS for Subsegment 100701 = 0.000 cms

Assumed effluent TDS concentration for point sources =	425 mg/L
Existing point source TDS load for Subsegment 100701 =	0.00 tons/day
WLA for TDS for Subsegment 100701 (same as existing Point Source load) =	0.00 tons/day
LA for TDS for Subsegment 100701 = total - MOS - WLA - FG =	24.20 tons/day

FILE: R:\PROJECTS\2110-617\TECH\TMDL\FTN\RED\FINAL TMDL BLACK LAKE BAYOU AT HIGHWAY 793, LA 1186.XLS

APPENDIX F

Calculations for subsegment 100704 TDS TMDL

Figure F.1. TDS Load Duration Curve for Kepler Creek (Subsegment 100704)

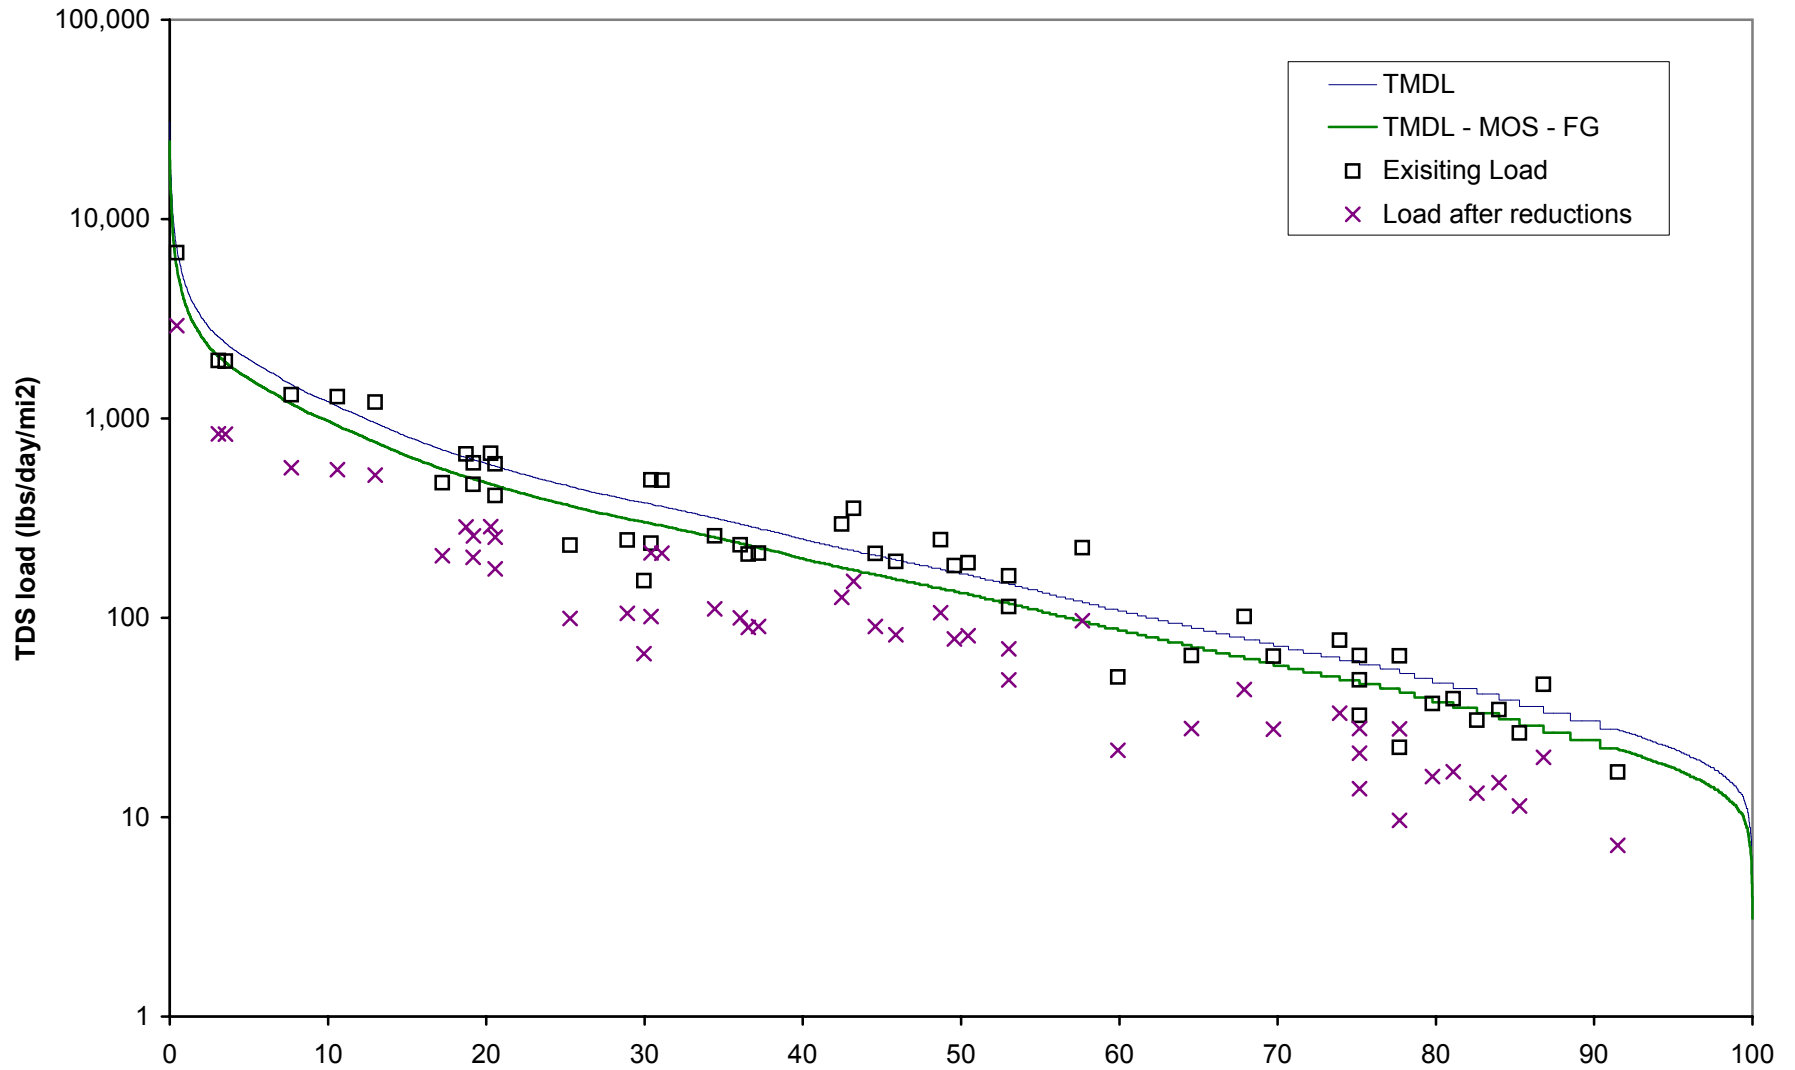


TABLE F.1. ALLOWABLE LOAD FOR TDS FOR KEPLER CREEK WEST OF BIENVILLE, LA (0283)

Drainage 154 mi2, of USGS gage 79 mg/L = TDS standard
 26.28 mi2, of subsegment (100704)

TDS Target = 392.37 lb/day/mi2

Date	Saline Bayou flow (cfs)	Percent non exceed-ance	Percent exceed-ance	Flow per unit area (cfs/mi2)	Flow per unit area (cms/mi2)	Width on plot between data points (unitless)	Allowable TDS load (lbs/day/mi2)	Area under TMDL curve (width times allowable load) (lbs/day/mi2)
9/6/2000	1.40	0.00	100.00	0.009	0.00026	0.00449	3.10	1.39E-04
8/31/2000	1.80	0.01	99.99	0.012	0.00033	0.00449	3.98	1.79E-04
9/1/2000	1.80	0.01	99.99	0.012	0.00033	0.00449	3.98	1.79E-04
8/30/2000	2.00	0.02	99.98	0.013	0.00037	0.00449	4.43	1.99E-04
9/5/2000	2.00	0.02	99.98	0.013	0.00037	0.00449	4.43	1.99E-04
8/16/2000	2.10	0.02	99.98	0.014	0.00039	0.00449	4.65	2.09E-04
9/2/2000	2.10	0.03	99.97	0.014	0.00039	0.00449	4.65	2.09E-04
9/4/2000	2.10	0.03	99.97	0.014	0.00039	0.00449	4.65	2.09E-04

For brevity, most of the rows in this spreadsheet have been hidden (between the 99.97% and the 0.03% exceedances).

12/13/2001	6,970.00	99.97	0.03	45.260	1.28142	0.00449	15,425.85	6.92E-01
5/19/1942	7,380.00	99.97	0.03	47.922	1.35680	0.00449	16,333.25	7.33E-01
5/17/1953	7,730.00	99.98	0.02	50.195	1.42114	0.00449	17,107.87	7.68E-01
5/19/1989	8,050.00	99.98	0.02	52.273	1.47998	0.00449	17,816.08	8.00E-01
4/2/1945	8,300.00	99.98	0.02	53.896	1.52594	0.00449	18,369.38	8.25E-01
1/30/1999	8,590.00	99.99	0.01	55.779	1.57925	0.00449	19,011.20	8.53E-01
4/23/1995	9,730.00	99.99	0.01	63.182	1.78884	0.00449	21,534.22	9.67E-01
1/1/1945	11,100.00	100.00	0.00	72.078	2.04071	0.00449	24,566.28	1.10E+00
							TOTAL =	392.37

FILE: R:\PROJECTS\2110-617\TECH\TMDL\FTN\RED\FINAL TMDL KEPLER CREEK WEST OF BIENVILLE, LA 283.XLS

TABLE F.2. EXISTING LOAD AND PERCENT REDUCTIONS FOR KEPLER CREEK WEST OF BIENVILLE, LA (0283)

WQ standard for TDS = 79 mg/L Error check for reduction is / is not needed: ok
 Percent reduction = 57% Error check for less or more reduction needed: ok

<u>Date</u>	<u>Observed TDS at station 283 (mg/L)</u>	<u>Flow per unit area on sampling day (cms/mi²)</u>	<u>Percent exceedance for flow on sampling day</u>	<u>Current TDS load (lbs/day/mi²)</u>	<u>Reduced TDS load (lbs/day)/mi²</u>	<u>Allowable TDS load with MOS and FG incorporated (lbs/day)/mi²</u>	<u>Reduced load less than or equal to allow. load?</u>
12-Aug-02	48.0	0.0018	91.49	16.81	7.23	22.13	Yes
11-Oct-93	32.0	0.0037	77.71	22.41	9.64	44.26	Yes
10-Aug-92	54.0	0.0026	85.28	26.47	11.38	30.98	Yes
16-Sep-02	54.7	0.0029	82.60	30.65	13.18	35.41	Yes
8-Aug-94	42.0	0.0040	75.17	32.36	13.91	48.69	Yes
14-Aug-95	66.0	0.0028	83.98	34.67	14.91	33.20	Yes
15-Oct-90	59.0	0.0033	79.77	37.19	15.99	39.84	Yes
15-Jul-02	66.0	0.0031	81.09	39.29	16.90	37.62	Yes
15-Oct-96	102.0	0.0024	86.80	46.43	19.97	28.77	Yes
10-Jun-02	63.3	0.0040	75.17	48.77	20.97	48.69	Yes
12-Nov-02	36.0	0.0074	59.90	50.43	21.68	88.53	Yes
14-Oct-91	68.0	0.0050	69.74	64.29	27.65	59.76	Yes
10-Oct-94	92.0	0.0037	77.71	64.43	27.71	44.26	Yes
12-Jun-95	56.0	0.0061	64.56	64.71	27.83	73.04	Yes
14-Oct-02	84.0	0.0040	75.17	64.71	27.83	48.69	Yes
13-Aug-90	96.0	0.0042	73.92	77.32	33.25	50.90	Yes
13-May-02	100.0	0.0053	67.90	101.55	43.67	64.18	Yes
13-Oct-97	60.1	0.0099	53.02	113.65	48.87	119.51	Yes
4-Feb-91	32.0	0.0252	29.95	153.52	66.01	303.21	Yes
13-Apr-98	85.9	0.0099	53.02	162.44	69.85	119.51	Yes
13-Dec-93	84.0	0.0114	49.57	182.38	78.42	137.22	Yes
9-Jun-97	90.0	0.0110	50.44	189.10	81.31	132.79	Yes
10-Dec-90	77.0	0.0131	45.88	191.45	82.32	157.14	Yes
9-Dec-02	56.7	0.0193	36.55	208.48	89.65	232.38	Yes
4-Apr-95	80.0	0.0138	44.57	210.11	90.35	165.99	Yes

11-Jun-90	59.0	0.0188	37.20	210.74	90.62	225.75	Yes
12-Aug-91	146.0	0.0081	57.66	224.96	96.73	97.38	Yes
14-Feb-95	40.0	0.0303	25.30	231.12	99.38	365.18	Yes
6-Apr-92	62.0	0.0197	36.05	232.31	99.90	236.81	Yes
7-Feb-94	50.0	0.0248	30.42	236.38	101.64	298.78	Yes
18-Feb-02	49.3	0.0261	28.91	245.15	105.42	314.27	Yes
10-Jun-91	110.0	0.0118	48.71	246.53	106.01	141.64	Yes
14-Jan-02	64.0	0.0211	34.44	257.74	110.83	254.52	Yes
10-Dec-96	104.0	0.0149	42.46	295.00	126.85	179.27	Yes
11-Aug-97	128.0	0.0145	43.20	354.11	152.27	174.84	Yes
9-Feb-98	56.0	0.0384	20.56	409.86	176.24	462.56	Yes
9-Apr-90	59.0	0.0415	19.16	466.94	200.78	500.18	Yes
9-Dec-91	54.0	0.0463	17.22	476.54	204.91	557.72	Yes
11-Apr-94	106.0	0.0243	31.10	489.98	210.69	292.14	Yes
15-Jun-92	104.0	0.0248	30.42	491.66	211.42	298.78	Yes
18-Mar-02	80.7	0.0384	20.56	590.64	253.97	462.56	Yes
13-Jun-94	76.0	0.0414	19.19	598.82	257.49	497.97	Yes
8-Dec-97	82.1	0.0425	18.72	664.14	285.58	511.25	Yes
14-Apr-97	89.9	0.0390	20.28	667.42	286.99	469.20	Yes
13-Dec-94	100.0	0.0634	12.97	1,208.15	519.50	763.55	Yes
10-Feb-92	88.0	0.0767	10.60	1,285.05	552.57	922.90	Yes
8-Apr-02	70.0	0.0985	7.67	1,313.91	564.98	1,186.27	Yes
17-Feb-97	64.0	0.1590	3.53	1,938.64	833.62	1,914.41	Yes
13-Feb-90	60.0	0.1706	3.08	1,949.85	838.43	2,053.84	Yes
16-Apr-91	74.0	0.4817	0.45	6,789.45	2,919.46	5,798.55	Yes

Total number of values = 50
 Allowable % of exceedances = 0%
 Allowable no. of exceedances = 0
 No. of exceedances before reductions = 23
 No. of exceedances after reductions = 0

Total allowable loading per unit area to meet stds (from Table F.1) = 392.37 lbs/day/mi2
 Total allowable loading for Subsegment 100704 = 392.37 * 26 mi2 = 5.16 tons/day

Explicit MOS for TDS for Subsegment 100704 (10% * 5.16) = 0.52 tons/day
 Explicit MOS for TDS for Subsegment 100704 (10% * 5.16) = 0.52 tons/day

Sum of design flows for point sources of TDS for Subsegment 100704 =	0.000 cms
Assumed effluent TDS concentration for point sources =	425 mg/L
Existing point source TDS load for Subsegment 100704 =	0.00 tons/day
WLA for TDS for Subsegment 100704 (same as existing Point Source load) =	0.00 tons/day
LA for TDS for Subsegment 100704 = total - MOS - WLA - FG =	4.12 tons/day

FILE: R:\PROJECTS\2110-617\TECH\TMDL\FTN\RED\FINAL TMDL KEPLER CREEK WEST OF BIENVILLE, LA 283.XLS