

***SAFETY COMPLIANCE TESTING FOR FMVSS No. 218
MOTORCYCLE HELMETS***

Kerr, Model – H205 BLK

Size – M

Prepared By

Southwest Research Institute®

6220 Culebra Road

San Antonio, Texas 78238-5166

SwRI Report No 18.10499.FTR.06-006



July 20, 2006

Final Report 218-SRI-06-006

Prepared For

U.S. Department of Transportation

National Highway Traffic Safety Administration

Office of Vehicle Safety Compliance

400 7th Street S.W.

Room 6111 (NVS-220)

Washington, DC 20590



This publication is distributed by the U. S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings, and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Technician: Manny R. Gonzalez
Manny R. Gonzalez

Project Manager: Daniel J. Pomerening
Daniel J. Pomerening

Approved By: Jenny L. Blankinship
Jenny L. Blankinship

Approval Date: July 20, 2006

Final Report Acceptance by OVSC:

Accepted By: Claudia W. Covell
HS# 638434

Acceptance Date: July 24, 2006

TECHNICAL REPORT STANDARD TITLE PAGE

1. Report Number 218-SRI-06-006	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle FINAL REPORT OF FMVSS NO. 218 COMPLIANCE TESTING OF KERR, MODEL - H205 BLK, SIZE - M MOTORCYCLE HELMET		5. Report Date July 20, 2006	
		6. Performing Organization Code SRI	
7. Author(s) Daniel J. Pomerening, Program Manager		8. Performing Organization Report No. 18.10499.FTR.06-006	
9. Performing Organization Name and Address Southwest Research Institute® 6220 Culebra Road San Antonio, TX 78238-5166		10. Work Unit No.	
		11. Contract or Grant No. DTHN22-04-C-11002	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Vehicle Safety Compliance 400 Seventh St. S.W., Room 6111 (NVS-220) Washington, D.C. 20590		13. Type of Report and Period Covered Final Test Report	
		14. Sponsoring Agency Code NVS-220	
16. Abstract Compliance tests were conducted on the Kerr Model H205 BLK motorcycle helmet in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-218-05. Test failures identified were as follows: Impact (S5.1, S7.1) Peak accelerations in excess of 400 g for the following conditions: 429 g for ambient helmet, Drop No. 2, hemispherical anvil, front location 409 g for water immersed helmet, Drop No. 2, hemispherical anvil, front location. Projections (S5.5) There were three internal projections used to hold the face shield in place. Labeling (S5.6) The manufacturer's name was not present on the helmet.			
17. Key Words Compliance Testing Safety Engineering FMVSS No. 218		18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services (NPO-405) 400 Seventh St. S.W. Room 2336 Washington, D.C. 20590 tis@nhtsa.dot.gov FAX 202-493-2833	
19. Security Classification (of this report) Unclassified	20. Security Classification (of this page) Unclassified	21. No. of Pages 41	22. Price

TABLE OF CONTENTS

SECTION 1	PURPOSE OF COMPLIANCE TEST	1
1	PURPOSE OF COMPLIANCE TEST	2
2	TEST PROCEDURE	2
SECTION 2	COMPLIANCE TEST DATA SUMMARY	3
1	HELMET DATA	4
2	SUMMARY OF TEST RESULTS	5
3	SELECTION OF APPROPRIATE HEADFORM (S6.1)	5
4	CONDITIONING FOR TESTING (S6.4)	6
5	IMPACT TESTING (S5.1 & S7.1)	7
6	PENETRATION (S5.2 & S7.2)	8
7	RETENTION SYSTEM TESTING (S5.3 & S7.3)	9
8	PERIPHERAL VISION AND BROW OPENING (S5.4)	10
9	CONFIGURATION (S5.4)	10
10	PROJECTIONS (S5.5)	10
11	LABELING (S5.6)	11
SECTION 3	TEST DATA	12
1	CONDITIONING ENVIRONMENTS	13
2	IMPACT TIME HISTORIES	14
3	RETENTION TIME HISTORIES	23
SECTION 4	TEST FAILURE DETAILS	25
APPENDIX A	INTERPRETATIONS OR DEVIATIONS FROM FMVSS NO. 218	26
APPENDIX B	EQUIPMENT LIST AND CALIBRATION INFORMATION	27
APPENDIX C	PHOTOGRAPHS	29

SECTION 1 PURPOSE OF COMPLIANCE TEST

1 PURPOSE OF COMPLIANCE TEST

This testing was conducted as part of the Department of Transportation, National Highway Traffic Safety Administration's Federal Motor Vehicle Safety Standard (FMVSS) No. 218, "Motorcycle Helmets"¹ Compliance Program. The purpose of the test was to determine if the production helmets supplied by the Office of Vehicle Safety Compliance satisfy the requirements of TP-218-05², as governed by the contract.

2 TEST PROCEDURE

The Southwest Research Institute Test Procedure for FMVSS No. 218³ submitted to the Office of Vehicle Safety Compliance, National Highway Traffic Safety Administration, contains the specific procedures used to conduct this test. The Southwest Research Institute Test Procedure for FMVSS No. 218 as modified by project specific process travelers is in accordance with TP-218-05.

The test procedure shall not be in conflict with any portion of FMVSS No. 218 nor amendments in effect as noted in the applicable contract.

¹ National Highway Traffic Safety Administration, Federal Motor Vehicle Safety Standard (FMVSS) No. 218, "Motorcycle Helmets", 49 CFR Chapter V Section 571.218, August 20, 1973 as last amended FR 12529 on April 15, 1988.

² National Highway Traffic Safety Administration, TP-218-05, Laboratory Test Procedure for FMVSS 218 Motorcycle Helmets, February 28, 2006.

³ Southwest Research Institute, SwRI Test Procedure for Compliance Testing in Accordance with FMVSS No. 218 for Motorcycle Helmets, May 2006.

SECTION 2 COMPLIANCE TEST DATA SUMMARY

1 HELMET DATA

Helmet Brand Name:	Kerr
Helmet Model Designation:	H205 BLK
Helmet Manufacturer:	Shanghai Hehui Safety Products Manufacturing Co., Ltd.
Helmet Size Designation:	M, 57 to 58 cm, 7 1/8 to 7 1/4
Helmet Coverage:	Partial
Helmet Position Index (HPI) (cm):	6.00
Shell Material:	Fiberglass and Resin
Liner Material:	Expanded Polystyrene
Buckle Description	Quick Disconnect

Helmet	A Ambient	B Low Temp	C High Temp	D Water Immersed	E Spare
Shell Color/Pattern	Black	Black	Black	Black	Black
Weight (grams)	794	848	826	848	839
Month & Year of Manufacture	06/2005	06/2005	06/2005	06/2005	06/2005

Comments:

The HPI and discrete helmet size was supplied by NHTSA based on information obtained from the manufacturer.

The weight was with all auxiliary equipment removed ready for testing.

Photographs of the helmets are given in Appendix C (Photographs of Equipment).

The helmet data given was based on information provided with the helmets, information provided by NHTSA, and measured data.

2 SUMMARY OF TEST RESULTS

HELMET	A Ambient	B Low Temp	C High Temp	D Water Immersed
IMPACT (S5.1, S7.1)	FAIL	PASS	PASS	FAIL
PENETRATION (S5.2, S7.2)	PASS	PASS	PASS	PASS
RETENTION (S5.3, S7.3)	PASS	PASS	PASS	PASS

CONFIGURATION (S5.4)	PASS
PERIPHERAL VISION/BROW OPENING (S5.4)	PASS
LABELING (S5.6)	FAIL

Comments: The helmet failed the impact testing with peak accelerations in excess of 400 g for the following conditions:

429 g for ambient helmet, Drop No. 2, hemispherical anvil, front location

409 g for water immersed helmet, Drop No. 2, hemispherical anvil, front location.

The helmet failed the internal projects in that there were rigid metal fasteners used to hold the face shield in place.

The helmet failed the labeling in that the manufacturer's name was not on the helmet.

3 SELECTION OF APPROPRIATE HEADFORM (S6.1)

Selection of the headform used during testing is based on the helmet size designation, marked on the helmet, as identified in the following table. If the size range is not specified on the helmet, consult with the COTR before beginning the test. As identified in FMVSS No. 218, if the helmet size designation falls into more than one of the size ranges, it shall be tested on each appropriate headform. Consult with the COTR before beginning the test.

HELMET SIZE DESIGNATION	HEADFORM SIZE	WEIGHT
$\leq 6 \frac{3}{4}$ \leq European size 54	Small	3.5, +0.00, -0.063 kg 7.8, +0.00, -0.14 lbs
$>6 \frac{3}{4}$ but $\leq 7 \frac{1}{2}$ $>$ European Size 54 but \leq European Size 60	Medium	5.0, +0.00, -0.090 kg 11.0, +0.00, -0.20 lbs
$> 7 \frac{1}{2}$ $>$ European size 60	Large	6.1, +0.00, -0.108 kg 13.4, +0.00, -0.24 lbs

Comments: A medium headform was used based on the helmet size, M, and discrete helmet size of 57 to 58 cm supplied by NHTSA based on information obtained from the manufacturer. The total weight of the drop assembly was 4.98 kg.

Recorded by: Manny Gonzalez

Approved by: Daniel Pomerening

July 6, 2006

4 CONDITIONING FOR TESTING (S6.4)

The helmets shall be conditioned for not less than 12 hours in the specified environmental condition shown below, prior to testing.

IDENTIFICATION	CONDITIONS	HELMET
Ambient Conditions	21°C ± 6°C, 40% to 60% RH, Site Pressure 59°F to 81°F	A
Low Temperature	-10°C +8°C, -0°C 14°F to 28°F	B
High Temperature	50°C +0°C, -4°C 115°F to 122°F	C
Water Immersion	25°C ± 6°C 66°F to 88°F	D

The maximum time during which the helmet may be out of the conditioning environment shall not exceed 4 minutes. It must then be returned to the conditioning environment for a minimum of 3 minutes for each minute or portion of a minute in excess of 4 minutes out of the conditioning environment or 12 hours, whichever is less, prior to resumption of testing.

The first test shall be performed at a time greater than 2 minutes after removal from conditioning. The second test in a sequence shall be performed before the 4-minute limit.

The helmets were conditioned prior to testing. Records of the conditioning are given in Section 3.1 (Conditioning Environments).

Comments: None.

6 PENETRATION (S5.2 & S7.2)

The helmets were subjected to the penetration test in accordance with the requirements of S5.2 and S7.2 of FMVSS No. 218.

Weight of Striker: 3, +0.000, -0.029 kg
6.625, +0.000, -0.065 lbs

Point of Striker: Included angle of 60°, +1.0°, -0.0°
Cone height of 3.8, +0.25, -0.00 cm (1.5, +0.1, -0.0 inches)
Radius of 0.5, +0.08, -0.0 mm (0.19, +0.003, -0.000 inches)
Minimum hardness of 60 Rockwell (Scale C)

The height of the free fall drop was 300, +0.00, -3.05 cm (118.1, +0.0, -1.2 inches) as measured from the striker point to the impact point on the outer surface of the test helmet. Two penetration blows are applied to each helmet at least 7.6 cm (3 inches) apart and at least 7.6 cm (3 inches) from the centers of any impacts applied during the impact attenuation test.

When tested, the test helmet shall be failed if the striker has made an indentation in the headform.

AMBIENT TEMPERATURE °C	AMBIENT RELATIVE HUMIDITY %
21	53

TEST	HELMET	CONDITION	PASS	FAIL
1	A	Ambient	PASS	
2	A	Ambient	PASS	
3	B	Low Temperature	PASS	
4	B	Low Temperature	PASS	
5	C	High Temperature	PASS	
6	C	High Temperature	PASS	
7	D	Water Immersed	PASS	
8	D	Water Immersed	PASS	

Comments: This helmet passed the penetration testing. The free fall drop was 299 cm.

7 RETENTION SYSTEM TESTING (S5.3 & S7.3)

The helmets were subjected to the retention system testing in accordance with the requirements of S5.3 and S7.3 of FMVSS No. 218.

READING	APPLIED LOAD	AMBIENT TEMPERATURE °C	AMBIENT RELATIVE HUMIDITY %
INITIAL	22.7, +4.54, -0.0 kg 50, +10, -0 lbs.	21	53
FINAL	136, +0.0, -4.5 kg 300, +0.0, -10.0 lbs		

The acceptance criteria shall be that the retention system remained intact without elongating more than 2.54 cm (1 inch).

HELMET	CONDITIONS	INITIAL READING (cm)	FINAL READING (cm)	ELONGATION (cm)
A	Ambient	0.00	1.49	1.49
B	Low Temperature	0.00	1.98	1.98
C	High Temperature	0.00	2.09	2.09
D	Water Immersed	0.00	1.54	1.54

Time histories for the retention system testing are given in Section 3.3 Retention Time Histories. Given on these plots are the conditioning environment, load, and elongation.

Comments: This helmet passed the retention testing. For the ambient and high temperature helmets, the plastic retention component broke during application of the full load. This resulted in a temporary drop in the load and a jump in the extension of approximately 0.1 cm. Breakage of the plastic retention component did not lead to loss of ability to retain the load or elongation in excess of 2.54 cm. The plastic component was present on the ambient, high temperature, and fifth helmet. It was not present on the low temperature or water-immersed helmet. Upon breakage of the plastic component for the ambient helmet, the testing was terminated. Following testing at the other conditions, testing of the ambient helmet was repeated without any failures.

8 PERIPHERAL VISION AND BROW OPENING (S5.4)

The helmet shall provide a minimum peripheral vision of 105° to each side of the mid-sagittal plane through the basic plane. The brow opening shall be at least 2.54 cm (1 inch) above all points in the basic plane that are within the angles of peripheral vision.

	REQUIREMENTS	TEST RESULTS
PERIPHERAL VISION	> 105°	> 105 °
BROW OPENING	> 2.54 cm	> 2.54 cm

Comments: This helmet passed the peripheral vision and brow opening testing.

9 CONFIGURATION (S5.4)

The configuration of this helmet must be such that it has a protective surface of continuous contour at all points above the test line.

Comments: The helmet passed the configuration requirements.

10 PROJECTIONS (S5.5)

A helmet shall not have any internal rigid projections. External rigid projections shall be limited to those required for operation of essential accessories, and shall not protrude more than 5mm (0.20 inches).

PROJECTION	REQUIREMENT
INTERNAL RIGID	None
EXTERNAL RIGID	Operational, shall not protrude more than 5 mm (0.20 inches)

Test Results

PROJECTION	PRESENT	HEIGHT (mm)
INTERNAL	Yes	5.1
EXTERNAL	Yes	2.5

Comments: Internal rigid projections include three meal fasteners used to hold the face shield in place. These are attached to the shell of the helmet and project inward. Photographs of the internal projections are given.

External projections include rivets for the retention system that located on the test line with parts above and below the test line.

11 LABELING (S5.6)

Each helmet shall be permanently and legibly labeled, in a manner such that the label(s) can be easily read without removing padding or any other permanent part. The following information shall be included:

REQUIRED INFORMATION	PASS	FAIL
(1) Manufacturer's name or identification.		FAIL
(2) Precise model designation.	PASS	
(3) Size.	PASS	
(4) Month and year of manufacture.	PASS	
(5) The DOT symbol, constituting the manufacturer's certification that the helmet conforms to the applicable Federal Motor Vehicle Safety Standards. This symbol shall appear on the outer surface, in a color that contrasts with the background, in letters at least 1 cm (0.375 inch) high centered laterally with the horizontal centerline on the symbol located a minimum of 2.9 cm (1.125 inches) and a maximum of 3.5 cm (1.375 inches) from the bottom edge of the posterior portion of the helmet.	PASS	
(6) Instruction to the Purchaser as follows:		
Shell and liner constructed of (identify type(s) of materials)	PASS	
The helmet can be seriously damaged by some common substances without the damage being visible to the user.	PASS	
Apply only the following: (Recommended cleaning agents, paints, adhesives, etc. as appropriate).	PASS	
Make no modifications.	PASS	
Fasten helmet securely.	PASS	
If the helmet experiences a severe blow, return it to the manufacturer for inspection or destroy and replace it.	PASS	


Comments: The manufacturer's name was not present of the helmet. The DOT symbol was centered 2.3 cm above the bottom edge of the helmet, specified as 2.9 cm to 3.5 cm.

SECTION 3


TEST DATA

1 CONDITIONING ENVIRONMENTS

Environmental Monitoring
DOT-06-006, Kerr Helmets, H205 BLK, M

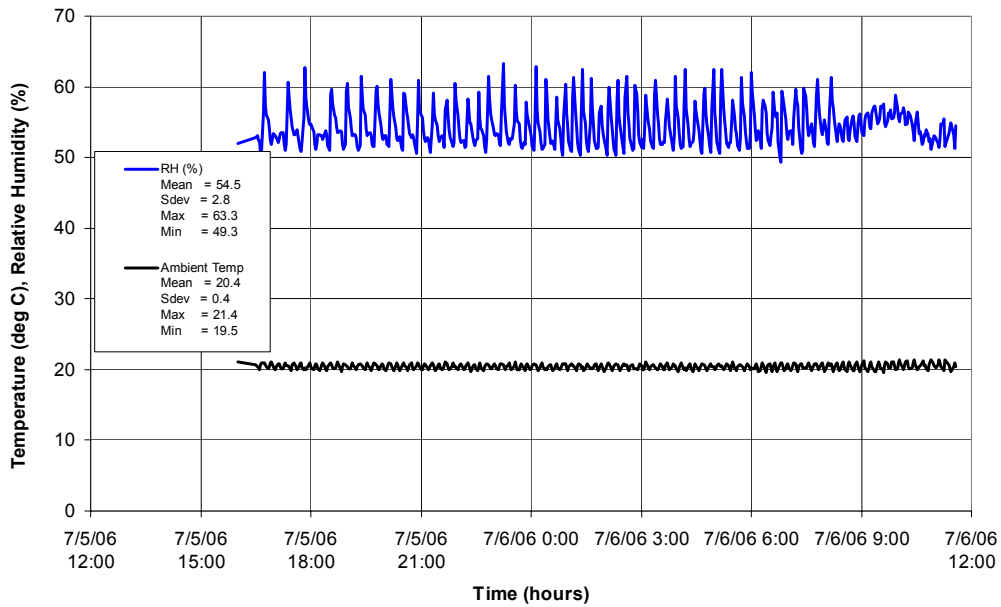


Environmental Monitoring
DOT-06-006, Kerr Helmets, H205 BLK, M

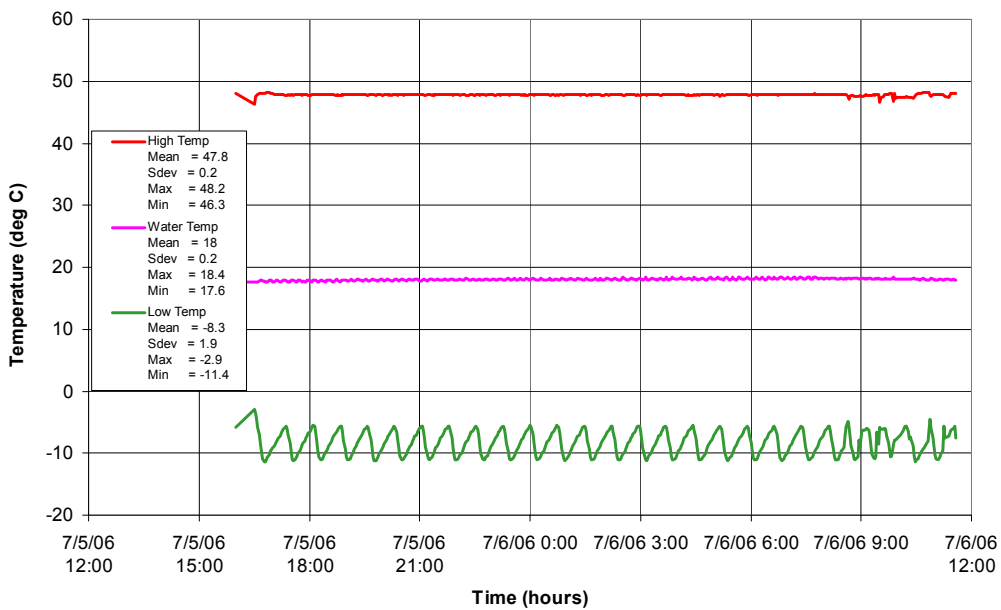


2 IMPACT TIME HISTORIES


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

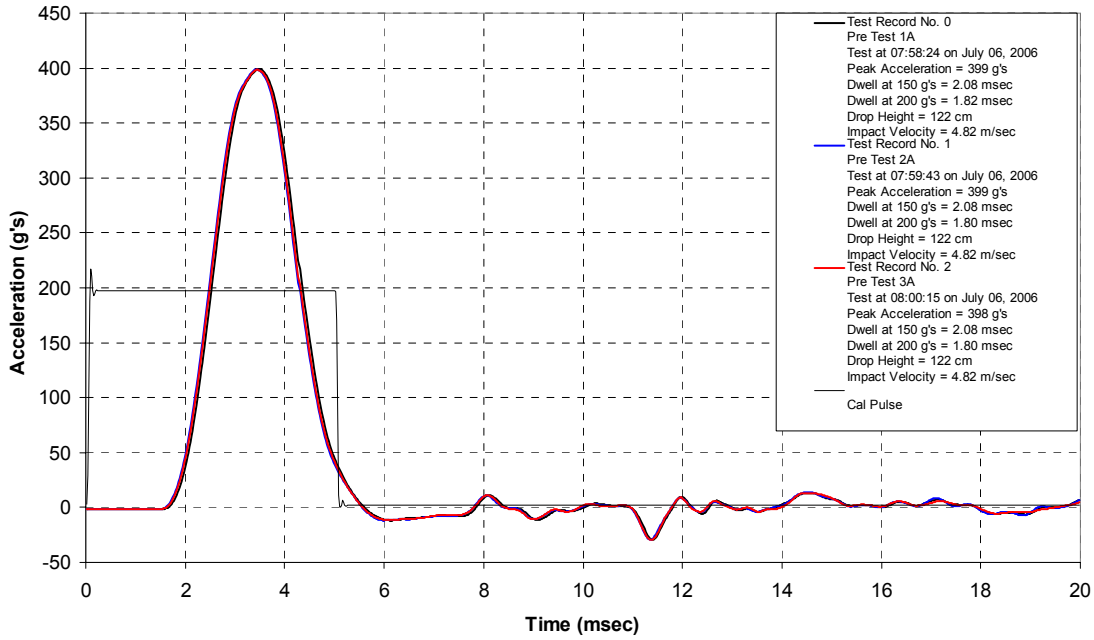


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

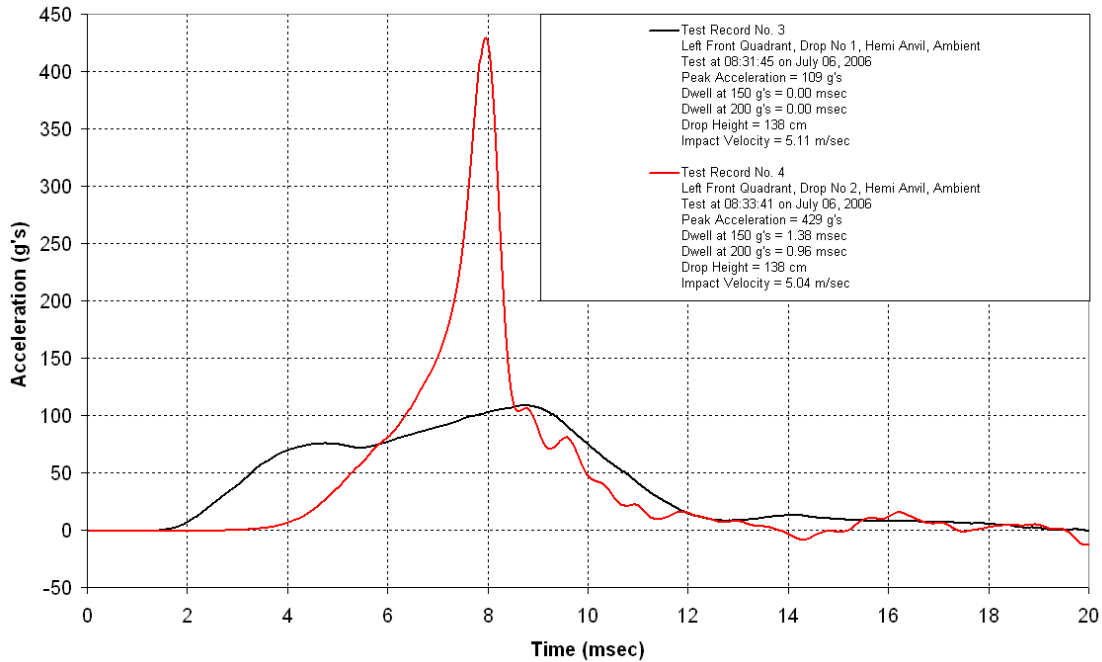


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

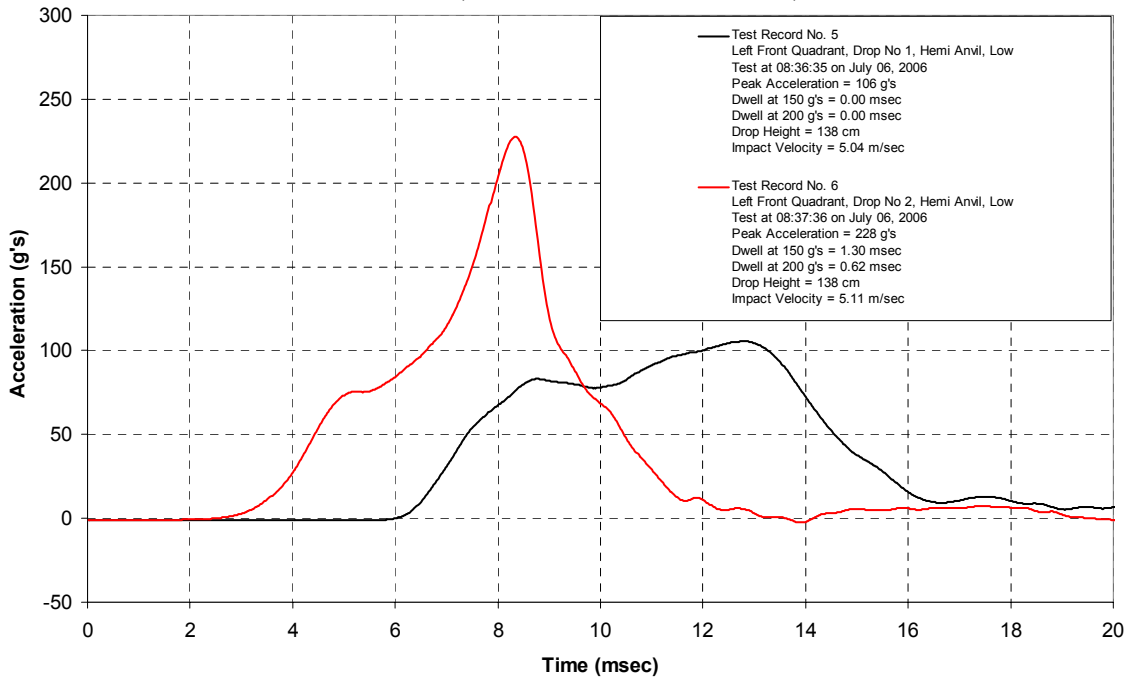


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

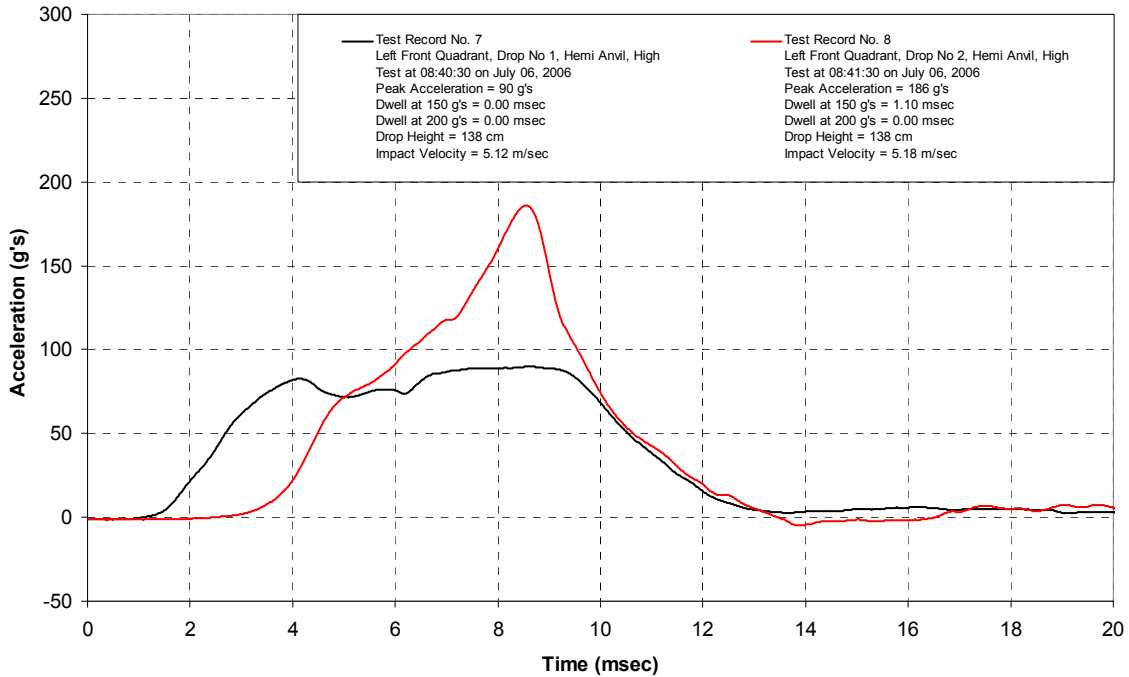


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

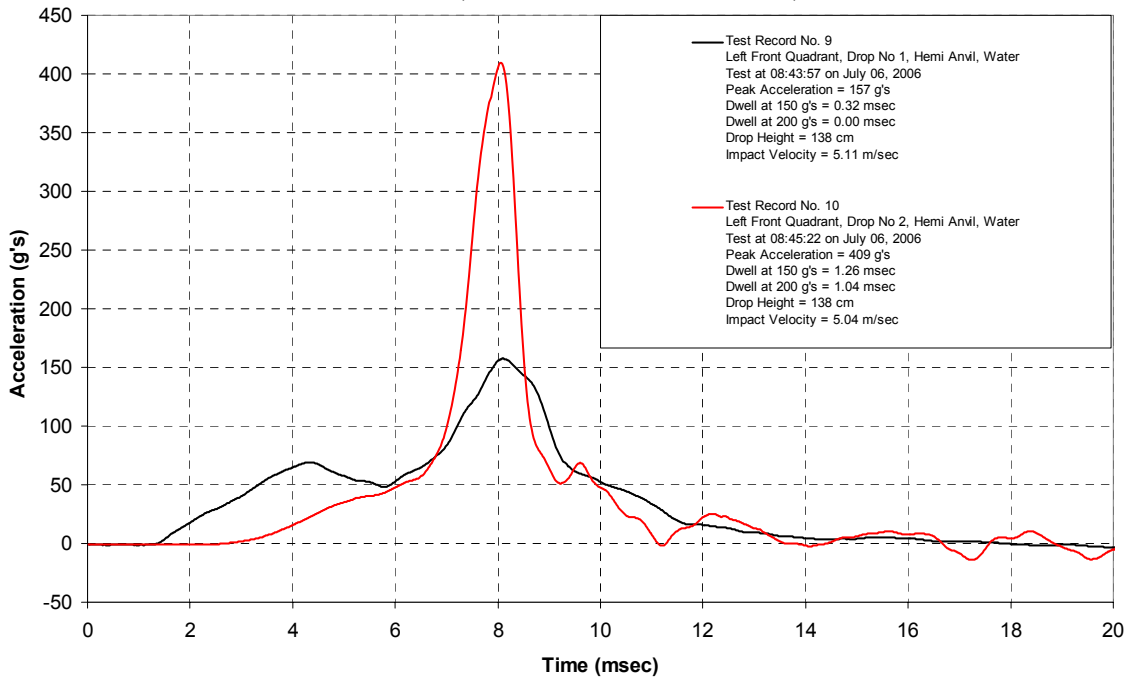


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

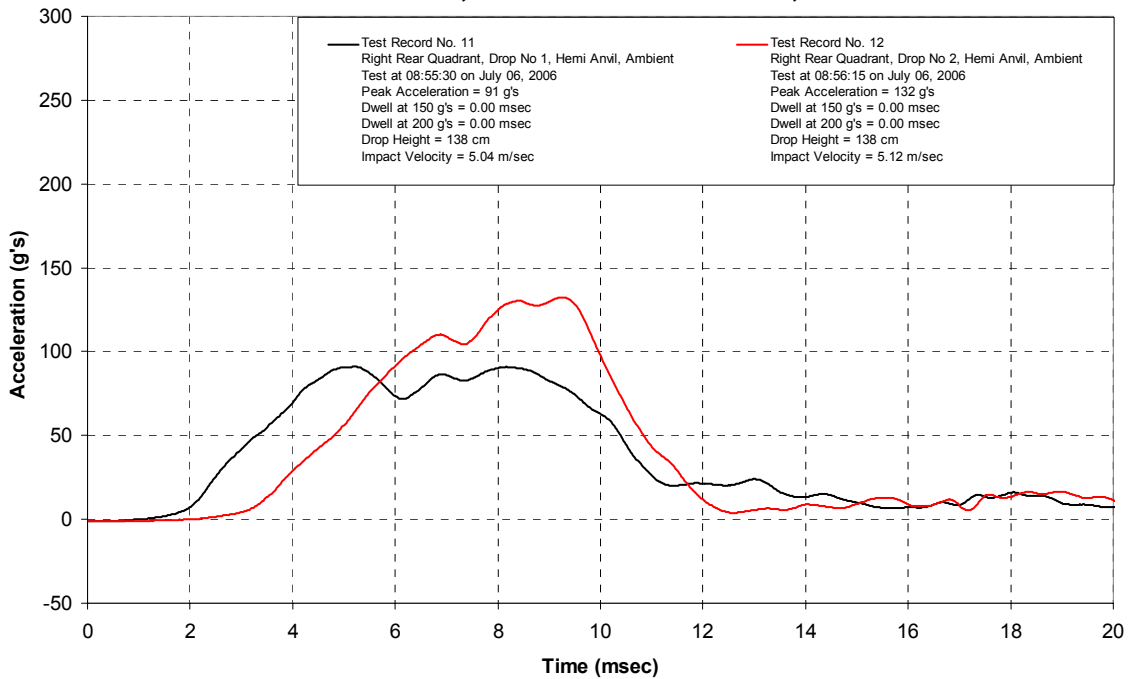


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

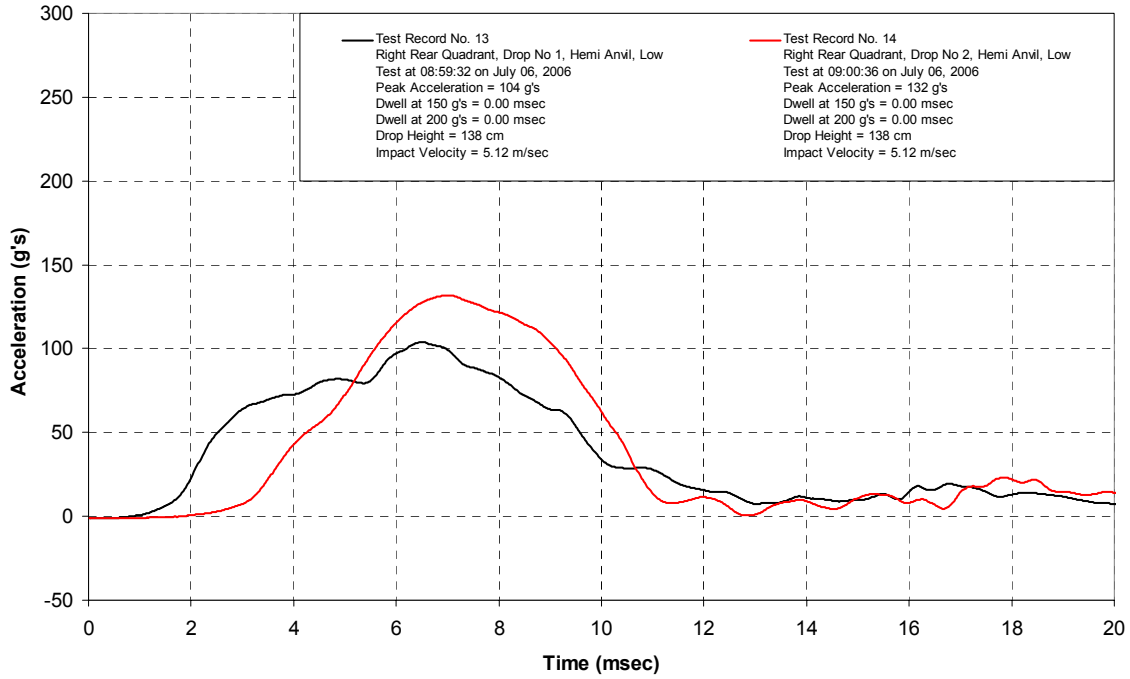


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

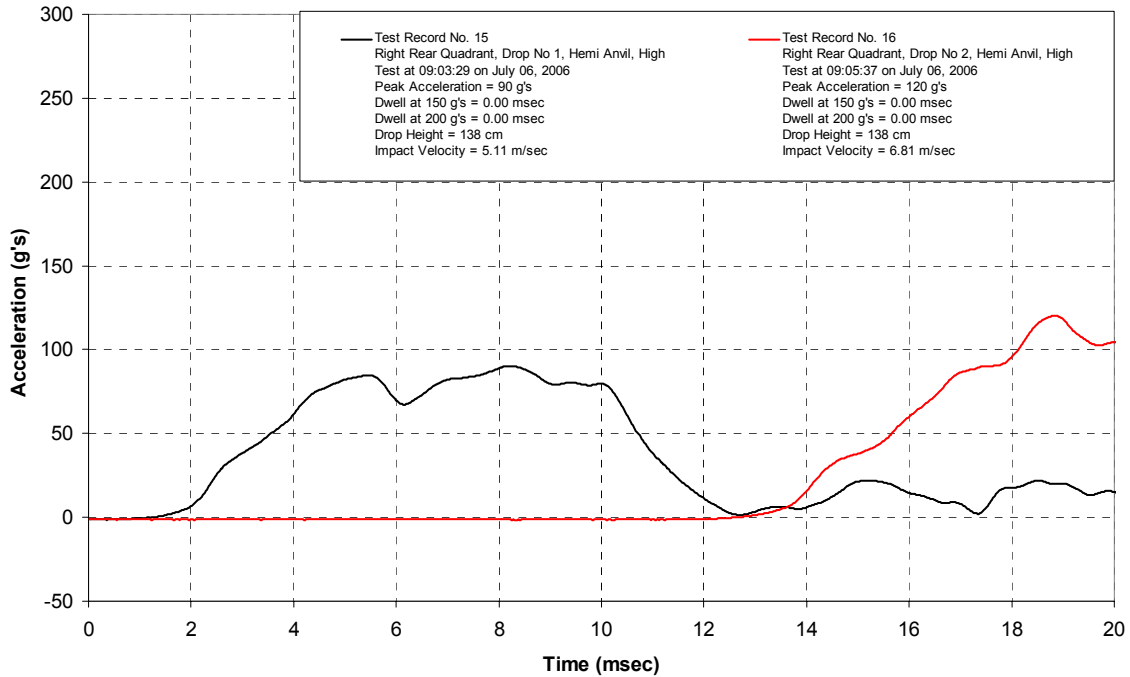


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

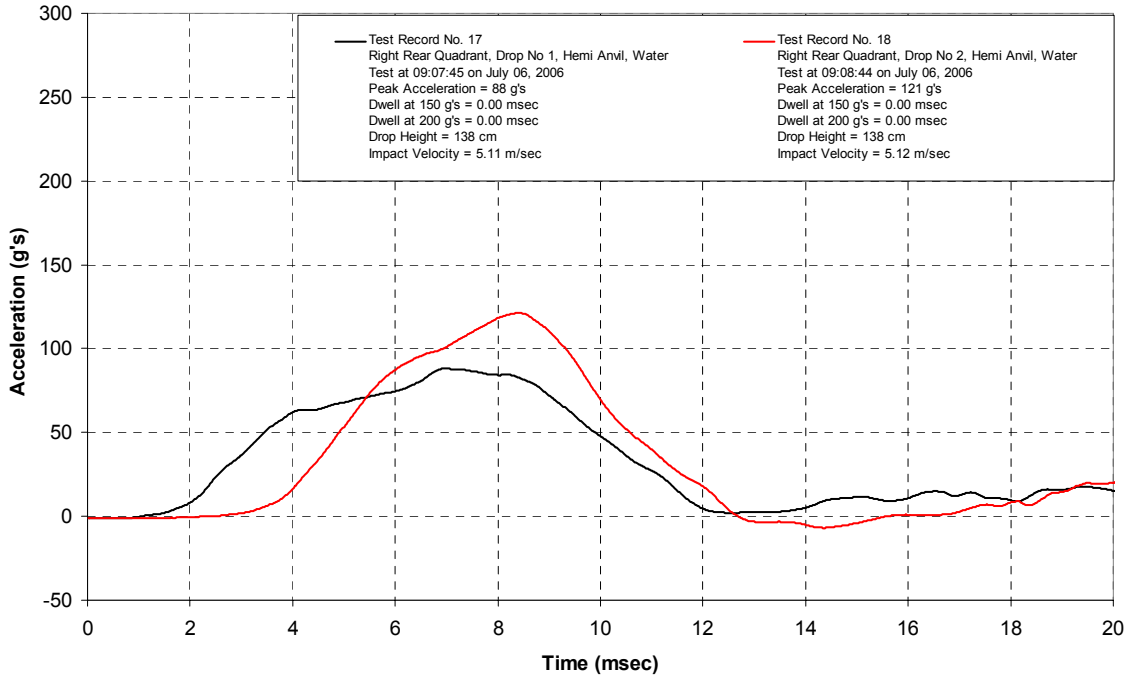


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

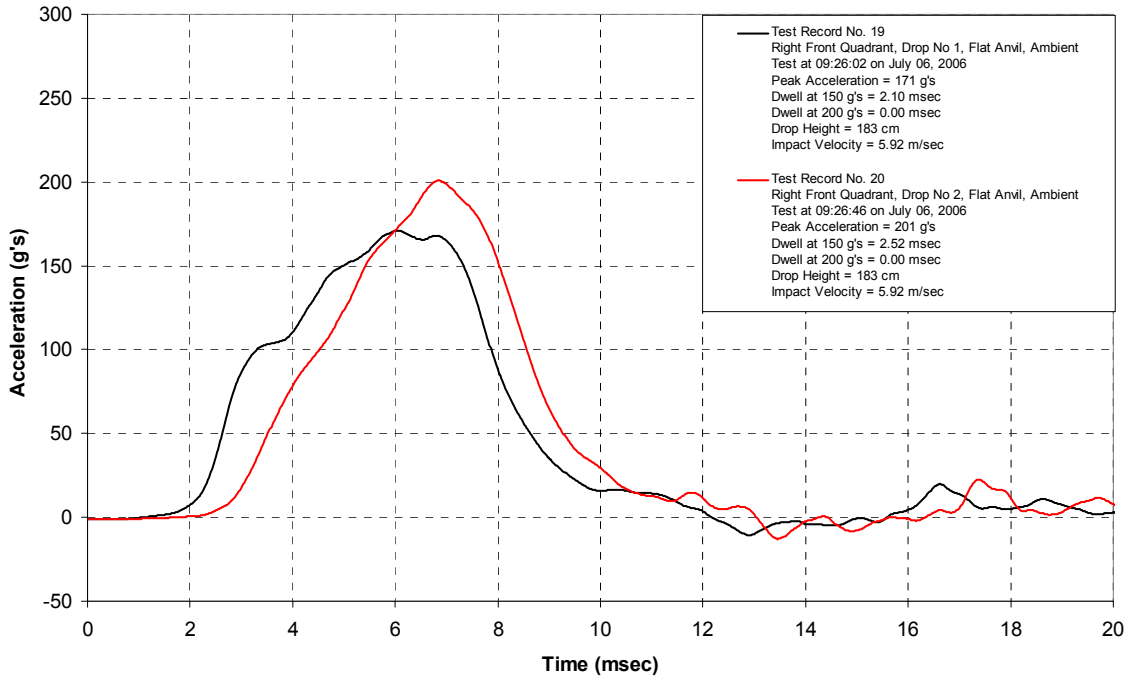


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

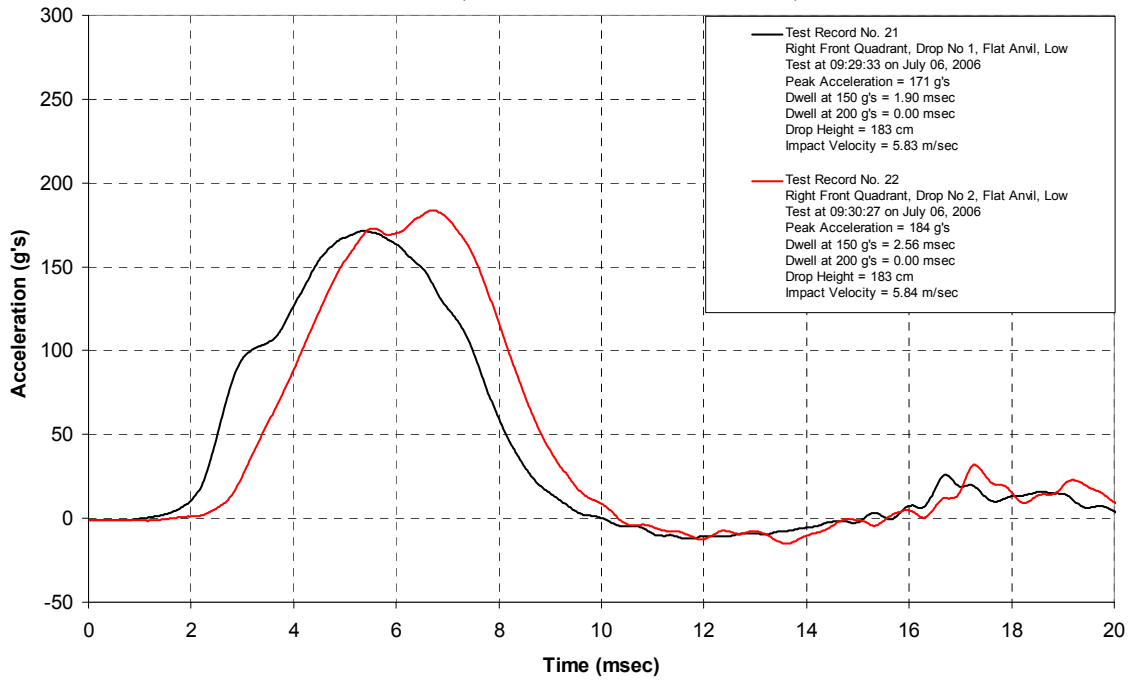


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

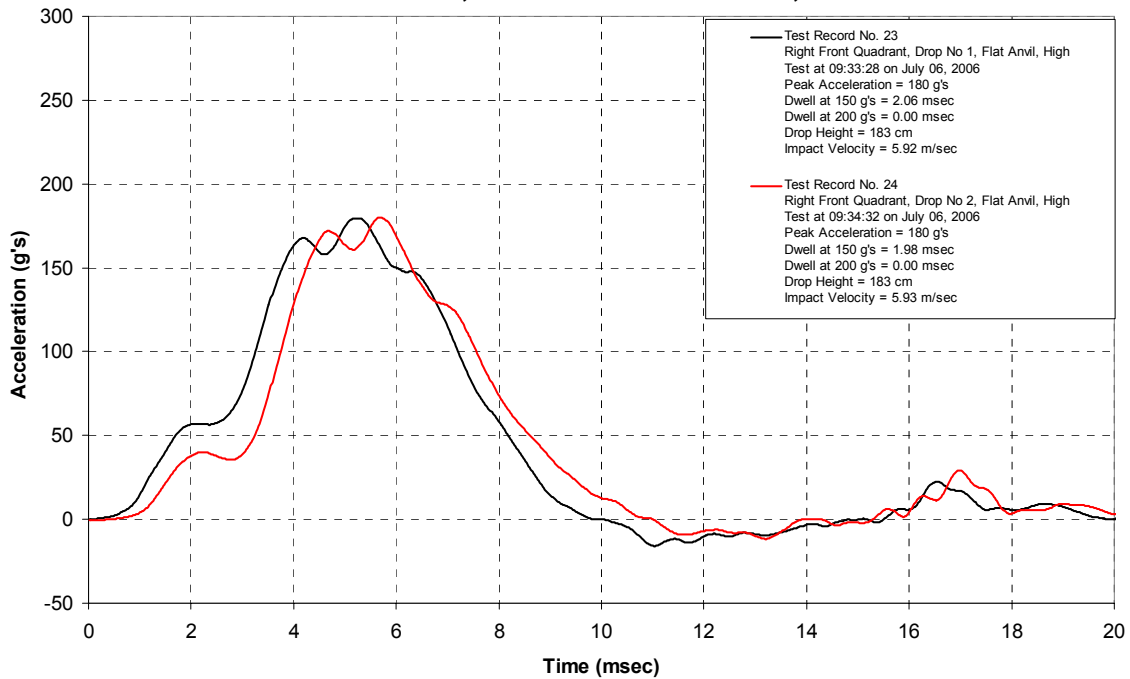


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

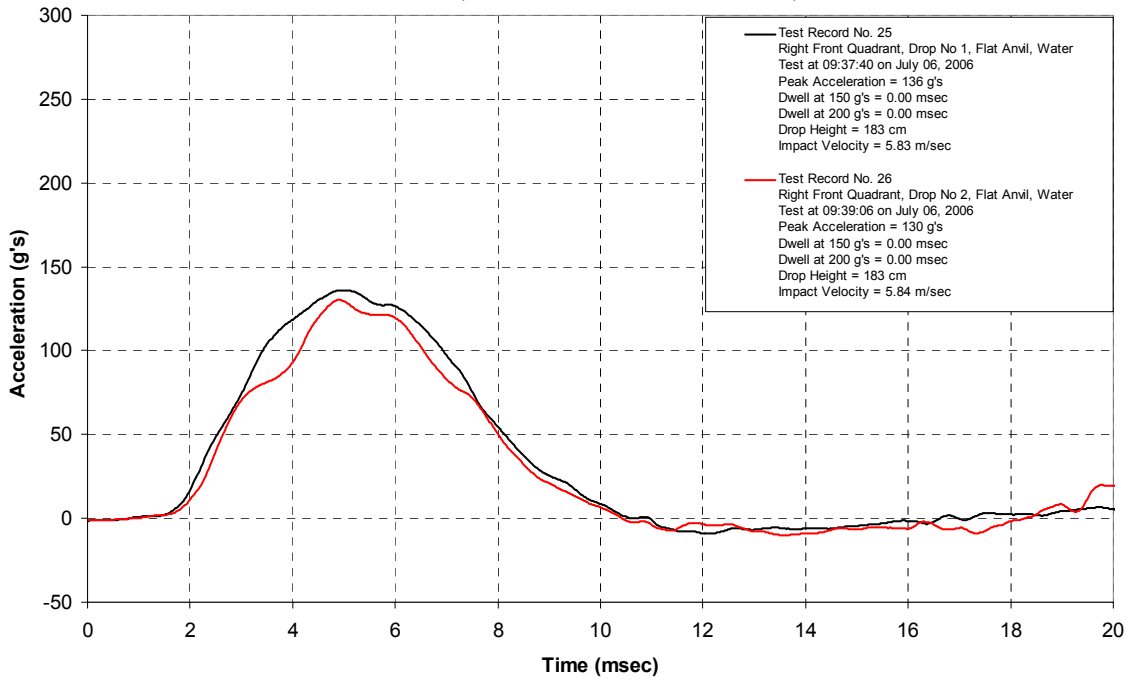


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

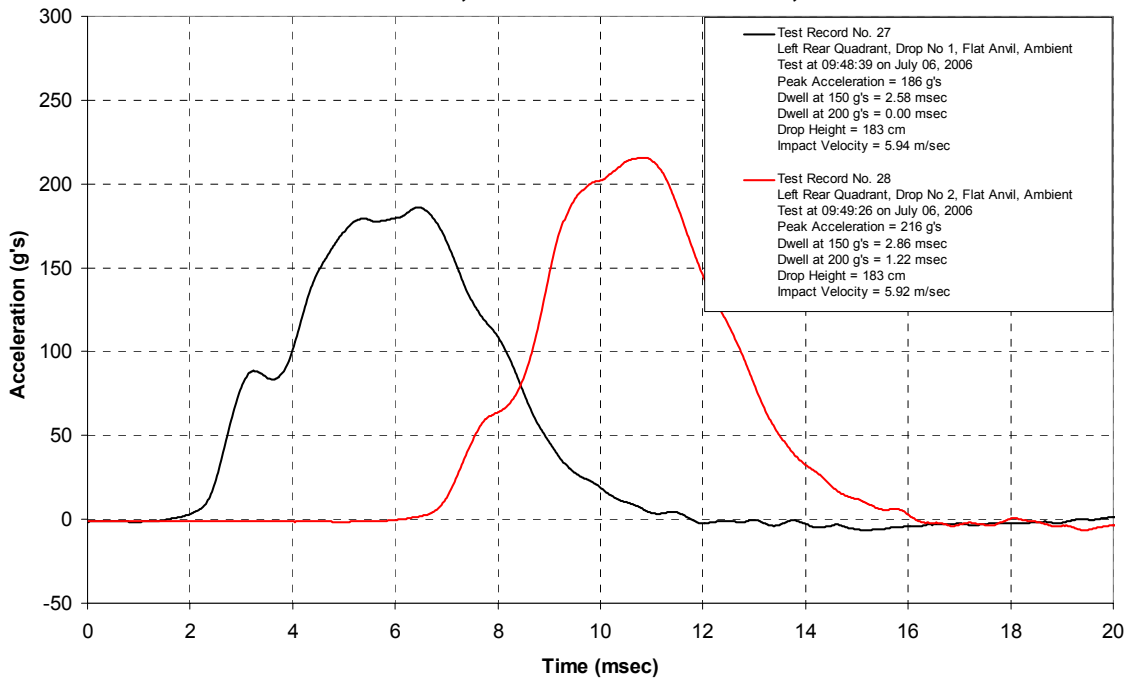


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

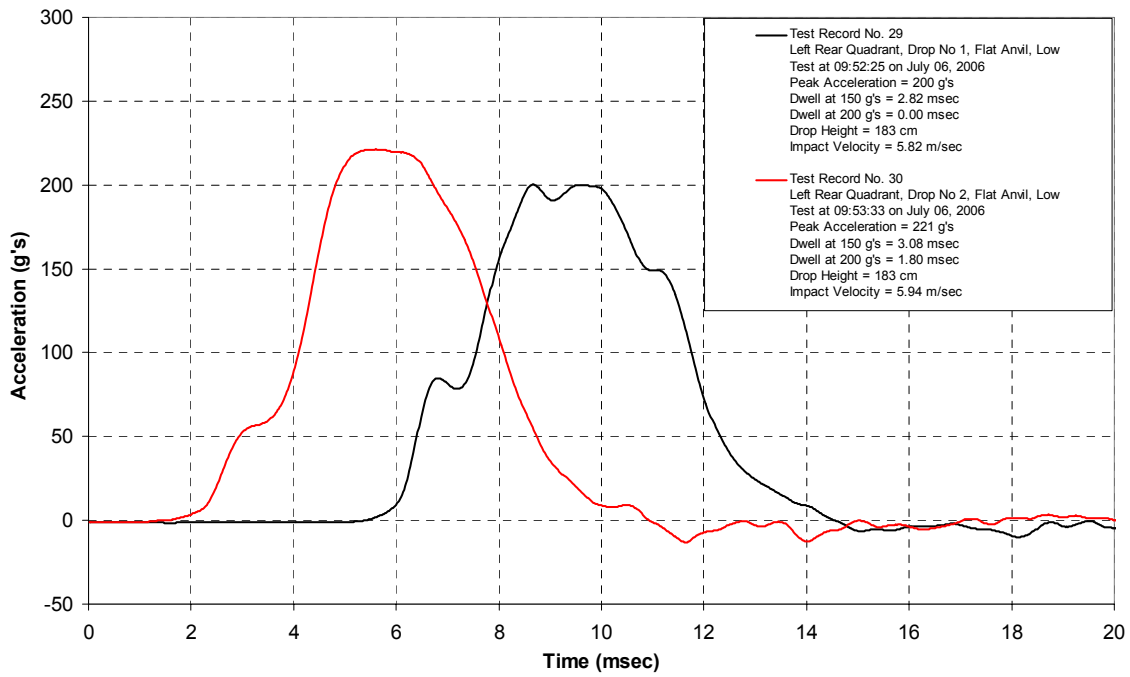


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

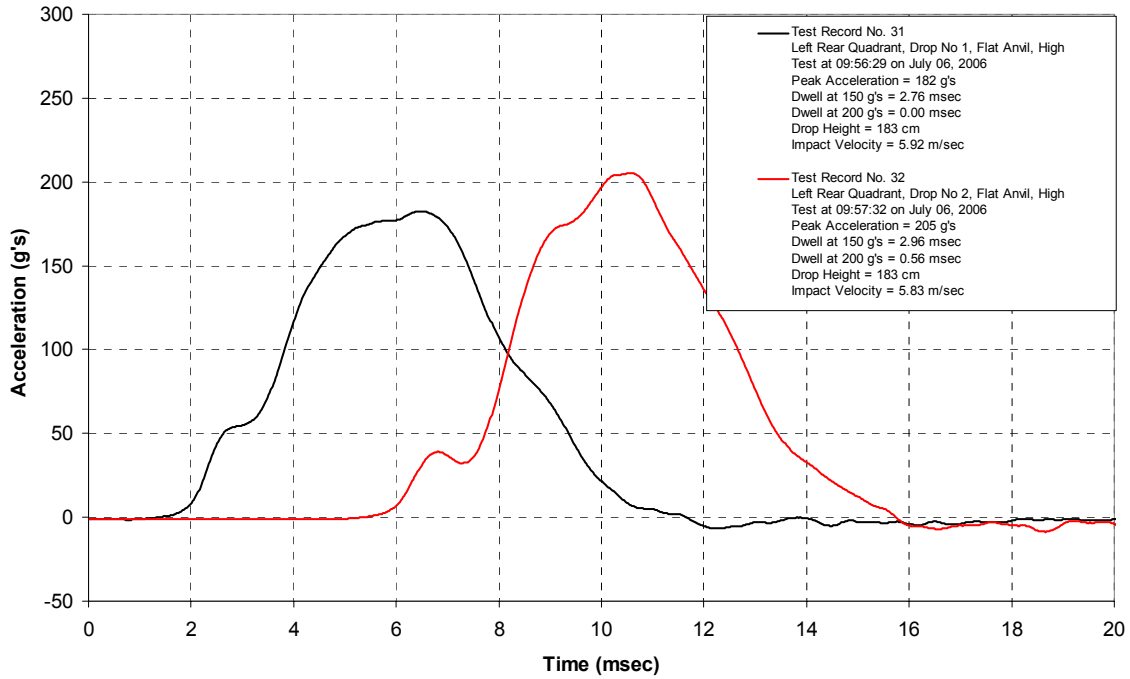

Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

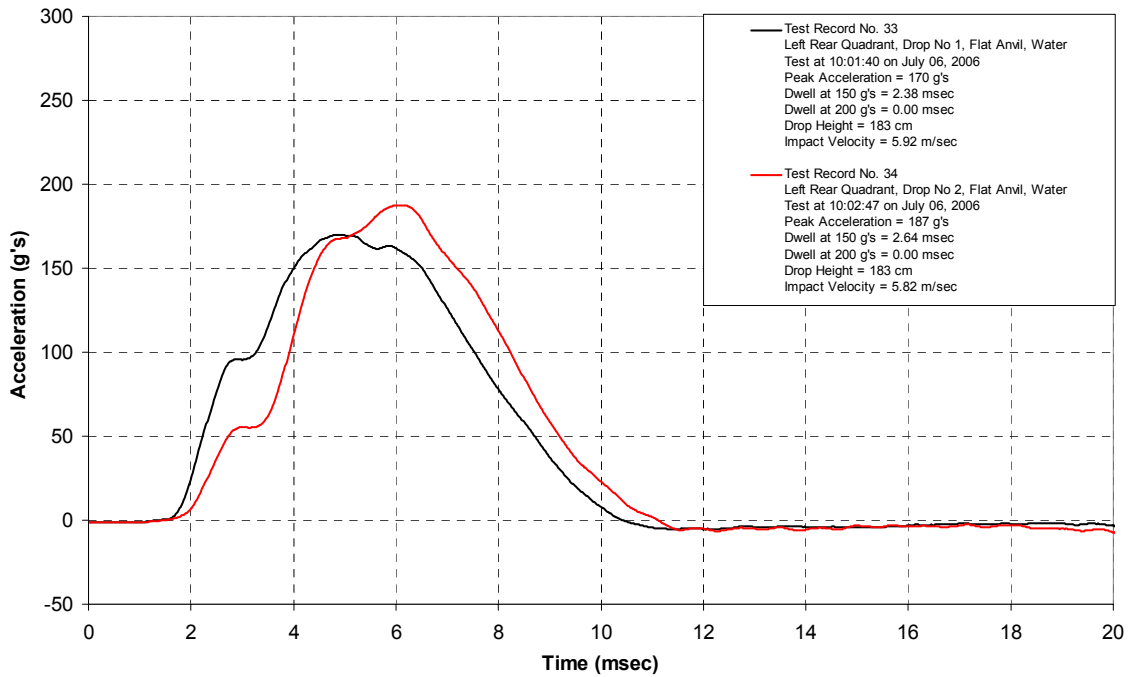


Impact Testing DOT-06-006, Kerr Helmets H205 BLK, M

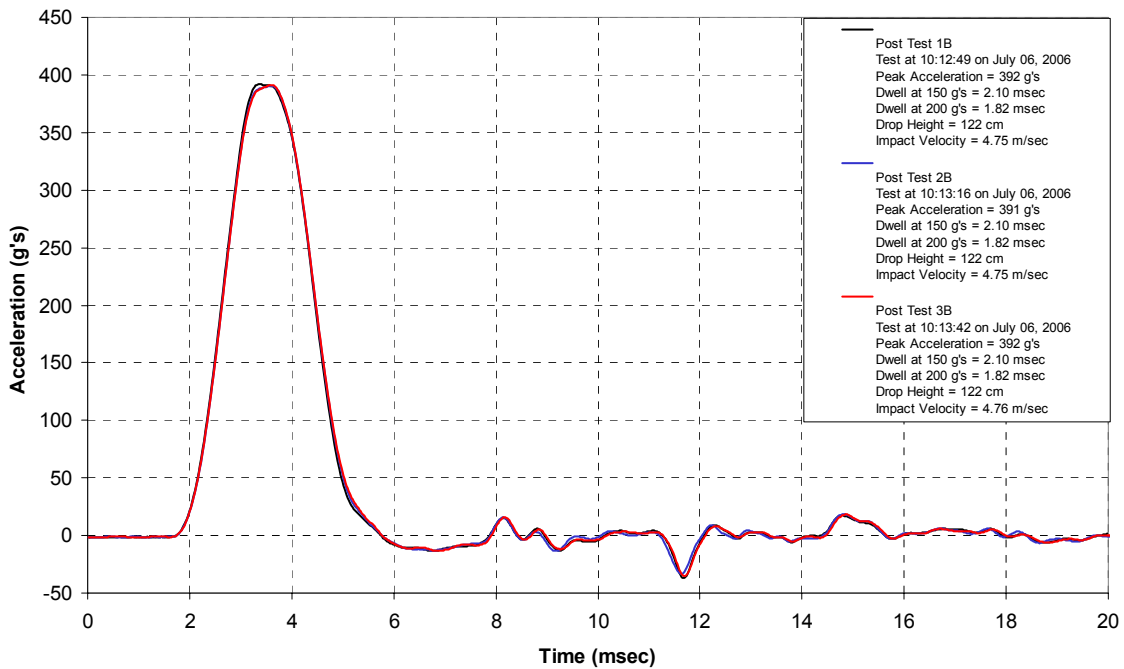


3 RETENTION TIME HISTORIES


Ambient Temperature Retention Testing 07/06/06
DOT-06-006, Kerr Helmets, H205 BLK, M

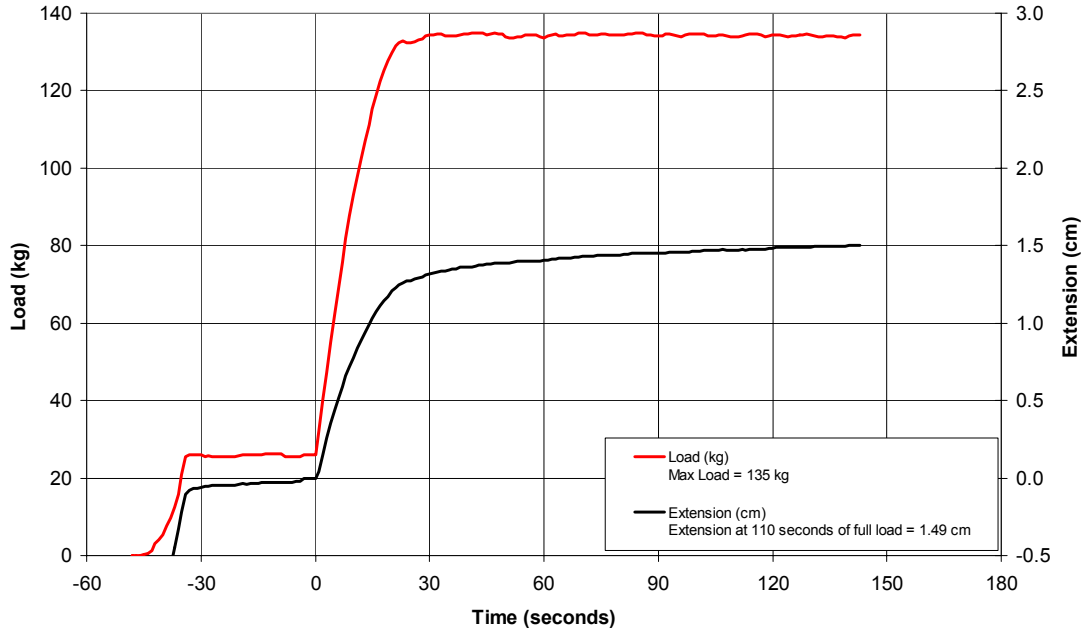


Low Temperature Retention Testing 07/06/06
DOT-06-006, Kerr Helmets, H205 BLK, M

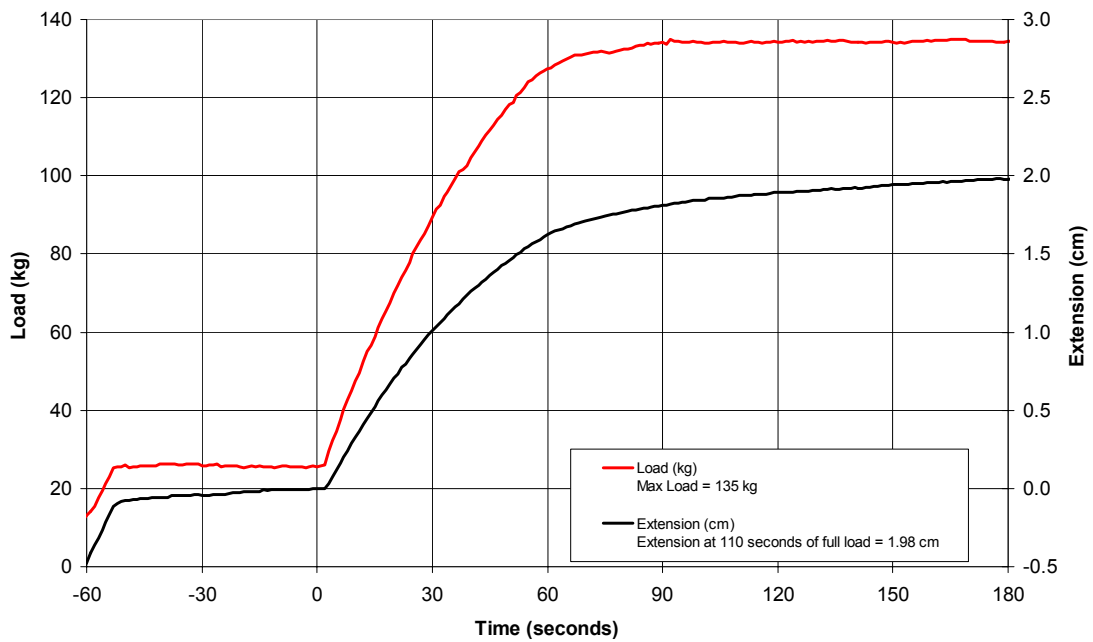

High Temperature Retention Testing 07/06/06 DOT-06-006, Kerr Helmets, H205 BLK, M

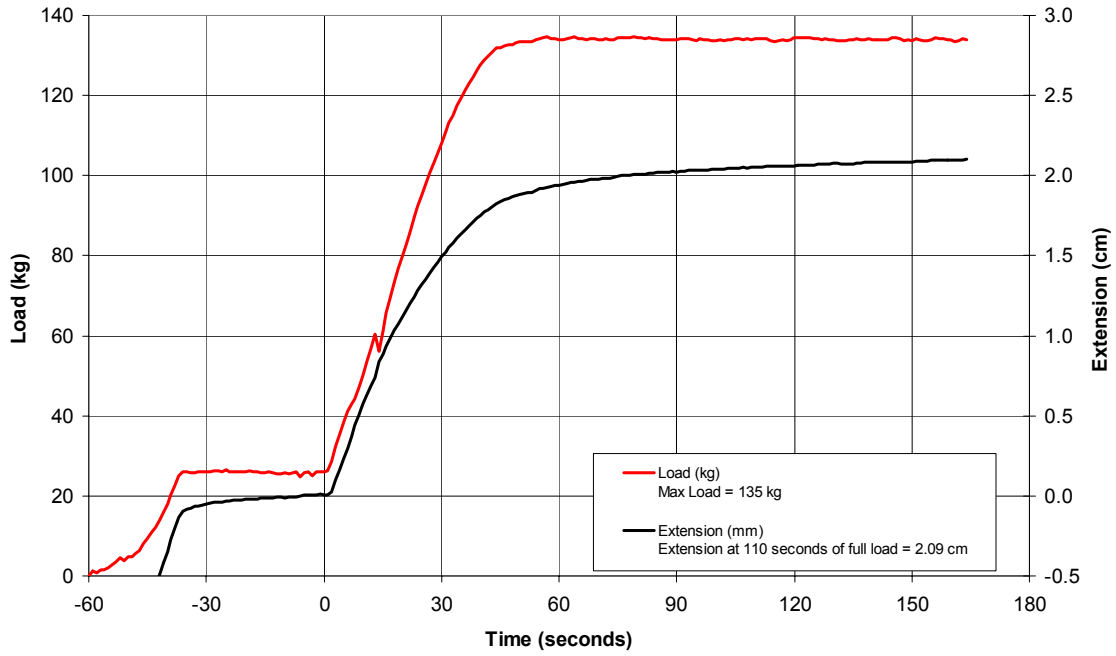

Water Immersed Retention Testing 07/06/06 DOT-06-006, Kerr Helmets, H205 BLK, M

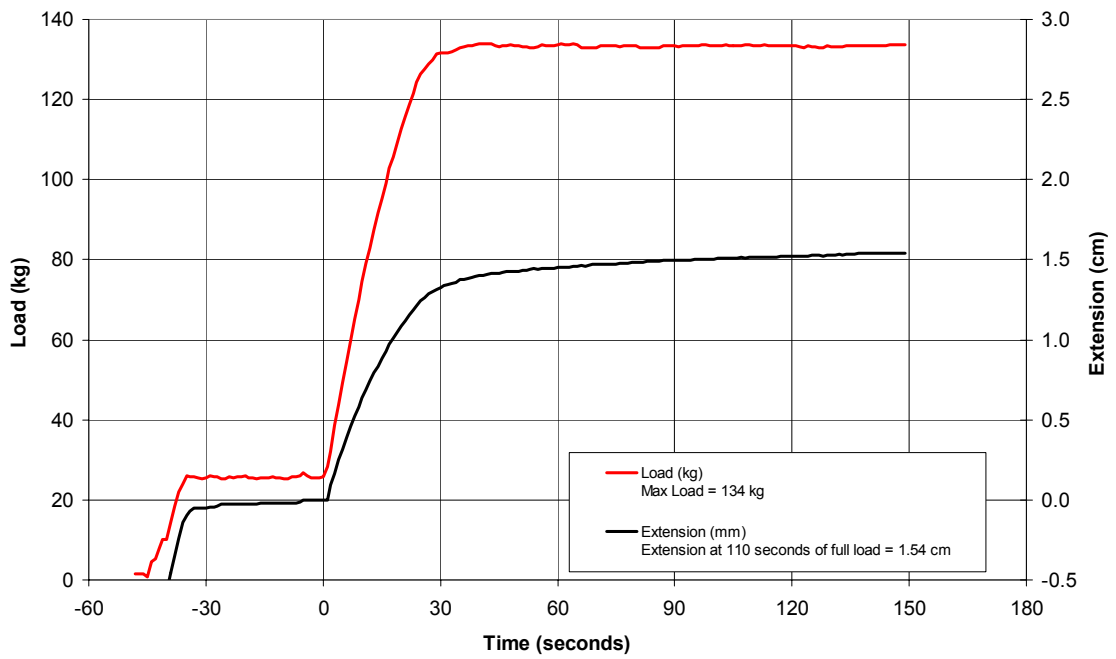

SECTION 4 TEST FAILURE DETAILS

The helmet failed the impact testing with peak accelerations in excess of 400 g for the following conditions:

429 g for ambient helmet, Drop No. 2, hemispherical anvil, front location

409 g for water immersed helmet, Drop No. 2, hemispherical anvil, front location.

Peak accelerations values were noted during testing and checked with the ASCII data files. Data was determined to be consistent.

Internal rigid projections include three meal fasteners used to hold the face shield in place. These are attached to the shell of the helmet and project inward 5.1 mm (0.2 inches). Photographs of the internal projections are given.

The helmet failed the labeling in that the manufacturer's name was not present on the helmet.

APPENDIX A INTERPRETATIONS OR DEVIATIONS FROM FMVSS NO. 218

All testing was performed in accordance with the requirements of FMVSS NO. 218.

APPENDIX B EQUIPMENT LIST AND CALIBRATION INFORMATION

Table 1 - Instrumentation List for SwRI Protective Headgear Testing


ITEM NO.	DESCRIPTION	MANUFACTURER AND MODEL	SERIAL NO	ACCURACY	DATE OF LAST CALIB.	DATE OF NEXT CALIB.	PERSON DOING CALIB.
1	Humidity and Temperature Input Module	Omega / OM5-II-4-20	9213-150149-08	System Software Validation Procedure	11/02/00	NA	DJP
	Filter	Frequency Devices, Inc. / 5BAF-LPBU4 4 Pole Butterworth 1.75 KHz	None				
	Data Acquisition Card	National Instruments PCIMIO-16E-4	None				
	Data Acquisition Software	National Instruments / Labview for Windows	Ver 4.1				
	Data Acquisition Computer	Dell Computer Dim. XPS M166s	2170089				
2	Humidity and Temperature Transmitter	Omega / HX41	0599-6004	Manufacturer's Specification and System Software Validation Procedure	03/28/06	03/28/07	BLT
	Isolated Voltage Output	Burr Brown / PCI-5B41-02	None				
3	Thermocouple Wire and Thermocouple Input Module	Omega / OM5-LTC-J2-C	21266 21261 21253	Thermocouple Cal Procedure	07/04/06	07/04/07	DJP
4	Optical Velocity Transducer	SwRI / 1	1	Velocity Gate Cal Procedure	07/04/06	07/04/07	DJP
5	Test Accelerometer	Endevco / 2262-1000	NL05	Accelerometer Cal Procedure	07/04/06	07/04/07	DJP
	Strain Gage Conditioner	Measurement Group Inc. / 2120A	102130				
	Strain Gage Power Supply	Measurements Group Inc. / 2110A	102034				
	Filter	Frequency Devices, Inc. / 5BAF-LPBU4 4 Pole Butterworth 1.75 KHz	None				
6	Load Cell	Western / 51	830-7X	Load Cell Cal Procedure	07/04/06	07/04/07	DJP
	Strain Gage Conditioner	Measurement Group Inc. / 2120A	102130				
	Strain Gage Power Supply	Measurements Group Inc. / 2110A	102034				
	Isolated Voltage Output	Burr Brown / PCI-5B41-02	None				
7	Potentiometer	Humphrey / RP14-0601-1	87	Potentiometer Cal Procedure	07/04/06	07/04/07	DJP
	Isolated Voltage Output	Burr Brown / PCI-5B41-02	None				
8	Scale	Ohaus Scale Corp / 20 Kg / 45 lb	SwRI 5485	Manufacturer's Specification	10/17/06	10/17/07	LGS

Table 2 - Test Apparatus List for SwRI Protective Headgear Testing Requiring One Time Dimensions Checks or No Calibration

ITEM NO.	DESCRIPTION	MANUFACTURER	MODEL	SERIAL NO.	ACCURACY	DATE OF DIMENSIONAL CHECK
1	DOT Headforms	Controlled Casting	Small, Medium, and Large	None	+0.31 inches	6/89
2	Monorail Drop Test System	SwRI	1	1	TP-218-04	1/80
3	Drop Assembly	SwRI	Small, Medium, and Large	None	TP-218-04	6/89
4	Modular Elastomeric Programmer (MEP)	U.S Testing	None	None	N/A	N/A
5	Penetration Test System	SwRI	1	1	TP-218-04	1/80
6	Penetration Striker	SwRI	1	1	TP-218-04	1/80
7	Retention Test System	SwRI	1	1	TP-218-04	1/80
8	Chin Strap Fixture	SwRI	1	1	TP-218-04	1/80
9	Static Weights (Steel)	SwRI	1	1	±0.1 lbs.	2/94
10	Hydraulic Cylinder	Enerpac	RD46	1	N/A	N/A
11	Hydraulic Pump	Delta Power Hydraulic Company	B2	NA	N/A	N/A
12	Environmental Conditioner	EDPAC	Mini Tech 90	None	N/A	N/A
13	Oven with Digitronic Control	Despatch Industries Inc.	LDB1-69	128710	N/A	N/A
14	Freezer with Omega Temperature Controller	Sears	9105010 CN100TC	S102041026 4011302	N/A	N/A
15	Peripheral Vision Template	SwRI	1	1	±15 min	1/80
16	HPI Indicator	SwRI	Small, Medium, Large	None	NA	NA
17	Test Line Marking System	SwRI	1	1	TP-218-04	1/80

APPENDIX C PHOTOGRAPHS

Test Equipment Photos

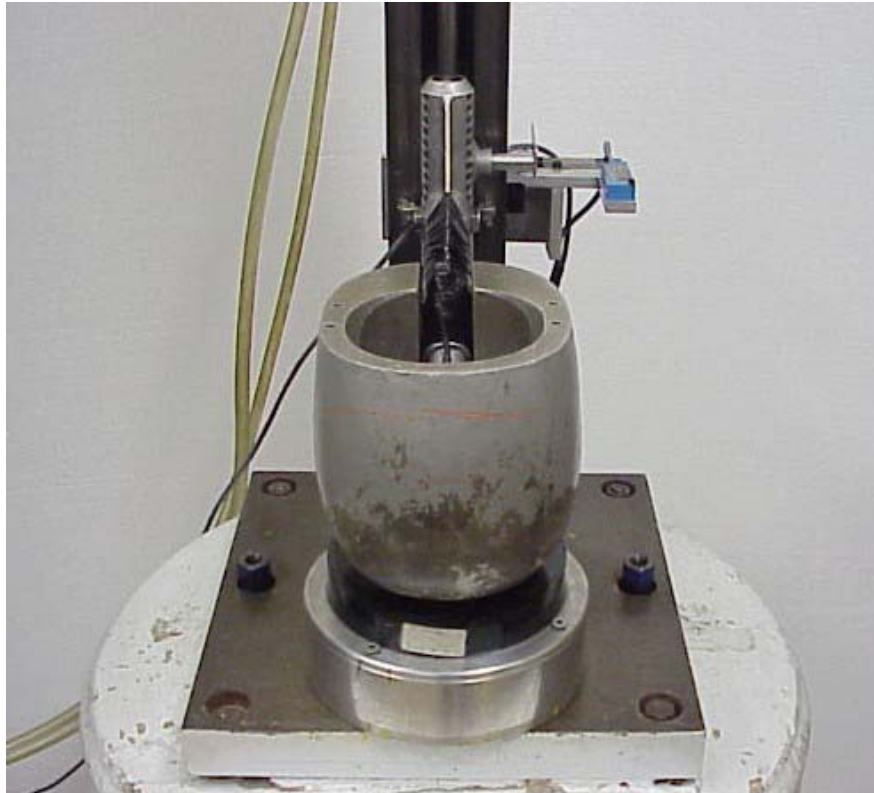

SwRI Helmet Test Equipment Photo 1. Monorail Impact Tester with MEP Pad, DOT Headform, SwRI Drop Assembly, and Velocity Gate



SwRI Helmet Test Equipment Photo 2. Flat Anvil Impact Configuration



SwRI Helmet Test Equipment Photo 3. Hemispherical Anvil Impact Configuration



**SwRI Helmet Test Equipment Photo 4.
Penetration Resistance Tester Configured for
Crown Locations**



**SwRI Helmet Test Equipment Photo 5.
Penetration Resistance Tester Configured for
Side, Front, and Rear Locations**



**SwRI Helmet Test Equipment Photo 6. Retention System Tester with Supported DOT Headform,
Simulated Jaw, and Displacement Measuring System**

Helmet Photographs



Helmet Photograph 1. Front View Kerr, H205 BLK, M



Helmet Photograph 2. Side View Kerr, H205 BLK, M



Helmet Photograph 3. Rear View Kerr, H205 BLK, M



Helmet Photograph 4. Top View Kerr, H205 BLK, M



Helmet Photograph 5. Interior View Kerr, H205 BLK, M



Helmet Photograph 6. Labeling Kerr, H205 BLK, M



Helmet Photograph 7. Labeling Kerr, H205 BLK, M



Helmet Photograph 8. Two Styles of Retention Systems Kerr, H205 BLK, M



Helmet Photograph 9. Broken Retention System Component Kerr, H205 BLK, M



Helmet Photograph 10. Overview of Internal Projection Kerr, H205 BLK, M



Helmet Photograph 11. Detail of Right Side Internal Projection Kerr, H205 BLK, M



Helmet Photograph 12. Detail of Center Internal Projection Kerr, H205 BLK, M



Helmet Photograph 13. Detail of Left Side Internal Projection Kerr, H205 BLK, M