


NEW VICTORIA, TX -- 1160 kHz

Daytime

Electric Field Strength
at 1 km radius
millivolts per meter - mV/m

Power: 0.5 kW
Graph Maximum: 500 mV/m

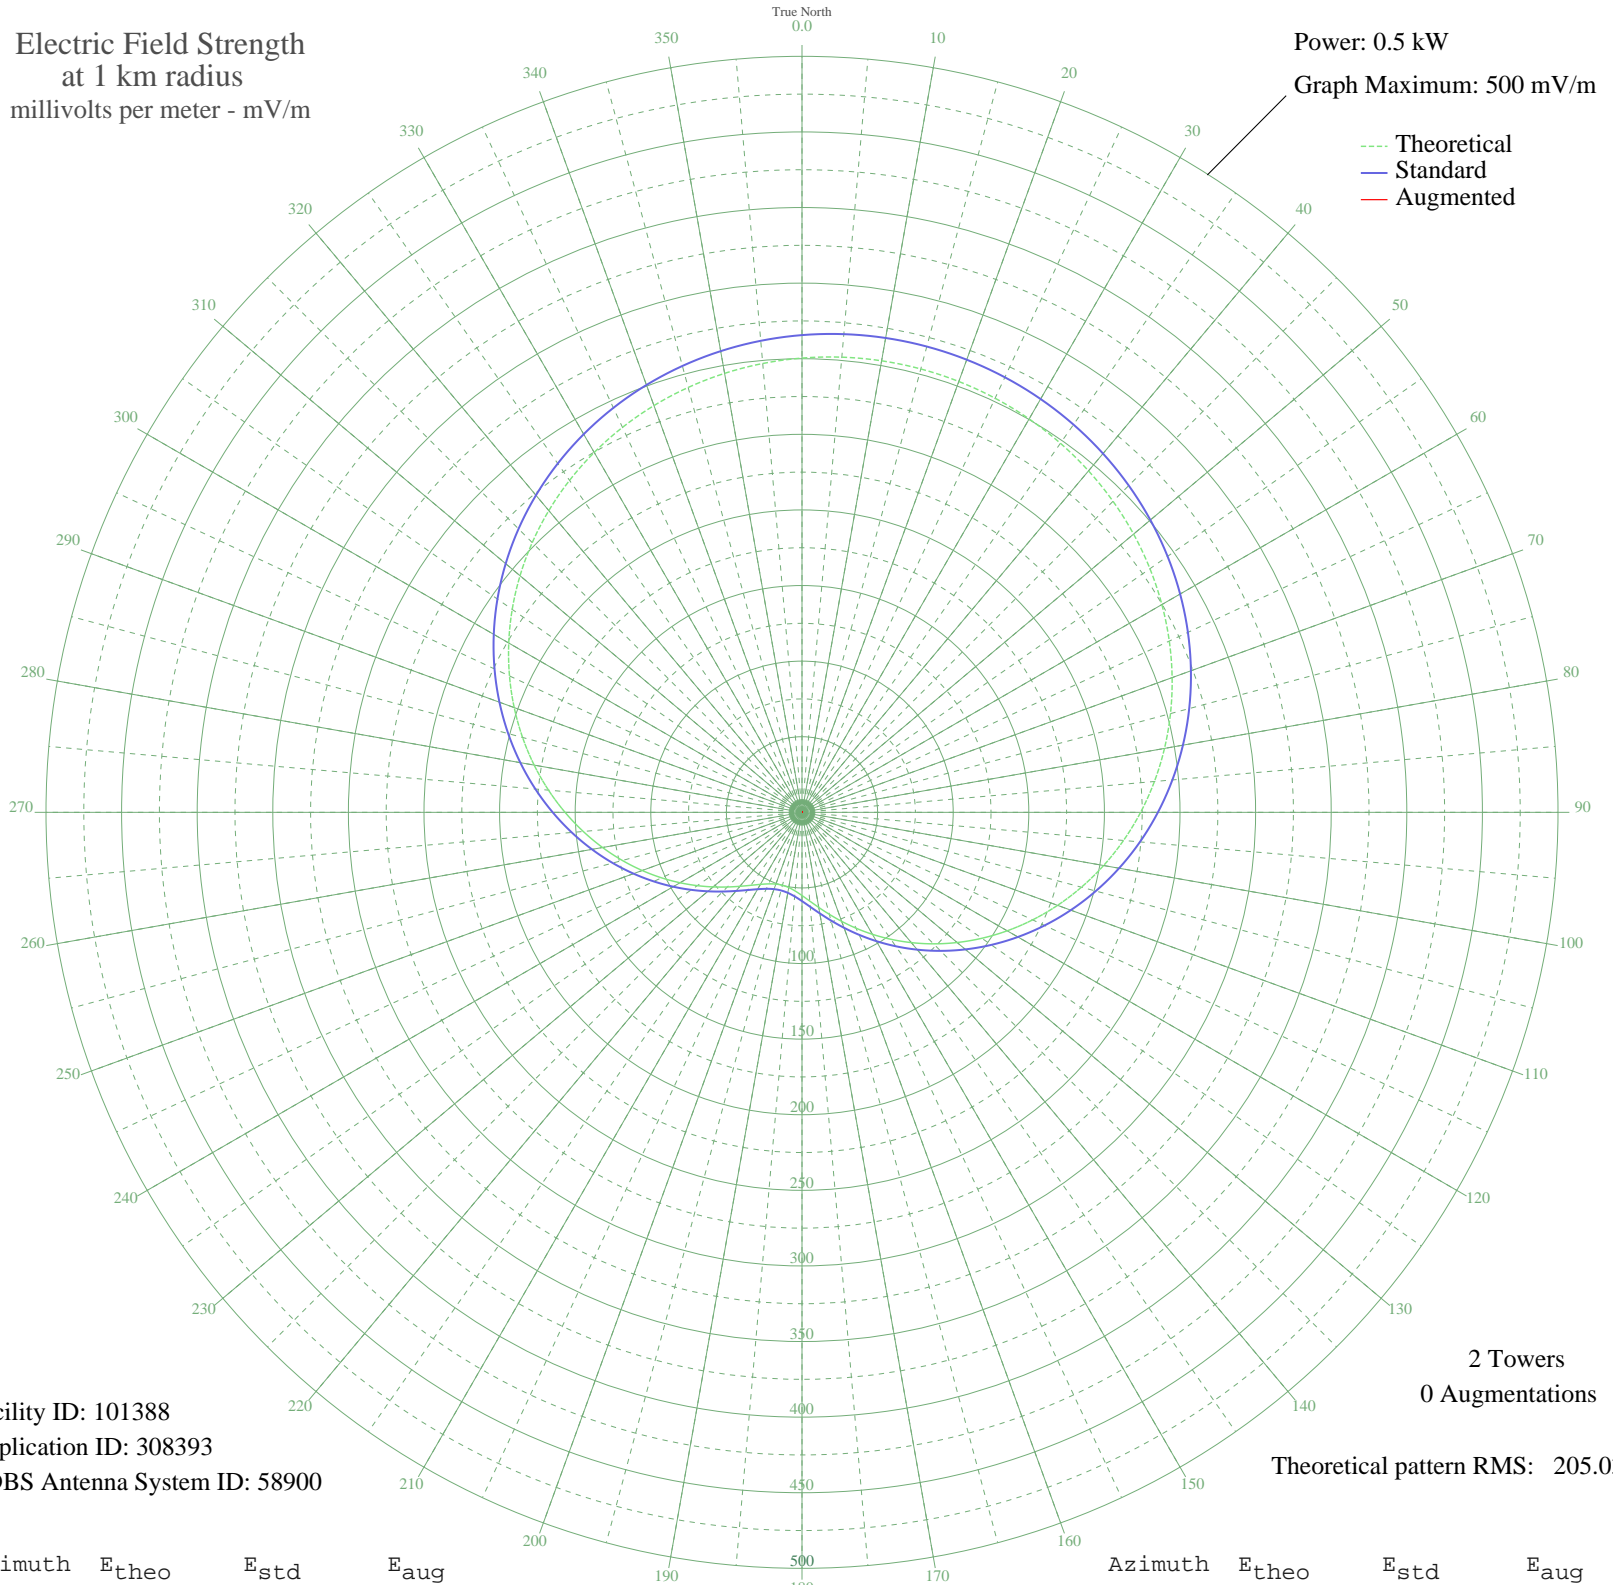

Facility ID: 101388
Application ID: 308393
CDBS Antenna System ID: 58900

2 Towers
0 Augmentations
Theoretical pattern RMS: 205.03

Azimuth	E _{theo}	E _{std}	E _{aug}
0	300.44	315.63	
5	302.19	317.47	
10	303.23	318.57	
15	303.58	318.93	
20	303.23	318.57	
25	302.19	317.47	
30	300.44	315.63	
35	297.98	313.05	
40	294.81	309.72	
45	290.91	305.64	
50	286.29	300.78	
55	280.93	295.16	
60	274.84	288.77	
65	268.03	281.63	
70	260.51	273.73	
75	252.30	265.12	
80	243.44	255.83	
85	233.98	245.90	
90	223.96	235.40	
95	213.46	224.38	
100	202.56	212.94	
105	191.33	201.17	
110	179.88	189.16	
115	168.30	177.03	
120	156.72	164.89	
125	145.23	152.85	
130	133.95	141.04	
135	123.00	129.58	
140	112.48	118.57	
145	102.50	108.14	
150	93.16	98.38	
155	84.54	89.39	
160	76.74	81.26	
165	69.83	74.07	
170	63.87	67.88	
175	58.92	62.75	

The theoretical pattern is used to create the standard pattern. Augmentations (if any) expand the standard pattern in specified directions. See Sections 73.150 and 73.152 of the FCC's Rules.

AM coverage may not mirror the pattern shown here. Additional factors such as ground conductivity or skywave propagation affect how far the AM signal will travel.

Patterns for stations outside the USA are based on notified parameters.

AM directional patterns created before 1982 used units of 1 mV/m at 1 mile, not one kilometer. The pattern values on such plots at 1 mile will be 0.62137 of the values listed here. Measured pattern values may vary from values shown here.

Plot is best printed on 11" by 17" or larger paper.

22 Feb 2009

Prepared by Audio Division, Media Bureau
Federal Communications Commission

Azimuth	E _{theo}	E _{std}	E _{aug}
180	55.02	58.72	
185	52.21	55.82	
190	50.51	54.07	
195	49.95	53.48	
200	50.51	54.07	
205	52.21	55.82	
210	55.02	58.72	
215	58.92	62.75	
220	63.87	67.88	
225	69.83	74.07	
230	76.74	81.26	
235	84.54	89.39	
240	93.16	98.38	
245	102.50	108.14	
250	112.48	118.57	
255	123.00	129.58	
260	133.95	141.04	
265	145.23	152.85	
270	156.72	164.89	
275	168.30	177.03	
280	179.88	189.16	
285	191.33	201.17	
290	202.56	212.94	
295	213.46	224.38	
300	223.96	235.40	
305	233.98	245.90	
310	243.44	255.83	
315	252.30	265.12	
320	260.51	273.73	
325	268.03	281.63	
330	274.84	288.77	
335	280.93	295.16	
340	286.29	300.78	
345	290.91	305.64	
350	294.81	309.72	
355	297.98	313.05	