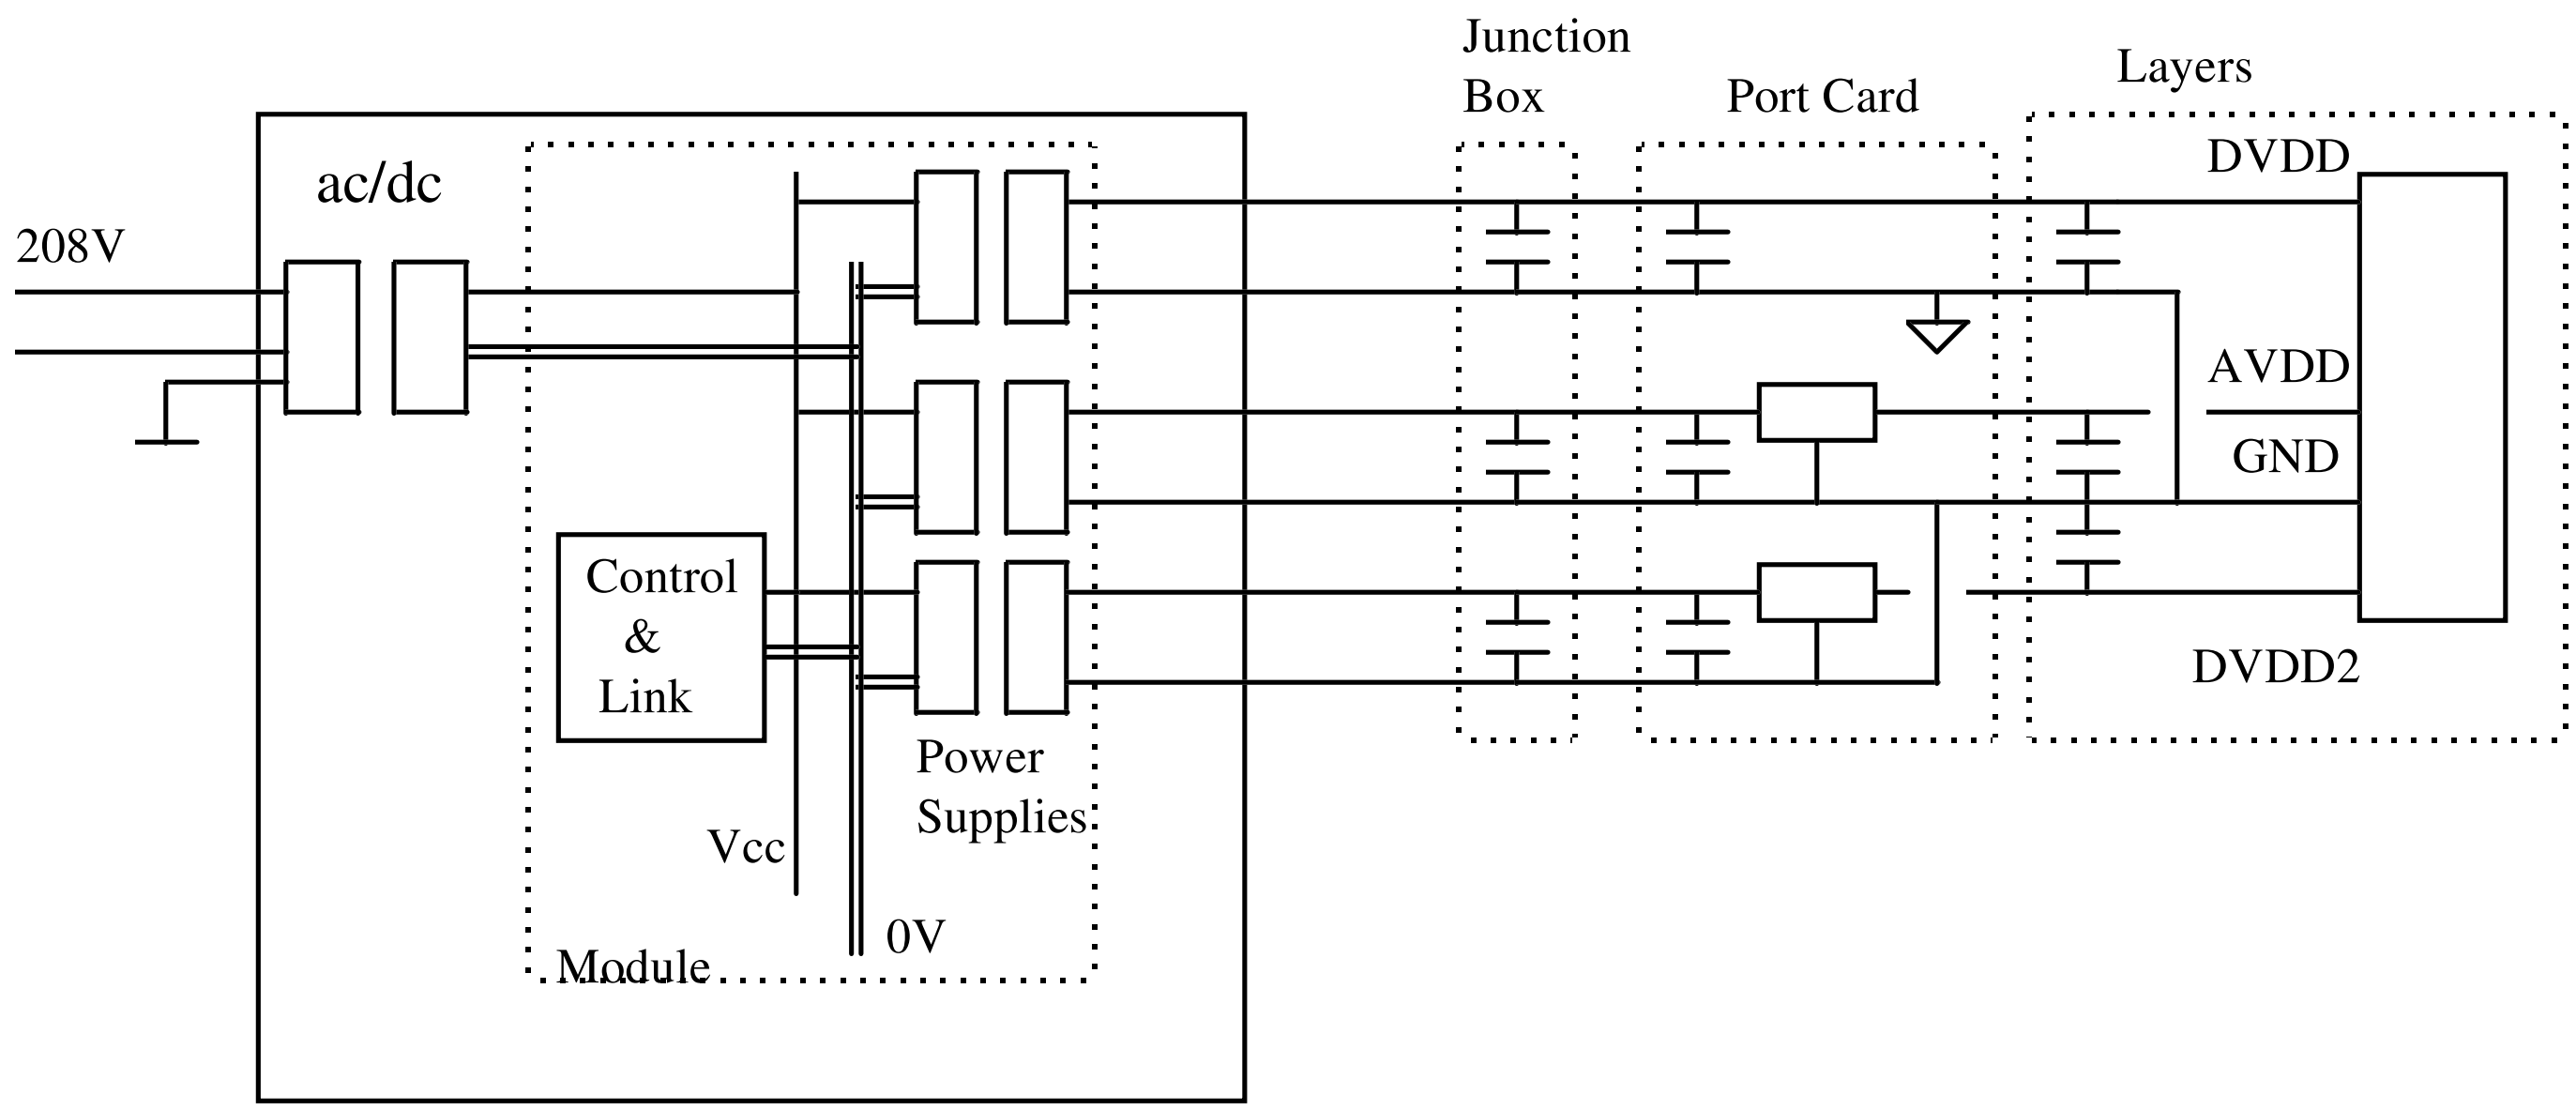

Figure 2- Version with low voltage bus Vcc. The link ground has to be connected to 0v.
The load is connected to graound at the Port Card. The rack and crate are connected to the AC mains safety ground.