

# **LRIT TRANSMITTER SPECIFICATION**

## **1.0 Introduction**

The Coordination Group for Meteorological Satellites has agreed to the Global Specification for LRIT. The global specification is based on the OSI Standard 7498 and the CCSDS recommendations of Advanced Orbiting Systems (AOS). It defines the structure and formatting of the LRIT files and the processing and transport protocols of all OSI layers applicable to all geostationary meteorological spacecraft.

### **1.1 LRIT Service**

The mission is named LRIT because the communications link provides for a relatively low data rate below 256 kbps.

### **1.2 Document Structure**

The flow of this document will follow the chronological flow of events in the processing of each data file for transmission. Primarily the sections will correspond to the layers in the OSI reference model.

## **2.0 Introduction to the GOES-Specific OSI Reference Model**

This section discusses the logical categorization of functions, OSI reference model, GOES-specific implementation, outside data sources, dissemination, partitioning of data files in the application layer, compressing files in the application layer, as well as encryption in the application layer.

### **2.1 Logical Categorization of Functions**

The communications service can be logically considered in three functions:

#### **1. Packetizing of the data files for transmission over the communications channel.**

The functions performed by the LRIT preprocessor will be according to the standards of the CCSDS.

#### **2. Data file encoding for transmission efficiency and data protection.**

These functions are the compression and encryption of the files. Both functions are optional. The GOES mission-specific implementation will not use encryption but provide a means for implementation if requirements change.

Compression could be performed by CEMSCS or within the LRIT communications processor. It will be a user-specific design decision as to where this function will be performed.

#### **3. Communications encoding for error control.**

These processes include block error check coding, bit interleaving, bit randomizing, and convolutional coding. These are optional functions in the CCSDS model. The LRIT processor at WCDA will perform these functions.

### **2.2 OSI Reference Model**

The OSI seven-layer reference model is shown in Table 1.

**Table 1. Layer Functionality (Usual Order of Implementation)**

<b>OSI Layer</b>	<b>Layer Functionality</b>
Application Layer	- Acquisition of application data
Presentation Layer	- Image segmentation - Formatting to LRIT file structure
Session Layer	- Compression (optional) - Encryption (if required)
Transport Layer	- Determination of APID - Split of files into source packets
Network Layer	- Determination of VCID
Data Link Layer	- Assembly of source packets into M_PDUs - Multiplexing - Assembly of VCDUs - Generation of 'idle frame' - Reed-Solomon coding - Randomization - Attachment of synchronization marker
Physical Layer	- Serialization - Convolutional coding - Modulation

## **2.3 GOES-Specific Implementation**


The GOES system architecture divides the processing layers into five domains and two locations.

### **2.3.1 Physical Location of Functional Units**

The data files for transmission will be processed partially at the IPD at the Suitland Federal Center in Maryland and partially at the Command and Data Acquisition (CDA) station at Wallops Island, Virginia. Between these facilities, the data will be transmitted on a multiplexed T1 data line.

### **2.3.2 LRIT Domain Processors**

The processing of the LRIT files for transmission will occur in five separate domains as illustrated in Figure 1.

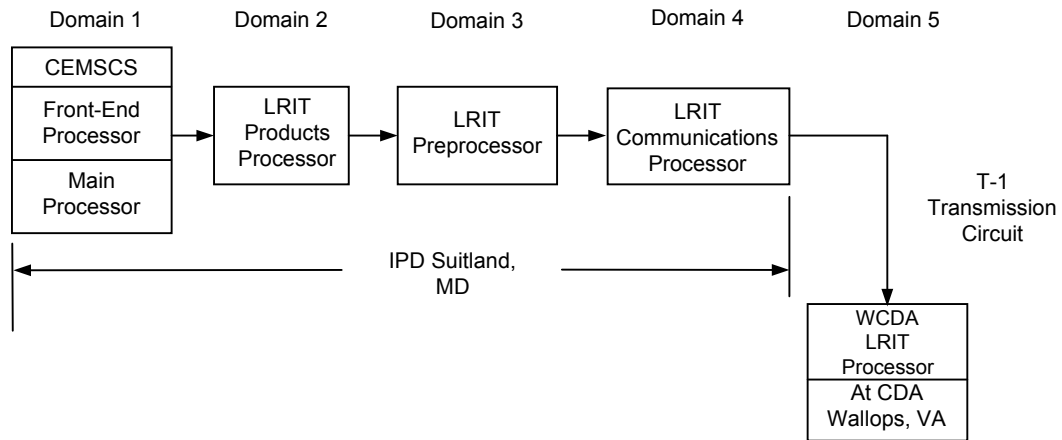

**Figure 1. LRIT System Overview**

The GOES mission-specific implementation may have the functions performed as indicated in Table 2.

**Table 2. Layer Functionality (GOES-Specific Implementation)**

OSI Layer	Layer Functionality
<b>Encoding For Data Transmission Efficiency - Domains 1 and 2</b>	
Application Layer	<ul style="list-style-type: none"> <li>- Acquisition of application data</li> <li>- Image partitioning (according to image features)</li> <li>- Encryption (optional)</li> </ul>
<b>Packetizing For Transmission - Domains 3 and 4</b>	
Presentation Layer	<ul style="list-style-type: none"> <li>- Formatting to LRIT file structure</li> </ul>
Session Layer	<ul style="list-style-type: none"> <li>- Encryption (optional)</li> </ul>
Transport Layer	<ul style="list-style-type: none"> <li>- Determination of APID</li> <li>- Split of files into source packets</li> </ul>
Network Layer	<ul style="list-style-type: none"> <li>- Determination of VCID</li> </ul>
Data Link Layer	<ul style="list-style-type: none"> <li>- Assembly of source packets into M_PDUs</li> <li>- Multiplexing</li> <li>- Assembly of VCDUs</li> <li>- Attachment of synchronization marker</li> </ul>
<b>Error Control Functions - Domain 5</b>	
Physical Layer	<ul style="list-style-type: none"> <li>- Insert VCDUs from other sources</li> <li>- Generation of 'idle frame'</li> <li>- Interleaving</li> <li>- Reed-Solomon coding</li> <li>- Randomization</li> <li>- Serialization</li> <li>- Convolutional coding</li> <li>- Modulation (NRZ-L, BPSK)</li> </ul>

## **2.4 Outside Data Sources**

Two options are being considered for assimilation of outside data into the LRIT bit stream.

- The data received at the WCDA could be transmitted over a T-1 line and inserted into the data stream at domain 2, the LRIT products processor.
- Another LRIT Preprocessor and communications processor would be necessary at the WCDA to form the application files from outside sources into CVCDUs. Then they would be inserted into the CVCDU data stream received from the IPD according to a predetermined priority scheme.

## **2.5 Dissemination**

The image dissemination is no longer governed by fixed time slots as WEFAX was. The start and end time of dissemination for a LRIT file is not bound to absolute time references. The dissemination service will maintain in principle a regular, periodic distribution of the image data. Meteorological data and service messages will be interleaved with the image data according to a priority scheme. Foreign satellite data, METEOSAT from Europe and Geostationary Meteorological Satellite from Japan and data from the U.S. National Weather Service will be interleaved with the data generated by NOAA.

## **2.6 Partitioning of Data Files in the Application Layer**

According to the OSI standard, images that are contained in large files may be segmented in the presentation layer. Segmentation in the presentation layer is based upon a transmission block size. Image partitioning by the application layer processor can be based upon some characteristic of the data itself (i.e., scan lines). Each image partition becomes a separate file. This way the user's application processor can partially recover from lost data packets. In order to implement image partitioning, the sequencing of the segments must be indicated within the data field of the files. The user application processor will reassemble the image file.

## **2.7 Compressing Files in the Application Layer**

Similarly to segmentation, the files can be compressed in the application layer to reduce the need for compression in the session layer. Compression algorithms in the application layer might take advantage of the knowledge of the image characteristics. If compression occurs in the application layer at the transmit end it must also be expanded in the user's application processor.

## **2.8 Encryption in the Application Layer**

Data encryption is not part of the requirements for the GOES LRIT architecture; however, the architecture should include a means to add encryption if requirements change. Adding this capability at the application layer would require the user application processor to have the capability to decrypt the message. LRIT files will also carry a field designating the intended recipient.

### **3.0 Application Layer**

The application layer provides specific services between application processes.

#### **3.1 GVAR Format Data**

GVAR data are converted to LRIT products in domains 1 and 2 as shown in Figure 1. The measured data from the satellite are transmitted in a raw form to the facility at Wallops Island, Virginia. There they are formatted and retransmitted back to the satellite for distribution as GVAR format data products.

##### **3.1.1 Central Environmental Satellite Computer System (CEMSCS) – Domain 1**

The CEMSCS FEP receives the GVAR data and other data from the Polar Orbiting Satellites (POES). It parses the data and delivers the relevant visible and infrared images to the main processor at the CEMSCS. The main processor creates the Level 1A meteorological products for distribution. Some of the satellite image data may be directly sent to the LRIT products processor from the FEP, depending on the option selected from the choices in Section 5.

##### **3.1.2 LRIT Products Processor – Domain 2**

The LRIT product processor may be receiving inputs from six sources as shown in Figure 1. Optionally, data may be received from METEOSAT, from GMS, and from NWS. The LRIT product processor creates the files that will be transmitted from the data received by this unit. These files will include digital images and text messages. Level 1A products will be created in the CEMSCS. Level 1B products will be created in this processor from satellite data received directly from the FEP. The files created in these processors will be used directly by the user application to recreate the products.

The processor will know the content of its input data. When large images are received, such as a full disk scan, this processor will build partial image files from a fixed number of scan lines. This subdivision of the full image will reduce the size of transmitted files, reduce latency, and provide a means for the user terminal to build an image even though some data are corrupted through the transmission system.

Along with each file, this processor will create a metadata file with all the data needed by the LRIT preprocessor to build LRIT file headers and control the optional actions of the preprocessor (i.e.; implementing priority, encrypting, compressing). The naming

convention for the file and its metadata file must be such that they can be easily associated. This processor must have knowledge of the parameters of the input data. Fields such as file size, priority, file type, etc. must be stored by the products processor. Because this processor creates the products, it will know the product characteristics.

The files created will be placed on a mass-storage device that is accessible to both the products processor and the preprocessor.

### **3.1.3 Manual Message Input Device**

The LRIT products processor or the CEMSCS main processor will provide a capability to create manually input messages. A terminal will be provided with formatted input screen for operators to send messages to the users.

### **3.1.4 LRIT Preprocessor – Domain 3**

The preprocessor shall create the LRIT formatted files. Details are presented in Section 4 on the presentation layer.

## **3.2 GOES File Types**

The GOES will disseminate:

- Image data files
  - Infrared
  - Visible
  - Water vapor
- Service messages

Other outside sources will provide:

- Meteorological data files
  - US
  - Northern Hemisphere
  - Full Disk
- Alphanumeric files

## **3.3 Metadata File Structure**

The metadata files will contain a delimited set of alphanumeric characters that are used to develop the LRIT file headers and pass other necessary information between the LRIT products processor and other processors. Fields in the metadata file will closely resemble the fields to be inserted in the LRIT headers. The ASCII 'space' ('20'h) will not be used as a delimiter.

```
Header_type, 0
Header_record_length, 16
File_type_code, 25
Total_header_length, 32758
Data_field_length, 32714
Header_type, 1
Header_record_length, 9
Bits_per_pixel, 64
Number_of_columns, 1200
Number_of_lines, 1400
Compression_flag, 1
.
.
.
Header_type, 4
Header_record_length, 16
Annotated_text, DATAFILENAME.txt
```

**Figure 2. Partial Sample Metadata File Fields**

```
;0,16,25,32758,32714;1,9,64,1200,1400,1;...;4,16,DATAFILENAME.txt
```

**Figure 3. Partial Sample Metadata Delimited File Structure**

### **3.4 Interface between LRIT Products Processor and LRIT Preprocessor**

The interface consists of a communications link, which provides access for that LRIT preprocessor to the data files for transmission. The communications network is connected to the LRIT products processor where GOES data products are assembled.



## 4 Presentation Layer

Processing at this layer will be performed in the LRIT preprocessor, domain 3. The presentation layer defines the uniform formatting of the data and image files. This layer is the beginning of packetizing or data transmission. The transfer mechanism of the GOES dissemination service is based on the transfer of data units that are called LRIT files. These files are the output of the presentation layer and their structure is explained in the following subsections.

### 4.1 LRIT Preprocessor


The LRIT Products Processor will make available to the LRIT preprocessor the data files for transmission and the corresponding metadata files with information on the content of the data files. This layer receives the data streams from the application processors by means of having them stored on a media accessible to both the LRIT processor and the application processors. Application files and the corresponding metadata files will be processed in the order in which they are received. The header fields will be built using the information contained in the metafiles. Once the files have been converted to LRIT files, the original files will be purged from the storage media.

### 4.2 Structure of LRIT Files

Each application data unit to be distributed will be formatted to an LRIT file. An LRIT file consists of one or more header records and one data field. The information for creating the header files will be contained in the metadata file.

The primary header record is mandatory and defines the file type and the sizing of the complete LRIT file. Depending on the file type, one or more secondary headers may be required to provide ancillary file information.

The header contains important data relating to the further processing of the LRIT files. Priority for transmission is established by transferring the priority indicator in the metadata file (or optionally having the processor know the correlation between the data file and the priority) to a priority parameter called "PRIO" in the LRIT file header. Fields in the header will trigger encryption and compression processes, which are created by corresponding fields in the metadata file. Some header fields will be inserted into the LRIT file during later processing.

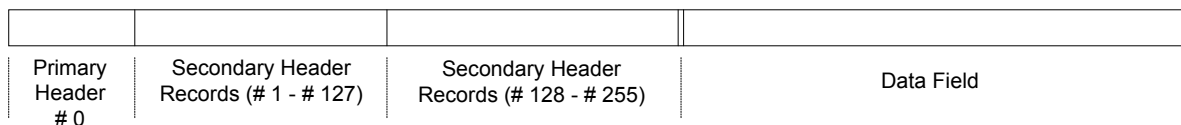

**Figure 4. LRIT File Structure**

### 4.3 Segmentation of LRIT Files

LRIT files segmented in this layer will be called image segment files.

Details of segmentation are presented in Section 4 of LRIT/HRIT Global Specification, CGMS 03, and dated August 12, 1999.

### 4.4 Overview of LRIT File Types

Table 3 presents an overview of LRIT file types.

**Table 3. LRIT File Types**

File Type Code	File Type	Application Data Type Contained in the Data Field
<b>Global LRIT File Type</b>		
0	Image data	
1	Messages	
2	Alpha-numeric text	
3	Encryption key message	Optional
4...127	Reserved	
<b>Mission-Specific LRIT File Type</b>		
128	Meteorological data	
129...255	Reserved	

#### 4.4.1 General

Table 4 shows the adaptation of LRIT header types.

**Table 4. Adaptation of LRIT Header Types**

Code	Header Record Type	Structure
<b>Headers as Defined in LRIT Global Specification</b>		
0	Primary header	
1	Image structure	
2	Image navigation	
3	Image data function	
4	Annotation	
5	Time stamp	
6	Ancillary text	
7	Key header	Optional
8...127	Reserved	
<b>Mission-Specific Headers</b>		
128	Segment identification	
129	Encryption key message	
130...255	Reserved	

#### 4.4.2 Primary Header Format

The primary header is required for all LRIT files. The structure of the primary header record is as follows:

**Table 5. LRIT Primary Header Format**

Size in Octets	Data Type	Contents
1	Integer, unsigned	Header type, set to 0
2	Integer, unsigned	Header record length, set to 16
1	Integer, unsigned	File type code, determining the top level structure of the file data field
4	Integer, unsigned	Total header length, specifying the total size of all header records
8	Integer, unsigned	Data field length, specifying the total size of the file data field in bits.

#### 4.4.3 Secondary Header Formats

Seven additional secondary headers can be used as defined in the CGMS Specification, CGMS 03, Issue 2.6, August 12, 1999. Two additional secondary header types are defined for mission specific applications. The secondary header types are shown in Table 4.

#### 4.4.4 Image Structure Record

This record determines the structure of the image. It is mandatory for and only applicable to image data files. The structure is as follows:

**Table 6. Image Structure Record**

Size in Octets	Data Type	Contents
1	Integer, unsigned	Header type, set to 1
2	Integer, unsigned	Header record length, set to 9
1	Integer, unsigned	Number of bits per pixel (1...255)
2	Integer, unsigned	Number of columns (1...65535)
2	Integer, unsigned	Number for lines (1...65535)
1	Integer, unsigned	Compression flag (0,1,2)

The image record is three-dimensional. Each picture element (pixel) is in an array with horizontal and vertical alignment with other elements in the array. For each pixel there is a number of bits that gives the characteristics of that pixel, such as intensity, shading, and hue.

The file structures will be as follows:

**Table 7. Data Field Parameters for LRIT Image Files**

LRIT Product	Number of Bits per Pixel	Number of Columns	Number of Lines
GOES Full Disk	8	1396	698
North Hemisphere	8	1396	740
South Hemisphere	8	1396	740
North West	8	1396	740
North East	8	1396	698
South West	8	1396	690
South East	8	1396	740
POES [Polar Stereographic Projection (PS)]	4	854	387
POES [Mercator Projection (MR)]	4	854	403
NWS	8	1200	900 (varies)
GMS	8	1200	804
METEOSAT	8	1200	804

The compression flag determines if compression will be performed. It will not be a function of the LRIT communications processor to determine if compression is needed. The values will be: "0" no compression, "1" lossless compression.

#### 4.4.5 Image Navigation Record

This record determines the mapping of the image onto the Earth. It is only applicable to image data files. The structure is as follows:

**Table 8. Image Navigation Record**

Size in Octets	Data Type	Contents	Abbreviation
1	Integer, unsigned	Header type, set to 2	
2	Integer, unsigned	Header record length, set	
32	Character	Projection name	
4	Integer, unsigned	Column scaling factor	CFAC
4	Integer, unsigned	Line scaling factor	LFAC
4	Integer, unsigned	Column offset	COFF
4	Integer, unsigned	Line offset	LOFF

The LRIT dissemination may use projection names such as Geostationary, Polar-stereographic, and Mercator. All unused characters will be set to an ASCII 'space' ('20'h)

- CFAC/LFAC - The column and line scaling factors contain variable values that depend on the input data and their specific segmentation approach. The sign of the CFAC/LFAC values will define the spacecraft's scan direction.
- COFF/LOFF - These values are projection-specific offsets and define the position of an image segment file window within the projection area.

#### 4.4.6 Image Data Function Record

This record determines the physical meaning of the image data. The structure is as follows:

**Table 9. Image Data Function Record**

Size in Octets	Data Type	Contents
1	Integer, unsigned	Header type, set to 3
2	Integer, unsigned	Header record length
Up to 65532	Character	Data definition block

Data Definition Block

This character string allows the definition of complex data structures. It can be used to define overlay-type images and images that require the establishment of a relationship between their pixel values and an engineering unit. This header type will only be included in the files containing imagery type or overlay type of meteorological products, foreign satellite data, or service messages.

#### 4.4.7 Annotation Record

This header is used to specify an alphanumeric annotation for the file. Header type 4 will be mandatory and will contain in characters the name of the file as presented by the LRIT Products Processor to the LRIT Preprocessor. The structure is as follows:

**Table 10. Annotation Record**

Size in Octets	Data Type	Contents
1	Integer, unsigned	Header type, set to 4
2	Integer, unsigned	Header record length
Up to 64	Character	Annotation text

The annotation text will be used to transfer the file names for the products. The extra capacity of the character field can be available for other data or annotations as needed. As an alternative architecture, another header type can be assigned to the file name.

#### 4.4.8 Time Stamp Record

This record is used to apply a time stamp to the file; it is optional for all file types. The LRIT mission will represent the time that the image was processed for transmission. The insertion of this header does not occur in this layer. The time stamp will be written after the end of the session layer processing (i.e., after compression and encryption processing). The structure is as follows:

**Table 11. Time Stamp Record**

Size in Octets	Data Type	Contents
1	Integer, unsigned	Header type, set to 5
2	Integer, unsigned	Header record length, set to 10
7	CCSDS time	Time stamp

The time stamp may contain a 2-byte counter of the days from a certain date and a 4-byte counter of the milliseconds of the day.

#### 4.4.9 Ancillary Text Record

This record is used to attach ancillary text information to the file. It is optional for all file types. The structure is as follows:

**Table 12. Ancillary Text Record**

Size in Octets	Data Type	Contents
1	Integer, unsigned	Header type, set to 6
2	Integer, unsigned	Header record length
Up to 65532	Character	Ancillary text

The ancillary text will contain descriptive text identifying the contents of the LRIT file in cases where the other headers are not conclusive. The ancillary text will be used for service message types (e.g., overlay files, test messages, alphanumeric messages).

#### 4.4.10 Key Header Record

This record is used to control encryption of the file; it has no meaning within the presentation layer. The presentation layer shall ignore any such header record, identified by header type 7. The structure is as follows:

**Table 13. Key Header Record**

Size in Octets	Data Type	Contents
1	Integer, unsigned	Header type, set to 7
2	Integer, unsigned	Header record length
Up to 65532	Character	Mission-specific key header

This header record will not be used unless LRIT GOES mission requirements change; however, the capability to provide this header will be provided. The specifics will depend upon the encryption scheme chosen.

#### **4.4.11 Segment Identification Record**

This record is used for images such as a full Earth disk image. This image will be sent in files that contain partitions of the image. A partition refers to the image portions created in the application layer. For example, if the image contains 2048 lines and each file contains 16 lines of the image then 128 individual files will be sent and the segment identification record will provide the sequence number.

**Table 14. Segment Identification Record**

Size in Octets	Data Type	Contents
1	Integer, unsigned	Header type, set to 128
2	Integer, unsigned	Header record length, 8
1	Integer, unsigned	Segment sequence number
1	Integer, unsigned	Total number of segments in image
2	Integer, unsigned	TBD - options available
1	Integer, unsigned	Image type

#### **4.4.12 Encryption Key Message Header Record**

If encryption is used, this header will be used to identify the authorized receiving stations.

**Table 15. Encryption Key Message Header Record**

Size in Octets	Data Type	Contents
1	Integer, unsigned	Header type, set to 129
2	Integer, unsigned	Header record length
2	Integer, unsigned	Station number of authorized user

## 4.5 File Type versus Header Implementation

Table 19 defines the GOES mission specific use of header record types.

**Table 16. Use of Header Records versus File Type**

File Types	Header Record Types									
	0	1	2	3	4	5	6	7	128	129
Image Data	•	•	◆	◆	•	◆	◆	◆	◆	◆
Service Messages	•						◆			◆
Alphanumeric Text	•				•	◆	◆	◆		◆
Encryption Key	•					•	◆			◆
Meteorological Data	•				•	◆	◆	◆		◆

• = Mandatory

◆ = Optional

## 4.6 LRIT File Content

Each LRIT file will contain a complete data product file or a segmented portion of a data product file. The presentation layer will pass to the session layer the LRIT files accompanied by a data field called the PRIO. The PRIO contains a value between 1 and 63 corresponding to the priority of the data product file and obtained from the metadata file. The GOES implementation will use the priority range from 1 to 6.



## 5.0 Session Layer – Domain 4

This section gives a general overview and discusses input to session layer, compression, encryption, as well as session layer output.

### 5.1 General

The session layer provides the means for interchange of data. In the GOES context, this layer includes the definition of data compression and encryption. It is the first layer in domain 4.

All data that are not subject to compression or encryption will pass the relevant data processing functionality unmodified and will receive its primary header record completed with the known data field length and time stamp.

In the case the data field of the LRIT files is compressed and/or encrypted, the session layer functionally will modify or insert the following headers/header fields after processing:

#### **For Compression:**

Header type #0, Data\_Field\_Length

Header type #1, Compression\_Flag

#### **For Encryption:**


Header type #7, Header Information

### 5.2 Input to Session Layer

The LRIT files as shown in Figure 4 are the input to the session layer processing.

### 5.3 Compression

Compression is required to maximize the data availability of the LRIT channel. An appropriate data compression technique is to be determined for the GOES-specific implementation.



**Figure 5. LRIT File Structure with Compressed Data Field**


Lossless data compression is preferred for the GOES. Compression standards are presented in OSI Standard 10918. The compression technique for the GOES implementation is to be determined.

### 5.4 Encryption

The GOES LRIT service does not presently require a mechanism to control the access to LRIT. If capabilities for data control are anticipated, the means for encryption and the necessary fields on the file structures must be provided. Also, encryption may be applied to the data files in the application layer. The capability for encryption should be provided even if not implemented.

### 5.5 Session Layer Output

Output of the session layer to the transport layer is the Session Protocol Data Unit (S\_PDU) containing the variable length compression and encrypted data field as shown in Figure 5-2. The PRIO parameter indicating transmission priority is also passed with each S\_PDU to the transport layer.

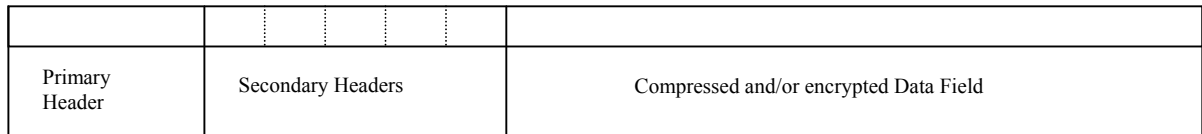

**Figure 6. LRIT Session Protocol Data Unit (S\_PDU)**

If neither compression nor encryption has been applied, the session layer will leave the data field unmodified.

The session layer processing will have to determine the data field length, fill it into the primary header, and add the time stamp (if required) before it passes the complete data unit as S\_PDU to the transport layer. If the time stamp is used, the time will be determined from the system real time clock, formatted as required by the mission, and a time-stamp header type #5 inserted into the LRIT file.

## 6.0 Transport Layer

This section gives a general overview of the transport layer and discusses source packetization.

### 6.1 General

Functions of the transport layer are implemented in domain 4. The transport layer receives the session layer service data units (S\_PDUs) as a transport service data unit (TP\_SDU), which is a variable length file as shown in Figure 15.

The determination of the application process identifier (APID) will be performed in order to implement the transmission priority. GOES LRIT will implement a six-level priority scheme.

The transport files are split into one or more blocks of 8190 bytes size, which form the user data field of the source packet. The last block may be shorter and contain 1...8190 bytes. Each user data field will be followed by a 2-octet Cyclic Redundancy Check (CRC).

### 6.2 Source Packetization

This section discusses source packet structure and APID determination.

#### 6.2.1 Source Packet Structure

This section defines in detail the source packet structure:

Source Packet Header (48 bits)							Packet Data Field (variable)	
Packet Identification				Packet Sequence Control		Packet Length	User Data Field	
Version No.	Type	Secondary Header Flag	APID	Sequence Flags	Packet Sequence Count		Application Data Field	Packet Error Control (CRC)
3 bits	1 bit	1 bit	11 bits	2 bits	14 bits	16 bits	Variable	16 bits
2 octets				2 octets		2 octets	Max. 8190 octets	2 octets

**Figure 7. Source Packet Structure (TP\_PDU)**

Version Number

The version number bits will be set to 000, identifying the Version-1 CCSDS packet.

Type

Set to '0'b. Type is not used in CCSDS AOS.

Secondary header flag Set to '0'b. A secondary header is not used in the LRIT dissemination service.

APID See Table 16.

**Table 17. Application Process Identifiers**

Application Process Identifier (APID)	Application
'0...191'	GOES LRIT application data
'192...2015'	Not used
'2016...2046'	Reserved by CCSDS (not used for LRIT)
'2047'	Fill packets

Sequence Flag As defined :

- Set to 3 if the user data contains one user data file entirely;
- Set to 1 if the user data contains the first segment of one user data file extending through subsequent packets;
- Set to 0 if the user data contains a continuation segment of one user data file still extending through subsequent packets;
- Set to 2 if the user data contains the last segment of a user data file beginning in an earlier packet.

Packet Sequence Count - 14-bit packet sequence count, straight sequential count (modulo 16394) that numbers each source packet generated per APID.

Packet Length - 16-bit binary count that expresses the length of the remainder of the source packet following this field minus 1.

Application Data Field - Contains up to 8190 octets of user data (i.e., a block of the TP\_SDU).

Packet Error Control - The 16-bit CRC forms the trailer of the user data field.  
 - The CRC is computed over the entire application data field. The generator polynomial is

$$g(x) = x^{16} + x^{12} + x^5 + 1$$

- The encoder shall be initialized to 'all ones' for each application data field.

### 6.2.2 APID Determination

The APID is used to determine the order in which packets are transmitted. It conveys the priority of the packet, which will be used later when assigning a virtual channel. As a

possible implementation, the transport layer processor could read the priority code of the LRIT file from the PRIO parameter. Each priority level has 32 APIDs. The next available APID is selected for the priority level and assigned to the LRIT file. If no APID is available, the processor waits until one is freed.

## 7.0 Network Layer

This section gives a general overview and discusses network layer processing as well as network layer output.

### 7.1 General

The network layer represents the CCSDS **Advanced Orbiting Systems** AOS path layer. The only function to be provided with respect to the LRIT dissemination service is the generation of a correct Virtual Channel Identifier (VCID). Otherwise the data received from the transport layer is transparently routed to the data link layer.

### 7.2 Network Layer Processing

APIDs will be used to assign virtual channels and must not be duplicated. APID values must be shared between the packets coming from the LRIT communications processor at the IPD and those coming from the local LRIT communications processor.

The VCID is set to a value resulting from an integer division of the APID by 32. With a GOES-specific limit of the priority to the range 1 to 6, the transport layer is capable of handling up to 192 parallel packet streams, while groups of 32 each have the same priority on the link. With increasing APID the priority decreases. The mapping of the APID to a Virtual Channel Identifier (VCDU\_ID) is as follows:

APID		VCDU_ID
0 - 31	→	0
32 - 63	→	1
64 - 95	→	2
96 - 127	→	3
128 - 159	→	4
160 - 191	→	5

### 7.3 Network Layer Output

The CCSDS path protocol data unit (CP\_PDU) is identical to the initial CP\_SDU; however, it is forwarded through the network layer. The output includes packets from all sources and their corresponding virtual channel number.



## 8.0 Data Link Layer

This section discusses the input to the data link layer, general overview, VCLC sublayer processing, VCA sublayer processing, as well as transfer to domain 5.

### 8.1 Input to Data Link Layer

The network layer provides the CP\_PDUs as multiplexing service data units (M\_SDU) to the data link layer.

### 8.2 General

The data link layer encompasses functionality of the CCSDS space line layer with its two sublayers:

- Virtual channel link control (VCLC) sublayer
- Virtual channel access (VCA) sublayer

As described in Section B.8.3, the VCLC sublayer processing provides the multiplexing service only. This includes filling of M\_SDUs into multiplexing protocol data units (M\_PDU). Fill packets may have to be generated for the completion of the M\_PDUs after time-out expiration.


The VCA sublayer generates the virtual channel data units (VCDU), performs Reed-Solomon coding, data randomization, and attachment of synchronization markers.

As an optional GOES-specific architecture the VCA sublayer will form the VCDUs into a continuous data stream with synchronization markers and deliver it to the physical layer without Reed-Solomon coding or data randomization.

### 8.3 VCLC Sublayer Processing

The VCLC sublayer processing performs the multiplexing, the M\_PDU generation, and the related fill packet generation.

The M\_PDUs will consist of 886 octets of which 2 octets are the M\_PDU header and the 844 octets are the M\_PDU packet zone as shown in Figure 17.

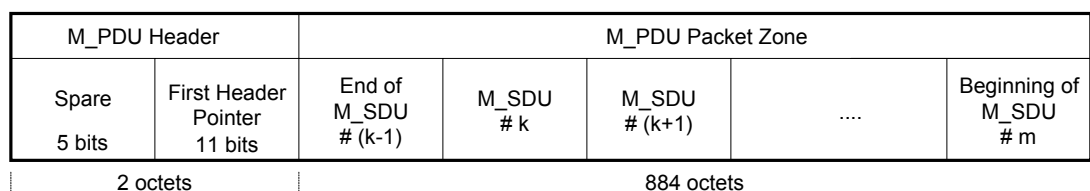

**Figure 8. M\_PDU Structure**



### 8.3.1 Fill Packet Generation

In case that the partly generated M\_PDU cannot be completed since no more M\_SDU is available for the related virtual channel, a fill packet is generated to complete the M\_PDU.


## 8.4 VCA Sublayer Processing

This section discusses VCDU assembly, sync marker attachment, as well as serialization and output of the data link layer.

### 8.4.1 VCDU Assembly


The M\_PDUs from the VCLC layer are received as VCA\_SDUs from the VCLC sublayer and are used to assemble VCDUs.

The VCDU structure is shown in Figure 18.

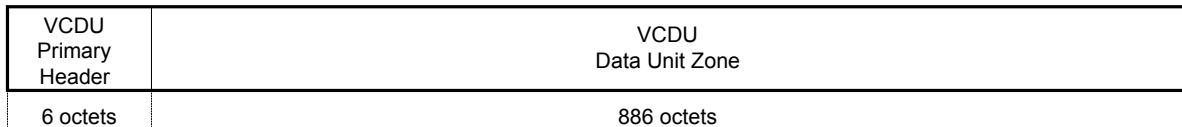

**Figure 9. VCDU Structure**

The decomposition of the VCDU header is given in Figure 9.

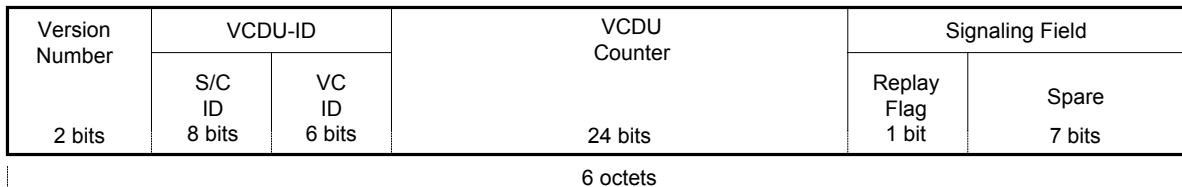

**Figure 10. VCDU Primary Header**

#### Mission-specific use:

Version Number	'01'b
VCDU ID	Spacecraft (S/C) ID representing on the disseminating spacecraft. (In the GOES-specific implementation, a separate processor will be used for each spacecraft. Therefore this filed should be set to zero.)
	VC ID '63'd ('all ones')
VCDU Counter	Sequential count (modulo 16777216) of VCDUs on each virtual channel.

Signaling Field

'all zeros'

In the CGMS standard, the Reed-Solomon coding and randomization occur here. A description of the procedures is presented in the physical layer section. The LRIT mission-specific implementation may move this function to the physical layer to permit available components to be used.

#### **8.4.2 Synchronization Marker Attachment**

An attached synchronization marker (ASM) will have to precede the VCDU to allow for frame synchronization. The 32-bit pattern can be represented in hexadecimal notation as:

'1ACFFC1D'h

The ASM together with the VCDU creates the channel access data unit (CADU) of 892 octets length.

#### **8.4.3 Serialization and Output of the Data Link Layer**

As a final task, the VCA sublayer performs the serialization of the CADU and provides the serial bit stream to the physical layer.

### **8.5 Transfer to Domain 5**

The VCDUs with markers will be transmitted over the T-1 line from domain 4 at Suitland, Maryland to domain 5 at Wallops Island, Virginia. At this point it is not necessary to transmit a synchronous data stream.

## 9.0 Physical Layer

The physical layer on the LRIT service performs the Reed-Solomon coding, interleaving, randomization, convolutional coding of the serialized data stream, and its modulation onto the RF uplink signal.

### 9.1 Insertion of Non-CEMSCS Data Products

Data from sources other than the CEMSCS are received at the CDA. Two options for handling these data are being considered. First, the data files could be transmitted from the CDA to the IPD and presented to the LRIT preprocessor for LRIT formatting and returned to the CDA within the CVCDU serial data stream. Otherwise another LRIT formatting processor would be necessary at the CDA to form the application files into CVCDUs. Then they would be inserted into the CVCDU data stream received from the IPD according to a predetermined priority scheme.

### 9.2 Reed-Solomon Coding

The LRIT dissemination service is a Grade-2 service (i.e., forward error correction only). Therefore, the transmission of user data will be error controlled using Reed-Solomon coding as an outer code.

The used Reed-Solomon code is (255,223) with an interleaving of  $I = 4$ .

The VCDUs will be attached by 128 octets of Reed-Solomon check symbols to form a coded VCDU (C\_VCDU).

VCDU Primary Header	VCDU Data Unit Zone	Reed-Solomon Check Symbols
6 octets	886 octets	128 octets

**Figure 11. C\_VCDU Structure**

#### 9.2.1 'Fill VCDU' Generation

The LRIT will have to maintain a "packetized data rate" when sending the data stream through the randomizer, convolutional coder and to the modulator (128 kbps, 64 kbps, or whatever rate is currently being used).

The physical layer processor in domain 5 will automatically generate a 'fill VCDU' in the case no or not sufficient VCDUs (underflow condition) are received from the IPD over the T-1lines to maintain a continuous data flow at the specified packetized data rate to the physical layer.

**The definition of a 'Fill VCDU' is:**

Version	'01'b
VCDU ID	Spacecraft (S/C) ID depending on the disseminating spacecraft. (Set to zero) VC ID '63'd ('all ones')
VCDU Counter	'all zeros'
Signaling Field	'all zeros'
VCDU Data Unit Zone	fill pattern ('all zeros')

**9.3 Randomization**

Randomization is applied to all LRIT CVUDUs. It is a process in which a pseudo-random sequence is bitwise exclusive-ORed to all 8160 bits of the CVDU to ensure sufficient data transitions.

The pseudo-random sequence shall be generated using the following polynomial:

$$h(x) = x^8 + x^7 + x^3 + 1$$

This sequence begins at the first bit of the CVCDU and repeats after 255 bits, continuing repeatedly until the end of the CVCDU. The sequence generator is then reinitialized to all-ones for the processing of the next CVCDU.

The first 255 bits of the pseudo-random sequence from the generator are shown below. The left-most bit is the first bit of the sequence to be exclusive-ORed with the first bit of the CVCDU. The second bit of the sequence is exclusive-ORed with the second bit of the CVCDU, and so on.

1111 1111 0100 1000 0000 1110 1100 0000 1001 1010 0000 1101 0111 0000 1011 1100 1000  
1110 0010 1100 1001 0011 1010 1101 1010 0111 1011 0111 0100 0110 1100 1110 0101 1010  
1001 0111 0111 1101 1100 1100 0011 0010 1010 0010 1011 1111 0011 1110 0000 1010 0001  
0000 1111 0001 1000 1000 1001 0100 1100 1101 1110 1010 1011 000 and so on...

**9.4 Convolutional Coding**

The convolutional coding has the following characteristics:

- Nomenclature: Convolutional code with maximum-likelihood (Viterbi)
- Code rate: 1/2 bit per symbol
- Constraint length: 7 bits
- Connection vectors: G1 = 1111001; G2 = 1011011
- Phase relationship: G1 is associated with the first symbol
- Symbol inversion: None

## 9.5 Modulation

The data stream should be shaped with a raised cosine filter having a roll-off factor of  $\alpha = 0.5$ . The transmitter modulation is NRZ-L with BPSK modulation. The initial operational capability will transmit data at a data rate of 64 kbps. The final operational capability will operate at a data rate of 128 kbps. The transmitted symbol rate for the final operational capability will be 292.7 kilosymbols per second.