


WSRF FORT LAUDERDALE, FL BMP-20071113AFR 1580 kHz

Nighttime

Electric Field Strength
at 1 km radius
millivolts per meter - mV/m

Power: 1.5 kW
Graph Maximum: 1000 mV/m

--- Theoretical
— Standard
— Augmented

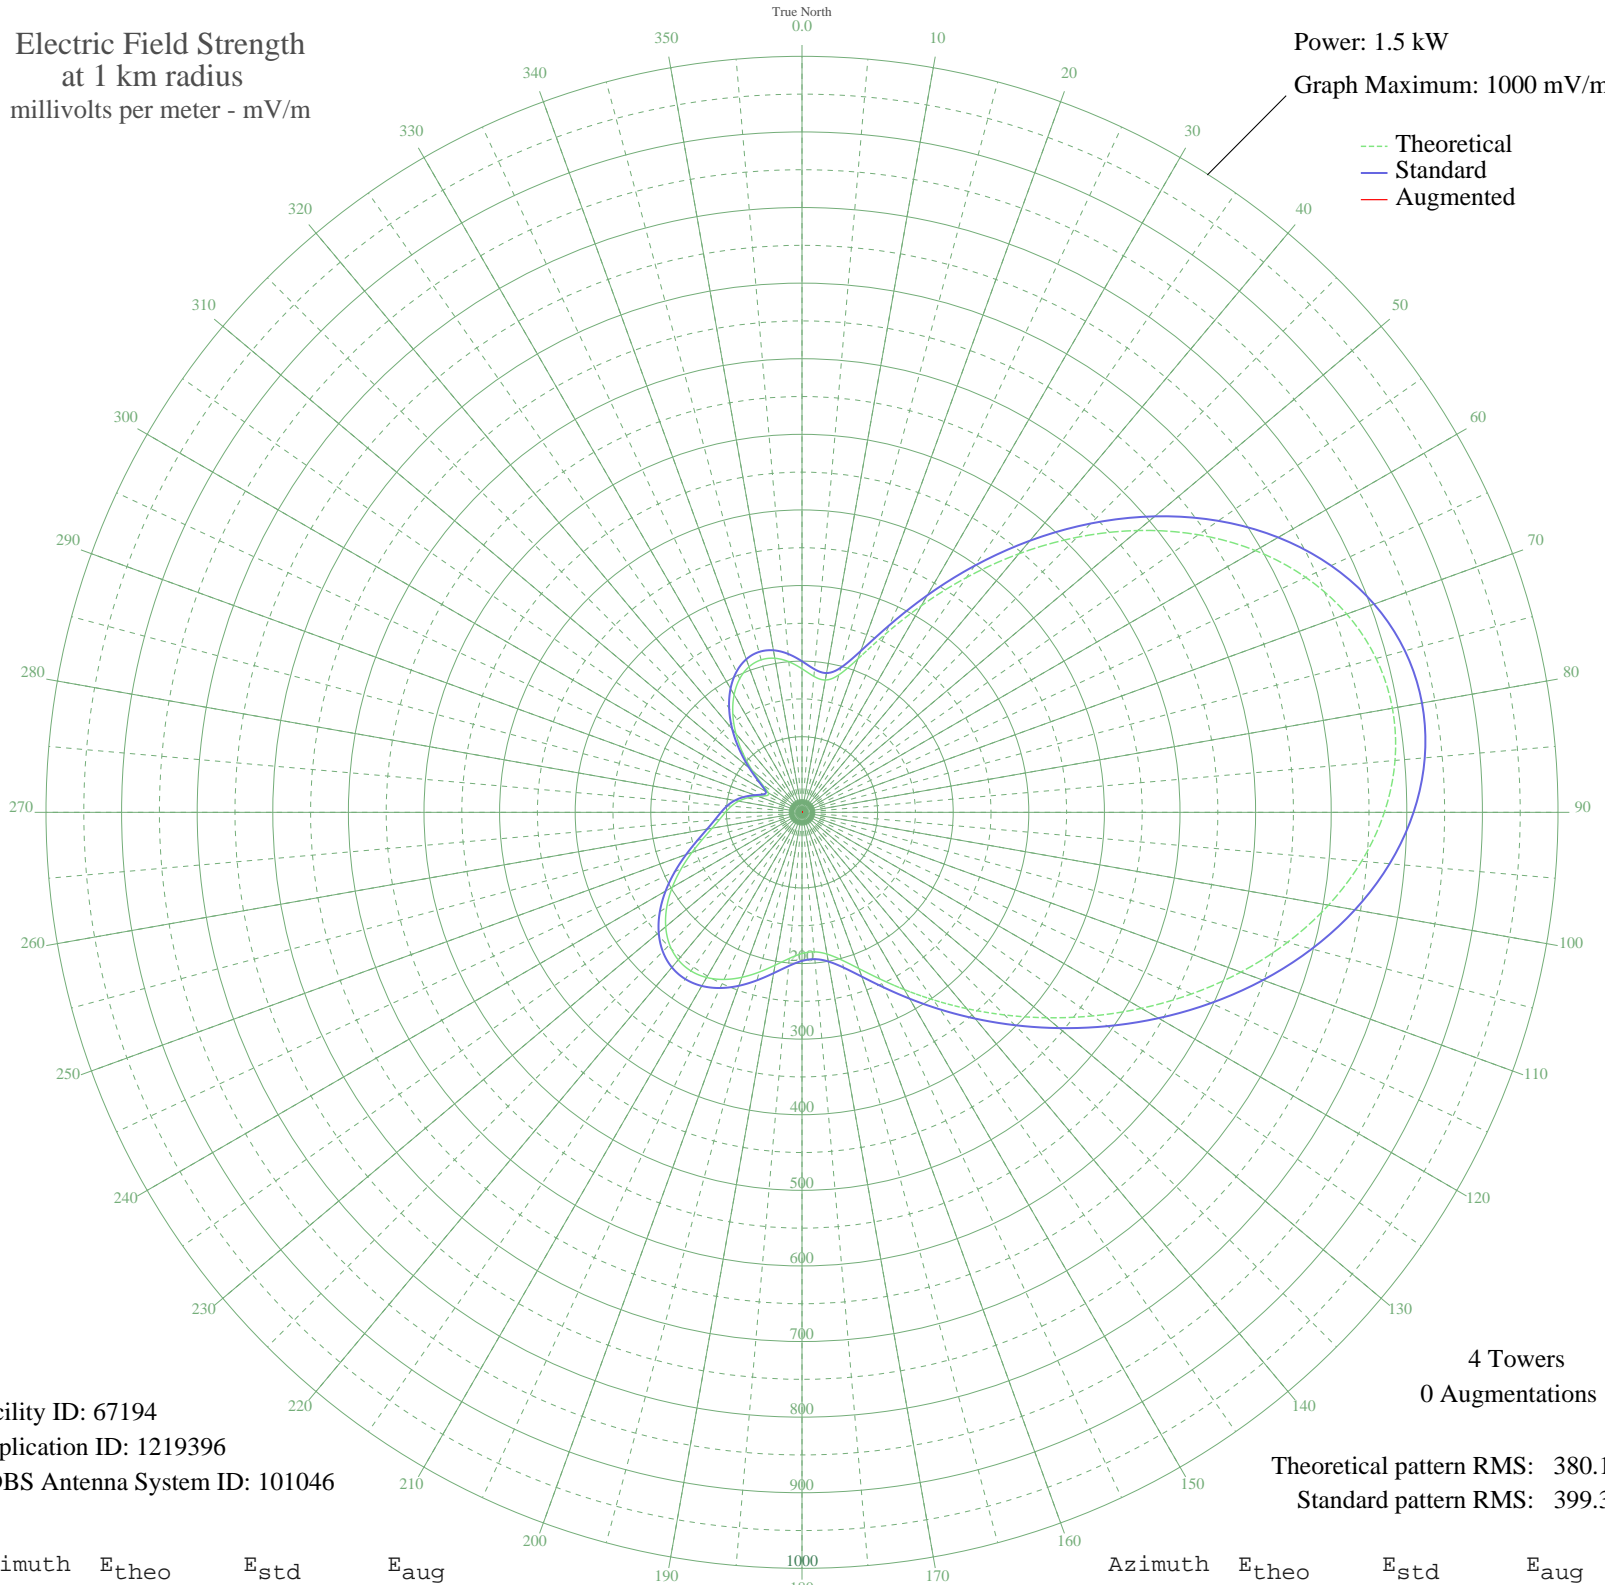

Facility ID: 67194
Application ID: 1219396
CDBS Antenna System ID: 101046

4 Towers
0 Augmentations

Theoretical pattern RMS: 380.10
Standard pattern RMS: 399.30

Azimuth	E _{theo}	E _{std}	E _{aug}
0	189.92	199.83	
5	180.52	189.98	
10	177.70	187.03	
15	188.21	198.04	
20	215.89	227.05	
25	259.63	272.92	
30	315.46	331.49	
35	379.05	398.21	
40	446.53	469.04	
45	514.51	540.39	
50	579.95	609.08	
55	640.10	672.22	
60	692.55	727.29	
65	735.32	772.19	
70	766.86	805.30	
75	786.21	825.62	
80	792.99	832.74	
85	787.43	826.90	
90	770.34	808.96	
95	743.02	780.28	
100	707.17	742.64	
105	664.76	698.11	
110	617.85	648.87	
115	568.47	597.03	
120	518.49	544.57	
125	469.49	493.14	
130	422.71	444.04	
135	379.02	398.18	
140	338.96	356.14	
145	302.81	318.21	
150	270.76	284.59	
155	243.01	255.48	
160	219.92	231.28	
165	202.13	212.62	
170	190.38	200.31	
175	185.27	194.96	

Azimuth	E _{theo}	E _{std}	E _{aug}
180	186.79	196.55	
185	194.03	204.14	
190	205.36	216.01	
195	218.77	230.06	
200	232.22	244.17	
205	243.90	256.42	
210	252.26	265.19	
215	256.12	269.23	
220	254.70	267.74	
225	247.70	260.40	
230	235.34	247.44	
235	218.37	229.65	
240	198.09	208.39	
245	176.23	185.48	
250	154.80	163.05	
255	135.82	143.19	
260	120.68	127.36	
265	109.59	115.79	
270	101.33	107.17	
275	93.80	99.32	
280	85.08	90.26	
285	74.25	79.02	
290	62.05	66.41	
295	52.04	56.14	
300	51.29	55.37	
305	63.88	68.30	
310	85.47	90.66	
315	110.66	116.90	
320	136.09	143.47	
325	159.59	168.07	
330	179.62	189.03	
335	194.98	205.14	
340	204.87	215.50	
345	208.83	219.65	
350	206.93	217.66	
355	199.97	210.37	

The theoretical pattern is used to create the standard pattern. Augmentations (if any) expand the standard pattern in specified directions. See Sections 73.150 and 73.152 of the FCC's Rules.

AM coverage may not mirror the pattern shown here. Additional factors such as ground conductivity or skywave propagation affect how far the AM signal will travel.

Patterns for stations outside the USA are based on notified parameters.

AM directional patterns created before 1982 used units of 1 mV/m at 1 mile, not one kilometer. The pattern values on such plots at 1 mile will be 0.62137 of the values listed here. Measured pattern values may vary from values shown here.

Plot is best printed on 11" by 17" or larger paper.

15 Mar 2009

Prepared by Audio Division, Media Bureau
Federal Communications Commission