


KCEG FOUNTAIN, CO BMP-20071227AAQ 780 kHz

Nighttime

Electric Field Strength
at 1 km radius
millivolts per meter - mV/m

Power: 0.49 kW
Graph Maximum: 500 mV/m

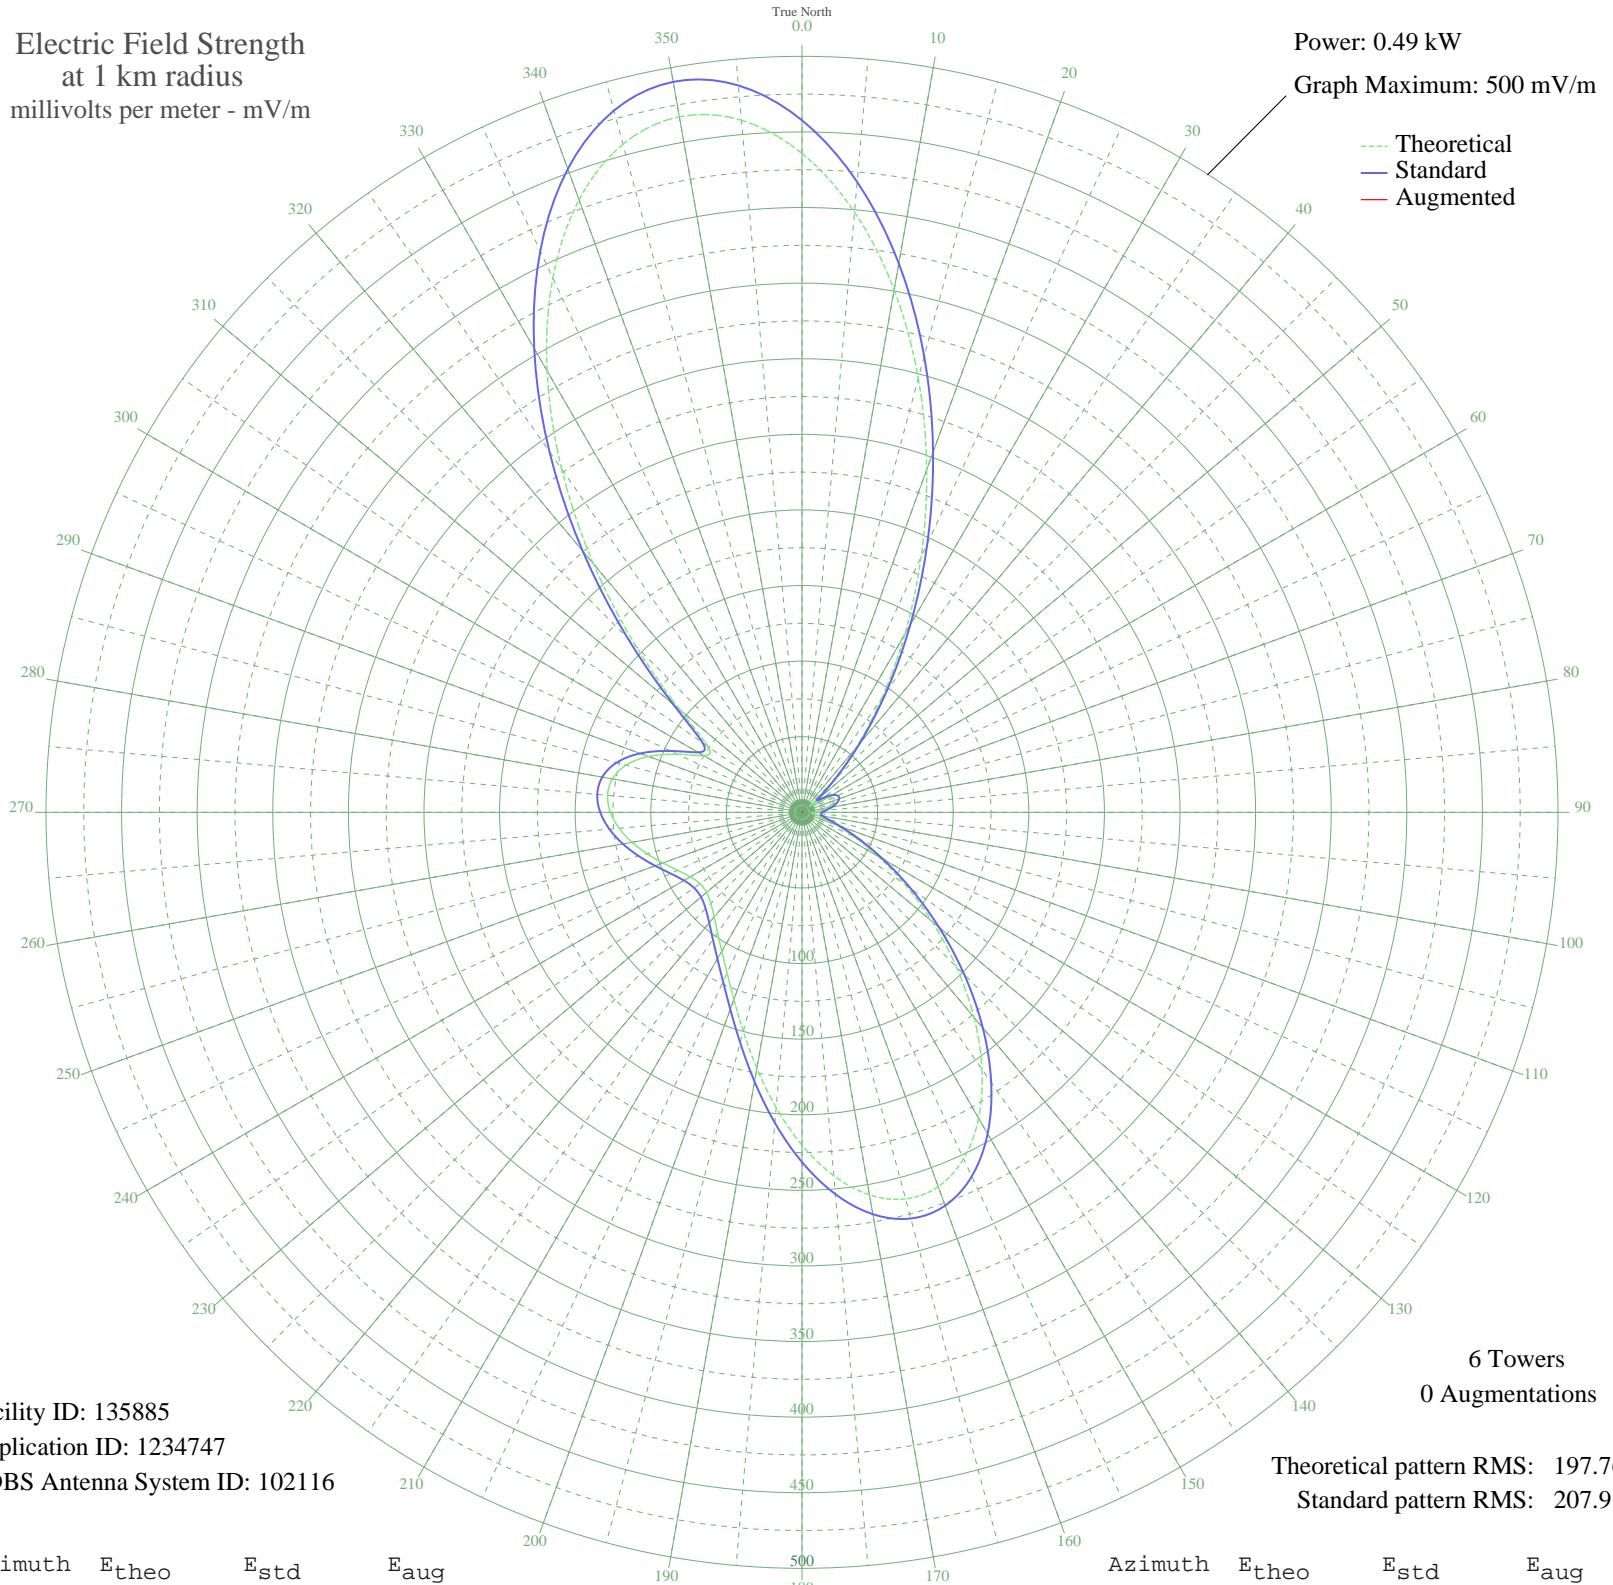

Facility ID: 135885
Application ID: 1234747
CDBS Antenna System ID: 102116

6 Towers
0 Augmentations

Theoretical pattern RMS: 197.76
Standard pattern RMS: 207.91

Azimuth	E _{theo}	E _{std}	E _{aug}
0	435.80	457.71	
5	398.48	418.53	
10	350.96	368.66	
15	297.20	312.24	
20	241.18	253.46	
25	186.51	196.12	
30	136.10	143.29	
35	92.00	97.17	
40	55.44	59.15	
45	26.93	30.17	
50	7.89	13.38	
55	11.39	15.92	
60	19.17	22.70	
65	22.77	26.12	
70	22.85	26.19	
75	20.38	23.83	
80	16.36	20.13	
85	11.80	16.24	
90	7.81	13.32	
95	6.13	12.32	
100	8.30	13.65	
105	13.95	18.02	
110	23.55	26.86	
115	38.05	41.31	
120	57.91	61.71	
125	82.95	87.73	
130	112.26	118.34	
135	144.29	151.87	
140	176.90	186.04	
145	207.54	218.17	
150	233.63	245.53	
155	252.83	265.68	
160	263.44	276.82	
165	264.70	278.13	
170	256.86	269.90	
175	241.26	253.54	

The theoretical pattern is used to create the standard pattern. Augmentations (if any) expand the standard pattern in specified directions. See Sections 73.150 and 73.152 of the FCC's Rules.

AM coverage may not mirror the pattern shown here. Additional factors such as ground conductivity or skywave propagation affect how far the AM signal will travel.

Patterns for stations outside the USA are based on notified parameters.

AM directional patterns created before 1982 used units of 1 mV/m at 1 mile, not one kilometer. The pattern values on such plots at 1 mile will be 0.62137 of the values listed here. Measured pattern values may vary from values shown here.

Plot is best printed on 11" by 17" or larger paper.

12 Mar 2008

Prepared by Audio Division, Media Bureau
Federal Communications Commission

Azimuth	E _{theo}	E _{std}	E _{aug}
180	220.09	231.33	
185	196.05	206.12	
190	171.91	180.81	
195	149.97	157.82	
200	131.66	138.64	
205	117.23	123.54	
210	106.09	111.88	
215	97.32	102.72	
220	90.36	95.46	
225	85.24	90.11	
230	82.41	87.16	
235	82.38	87.13	
240	85.28	90.16	
245	90.71	95.83	
250	97.92	103.35	
255	106.02	111.81	
260	114.13	120.29	
265	121.34	127.84	
270	126.68	133.43	
275	129.07	135.93	
280	127.36	134.14	
285	120.51	126.97	
290	108.01	113.89	
295	90.89	96.01	
300	74.95	79.40	
305	75.81	80.29	
310	105.43	111.20	
315	155.18	163.28	
320	214.67	225.65	
325	277.15	291.20	
330	337.21	354.23	
335	389.96	409.59	
340	431.15	452.83	
345	457.51	480.50	
350	467.10	490.57	
355	459.49	482.58	