

FINAL REPORT

**NASA Contract NAS8-38609
Delivery Order 29**

**Period of Performance
3/19/92 through 4/18/93**

ACCELERATION STUDIES

PREPARED BY:

**MELISSA J. B. ROGERS
(Principal Investigator)**

**Center for Microgravity and Materials Research
The University of Alabama in Huntsville
Huntsville, Alabama 35899**

1.0 Introduction

The Acceleration Characterization and Analysis Project (ACAP) at the NASA Marshall Space Flight Center (MSFC) was established at MSFC by the Microgravity Science and Applications Division (MSAD) of the NASA Office of Space Science and Applications to assist microgravity experiment investigators in understanding and utilizing the low level acceleration environment in experiment carriers. The research program undertaken for NASA Contract NAS8-38609, Delivery Order Number 29, consisted of three parallel projects which addressed the main goals of ACAP. These three projects were: 1) assessing the data access and processing needs of the investigators of low-gravity experiments; 2) analysis, development, and implementation of acceleration data processing software on MSFC computer systems; and 3) analysis of the acceleration environment of an Orbiter during specific missions. During the one year period of this project, work concentrated on the preparation for and implementation of near real-time SAMS data analysis during the USMP-1 mission. Additional data analysis and investigator contact involved the USML-1, USML-2, and USMP-2 missions. Details of specific work performed under this contract are given in the next section. Section 3 discusses areas open for further work.

2.0 Research Performed

Four tasks were identified by the ACAP Project Scientist as a guideline for this contract. These specific tasks were Analysis Development, Analysis Research, Analysis Documentation, and Acceleration Analysis. The research performed under DO 29 consisted of three parallel projects which addressed these four tasks. These three projects were: 1) assessing the data access and processing needs of the investigators of low-gravity experiments (Analysis Development); 2) analysis, development, and implementation of acceleration data processing software on MSFC computer systems (Analysis Research and Analysis Documentation); and 3) analysis of the acceleration environment of an Orbiter during specific missions (Acceleration Analysis). Details of the work performed are given in the remainder of this section.

2.1 Experiment Requirements

A variety of experiments are flown in the Orbiter to take advantage of the reduced gravity environment of low-Earth orbit. While investigators of such experiments obviously understand and appreciate the benefits of low-gravity, not all PIs are prepared to handle (process and analyze) a mission's worth of accelerometer data in an attempt to quantify the actual environment during their experiment runs. In addition to this, the data requirements of individual investigators differ greatly due to the nature of their experiments.

One of the major efforts by ACAP during 1992 was the development and implementation of a near real-time SAMS acceleration data processing and analysis system to be used during the USMP-1 mission by the Lambda Point Experiment (LPE) team. Under the Analysis Development Task of DO 29, the PI acted as Investigator Coordinator on the ACAP USMP-1 Project Scientist Team. In this capacity, the PI coordinated hardware, software, and data analysis requests from the LPE science and engineering teams with the Project Scientist Team; the Software Prototype, Data Simulation, and Data Structure Team; and the System Development and Implementation Team, Fig. 1. Interaction with the LPE team involved at least weekly telephone conversations up to flight time and person-to-person discussions during USMP-1 mission simulations at MSFC.

The LPE team performed numerous tests on their apparatus and identified a potential vibrational heating problem in the 50-60 Hz frequency range. The third harmonic of the 17 Hz KU band antenna dither frequency and Orbiter structural mode was therefore identified as a possible problem. The LPE team was also interested in maximum acceleration levels, RMS values, and the power spectral density, especially during sensitive stages of their experiment. Various near real-time data presentation approaches were discussed; the final screen layout showed one second maxima of the acceleration vector magnitude and one minute X, Y, and Z PSDs.

Additional science team / ACAP coordination during DO 29 includes processing of SAMS USML-1 data for the PAS PI, one of the CGF investigators, and the STDCE PI. The first Investigator Working Group for USML-2 was held in March 1993 and discussions about possible

processing schemes were held with several USML-1 and USML-2 investigators. With USMP-2 approximately one year away, ACAP is now contacting PIs of USMP-2 experiments so that the ACAP near real-time data processing, analysis, and visualization facilities can be updated and streamlined to best meet these PIs' needs.

2.2 Software Research, Development, and Implementation

A major goal of ACAP is to provide a facility on-site at MSFC which can be used by PIs to process and analyze accelerometer data that are of interest. For such a facility to be most useful to experiment investigators, the software available must be appropriate for their analysis needs, easy to access and use, and well documented.

Various commercially available data analysis software packages were evaluated to determine which, if any, were best suited for the MSFC ACAP Computer Facility. The Computer Facility is being developed using the USMP-1 near real-time hardware configuration. This set-up provides two work areas at which a Sun Microsystems SPARCstation II workstation and Gateway 33 MHz 486 computer are networked together for data access and processing. Precision Visual's PVWAVE software is available on the SPARCstation and DSP's DADiSP software is available on the 486 and on the SPARCstation. Both these products are useful for time and frequency domain analysis of regularly sampled data. Both packages also provide a variety of data display capabilities which can be supplemented by commercial plotting software for integration into reports. In addition to these software packages, software developed by the MSFC Astrionics Laboratory for use in the USMP-1 near real-time data processing system can be accessed to select and analyze sections of accelerometer data.

To ease PI utilization of the ACAP Computer Facility, documentation for all the commercial software is available. In addition to this documentation, case specific documentation, learning tutorials, and analysis spreadsheets were developed for PI and in-house usage. These products take a PI through a typical analysis scheme and provide a quick look reference to common commands.

User support documents were also necessary for use at the console during the USMP-1 mission. ACAP POCC Operations, ACAP Malfunction Procedures, and an ACAP Mission Logbook were developed as guidelines to follow during the USMP-1 simulations and mission. These guidelines are rather general and will be easily updated for use at the Computer Facility and during future ACAP supported missions.

Software tutorials and ACAP guidelines developed under DO 29 are included in Appendix A.

2.3 Characterization of the Acceleration Environment

The third major project performed under DO 29 was the analysis of SAMS data from various missions. Continued delays in obtaining large sections of corrected SAMS data limited the amount of data analysis that was completed. The main goals of such analysis are to correlate acceleration events with known sources and, hence, afford the characterization of specific experiment and operational systems of the Orbiter, mid-deck, cargo bay, and Spacelab module.

The identification of potential acceleration sources is done before, during, and after missions. Pre-flight identification is based on evaluation of sensitive experiments and perusal of the mission flight plan. Log books are kept by experiment teams and ACAP during missions to note acceleration activity. Post-flight identification of acceleration sources is based on experiment results, investigation of ancillary mission information, and data analysis.

Five specific areas of investigation were undertaken: the 135 Hz signal on IML-1, the 4.7 Hz mode on several missions, RMS activity during USMP-1, and PAS correlation and quasi-steady investigations on USML-1. A 135 Hz signal recorded by SAMS during IML-1 was identified by the Teledyne-Brown Engineering (TBE) Accelerometer Analysis Team as the possible source of instrument/filter saturation problems. The suspect data were recorded by sensor heads located in the Fluids Experiment System (FES) rack. The PI contacted members of the FES engineering team and searched the results of previous analysis of Spacelab-3 FES accelerometer (Bell MESA) data to determine whether the 135 Hz signal was experiment related.

No specific source was identified and resolution of the filter saturation problem was left to the TBE and SAMS teams.

Various Orbiter and Spacelab structural natural frequencies are known to exist in the 1 Hz to 10 Hz range. Previous analysis of Orbiter accelerometer data had identified the 4.7 Hz mode as a Spacelab mode. This excited frequency was also measured on the Gas Bridge Assembly (SLS-1, MMA instrument, a Spacelab mission) and on the MPRESS Carrier (USMP-1). Evaluation of data from different missions and discussions with PIs and engineers lead to the new interpretation that the 4.7 Hz frequency component is an Orbiter z-axis natural frequency that is modified by the presence of different carriers (there is a 4.6 to 4.7 Hz variation) and accentuated by the presence of the Spacelab module.

Work was started late in the contract period to investigate the effects on the Orbiter acceleration environment caused by use of the Remote Maneuvering System (RMS) on USMP-1. Numerous grapple and berth tests were run during the mission while the SAMS units were recording acceleration data. This is the first mission for which RMS activity and accelerations will be correlated. Initial analysis indicates the excitation of a 24 Hz component and of 0.5 and 1 Hz components not seen prior to RMS activity.

The final acceleration environment characterization project started under DO 29 deals with USML-1 data. SAMS data, acceleration measurements taken with the Passive Accelerometer System (PAS), and thruster, altitude, and attitude data are being combined to compare the two accelerometer systems, especially in terms of low frequency sensitivity. Analysis of SAMS data for the periods the PAS was used and for other identified times is being performed for the PAS PI (J.I.D. Alexander) and a CGF PI (D. Larson).

2.4 Information Dissemination

Dissemination of results is an important part of research. The ACAP Project Scientist is chartered to schedule and hold regular meetings of the microgravity users community to discuss current concerns. During DO 29, the PI took part in the planning of and participated in two Microgravity Measurement Group Meetings: MGGM 9, April 1992, in Washington, DC, and

MGMG 10, November 1992, in Huntsville, Alabama. Planning of MGMG 11 for September 1993 is currently underway.

During MGMG 9, an overview paper discussing the results of seven accelerometer systems flown on STS-40 was planned. The PI coordinated, edited, and submitted two versions of this eight-author paper. A shorter version was presented at the 31st AIAA Aerospace Sciences Meeting in January 1993 by co-author R. DeLombard. A longer version was submitted to **Microgravity Science and Technology** and is currently in print. These papers are included in Appendix B.

The PI was also involved in various other discussions of acceleration data processing and analysis. Most notable were participation in the ACAP/SAMS Joint Meeting in May 1992, the April 1992 LPE/ACAP USMP-1 Requirements Review, and numerous meetings with the MSFC Astrionics Lab System Development and Implementation and LPE Science and Engineering Personnel to discuss development of the USMP-1 ACAP near real-time data processing system.

3.0 Areas for Future Work

Due to the number of Spacelab missions which flew in 1992 and are scheduled to fly in 1994, 1993 should serve as a time of detailed data analysis and mission planning by ACAP. In particular, USMP-2, IML-2, and USML-2 experiment teams should be contacted to determine their need for acceleration data and near real-time data processing and analysis. In addition, the ACAP near real-time data processing system needs to be maintained and upgraded to fill PI needs during these missions. The ACAP Computer Facility also needs to be fully implemented and networked and data resources must be cataloged and made accessible. Continued work is necessary to characterize as many aspects of the Orbiter environment as possible so that future experiments can be run in an optimal low-gravity situation.

Project Scientist Team

Charles R. Baugher, MSFC Space Science Lab
ACAP & SAMS Project Scientist

Walter Roark, Sverdrup Corp. Melissa J.B. Rogers, UAH
Engineering Design of Operations Investigator Coordination

Greg Bankston, MSFC Space Science Lab
Equipment & Logistics

**Software Prototype,
Data Simulation & Data Structure
NTI Corporation**

John Scott,
Data Reduction Group Lead

Software Engineers:
Don Autry, Mitch Harris,
Richard Hedglin, Bryant Malone

**System Development & Implementation
Marshall Space Flight Center**

Larry Taormina, MSFC Astrionics
Laboratory Engineering Team Lead

System Engineers:
Sylvia Anderson, Geoffrey Hintze,
E.C. Richardson, Kenny Webster, MSFC
Astrionics Laboratory

Ken White, MSFC System Analysis &
Integration Laboratory

**Accelerometer Analysis
Teledyne-Brown Engineering**

Fred Henderson,
ACAP Lead Engineer

Analysis Engineers:
Brian Lamb,
Mike Luban, Steve Vest

**Mission Operations
Teledyne-Brown Engineering**

Bob Birt, Mary Groff, Kim Broyles,
Ron Olsen, Mike Fisk, Barbara Tepper

Figure 1. ACAP STS-52 Real-Time Acceleration Characterization Team: The Project Scientist Team developed the system concept based on investigator requirements. Early testing of software components was accomplished by the NTI Data Reduction Group which also provided simulations to the implementation group. Engineering expertise for the accelerometer analysis was provided by the Accelerometer Analysis Team at Teledyne-Brown. The Astrionics Laboratory group developed and implemented all of the specific engineering for the system integration and functional operation. Finally, a Mission Operations Group helped maintain the mission interface during the flight. All team members were available and contributed during the flight.

A1. DADISP PROCESSING GUIDE**N 9 3 - 2 6 9 4 9****DADiSP PROCESSING GUIDE****M. J. B. Rogers****7 October 1992**

The following is a guide for DADiSP software, intended for use by the Lambda Point Experiment Team during and after the USMP-1 mission. DADiSP is a Data Analysis and Display Software developed and marketed by DSP Development Corporation, Cambridge, Massachusetts. This guide is intended to be used in addition to the DADiSP Worksheet User Manual and Reference Manual which are supplied by the company with the software. Technical support for DADiSP is available from DSP at (617) 577-1133.

Access to DADiSP on ACAP EGSE is being provided to the LPE team during USMP-1 for off-line processing of SAMS data.

TO GET FROM DOS PROMPT TO DADISP WORKING ENVIRONMENT (A WORKSHEET)

DISPLAY OR HIGHLIGHTED OPTION	ACTION TO TAKE	RESULT
DOS PROMPT C:>	CD SAMS	CHANGES TO SAMS DIRECTORY
C:\SAMS>	DADISP	OPENS DADISP SOFTWARE PACKAGE
LIST OF AVAILABLE LABBOOKS / OPEN HIGHLIGHTED ON BAR MENU	ENTER TO OPEN LABBOOK AND TYPE OR SELECT LABBOOK OF INTEREST / SEE * BELOW FOR OTHER OPTIONS ON BAR MENU	OPENS LABBOOK OF INTEREST
LIST OF DATASETS AND WORKSHEETS / WORKSHEET HIGHLIGHTED ON BAR MENU	ENTER TO OPEN WORKSHEET, THE WORKING ENVIRONMENT / SEE ** BELOW FOR OTHER OPTIONS ON BAR MENU	OPENS WORKSHEET OF INTEREST

***BAR MENU OPTIONS UPON ENTERING DADISP**

*BAR MENU OPTION	ASSOCIATED ACTION / OPTION	POTENTIAL USES
OPEN	OPENS LABBOOK BASED ON CLICKED UPON OPTION OR TYPED SELECTION	ACCESS LABBOOK OF INTEREST
CREATE	CREATES A NEW LABBOOK	CREATE LABBOOK FOR NEW WORK
DIRECTORY	MOVE TO DIFFERENT DOS DIRECTORY	ACCESS LABBOOKS SAVED IN LOCATION OTHER THAN C:\DSP
UTILITIES	COPY - COPY LABBOOK	DO WORK WITH DIFFERENT DATA BASED ON WORK IN ANOTHER LABBOOK
	DELETE - DELETE LABBOOK	
	LOAD - LOAD COMMAND FILE	COMMAND FILES CAN BE WRITTEN TO PERFORM OPERATIONS
EXIT	EXIT TO DOS	

****BAR MENU OPTIONS UPON ENTERING A LABBOOK**

**BAR MENU OPTIONS	ASSOCIATED ACTION / OPTION	POTENTIAL USES
WORKSHEET	OPENS WORKSHEET BASED ON CLICKED UPON OPTION OR TYPED SELECTION	WORKSHEETS ARE THE BASIC WORKING ENVIRONMENT
UTILITIES	DELETE - DELETE SELECTED DATASET OR WORKSHEET	
	IMPORT (DATA)	IMPORT DATA FILE FROM DIRECTORY
	EXPORT (DATA)	EXPORT DATA FILE TO DIRECTORY
	COPY - COPY SELECTED DATASET OR WORKSHEET	
INDEX	LISTS CONTENTS OF SELECTED DATASET	ALLOW USER TO SEE WHICH DATA SERIES ARE IN A SELECTED DATASET
CLOSE	CLOSES CURRENT LABBOOK	

*****BAR MENU OPTIONS UPON ENTERING A WORKSHEET**

***BAR MENU OPTIONS	ASSOCIATED ACTION / OPTION	POTENTIAL USES
LOAD	LOADS AN EXISTING WORKSHEET	CONTINUE PREVIOUS WORK OR USE EXISTING WORKSHEET AS PROCESSING GUIDE
SAVE	SAVES CURRENT WORKSHEET	SAVE FOR CONTINUED WORK OR AS PROCESSING GUIDE
ADD	ADD WINDOWS TO WORKSHEET	CALCULATIONS ARE PERFORMED AND PLOTTED IN SEPARATE WINDOWS
REMOVE	REMOVE WINDOWS FROM WORKSHEET	REMOVE UNNECESSARY WINDOWS AND CUSTOMIZE WORKSHEET STYLE
ENTER	ENTER WINDOW IN WORKSHEET ENVIRONMENT	NECESSARY TO HAVE WINDOW SELECTED TO WORK IN IT; ALSO DONE BY CLICKING IN WINDOW
CLOSE	CLOSES CURRENT LABBOOK	

FUNCTION KEYS FOR USE IN WORKSHEET ENVIRONMENT

F1	ON-LINE HELP
F2	DISPLAY BACKGROUND (HEADER) INFORMATION FOR SELECTED WINDOW (THESE VALUES ARE SET WHEN DATA FILE IS IMPORTED)
F3	ACTIVATES LINE EDITOR FOR SELECTED WINDOW
F4	OVERPLOT - ALLOWS SEVERAL WINDOWS TO BE PLOTTED IN ONE WINDOW
F5	TOGGLES THROUGH DIFFERENT AXIS SCALE OPTIONS
F6	PUTS VARIOUS GRIDS ON PLOT
F7	TOGGLES BETWEEN DIFFERENT DISPLAY OPTIONS (LINE PLOT, BAR GRAPH, TABLE VIEW)
F8	LOAD DATASET
F9	SAVE DATASET
F10	ZOOM; ONCE ZOOMED, F9 PROVIDES CROSSHAIRS WHICH CAN BE MOVED BY MOUSE OR ARROW KEYS FOR FINER CONTROL, F9 AGAIN LOCKS FIRST CROSSHAIRS AND PROVIDES A SECOND SET; POSITIONS IN DATA FILE AND POSITION RELATIVE TO FIRST CROSSHAIR, IF APPLICABLE, DISPLAYED AT BOTTOM OF SCREEN. RIGHT MOUSE BUTTON OR ESC KEY REMOVES CROSSHAIRS AND ZOOM.

MAIN MENU**HELP****LOAD AND SAVE DATA****EDIT/REDUCE DATA****GRAPHICAL VIEWS****CREATE NEW VIEW****VIEW CONTROLS****SET UNITS****SET DELTA OFFSET****SET COLORS****SET SCALE INFORMATION****MATH AND MATRICES****STATISTICS****ANALYZE PEAK****FFT ANALYSIS****WORKSHEET****PRINTS AND PLOTS****OPTIONAL MODULES**

TYPICAL DADiSP PROCESSING SCHEME FOR LPE DURING USMP-1**SETTING UP A DADiSP PROCESSING GUIDE****ENTER DADiSP****CREATE LABBOOK - LPE_GUIDE****OPEN - LPE_GUIDE****UTILITIES - IMPORT - DATA FILE (AT 250 Hz SAMPLING FREQUENCY) FORMED
BY CONVERT ROUTINE, HEADER FILE SET UP BY
CONVERT, CARRIAGE RETURN****WORKSHEET - ADD - 9 ENTER****W1 - CLICK IN W1 TO ACTIVATE WINDOW****F8 TO LOAD X-AXIS SERIES IN W1, SELECT DATASET****W2 - W1-MEAN(W1) - DEMEANS W1****W3 - $(PSD(W2)/4)*(LENGTH(W2))/250$** **CALCULATES AND PLOTS PSD OF DEMEANED DATA SUCH
THAT $(g_{rms})^2 = \int PSD$** **W4-W9 REPEAT WITH Y- AND Z- AXIS DATA****SAVE - PSD_GUIDE****SAVES WORKSHEET TO BE USED AS PROCESSING GUIDE****SELECT EXIT/CLOSE FROM BAR MENU****CLICK RIGHT MOUSE BUTTON****HIT ESC KEY****THE ABOVE ARE THREE WAYS TO GET OUT OF DADiSP**

TYPICAL DADiSP PROCESSING SCHEME FOR LPE DURING USMP-1**USING A DADiSP PROCESSING GUIDE****ENTER DADiSP****OPEN - LPE_GUIDE****UTILITIES - IMPORT - NEW DATA FILE****WORKSHEET - LOAD - PSD_GUIDE****W1 - CLICK TO ACTIVATE****F8 - TO LOAD NEW X-AXIS SERIES FROM DATASET****W2/W3- NEW DATA WILL PROPAGATE THROUGH WINDOWS****CONTINUE BY LOADING Y- AND Z- AXIS DATA INTO W4 AND W7****ADDITIONAL PROCESSING****NARROW BAND SPECTRAL ANALYSIS****CUMULATIVE SPECTRAL ANALYSIS****NARROW BAND g_{rms}** **DIFFERENCING OF SPECTRA****COMPARISON OF SPECTRUM OF LONG TIME WINDOW TO
AVERAGED SPECTRA OF SUCCESSIVE TIME WINDOWS**

A2. ACAP POCC OPERATIONS PROCEDURES

ACAP Sun Operations for USMP-1

Desired Operation/Information	Procedure
real-time sun ethernet address	128.158.29.121 (samson1)
real-time sun login	sams
real-time sun password	*****
real-time directories of interest	/home/samson1/sams : working directory /home/samson1/sams/data: data directory note that data directory is a common directory with real-time 486
play back sun ethernet address	128.158.29. (samson2)
play back sun login	sams
play back sun password	*****
play back directories of interest	/home/samson2/sams : working directory /home/samson2/sams/data: data directory note that data directory is a common directory with real-time 486
starting shell routine to run real-time or playback recording/processing systems	type sams2rt, wait for data stream to start
necessary input for initialization	bias, temperature, a0, and a1 for x, y, z (can be changed anytime during run)

recognizing data loss	status check should identify short term bad data LOS will result in DQM status=3 response upon status check LOS will also result in zero values being passed to peak value plots
formation of data files	done automatically through shell program, default data file length is 5 minutes, can set to lengths of 1 min to 60 min upon startup of shell routine or anytime during run; peak value data file default length is 30 min, can set from 1 min to 60 min
data file format and naming convention	see attached sheets

ACAP 486 Operations for USMP-1

Desired Operation/Information	Procedure
real-time 486 LOGIN	sams
real-time 486 PASSWORD	*****
play back 486 LOGIN	sams
play back 486 PASSWORD	*****
real-time 486 ethernet address	128.158.29.125 (delilah_1)
play back 486 ethernet address	(delilah_2)
directories of interest	c:\sams\acap processing directory e: data directory (common with sun \data)
accessing (forming) data files from Sun	in acap directory type CONVERT to start program which prompts for start time, axes, engineering, peak value, total time information
starting and running dadisp	see DADISP operations sheet

Sun Disk Storage Naming and Format Convention

Engineering Unit (X, Y, and Z axis) data

Variable length files: 5 minute default, can be set to lengths 1 minute to 60 minutes

Name: RDHHMMSS.EU or PDHHMMSS.EU

where first character **R** denotes real-time data and **P** denotes playback data
the **D** denotes mission day and is a hex character

hours, minutes, and seconds (HHMMSS) are ASCII characters

File type: binary

Units:

Format: T₁ (hhmmss)
 TEMP_{x,y,z}
 X₁
 X₂
 X₃
 .
 .
 .
 X₂₅₀
 Y₁
 Y₂
 Y₃
 .
 .
 .
 Y₂₅₀
 Z₁
 Z₂
 Z₃
 .
 .
 .
 Z₂₅₀
 STATUS WORDS

Peak Value Data $(X_{1MAX}^2+Y_{1MAX}^2+Z_{1MAX}^2)^{1/2}$

Variable length files: 30 minute default, can be set to lengths 1 minute to 60 minutes

Name: RDHHMMSS.MA or PDHHMMSS.MA

where first character **R** denotes real-time data and **P** denotes playback data

the **D** denotes mission day and is a hex character

hours, minutes, and seconds (HHMMSS) are ASCII characters

File type: Floating point

Units:

Format:

T ₁	$(X_{1MAX}^2+Y_{1MAX}^2+Z_{1MAX}^2)^{1/2}$
T ₂	$(X_{1MAX}^2+Y_{1MAX}^2+Z_{1MAX}^2)^{1/2}$
T ₃	$(X_{1MAX}^2+Y_{1MAX}^2+Z_{1MAX}^2)^{1/2}$
.	$(X_{1MAX}^2+Y_{1MAX}^2+Z_{1MAX}^2)^{1/2}$
.	$(X_{1MAX}^2+Y_{1MAX}^2+Z_{1MAX}^2)^{1/2}$
.	$(X_{1MAX}^2+Y_{1MAX}^2+Z_{1MAX}^2)^{1/2}$

MALFUNCTION	PROCEDURE
<p>REAL-TIME SUN SYSTEM CRASH WHILE AOS R/T DATA FLOWING NO P/B DATA FLOWING</p>	<ol style="list-style-type: none"> 1) RE-BOOT R/T SYSTEM <ol style="list-style-type: none"> a) RE-BOOT SUCCESSFUL - CONTINUE AS IS b) RE-BOOT UNSUCCESSFUL - PROCEED TO STEP 2) 2) EXIT AND RESTART DATA COLLECTION PROGRAM ON P/B SUN SO THAT IT IS SET TO RECEIVE R/T DATA (NECESSARY FOR APPROPRIATE FILE NAMES) 3) SWITCH REAL-TIME DATA FLOW BETWEEN SUN SYSTEMS 4) RE-BOOT CRASHED SUN <ol style="list-style-type: none"> a) RE-BOOT SUCCESSFUL - RESTART DATA COLLECTION PROGRAM ON RE-BOOTED SUN TO RECEIVE P/B DATA (DO NOT SWITCH BACK UNLESS ANOTHER PROBLEM COMES UP OR THERE IS A CONVENIENT TIME TO DO SO, i.e. LOS AND NO R/T OR P/B DATA FLOWING) b) RE-BOOT UNSUCCESSFUL - LEAVE SET-UP AS IS AND CONTINUE TO TRY SUN RE-BOOT; MAY BE NECESSARY TO CONTACT EB LAB PERSONNEL OR SUN TECHNICAL SUPPORT FOR ADVICE; NOTE THAT THIS MEANS THAT P/B DATA CANNOT BE RECEIVED SO ARRANGE TO HAVE P/B DATA SENT AFTER SUN RE-BOOTED (SUBMIT A PDRF THROUGH LPE WHEN SUN RE-BOOTED; MUST KEEP TRACK OF LOS TIMES WHILE SUN IS DOWN)

REAL-TIME SUN SYSTEM CRASH WHILE LOS NO R/T DATA FLOWING NO P/B DATA FLOWING	1) MORE THAN 5 MINUTES TO AOS a) RE-BOOT REAL-TIME SUN WITHOUT SWITCHING DATA FLOW b) RE-BOOT SUCCESSFUL - CONTINUE AS IS c) RE-BOOT UNSUCCESSFUL - FOLLOW R/T CRASH WHILE AOS PROCEDURE STARTING AT STEP 2) 2) LESS THAN 5 MINUTES TO AOS FOLLOW R/T CRASH WHILE AOS PROCEDURE STARTING AT STEP 1)
REAL-TIME SUN SYSTEM CRASH WHILE LOS NO R/T DATA FLOWING P/B DATA FLOWING	1) LESS THAN 5 MINUTES TO AOS - FOLLOW PROCEDURES FOR R/T CRASH WHILE AOS STARTING AT STEP 1)

NOTE THAT SUN CRASH RECOVERY PROCEDURES ARE BASED ON THE ASSUMPTION THAT RECEIVING REAL-TIME DATA IS A HIGHER PRIORITY THAN PLAY BACK DATA

MALFUNCTION	PROCEDURE
PLAY BACK SUN SYSTEM CRASH R/T DATA FLOWING R/T DATA NOT FLOWING	1) RE-BOOT PLAY BACK SUN 2) ONCE SYSTEM IS RUNNING, HAVE LPE SUBMIT A PDRF (OD) TO RECOVER ANY LOST DATA

MALFUNCTION	PROCEDURE
REAL-TIME SUN MONITOR FAILURE R/T DATA FLOWING OR NOT P/B DATA FLOWING OR NOT	1) REPLACE R/T MONITOR WITH SPARE 2) RECONFIGURE R/T SYSTEM AND MONITOR AS NEEDED
PLAY BACK SUN MONITOR FAILURE R/T DATA FLOWING P/B DATA FLOWING OR NOT	1) HOOK UP SPARE MONITOR TO P/B SUN 2) RECONFIGURE P/B SYSTEM AND MONITOR AS NEEDED
REAL-TIME 486 MONITOR FAILURE	<ul style="list-style-type: none"> • HOOK UP SPARE FROM DATA CENTER
PLAY BACK 486 MONITOR FAILURE	<ul style="list-style-type: none"> • HOOK UP SPARE FROM DATA CENTER
OFF-LINE 486 MONITOR FAILURE	<ul style="list-style-type: none"> • HOOK UP SPARE FROM DATA CENTER
REAL-TIME SUN FILE SERVER FAILURE	1) RE-BOOT R/T SUN a) RE-BOOT SUCCESSFUL - CONTINUE AS IS b) RE-BOOT BRINGS SYSTEM UP BUT FILE SERVER STILL SEEMS TO BE DOWN <i>i)</i> CONTACT SUN TECHNICAL SUPPORT <i>ii)</i> CONTACT DIANE JOHNSON AT SUN TO BORROW ONE
PLAY BACK SUN FILE SERVER FAILURE	1) RE-BOOT P/B SUN a) RE-BOOT SUCCESSFUL - CONTINUE AS IS b) RE-BOOT BRINGS SYSTEM UP BUT FILE SERVER STILL SEEMS TO BE DOWN <i>i)</i> CONTACT SUN TECHNICAL SUPPORT <i>ii)</i> CONTACT DIANE JOHNSON AT SUN TO BORROW ONE

REAL-TIME SUN TAPE DRIVE FAILURE	<ol style="list-style-type: none"> 1) COORDINATE SCHEDULING OF TAPE ARCHIVING SO THAT ONE TAPE DRIVE CAN BE USED FOR BOTH R/T AND P/B 2) SHOULD BOTH TAPE DRIVES FAIL <ol style="list-style-type: none"> a) CONTACT SUN TECHNICAL SUPPORT b) CONTACT DIANE JOHNSON AT SUN TO BORROW ONE
PLAY BACK SUN TAPE DRIVE FAILURE	<ol style="list-style-type: none"> 1) COORDINATE SCHEDULING OF TAPE ARCHIVING SO THAT ONE TAPE DRIVE CAN BE USED FOR BOTH R/T AND P/B 2) SHOULD BOTH TAPE DRIVES FAIL <ol style="list-style-type: none"> a) CONTACT SUN TECHNICAL SUPPORT b) CONTACT DIANE JOHNSON AT SUN TO BORROW ONE
REAL-TIME 486 CRASH	<ol style="list-style-type: none"> 1) REBOOT R/T 486 2) RE-BOOT SUCCESSFUL - CONTINUE AS IS 3) RE-BOOT UNSUCCESSFUL - SWITCH R/T AND OFF-LINE 486 AND BRING IN SPARE FROM DATA CENTER
PLAY BACK 486 CRASH	<ol style="list-style-type: none"> 1) REBOOT P/B 486 2) RE-BOOT SUCCESSFUL - CONTINUE AS IS 3) RE-BOOT UNSUCCESSFUL - SWITCH P/B AND OFF-LINE 486 AND BRING IN SPARE FROM DATA CENTER
OFF-LINE 486 CRASH	<ol style="list-style-type: none"> 1) REBOOT OFF-LINE 486 2) RE-BOOT SUCCESSFUL - CONTINUE AS IS 3) RE-BOOT UNSUCCESSFUL - BRING IN SPARE FROM DATA CENTER
VIDEO RECORDER FAILURE	<ul style="list-style-type: none"> • SWITCH WITH SPARE FROM DATA CENTER

MALFUNCTION	PROCEDURE
<p>INTERRUPTED DATA FLOW NOTED ON REAL-TIME SYSTEM (BESIDES LOS)</p>	<p>1) CHECK DATA BOX FOR DATA FLOW INDICATION</p> <ul style="list-style-type: none"> a) DATA FLOW LIGHT NOT FLASHING (DATA NOT FLOWING) - MAKE SURE DATA ARE EXPECTED ON PARTICULAR SYSTEM (i.e., CHECK FOR AOS/LOS SITUATION); IF DATA ARE EXPECTED, CONTACT SYS CON ON POCC OPS LOOP b) DATA FLOW LIGHT IS FLASHING, BUT DATA BEING RECEIVED IS "BAD," <ul style="list-style-type: none"> i) CONTACT SAMS TEAM (SCI LOOP 2) TO CHECK IF THIS IS A SAMS RECORDING PROBLEM, IF SO LET SAMS HANDLE IT ii) IF NOT A SAMS SYSTEM PROBLEM, AND STILL RECEIVING "BAD" DATA, CONTACT SYS CON ON POCC OPS LOOP c) DATA FLOW LIGHT IS FLASHING, BUT NO DATA BEING RECEIVED, PROBABLY EGSE PROBLEM <ul style="list-style-type: none"> i) CHECK COMPUTER CONNECTIONS AND TIGHTEN LOOSE PARTS, AS NECESSARY ii) EXIT DATA COLLECTION PROGRAM AND RESTART iii) EXIT DATA COLLECTION PROGRAM AND RE-BOOT SYSTEM iv) FOLLOW MAL PROCEDURES FOR SYSTEM CRASH FOR APPROPRIATE R/T - P/B DATA FLOW SITUATION v) CALL SOMEONE <p>2) SUBMIT OD PDRF THROUGH LPE FOR LOST DATA</p>

SWITCHING SUN SYSTEMS BETWEEN REAL-TIME AND PLAY BACK DATA	1) SWITCH CHANNELS ON CONTROL BOARD 2) REQUEST SWITCH FROM SYS CON ON POCC OPS LOOP
---	--

MALFUNCTION	PROCEDURE
VIDEO FAILURE	<ul style="list-style-type: none"> • SUBMIT VIDEO PDRF • FORMS IN ACAP OPERATIONS NOTEBOOK
HVODS FAILURE	<ul style="list-style-type: none"> • FOLLOW PROCEDURE IN POH - SOP 1.7.1 - CONTACT MARSHALL COMM ON POCC OPS LOOP
POCC TERMINAL FAILURE	<ul style="list-style-type: none"> • FOLLOW PROCEDURE IN POH - SOP 1.7

****NOTE - SEE TABLE 1.7-I (p. 1.7-2) IN POH FOR SUMMARY OF PROCEDURES FOR POCC EQUIPMENT PROBLEMS**

AP POCC LOGBOOK

ET	LOG NOTE
T: S GMT: J	SIMULATION START
	ORBITER TO REACH CONJUNCTION WITH TURKISH SATELLITE AT 4/23; MANEUVER WILL BE NECESSARY; OMS BURN OR PRCS BURN PROPOSED FOR IMU ALIGN PERIOD SCHEDULED AT 4/19; IF WAIT LONGER THAN THAT, WILL HAVE TO DO BIGGER BURN. PROPOSED BURN IS +X PRCS OF 2 FT/SEC, DURATION 1-2 SEC
	REQUEST FROM LPE TO INFORM THEM OF ACCELERATION PEAK VALUES ASSOCIATED WITH MANEUVER
	CALLED SIM SUP (0424) TO REQUEST GUIDANCE ON PROVIDING LPE WITH ACCELERATION VALUES (CAN BE GET ESTIMATED VALUES FROM ANYONE); RESPONSE WAS TO MAKE OUR OWN ESTIMATE
	CONTACT POL TO REQUEST INFORMATION ON UPCOMING MANEUVER BURN: PRCS 1-2 FT/SEC, DURATION OF A COUPLE OF SECONDS, STILL SET FOR 4/19 IMU ALIGN TO OCCUR AFTER MANEUVER
09	PRCS MANEUVER START
	INFORMED BY SIM TEAM TO NOTIFY ANYONE WHO INQUIRES THAT PRCS BURN CAUSED LARGER THAN EXPECTED ACCELERATIONS

A5. ACAP STANDARD PDRF FORM

PDRF FORM (VIDEO)

PDRF	USMP-1	MET:
ABCD-000		
Opt:		
PHONE (205)544-8697	ROOM SOA-M	AUTHOR NEEDED REQUEST VIDEO
START/STOP DATA TIME: GMT/MET	START:	STOP:
VIDEO SOURCE: NASA SELECT	PB DIST: (MONITOR/GSE)	
PB AUD: (W or W/O)	DUB: (W or W/O TIMING)	TAPE TYPE: VHS 3/4"
USER COMMENTS:		
S=SUBMIT/C=CANCEL-->		
DFA ACTION	PRIORITY-	EXECUTE: START STOP
DFA NOTES:		
ACTIONEE MTV	IMPLEMENTED	CLOSEOUT
NOTES:		

E=REVIEW J=STATUS K=CATEG L=MESSAGES M=STATISTICS N=READ Y=MORE Z=MENU

N 9 3 - 2 6 9 5 0

B. STS-40 PAPERS PREPARED BY PI

**A COMPARISON OF LOW-GRAVITY MEASUREMENTS ON-BOARD COLUMBIA
DURING STS-40**

M. J. B. Rogers

**Center for Microgravity and Materials Research
University of Alabama in Huntsville
Huntsville, Alabama 35899 USA**

C. R. Baugher

**Acceleration Characterization and Analysis Project
NASA Marshall Space Flight Center
MSFC, Alabama 35812 USA**

R. C. Blanchard

**OARE Project Technologist
NASA Langley Research Center
Hampton, Virginia USA**

R. DeLombard

**SAMS Project Manager
NASA Lewis Research Center
Cleveland, Ohio USA**

W. W. Durgin

**Aerospace Engineering
Worcester Polytechnic Institute
Worcester, Massachusetts USA**

D. H. Matthiesen

**Case Western Reserve Univ.
NASA Lewis Research Center
Cleveland, Ohio USA**

W. Neupert

**Code 680
NASA Goddard Space Flight Ctr.
Greenbelt, Maryland USA**

P. Roussel

**European Space Agency
Keplerlaan 1
Noordwijk, The Netherlands**

A COMPARISON OF LOW-GRAVITY MEASUREMENTS ON-BOARD COLUMBIA DURING STS-40

Abstract

The first NASA Spacelab Life Sciences mission (SLS-1) flew 5 June to 14 June 1991 on the orbiter Columbia (STS-40). The purpose of the mission was to investigate the human body's adaptation to the low-gravity conditions of space flight and the body's readjustment after the mission to the 1 g environment of earth. In addition to the life sciences experiments manifested for the Spacelab module, a variety of experiments in other scientific disciplines flew in the Spacelab and in Get Away Special (GAS) Canisters on the GAS Bridge Assembly. Several principal investigators designed and flew specialized accelerometer systems to better assess the results of their experiments by means of a low-gravity environment characterization. This was also the first flight of the NASA Microgravity Science and Applications Division (MSAD) sponsored Space Acceleration Measurement System (SAMS) and the first flight of the NASA Orbiter Experiments Office (OEX) sponsored Orbital Acceleration Research Experiment accelerometer (OARE). We present a brief introduction to seven STS-40 accelerometer systems and discuss and compare the resulting data. During crew sleep periods, acceleration magnitudes in the 10^{-6} to 10^{-5} g range were recorded in the Spacelab module and on the GAS Bridge Assembly. Magnitudes increased to the 10^{-4} g level during periods of nominal crew activity. Vernier thruster firings caused acceleration shifts on the order of 10^{-4} g and primary thruster firings caused accelerations as great as 10^{-2} g. Frequency domain analysis revealed typical excitation of Orbiter and Spacelab structural modes at 3.5, 4.7, 5.2, 6.2, 7, and 17 Hz.

1. Introduction

The first NASA Spacelab Life Sciences mission (SLS-1) flew 5 June to 14 June 1991 on the orbiter Columbia (mission STS-40). The purpose of the mission was to investigate the human body's adaptation to the low-gravity conditions of space flight and the body's readjustment after the mission to the 1 g environment of earth. In addition to the life sciences experiments manifested for the Spacelab module, a variety of experiments in other scientific disciplines flew in the Spacelab and in Get Away Special (GAS) Canisters on the GAS Bridge Assembly. Several principal investigators designed and flew accelerometer systems to characterize the low-gravity environment. This was done to better assess the results of their experiments. This was also the first flight of the MSAD-sponsored SAMS and the first flight of the OEX-sponsored OARE. This paper presents a brief introduction to seven accelerometer systems which measured and recorded acceleration levels during STS-40 and discusses the resulting data.

2. Accelerometer Systems

The STS-40 accelerometer systems to be discussed are listed in Table 1. Two of the systems flew in support of individual crystal growth experiments - the Worcester Polytechnic Institute (WPI) Fluid Behavior and Zeolite Crystal Growth Experiments, and the GTE Gallium Arsenide Crystal Growth Experiment.[1,2] The NASA Goddard Orbiter Stability Experiment (OSE) was designed to characterize Orbiter g-jitter by measuring angular accelerations using sun sensors. The ESA Solid State Micro-Accelerometer (SSMA) recorded data as part of a component performance testing procedure. The OARE system, a space accelerometer package with on-orbit calibration capabilities, was designed to measure and record the Orbiter aerodynamic acceleration environment from the free molecule flow regime through the rarefied-flow transition into the hypersonic continuum regime.[3,4] The OEX High Resolution Acceleration Package (HiRAP) was also designed to measure low frequency aerodynamic accelerations with the goal of determining Orbiter re-entry aerodynamic flight performance

characteristics.[5-14] SAMS flew in support of the Solid Surface Combustion Experiment (SSCE). SAMS was designed to support multiple experiments and multiple missions; it is scheduled to fly on all Orbiter missions which include MSAD-sponsored low-gravity experiments. The resulting data base is expected to contribute to the characterization of the low-gravity environment of Orbiters.[15-17] The locations of the GAS Bridge Assembly and of the SAMS units in the Spacelab are shown in Figs. 1 and 2.

2.1 GTE Gallium Arsenide Crystal Growth Experiment

The GTE experiment was designed to study the effect of reduced gravity on the growth of gallium arsenide (GaAs) semiconductor material.[1] The experiment was located in GAS Canister G-052 and was oriented with the accelerometer x- and y-axes parallel to those of the Orbiter and with the z-axis anti-parallel. The GTE triaxial sensor accelerometer was developed and tested prior to the STS-40 flight on a NASA KC-135 Microgravity Research Aircraft.[2] On STS-40, a Sundstrand QA-2000 sensor was aligned with the crystal growth axis (x-axis) and two QA-1400 sensors were used in the y- and z-directions. The measurement range for the system was 1×10^{-5} to 1×10^{-2} g and the data were lowpass filtered at 16 Hz with a 3 dB/decade rolloff. A Tattletale IV microcomputer was used for data processing and storage, allowing 155 kilobytes of memory per axis.

A specialized data processing technique was developed to reduce memory requirements. For a two second period, 100 measurements were made and initially stored. For each two second block of data, a least squares fit to the data was computed and the slope and intercept of the fit were recorded. Two other statistics were recorded - the standard deviation of the 100 samples and the value of the point with the largest deviation from the intercept value. Upon calculation and storage of these values, the 100 data points were discarded and the next two seconds of data were recorded. At five minute intervals, absolute time, relative time, microcomputer temperature, and accelerometer temperature were recorded.

2.2 WPI Fluid Behavior and Zeolite Crystal Growth Experiments

The WPI accelerometer system flew on STS-40 in conjunction with zeolite crystal growth and fluid behavior experiments in GAS Canister G-408. The zeolite crystal growth experiment involved nucleation and subsequent growth from solution. It was hypothesized that the mass transfer and, thus, the growth rate would be functions of the g-jitter environment. The fluid behavior experiment involved measurements of quantity and heat and mass transfer in the re-establishment of equilibrium. It was expected that these processes as well as transfer of additional liquid to the test vessels would also be affected by the g-jitter environment.

The accelerometer system was flown to assess the performance of these experiments as a function of the acceleration environment. The system consists of three piezoelectric sensors and a system for analog signal processing, digital sampling, and storage of data. Accelerometer axes were aligned with the roll, pitch, and yaw axes of the Orbiter. A low frequency data cutoff of approximately 0.8 Hz was established by the a.c. nature of the piezoelectric elements. The high frequency cutoff was set at 10 Hz using a lowpass filter associated with the signal amplifiers. Each of the three channels was monitored by positive and negative peak detectors which were read at a rate of 1 Hz. The greatest magnitude value for each one second window for each channel was stored together with sign. For the data presented here, the magnitude of the acceleration vector (root sum of squares of the three axes) is used. Resolution of the system was 10 μg , and full scale was 20,000 μg .

2.3 NASA/GSFC Orbiter Stability Experiment

The primary objective of the Orbiter Stability Experiment (OSE) was to obtain a characterization of the Orbiter's spectrum of high frequency angular motions. The OSE measures angular accelerations directly with sun sensors by observing changes in the orientation of the Orbiter in pitch and roll relative to the Sun. The OSE detected the Orbiter's motion by measuring the direction of incoming sunlight with two precision Lockheed Intermediate Sun Sensors (LISS) provided by the Lockheed Missiles and Space Co. SPARCS Office, White Sands Missile Range, NM, under contract to the Wallops Flight Facility of the NASA Goddard Space Flight Center.

The system can measure angular changes as small as 0.25 arc sec, the level set by data digitization. Electronics noise is about 0.2 arc sec RMS for the most sensitive pitch and roll channels. The OSE recorded the position of the Sun relative to the Orbiter during the sunlit portions of orbits 34, 35, and 39, for a total duration of three hours. It was necessary for the OSE sensors to be oriented toward the Sun within two degrees before observations could be made, and the Orbiter was held in a $-z_0$ solar inertial attitude with a deadband of 0.1 arc degree during observations. The sensors were mounted to the top plate of GAS Canister G-507 and aligned to the GAS Bridge within 1 arc min in pitch and 7 arc min in roll.

The two LISS were oriented to provide signals of opposite polarity for Orbiter pointing deviation as a means of discriminating against unintended electrical noise pickup. The analog signals from the sensor were passed through an 11 Hz lowpass filter with 12 dB/octave rolloff, amplified, and sampled at a rate of 58 Hz for each of four (two pitch and two roll) data channels. The data stream was recorded on a Lockheed 4200 tape recorder for playback after the mission. The instrument was operated both with and without a solar input to determine the level of internal electronic noise.

2.4 ESA Solid State Micro-Accelerometer

The primary objective of the Solid State Micro-Accelerometer experiment (SSMA) was to test a new type of highly sensitive accelerometer in low-g to characterize performance in the absence of the 1 g environment of Earth. The system was also designed to provide an engineering test demonstration of the sensors to prove suitability for applications on future flights. The SSMA was located in GAS Canister G-021. Each accelerometer unit included a small proof mass (15 micro-gram) and supporting silicon springs fabricated from mono-crystalline silicon and combined on a hybrid substrate with the analog readout electronics. The micro-structure and associated micro-electronics were sealed and mounted in a standard, 14 pin dual-in-line electronics package as an integral unit. The accelerometers were designed to operate within the acceleration range ± 80 milli-g with a sensitivity of 125 volts/g and a frequency range from d.c. to 100 Hz.

Twelve accelerometers (among which were two dummy units) were mounted in a three axis array on a one axis vibrating table designed to provide variable calibration signals during flight. Four accelerometers were oriented with their sensitive axis parallel to the vibration axis of the table and to the Orbiter pitch axis (y-axis), 3 parallel to the Orbiter roll axis (x-axis), and 3 parallel to the Orbiter z-axis. The array configuration was chosen to assess the transverse effects of the accelerometers and to compensate, at the processing level, for external disturbances. The SSMA experiment consisted of 51 measurement sequences: 31 with excitations from 1 μ g to 40 milli-g at rates between 0.1 and 50 Hz (sinusoidal); 12 without excitation; and 8 self-test sequences.

The Data Acquisition System was designed to sample, digitize, and store in a Mass Memory Unit the signals of the 12 accelerometers; the thermistor readings of accelerometer temperature; the displacement transducer signals from the vibrating table; the temperature and voltage outputs from the Data Acquisition System; the temperature, pressure, and voltages from the battery; and the signals from a Real Time Clock and an Advanced Real Time Clock. To minimize the amount of stored data and to avoid aliasing effects, the accelerometers and displacement transducer signals were sampled at 16 times the excitation frequency and filtered through a digital signal processor with a cut-off frequency of 4 times the excitation and a rolloff of -80 dB.

2.5 Orbital Acceleration Research Experiment

The Orbital Acceleration Research Experiment (OARE) is a triaxial electrostatic accelerometer package with complete on-orbit calibration capabilities.[3,4] The OARE consists of three orthogonal, electrostatically suspended proof mass sensors, a full in-flight calibration station, and a microprocessor which is used for in-flight experiment control, processing, and storage of flight data. The experiment system is designed to measure low frequency (<5 Hz), low-level acceleration (nano-g sensitivity), and is principally directed at characterizing the Orbiter's aerodynamic behavior in the rarefied-flow flight regime. The OARE system is mounted as a payload on the floor of the cargo bay on a keel bridge spanning bay 11.

2.6 High Resolution Acceleration Package

The High Resolution Acceleration Package (HiRAP) consists of a set of three orthogonal, pendulous, gas-damped accelerometers, each with a resolution of $1 \mu\text{g}$ and a measurement range of approximately $\pm 8000 \mu\text{g}$. The HiRAP is designed to measure high-altitude aerodynamic acceleration on the Orbiter vehicle during atmospheric re-entry. The HiRAP is mounted in a wing box of the cargo bay, such that the orthogonal HiRAP axes are aligned with the Orbiter body axes. Data are collected at 112 Hz, and two lowpass filters at 20 Hz and 2 Hz are applied. The HiRAP absolute accuracy over its twelve flights since 1983, after in-flight calibration, is 3 to $7 \mu\text{g}$. [5-14]

2.7 Space Acceleration Measurement System

The Space Acceleration Measurement System was developed to monitor and measure the low-g environment of Orbiters in support of MSAD-sponsored science payloads.[15-17] Resulting data are used by microgravity investigators in assessing the influence of acceleration on flight experiments. On STS-40, SAMS was manifested to support the Solid Surface Combustion Experiment (SSCE). SAMS consists of three remote triaxial sensor heads, connecting cables, and a controlling data acquisition unit with a digital data recording system using optical disks with 200 megabyte storage capacity per side. With the availability of crew access to change the disks, data storage capacity is essentially unlimited. On STS-40, three triaxial sets of Sundstrand QA-2000 sensors recorded data at 25 samples per second with a 5 Hz lowpass filter applied (140 dB/decade rolloff). The SAMS control electronics and data recording package was mounted in the Spacelab in SMIDEX Rack 5. The three triaxial sensor heads were mounted 1) on the Spacelab floor on the base of the Body Restraint System, 2) on the connector bracket panel of the SMIDEX in Rack 5, and 3) on the SSCE in Rack 7, see Fig. 2. The orientations of the SAMS heads with respect to the Orbiter coordinate system are given in Table 2.

3. Results

The accelerometer systems flown during STS-40 recorded data during a variety of time periods. There is some overlap, however, early in the mission and especially during crew sleep

periods. A comparison of the results from these periods provides an indication of the low-g environment at various locations.

3.1 GTE Gallium Arsenide Crystal Growth Experiment

According to the pre-flight mission plan, the GTE experiment was to be activated at MET 02/10:35. The accelerometer system was to start recording data 4 hours, 55 minutes later. Crystal growth was scheduled to begin at the same time as data recording. These times were selected to coincide with a crew sleep period, to reduce the effects of crew related g-jitter. While the exact time of experiment activation was not recorded, examination of the data indicates that the full five hours of crystal growth and accelerometer data recording did take place during a quiescent period.

Several general comments can be made about the GTE accelerometer data during STS-40. Details have been presented previously.[1] The z-axis experienced the greatest variation and the x-axis was the most quiet. The lesser quality of the accelerometer sensors used for the y- and z-axes is apparent; the increased temperature dependence of these sensors was manifested as larger drifts due to temperature variations.

The data collected indicate that a relatively quiet acceleration environment existed for the GTE crystal growth experiment run. A total of 541 significant acceleration variations were recorded on the three axes. Events were considered significant when a relative change of at least 1×10^{-5} g occurred. For variations of 10^{-4} g or larger only 28 events were detected, with none in the most sensitive experiment axis (x-axis). The largest difference in average acceleration during the five hour crystal growth period was 2.5×10^{-4} g.

3.2 WPI Fluid Behavior and Zeolite Crystal Growth Experiments

The GAS relay for this experiment package was activated at MET 00/10:47. The times indicated on Fig. 3 are relative to that MET. The total run time for the experiment was approximately 71 hours and acceleration data were continuously collected during that time. Fig. 3 shows a two hour record beginning at experiment start plus four hours and illustrates two basic types of acceleration environment present during the experiment operation. Type A data were

defined by pairs of acceleration pulses occurring approximately every 2 minutes with magnitudes of 5 to 7 milli-g. This type of event is present during the entire 71 hours. Type B accelerations have magnitudes on the order of 2 to 3 milli-g occurring at intervals of 10.1 seconds.

The Type A accelerations resulted from an electromechanical relay used to control the oven heating system for the zeolite crystal growth experiment. The period was approximately 2.0 minutes early in the experiment and became 1.9 minutes near the end of the experiment because decreasing payload temperature resulted in faster heat loss from the oven. Similarly, the duty cycle increased from 17 to 18 seconds over the course of the experiment because lower battery voltage necessitated greater heating times.

The Type B accelerations resulted from relays in a power conservation system. Whenever precision temperature and pressure readings were required from the fluid behavior system, the analog circuits were energized and de-energized at approximately 10 second intervals.

Between these events, accelerations on the order of 100 to 200 μg were recorded. Thus, the self-induced acceleration of the experiment package greatly exceeded the Orbiter accelerations whenever electromechanical devices were in operation.

3.3 NASA/GSFC Orbiter Stability Experiment

The OSE was operated for a total of three hours on STS-40: MET 01/23:56 - 02/02:01 and 02/07:26 - 02/08:21. Only data from the first two hour interval have been processed to date. That interval included two periods of solar observation separated by about 30 min in the Earth's shadow. During this period, the offset of the Orbiter's $-z_0$ -axis from the solar direction as the vehicle moved in its deadband about its pitch axis (+y-axis) produced a signal reminiscent of a rectified sine wave. Atmospheric drag forces typically rotated the Orbiter against one side of the deadband. The motions of the Orbiter about its roll axis (+x-axis) were less regular in frequency.

The objective of the OSE was to record high frequency g-jitter in the Orbiter bay that might be superimposed on the expected larger scale motion of the Orbiter within its deadband. An initial scan of the first sunlit interval of observation indicates that any g-jitter must have been at or below the limit of detectability (0.25 - 0.5 arc sec). A typical example of the signal output

for pitch channel A during an interval including an assumed thruster firing (which reversed the angular motion of the Orbiter) is shown in Fig. 4.

Power spectral densities were calculated for periods of interest. The reversal of Orbiter motion due to a thruster firing at the extremes of its deadband is smooth. No detailed correlation of the data has yet been made, however, and it is not clear to what extent the smooth reversal of attitude is the result of a sequence of thruster firings or reflects a low frequency response by the Orbiter to a single firing. In any case, no angular vibrations at frequencies above about 1 Hz attributable to a vernier thruster firing are detectable with the present instrument.

3.4 ESA Solid State Micro-Accelerometer

The GAS relay for G-021 was activated at MET 00/10:37. The SSMA sequences started 4 hours, 33 minutes later during the first crew sleep period. From post-flight data analysis, no significant differences were found between the on-ground and the in-space performance of these new accelerometers. The measured noise of the devices was 0.1 μg RMS (0.6 $\mu\text{g}/\text{Hz}$). The success of the SSMA experiment demonstrates that the new type of accelerometers based on silicon technology are suitable and adequate for low-gravity applications.

The SSMA also provided measurements of the dynamic environment, mainly during the experiment sequences for which the vibrating table was not excited and when the amplitude of induced accelerations was below 100 μg . The amplitudes of the micro-dynamic disturbances observed during the experiment were on average below 10 to 50 μg with the exception of some peak events correlated with Orbiter thruster firings. It was clear, after processing, that the relatively large signals observed in the time domain were essentially due to strong disturbances at specific frequencies. Fig. 5 shows data from Experiment Sequence No. 5. In the time domain, the 1 Hz/6 μg calibration signal is clearly visible together with two strong external perturbations. Frequency modes of 3.7 Hz and 4.7 Hz dominate the frequency domain representations of this time period.

Other frequency modes related to the vibrating table, Orbiter structural modes, and the Orbiter Ku band antenna (17 Hz) were observed in sequences of SSMA data. Within the low

frequency observation band (d.c. - 1 Hz), the acceleration levels are very low. Long periods of quiet environment in low frequency regimes can be found in between successive Orbiter thruster firing events. The 4.7 Hz signal, observed consistently in the frequency domain, could also be clearly discerned in the time domain associated with strong events such as thruster firings.

3.5 Orbital Acceleration Research Experiment

Because of its sensitivity, the OARE instrument detects aerodynamic behavior of the Orbiter while in low-Earth orbit. A typical sleep period (MET 07/16 - 07/18) was examined on STS-40. The results of the examination for the spacecraft y-axis are shown in Fig. 6. During the flight, a "trimmed-mean" filter was applied to the data which were stored aboard the Shuttle in the OARE data storage system.[3,4] An acceleration model which includes aerodynamic, gravity gradient, and rotational effects was constructed and compared with flight data. Comparison of the model to the flight data shows the instrument to be sensitive to all major expected low frequency acceleration phenomena in the y-axis. Variation of atmospheric drag among orbits was on the order of $\pm 2 \times 10^{-7}$ g. Some erratic instrument bias persists in the x- and z-axes. In these axes, the OARE data can be made to match a comprehensive atmospheric-aerodynamic model by making arbitrary bias adjustments.

3.6 High Resolution Acceleration Package

On STS-40, HiRAP data were recorded during ascent, orbit, and re-entry. During re-entry, aerodynamic control surfaces used for Orbiter attitude and control require hydraulic power. This power is provided by a set of three auxiliary power units (APU). The exhaust gas ports for these pulsed turbines are located on the top of the Orbiter just in front and to the sides of the vertical tail. The exhaust jets of gas produce accelerations in the Orbiter negative z-direction. These APU accelerations were measured and recorded by HiRAP.

Fig. 7 shows the HiRAP z-axis re-entry acceleration measurements for STS-40. The APU signals become evident at two times during Orbiter descent: just before the deorbit burn and just before the onset of atmospheric drag. The 112 Hz HiRAP data have been averaged over one second intervals to permit characterization of the acceleration changes. The time history of this

data segment shows a shift at the ignition of the first APU, a sensor saturation during deorbit burn, a second shift at the ignition of the second and third APU, and the onset of atmospheric drag. The scattered points are the averaged thruster induced acceleration spikes.

In the region surrounding the first APU transition, a measurement of the data shift represents a bias of about 15 μg . Data from the second and third APU transition show a shift of about 32 μg . It is at the second APU transition region that an in-flight HiRAP calibration is performed. This 32 μg shift is incorporated in the calibration aerodynamic signal. The shifts in the z-axis acceleration signal are consistent with shifts found in prior HiRAP mission data.[5-14]

3.7 Space Acceleration Measurement System

The SAMS units collected data for approximately 7 days during STS-40: MET 01/00:57 - 08/01:38. SAMS was powered down twice during this time to allow operation of the Rotating Dome Experiment. Initial processing of the SAMS data as reported in the ACAP Early Summary Report[17] includes calculation and plotting of 10-second means and 1-second RMS for 2-hour periods and frequency domain representations of composite magnitude spectra in color spectrogram form. Data correction for bias and temperature variations used both Sundstrand supplied information and information derived from mission data. Detailed analysis of specific segments of the STS-40 SAMS data has focused on periods of thruster firings. Fig. 8 shows an example of a visual correlation of thruster firing occurrences with 1-second mean SAMS data during a period of otherwise low-level activity. Resulting accelerations (vector magnitude) reached 10^{-2} g. Variations in thruster-related acceleration result from the different combinations of jets fired and different pulse strength and firing duration. Fig. 9 shows a detailed example of one axis of SAMS data during a vernier thruster firing. Note that the effect of the firing is an overall linear shift of the vehicle, reflected in a shift of the mean acceleration.

In general, the acceleration environment measured by SAMS during STS-40 is summarized as follows. During sleep periods, acceleration magnitudes were in the 5 μg range. During periods of crew activity, magnitudes ranged from tens to hundreds of μg . As seen in previous studies of Orbiter acceleration environment,[18-21] spectral representations of SAMS

data were dominated by specific Orbiter and Spacelab structural modes, most notable are the 3.5, 4.7, 5.2, 6.2, and 7 Hz modes. The three modes >5 Hz are modulated by the 5 Hz lowpass filter applied to the data.

4. Discussion

The accelerometers which flew on STS-40 provided data in the frequency range up to 100 Hz (ESA SSMA), but most were restricted to an upper bound of about 10 Hz. This limited the contribution of higher frequency vibration and noise to the measured data, making the STS-40 data some of the "quietest" acceleration data collected on an Orbiter mission. During crew sleep periods, acceleration magnitudes in the 10^{-6} to 10^{-5} g range were recorded in the Spacelab module and on the GAS Bridge Assembly. The acceleration magnitudes increased to the 10^{-4} g level during periods of nominal crew activity. Vernier thruster firings caused acceleration shifts on the order of 10^{-4} g and primary thruster firings caused accelerations as great as 10^{-2} g. The WPI accelerometer system recorded a number of acceleration events in the milli-g range which were identified as experiment related. The OSE accelerometer system measured no angular vibrations with frequencies greater than 1 Hz during a period of vernier firings. This is attributed to the g-jitter levels being below the instrument's limit of detectability. The HiRAP data show variations on the order of 10^{-5} g during APU firings during Orbiter re-entry. This is consistent with data collected during previous flights of HiRAP, but cannot be compared with other STS-40 accelerometer data because of the data collection time. OARE measured low frequency accelerations consistent with a model of atmospheric and aerodynamic effects.

Frequency domain analysis was applied to OSE, SAMS, and SSMA data. The SAMS and SSMA data show the typical excitation of Orbiter and Spacelab structural modes that is expected in accelerometer data. The most common of these modes in the STS-40 data are those at 3.5, 4.7, 5.2, 6.2, and 7 Hz. The SSMA, recording data at a higher sampling rate than other instruments on STS-40, also measured the 17 Hz Ku-band antenna dither and Orbiter structural mode. The fact that the 4.7 Hz Spacelab mode was recorded by the SSMA on the GAS Bridge

Assembly leads us to reevaluate our understanding of how accelerations propagate across loosely coupled structures. Further analysis of this phenomenon is required. Before drawing any conclusions about the Orbiter low-g environment, however, one must keep in mind that the environment monitored by SSMA was that of the accelerometer head linked to the cargo bay through the vibrating table, the GAS canister, and the GAS Bridge Assembly.

The flight of the seven accelerometer systems discussed here made STS-40 the best instrumented low-g Orbiter flight to date. The analysis to date has greatly fortified our knowledge of the typical acceleration environment of a manned Orbiter in low-Earth orbit. Further work, specifically additional frequency domain analysis, comparisons of thruster firing times with accelerometer data, and comparisons of data from accelerometers in the Spacelab and on the Gas Bridge Assembly, will greatly increase our understanding of the propagation of accelerations throughout and across structures of the Spacelab and Orbiter.

References

- [1] *Matthiesen, D. H., Bellows, A. H.*: Microgravity Acceleration Measurements Aboard the Get Away Special Bridge During STS-40. AIAA Paper 92-0355, AIAA 30th Aerospace Sciences Meeting, January 1992, Reno, Nevada.
- [2] *Bellows, A., Matthiesen, D., Duchene, G.*: Free Float Acceleration Measurements Aboard NASA's KC-135 Microgravity Research Aircraft, AIAA Paper 90-0742, AIAA 28th Aerospace Sciences Meeting, January 1990, Reno, Nevada.
- [3] *Blanchard, R. C., Hendrix, M. K., Fox, J. C., Thomas, D. J., Nicholson, J.*: The Orbital Acceleration Research Experiment, AIAA Paper 86-1195, June 1986.
- [4] *Blanchard, R. C., Nicholson, J. Y., Ritter, J. R.*: STS-40 Orbital Acceleration Research Experiment Flight Results During a Typical Sleep Period, NASA Technical Memorandum 104209, January 1992.
- [5] *Blanchard, R. C.*: Rarefied Flow Lift-to-Drag Measurements of the Shuttle Orbiter, ICAS Proceedings 1986 - 15th Congress of the International Council of the Aeronautical Sciences, Volume 2, P. Santini and R. Staufenbiel, eds., 1986, pp. 1421-1430.

- [6] *Blanchard, R. C., Buck, G. M.*: Rarefied-flow Aerodynamics and Thermosphere Structure from Shuttle Flight Measurements. *J. Spacecraft and Rockets*, 23, 18 (1986).
- [7] *Blanchard, R. C., Hinson, E. W., Nicholson, J. Y.*: Shuttle High Resolution Accelerometer Package Experiment Results: Atmospheric Density Measurements Between 60 and 160 km, *J. Spacecraft and Rockets*. 26, 173 (1989).
- [8] *Blanchard, R. C., Larman, K. T.*: Rarefied Aerodynamics and Upper Atmospheric Flight Results from the Orbiter High Resolution Accelerometer Package Experiment, AIAA Paper 87-2366, AIAA Atmospheric Flight Mechanics Conference, August 1987.
- [9] *Blanchard, R. C., Rutherford, J. F.*: Shuttle Orbiter High Resolution Accelerometer Package Experiment: Preliminary Flight Results, *J. Spacecraft and Rockets*. 22, 474 (1985).
- [10] *Buck, G. M., Blanchard, R. C.*: Rarefied Aerodynamics and Upper Atmosphere Density from Multiple Orbiter Flight Measurements, AIAA Paper 86-0269, January 1986.
- [11] *Thompson, J. M., Russell, J. W., Blanchard, R. C.*: Methods for Extracting Aerodynamic Accelerations from Orbiter High Resolution Accelerometer Package Flight Data, A Collection of Technical Papers - AIAA Atmospheric Flight Mechanics Conference, AIAA, 1987, pp. 130-138.
- [12] *Blanchard, R. C., Hinson, E. W.*: Flight Measurements of Shuttle Orbiter Pitching-moment Coefficient and Elevon Effectiveness in the Rarefied-flow Regime, NASA Technical Paper 2889, March 1989.
- [13] *Blanchard, R. C., Hinson, E. W.*: Hypersonic Rarefied-flow Aerodynamics Inferred From Shuttle Orbiter Acceleration Measurements, Paper N.7.0, International Conference on Hypersonic Aerodynamics, University of Manchester, England, September 1989.
- [14] *Blanchard, R. C., Larman, K. T., Barrett, M.*: The High Resolution Accelerometer Package (HiRAP) Flight Experiment Summary for the First 10 Flights, NASA Reference Publication 1267, April 1992.
- [15] *DeLombard, R., Finley, B. D.*: Space Acceleration Measurement System Description and Operations on the First Spacelab Life Sciences Mission, NASA Technical Memorandum 105301, November 1991.
- [16] *DeLombard, R., Finley, B. D., Baugher, C. R.*: Development of and Flight Results from the Space Acceleration Measurement System (SAMS), AIAA Paper 92-0354, AIAA 30th Aerospace Sciences Meeting, January 1992, Reno, Nevada (NASA Technical Memorandum 105652, January 1992).
- [17] *Baugher, C. R.*: Early Summary Report of Mission Acceleration Measurements from STS-40 (1991).

- [18] *Hamacher, H., Merbold, U.*: Microgravity Environment of the Material Science Double Rack on Spacelab-1. *J. Spacecraft*, 24, 264 (1987).
- [19] *Hamacher, H., Merbold, U., Jilg, R.*: Analysis of Microgravity Measurements Performed During D1, in *Proceedings of the Norderney Symposium on Scientific Results of the German Spacelab Mission D1*, Norderney, Germany, 27-29 August 1986, pp. 48-56.
- [20] *Rogers, M. J. B., Alexander, J. I. D.*: Analysis of Spacelab 3 Residual Acceleration Data. *J. Spacecraft and Rockets*, 28, 707 (1991).
- [21] *Rogers, M. J. B., Alexander, J. I. D.*: Residual Acceleration Data Analysis for Spacelab Missions. *Microgravity Sci. Tech.* V, 43 (1992).

Acknowledgements

There is a very large group of people without whom this paper would not have been possible. These are the teams responsible for the development and flight of the accelerometer systems and the post-flight analysis of the accelerometer data. This includes the SAMS project team at NASA LeRC and the ACAP project team at NASA MSFC who are involved in the development and flight of SAMS and the analysis of SAMS data, respectively. Continuing support by NASA Headquarters for the SAMS and ACAP projects is greatly appreciated.

Technical development of the OSE was carried out by J. Houston, K. J. Meese, W. S. Money, T. B. Plummer, and F. P. Russo, all of the NASA Goddard Laboratory for Astronomy and Solar Physics. Project coordination was provided by N. F. Barthelme and S. P. Olden of Goddard's Special Payloads Division.

The SSMA units were manufactured by Centre Suisse pour Electronique et Microtechnique. The manufacturer of the measurement support system and the overall prime contractor for the payload was Compagnie Industrielle Radioelectrique.

Special thanks to Lynne Carver of the CMMR for formatting the majority of the figures. Walt Roark of Sverdrup Technology/ACAP Project provided Fig. 8.

Figure Captions

- Fig. 1. General locations of the Spacelab Module and GAS Bridge Assembly on Columbia during STS-40.
- Fig. 2. General locations of SAMS units in the Spacelab Module during STS-40: on the base of the Body Restraint System (BRS), on the connector bracket panel of the SMIDEX in Rack 5, and on the SSCE in Rack 7.
- Fig. 3. Peak acceleration magnitude versus time recorded by the WPI accelerometer system. Note Type A accelerations resulting from an electromechanical relay and Type B accelerations resulting from power conservation system relays. Time is from initiation of experiment operations.
- Fig. 4. Output of the OSE high sensitivity pitch channel during an interval when vernier thrusters were active. Pitch offset is the angle between the solar direction and the optical axis of a sun sensor. Time is from initiation of experiment operations.
- Fig. 5. Time history (a) and frequency domain representation (b) of SSMA y-axis data during Experiment Sequence 5. Note the 1 Hz / 6 μ g calibration signal and structural frequency modes of 3.7 and 4.7 Hz.
- Fig. 6. OARE y-axis flight data compared with calculated atmospheric-aerodynamic model. Time is in MET.
- Fig. 7. HiRAP z-axis (1.0 sec mean) uncalibrated reentry data. Time is in GMT.
- Fig. 8. Overlay of thruster firing occurrences with 1-second mean SAMS data during a period of low-level activity. Solid circles denote firings of vernier thrusters; open circles denote firings of primary thrusters.
- Fig. 9. Y-axis SAMS data during a period of vernier thruster firings. Note that the resultant linear shift of the vehicle is reflected in a shift of the mean acceleration in the time domain (a) and an increased d.c. component in the frequency domain (b).

Table 1. STS-40 Accelerometer Systems

Accelerometer System/Experiment	Investigator / Contact Person	Organization/Affiliation
Fluid Behavior and Zeolite Crystal Growth Experiments	William W. Durgin	Worcester Polytechnic Institute
Gallium Arsenide Crystal Growth	David H. Matthiesen	Case Western Reserve University / NASA LeRC
Orbiter Stability Experiment	Werner Neupert	NASA GSFC
OARE	Robert C. Blanchard	NASA LaRC
HiRAP	Robert C. Blanchard	NASA LaRC
Solid State Micro-Accelerometer	Philippe Roussel	ESA
SAMS	Richard DeLombard	NASA LeRC

Table 2. Orientation of SAMS with respect to the Orbiter on STS-40.

Sensor Head	SAMS Orientation With Respect to Orbiter		
	X_o	Y_o	Z_o
Spacelab floor	Y_s	$-Z_s$	$-X_s$
Rack 5	$-Y_s^*$	$-X_s^*$	$-Z_s^*$
Rack 7	$-Y_s$	$-X_s$	$-Z_s$

*with -28.9° rotation about Y_s



AIAA 93-0833 Low Gravity Environment On-board Columbia During STS-40

M. J. B. Rogers

Center for Microgravity and Materials Research
University of Alabama in Huntsville, Huntsville, Alabama 35899 USA

C. R. Baugher

Acceleration Characterization and Analysis Project
NASA Marshall Space Flight Center, MSFC, Alabama 35812 USA

R. C. Blanchard

OARE Project Technologist,
NASA Langley Research Center, Hampton, Virginia USA

R. DeLombard

SAMS Project Manager
NASA Lewis Research Center, Cleveland, Ohio USA

W. W. Durgin

Aerospace Engineering
Worcester Polytechnic Institute, Worcester, Massachusetts USA

D. H. Matthiesen

Case Western Reserve University
NASA Lewis Research Center, Cleveland, Ohio USA

W. Neupert

Code 680
NASA Goddard Space Flight Center, Greenbelt, Maryland USA

P. Roussel

European Space Agency
Keplerlaan 1, Noordwijk, The Netherlands

**31st Aerospace Sciences
Meeting & Exhibit
January 11-14, 1993 / Reno, NV**

LOW GRAVITY ENVIRONMENT ON-BOARD COLUMBIA DURING STS-40

M. J. B. Rogers
Center for Microgravity and Materials Research
University of Alabama in Huntsville
Huntsville, Alabama 35899 USA

C. R. Baugher
Acceleration Characterization and Analysis Project
NASA Marshall Space Flight Center
MSFC, Alabama 35812 USA

R. C. Blanchard
OARE Project Technologist
NASA Langley Research Center
Hampton, Virginia USA

R. DeLombard
SAMS Project Manager
NASA Lewis Research Center
Cleveland, Ohio USA

W. W. Durgin
Aerospace Engineering
Worcester Polytechnic Institute
Worcester, Massachusetts USA

D. H. Matthiesen
Case Western Reserve Univ.
NASA Lewis Research Center
Cleveland, Ohio USA

W. Neupert
Code 680
NASA Goddard Space Flight Ctr.
Greenbelt, Maryland USA

P. Roussel
European Space Agency
Keplerlaan 1, Noordwijk
The Netherlands

Abstract

The first NASA Spacelab Life Sciences mission (SLS-1) flew 5 June to 14 June 1991 on the orbiter Columbia (STS-40). The purpose of the mission was to investigate the human body's adaptation to the low gravity conditions of space flight and the body's readjustment after the mission to the 1 g environment of earth. In addition to the life sciences experiments manifested for the Spacelab module, a variety of experiments in other scientific disciplines flew in the Spacelab and in Get Away Special (GAS) Canisters on the GAS Bridge Assembly. Several principal investigators designed and flew specialized accelerometer systems to characterize the low gravity environment. This was done to better assess the results of their experiments. This was also the first flight of the NASA Microgravity Science and Applications Division (MSAD) sponsored Space Acceleration Measurement System (SAMS) and the first flight of the NASA Orbiter Experiments Office (OEX) sponsored Orbital Acceleration Research Experiment accelerometer (OARE). We present a brief introduction to seven STS-40 accelerometer systems and discuss and compare the resulting data.

1. Introduction

The first NASA Spacelab Life Sciences mission (SLS-1) flew 5 June to 14 June 1991 on the orbiter Columbia (mission STS-40). The purpose of the mission was to investigate the human body's adaptation to the low gravity conditions of space flight and the body's readjustment after the mission to the 1 g environment of earth. In addition to the life sciences experiments manifested for the Spacelab module, a variety of experiments in other scientific disciplines flew in the Spacelab and in Get Away Special (GAS) Canisters on the GAS Bridge Assembly. To better assess the results of the various experiments, several principal investigators designed and flew accelerometer systems. This was also the first flight of the MSAD-sponsored SAMS and the first flight of the OEX-sponsored OARE. In the following section, we introduce seven accel-

erometer systems which measured and recorded acceleration levels during STS-40 and discuss the resulting data.

2. Accelerometer Systems, Data, and Results

The STS-40 accelerometer systems to be discussed are listed in Table 1.

Table 1. STS-40 Accelerometer Systems

Accelerometer System/Experiment	Investigator / Contact Person	Organization/Affiliation
Fluid Behavior and Zeolite Crystal Growth Experiments	William W. Durgin	Worcester Polytechnic Institute
Gallium Arsenide Crystal Growth	David H. Matthiesen	Case Western Reserve Univ.
Orbiter Stability Experiment	Werner Neupert	NASA GSFC
OARE	Robert C. Blanchard	NASA LaRC
HiRAP	Robert C. Blanchard	NASA LaRC
Solid State Micro-Accelerometer	Philippe Roussel	ESA
SAMS	Richard DeLombard	NASA LeRC

2.1 GTE Gallium Arsenide Crystal Growth Experiment

The GTE experiment was designed to study the effect of reduced gravity on the growth of gallium arsenide semiconductor material.¹ The experiment was located in GAS Canister G-052 and was oriented with the accelerometer x- and y-axes parallel to those of the Orbiter and with the z-axis anti-parallel. A Sundstrand QA-2000 sensor was aligned with the crystal growth axis (x-axis) and QA-1400 sensors were used in the y- and z-directions. The measurement range for the system was 1×10^{-5}

clear to what extent the smooth reversal of attitude is the result of a sequence of thruster firings or reflects a low frequency response by the Orbiter to a single firing. In any case, no angular vibration at frequencies above about 1 Hz attributable to a vernier thruster firing is detectable with the present instrument.

2.4 ESA Solid State Micro-Accelerometer

The primary objective of the Solid State Micro-Accelerometer experiment (SSMA) was to test a new type of highly sensitive accelerometer in low-g to characterize the instrument performance. The system was designed to provide an engineering test demonstration of the sensors to prove suitability for applications on future flights. The SSMA was located in GAS Canister G-021. Twelve accelerometers (including two dummy

units) were mounted in a three axis array on a one axis vibrating table designed to provide variable calibration signals during flight. Four accelerometers were oriented with their sensitive axis parallel to the vibration axis of the table and to the Orbiter y-axis, three parallel to the Orbiter x-axis, and three parallel to the Orbiter z-axis. Each accelerometer unit included a small proof mass (15 micro-gram) and supporting silicon springs fabricated from mono-crystalline silicon and combined on a hybrid substrate with analog readout electronics. The micro-structure and associated micro-electronics were sealed and mounted in a standard, 14 pin dual-in-line electronics package as an integral unit.

The SSMA was designed to operate in the range ± 8 milli-g with a sensitivity of 125 volts/g and a frequency range of d.c. to

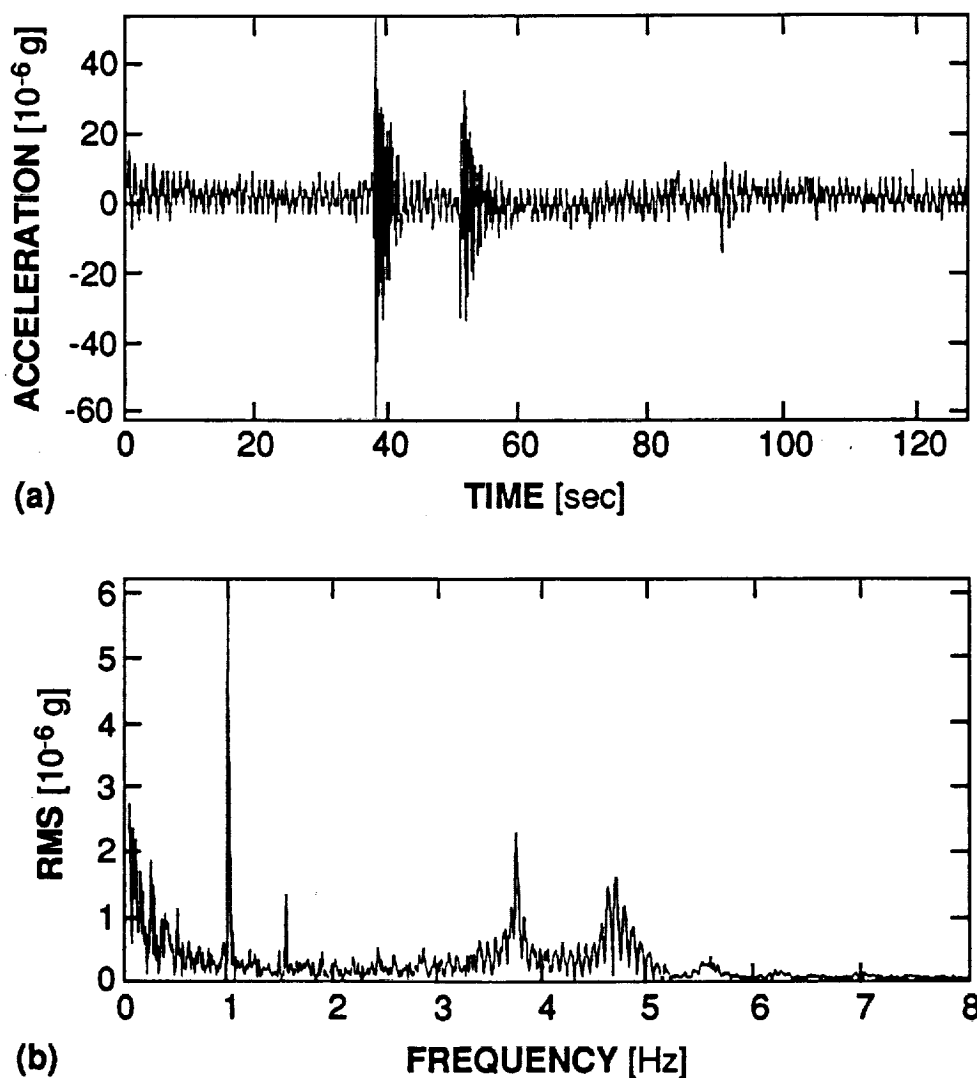


Fig. 1. Time history (a) and frequency domain representation (b) of SSMA y-axis data during Experiment Sequence 5. Note the 1 Hz/6 μ g calibration signal and structural frequency modes of 3.7 and 4.7 Hz. Data were sampled at 16 Hz and a 4 Hz cutoff was applied in processing.

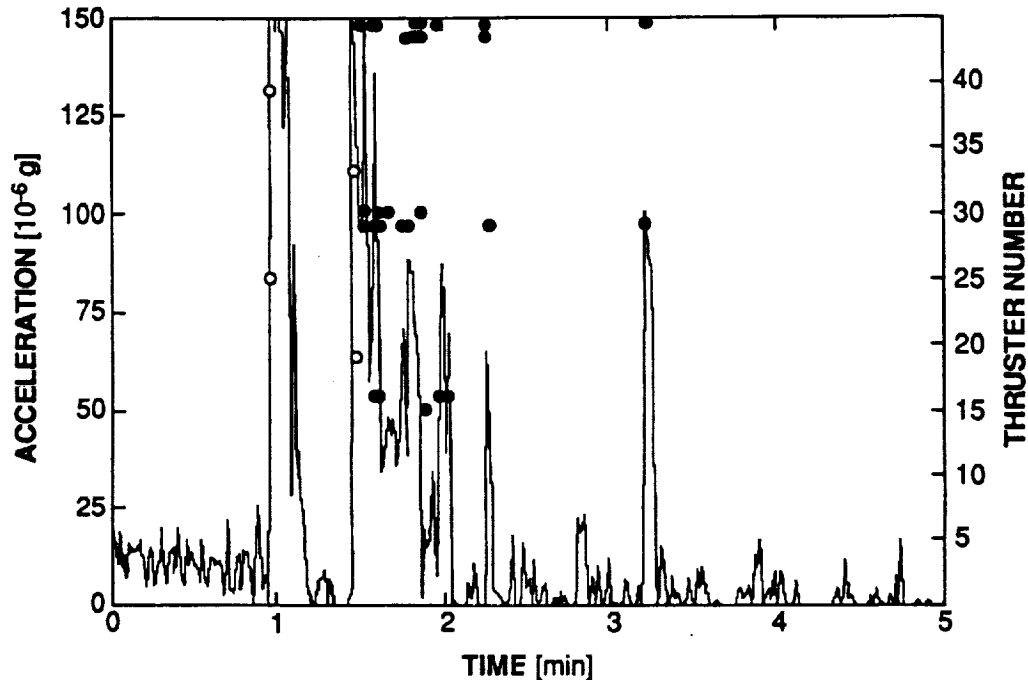


Fig. 3. Overlay of thruster firing occurrences and 1-second mean SAMS data. Solid circles denote vernier thruster firings, open circles denote primary thruster firings.

Variation of atmospheric drag among orbits was on the order of $\pm 2 \times 10^{-7}$ g. Some erratic instrument bias persists in the x- and z-axes. In these axes, the OARE data can be made to match a comprehensive atmospheric-aerodynamic model by making arbitrary bias adjustments.

2.6 High Resolution Acceleration Package

The High Resolution Acceleration Package (HiRAP) consists of a set of three orthogonal, pendulous, gas-damped accelerometers, each with a resolution of $1 \mu\text{g}$ and a measurement range of approximately $\pm 8000 \mu\text{g}$. HiRAP is designed to measure high-altitude aerodynamic acceleration on the Orbiter vehicle during atmospheric re-entry. The HiRAP is mounted in a wing box of the cargo bay, such that the orthogonal HiRAP axes are aligned with the Orbiter body axes. Data are collected at 112 Hz, and two lowpass filters at 20 Hz and 2 Hz are applied. HiRAP absolute accuracy over its twelve flights since 1983, after in-flight calibration, is in the range 3 to 7 μg .⁴⁻¹³

During re-entry, aerodynamic control surfaces used for Orbiter attitude and control require hydraulic power. This power is provided by a set of three auxiliary power units (APU). The exhaust gas ports for these pulsed turbines are located on the top of the Orbiter just in front and to the sides of the vertical tail. The exhaust jets of gas produce accelerations in the Orbiter negative z-direction. These APU accelerations were measured and recorded by HiRAP.

The APU signals become evident at two times during Orbiter descent: just before the deorbit burn and just before the

onset of atmospheric drag. The 112 Hz HiRAP data were averaged over one second intervals to permit characterization of the acceleration changes. A time history of this period shows a shift at the ignition of the first APU, a sensor saturation during deorbit burn, a second shift at the ignition of the second and third APU, and the onset of dominant atmospheric drag.

Around the first APU transition, a measurement of the data shift shows a bias of about $15 \mu\text{g}$. Data from the second and third APU transitions show a shift of about $32 \mu\text{g}$. It is at the second APU transition region that an in-flight HiRAP calibration is performed. This $32 \mu\text{g}$ shift is incorporated in the calibration aerodynamic signal. The shifts in the z-axis acceleration signal are consistent with the shifts found in prior HiRAP missions.

2.7 Space Acceleration Measurement System

The Space Acceleration Measurement System was developed to monitor and measure the low-g environment of MSAD-sponsored science payloads on the Orbiter.^{14,15} SAMS consists of three remote triaxial sensor heads, connecting cables, and a controlling data acquisition unit with a digital data recording system using optical disks with 200 megabyte storage capacity per side. With crew access to change the disks, the data storage capacity is essentially unlimited. On STS-40, three triaxial sets of Sundstrand QA-2000 sensors recorded data at 25 samples per second with a 5 Hz lowpass filter applied (140 dB/decade rolloff). The SAMS control electronics and data recording package was mounted in the Spacelab in SMIDEX Rack 5; SAMS was manifested to support the Solid Surface Combustion

SAMS, and SSMA data. The SAMS and SSMA data show typical excitation of Orbiter and Spacelab structural modes. The most common of these modes in the STS-40 data are those at 3.5, 4.7, 5.2, 6.2, and 7 Hz. The SSMA, recording data at a higher sampling rate than other instruments on STS-40, also measured the 17 Hz Ku-band antenna dither and Orbiter structural mode. The fact that the 4.7 Hz Spacelab mode was recorded by the SSMA on the GAS Bridge Assembly leads us to reevaluate our understanding of how vibrations propagate across loosely coupled structures. Further analysis of this phenomenon is required.

The flight of the seven accelerometer systems discussed here made STS-40 the best instrumented low-g Orbiter flight to date. The analysis has increased our knowledge of the typical acceleration environment of a manned Orbiter in low-Earth orbit. Further work, specifically additional frequency domain analysis, comparisons of thruster firing times with accelerometer data, and comparisons of data from accelerometers in the Spacelab and on the Gas Bridge Assembly, will greatly enhance our understanding of the propagation of accelerations throughout and across structures of the Spacelab and Orbiter.

4. References

- ¹Mathiesen, D. H. and A. H. Bellows, Microgravity Acceleration Measurements Aboard the Get Away Special Bridge During STS-40, AIAA Paper 92-0355, AIAA 30th Aerospace Sciences Meeting, January 1992, Reno, Nevada.
- ²Blanchard, R. C., M. K. Hendrix, J. C. Fox, D. J. Thomas, and J. Nicholson, The Orbital Acceleration Research Experiment, AIAA Paper 86-1195, June 1986.
- ³Blanchard, R. C., J. Y. Nicholson, and J. R. Ritter, STS-40 Orbital Acceleration Research Experiment Flight Results During a Typical Sleep Period, NASA Technical Memorandum 104209, January 1992.
- ⁴Blanchard, R. C., Rarefied Flow Lift-to-Drag Measurements of the Shuttle Orbiter, ICAS Proceedings 1986 - 15th Congress of the International Council of the Aeronautical Sciences, Volume 2, P. Santini and R. Staufenbiel, eds., 1986, pp. 1421-1430.
- ⁵Blanchard, R. C. and G. M. Buck, Rarefied-flow Aerodynamics and Thermosphere Structure from Shuttle Flight Measurements, *J. Spacecraft and Rockets* 23 (1986) 18-24.
- ⁶Blanchard, R. C., E. W. Hinson, and J. Y. Nicholson, Shuttle High Resolution Accelerometer Package Experiment Results: Atmospheric Density Measurements Between 60 and 160 km, *J. Spacecraft and Rockets* 26 (1989) 173-180.
- ⁷Blanchard, R. C. and K. T. Larman, Rarefied Aerodynamics and Upper Atmospheric Flight Results from the Orbiter High Resolution Accelerometer Package Experiment, AIAA Paper 87-2366, AIAA Atmospheric Flight Mechanics Conference, August 1987.
- ⁸Blanchard, R. C. and J. F. Rutherford, Shuttle Orbiter High Resolution Accelerometer Package Experiment: Preliminary Flight Results, *J. Spacecraft and Rockets* 22 (1985) 474-480.
- ⁹Buck, G. M. and R. C. Blanchard, Rarefied Aerodynamics and Upper Atmosphere Density from Multiple Orbiter Flight Measurements, AIAA Paper 86-0269, January 1986.
- ¹⁰Thompson, J. M., J. W. Russell, and R. C. Blanchard, Methods for Extracting Aerodynamic Accelerations from Orbiter High Resolution Accelerometer Package Flight Data, A Collection of Technical Papers - AIAA Atmospheric Flight Mechanics Conference, AIAA, 1987, pp. 130-138.
- ¹¹Blanchard, R. C. and E. W. Hinson, Flight Measurements of Shuttle Orbiter Pitching-moment Coefficient and Elevon Effectiveness in the Rarefied-flow Regime, NASA Technical Paper 2889, March 1989.
- ¹²Blanchard, R. C. and E. W. Hinson, Hypersonic Rarefied-flow Aerodynamics Inferred From Shuttle Orbiter Acceleration Measurements, Paper N.7.0, International Conference on Hypersonic Aerodynamics, University of Manchester, England, September 1989.
- ¹³Blanchard, R. C., K. T. Larman, and M. Barrett, The High Resolution Accelerometer Package (HiRAP) Flight Experiment Summary for the First 10 Flights, NASA Reference Publication 1267, April 1992.
- ¹⁴DeLombard, R. and B. D. Finley, Space Acceleration Measurement System Description and Operations on the First Spacelab Life Sciences Mission, NASA Technical Memorandum 105301, November 1991.
- ¹⁵DeLombard, R., B. D. Finley, and C. R. Baugher, Development of and Flight Results from the Space Acceleration Measurement System (SAMS), AIAA Paper 92-0354, AIAA 30th Aerospace Sciences Meeting, January 1992, Reno, Nevada (NASA Technical Memorandum 105652, January 1992).
- ¹⁶Baugher, C. R., Early Summary Report of Mission Acceleration Measurements from STS-40 (1991).
- ¹⁷Hamacher, H. and U. Merbold, Microgravity Environment of the Material Science Double Rack on Spacelab-1, *J. Spacecraft* 24 (1987) 264-269.
- ¹⁸Hamacher, H., U. Merbold, and R. Jilg, Analysis of Microgravity Measurements Performed During D1, in Proceedings of the Norderney Symposium on Scientific Results of the German Spacelab Mission D1, Norderney, Germany, August 1986, pp. 48-56.
- ¹⁹Rogers, M. J. B. and J. I. D. Alexander, Analysis of Spacelab 3 Residual Acceleration Data, *J. Spacecraft and Rockets* 28 (1991) 707-712.



Report Documentation Page

1. Report No. 4	2. Government Accession No.	3. Recipient's Catalog No.
4. Title and Subtitle Acceleration Studies	5. Report Date April 15, 1993	6. Performing Organization Code
7. Author(s) Ms. Melissa Rogers	8. Performing Organization Report No.	9. Work Unit No.
9. Performing Organization Name and Address Center for Microgravity and Materials Research The University of Alabama in Huntsville Huntsville, AL 35899	10. Contract or Grant No. NAS8-38609, D.O.29	11. Type of Report and Period Covered Final
12. Sponsoring Agency Name and Address George C. Marshall Space Flight Center National Aeronautics & Space Administration Marshall Space Flight Center, AL 35812	13. Sponsoring Agency Code	
15. Supplementary Notes		
16. Abstract <p>Work was performed under NASA Contract NAS8-38609, Delivery Order 29 to support the NASA MSFC Acceleration Characterization and Analysis Project (ACAP). Four tasks (Analysis Development, Analysis Research, Analysis Documentation, and Acceleration Analysis) were addressed by parallel projects: 1) assessment of data access and processing needs of low-gravity investigators; 2) analysis, development, and implementation of acceleration data processing software; and 3) analysis of the acceleration environment of Orbiters. Work in particular was concentrated on the preparation for and implementation of near real-time SAMS data analysis during the USMP-1 mission. Additional data analysis and investigator contact involved the USML-1, USML-2, and USMP-2 missions. User support documents and case specific software documentation and tutorials were developed. Information and results were presented to microgravity users through participation in MGMG meetings and preparation and submittal of technical papers. The potential for future work exists: ACAP computer facilities need to be fully implemented and networked, data resources must be cataloged and accessible, future microgravity missions must be coordinated, and continued Orbiter characterization is necessary.</p>		
17. Key Words (Suggested by Author(s)) Microgravity, Residual Acceleration	18. Distribution Statement UNCLASSIFIED UNLIMITED	
19. Security Classif. (of this report)	20. Security Classif. (of this page)	21. No. of pages 22. Price

PREPARATION OF THE REPORT DOCUMENTATION PAGE

The last page of a report facing the third cover is the Report Documentation Page, RDP. Information presented on this page is used in announcing and cataloging reports as well as preparing the cover and title page. Thus it is important that the information be correct. Instructions for filling in each block of the form are as follows:

Block 1. Report No. NASA report series number, if preassigned.

Block 2. Government Accession No. Leave blank.

Block 3. Recipient's Catalog No. Reserved for use by each report recipient.

Block 4. Title and Subtitle. Typed in caps and lower case with dash or period separating subtitle from title.

Block 5. Report Date. Approximate month and year the report will be published.

Block 6. Performing Organization Code. Leave blank.

Block 7. Author(s). Provide full names exactly as they are to appear on the title page. If applicable, the word editor should follow a name.

Block 8. Performing Organization Report No. NASA installation report control number and, if desired, the non-NASA performing organization report control number.

Block 9. Performing Organization Name and Address. Provide affiliation (NASA program office, NASA installation, or contractor name) of authors.

Block 10. Work Unit No. Provide Research and Technology Objectives and Plans (RTOP) number.

Block 11. Contract or Grant No. Provide when applicable.

Block 12. Sponsoring Agency Name and Address. National Aeronautics and Space Administration, Washington, D.C. 20546-0001. If contractor report, add NASA installation or HQ program office.

Block 13. Type of Report and Period Covered. NASA formal report series; for Contractor Report also list type (interim, final) and period covered when applicable.

Block 14. Sponsoring Agency Code. Leave blank.

Block 15. Supplementary Notes. Information not included elsewhere: affiliation of authors if additional space is re-

quired for block 9, notice of work sponsored by another agency, monitor of contract, information about supplements (film, data tapes, etc.), meeting site and date for presented papers, journal to which an article has been submitted, note of a report made from a thesis, appendix by author other than shown in block 7.

Block 16. Abstract. The abstract should be informative rather than descriptive and should state the objectives of the investigation, the methods employed (e.g., simulation, experiment, or remote sensing), the results obtained, and the conclusions reached.

Block 17. Key Words. Identifying words or phrases to be used in cataloging the report.

Block 18. Distribution Statement. Indicate whether report is available to public or not. If not to be controlled, use "Unclassified-Unlimited." If controlled availability is required, list the category approved on the Document Availability Authorization Form (see NHB 2200.2, Form FF427). Also specify subject category (see "Table of Contents" in a current issue of STAR), in which report is to be distributed.

Block 19. Security Classification (of this report). Self-explanatory.

Block 20. Security Classification (of this page). Self-explanatory.

Block 21. No. of Pages. Count front matter pages beginning with iii, text pages including internal blank pages, and the RDP, but not the title page or the back of the title page.

Block 22. Price Code. If block 18 shows "Unclassified-Unlimited," provide the NTIS price code (see "NTIS Price Schedules" in a current issue of STAR) and at the bottom of the form add either "For sale by the National Technical Information Service, Springfield, VA 22161-2171" or "For sale by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001," whichever is appropriate.