

SPECIFICATIONS

PRODUCT SPECIFICATIONS



**DIGITAL CCD AREA SCAN
MONOCHROME
CHANNEL LINK® OR
IEEE 1394 OUTPUT
UP TO 80 FPS AT VGA RESOLUTION**

BASLER A300 SERIES

Features/Benefits

- Superior image quality improves your image processing results
- Super compact size reduces the space needed in your installation
- 100% factory testing ensures consistent product quality
- LED indicators and test image generation capability reduce your integration time and aid troubleshooting
- Choice of resolutions and output types maximizes your system design flexibility
- Windows® setup tool lets you configure your camera with ease
- Electronic exposure time control provides maximum flexibility
- Shading correction feature reduces image variability caused by optics or lighting

Description

The A300 Series of high-performance, digital cameras is ideal for a variety of industrial applications. The cameras can be triggered via an external sync signal or run in an internally controlled "free-run" mode. A300 cameras operate with a single voltage power supply and have the advantage of remarkably simple cabling requirements. A combination of features such as digital shift, test images, and indicator LEDs, ensure that these versatile cameras provide an exceptional price/performance ratio.


Applications

- Semiconductor and component inspection
- Manufacturing quality control
- Food and beverage inspection
- Microscopy and medical imaging
- Biometrics
- Many other vision applications


BASLER
VISION TECHNOLOGIES

Dimensions (in mm)

A300b (Channel Link)

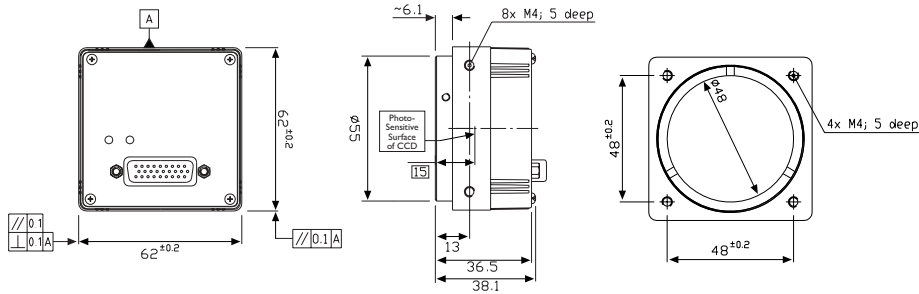

A300f (IEEE 1394)

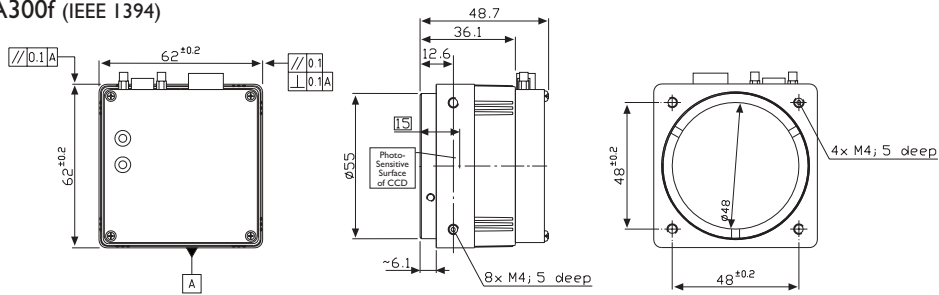

Specifications	A301b	A302b	A301f	A302fs
Sensor Size (H x V Pixels)	658 x 494	782 x 582	658 x 494	782 x 582
Sensor Type	Progressive Scan CCD			
Pixel Size (in μm)	9.9 x 9.9	8.3 x 8.3	9.9 x 9.9	8.3 x 8.3
Pixel Clock	18 MHz	18 MHz	Not Applicable	Not Applicable
Max. Frame Rate at Full Resolution	80 frames/s	60 frames/s	80 frames/s	30 frames/s
Color / Mono	Mono			
Video Output Type	Channel Link*	Channel Link*	IEEE 1394	IEEE 1394
Video Output Format	Dual Pixel 8 or 10 bits	Dual Pixel 8 or 10 bits	Mono: 8 bits/pixel	Mono: 8 bits/pixel
Synchronization	Via external trigger or free-run	Via external trigger or free-run	Via external trigger or the 1394 bus	Via external trigger or the 1394 bus
Exposure Control	Level-controlled or programmable	Level-controlled or programmable	Programmable via the 1394 bus	Programmable via the 1394 bus
Power Requirements	12VDC ($\pm 10\%$) max. 4.0 W	12VDC ($\pm 10\%$) max. 4.0 W	12VDC ($\pm 10\%$) max. 6.0 W	12VDC ($\pm 10\%$) max. 6.0 W
Lens Mounts	C-mount or F-mount			
Housing Size (L x W x H)	38.1 mm x 62 mm x 62 mm		48.7 mm x 62 mm x 62 mm	
Weight	max. 265 g	max. 265 g	max. 310 g	max. 310 g
Conformity	CE, FCC			

Specifications are subject to change without prior notice.

*The output is RS-644 LVDS when this camera is used with an optional Basler Interface Converter (BIC)

BASLER
VISION TECHNOLOGIES

Germany, Headquarters
Phone +49 4102 463 500
Fax +49 4102 463 599
vc.sales.europe@baslerweb.com

USA
Phone +1 610 280 0171
Fax +1 610 280 7608
vc.sales.usa@baslerweb.com

Singapore
Phone +65 6425 0472
Fax +65 6425 0473
vc.sales.asia@baslerweb.com

www.basler-vc.com