

## SAR Compliance Test Report

<b>Test report no.:</b>	Cph_SAR_0802_05	<b>Date of report:</b>	2008-01-10
<b>Template version:</b>	8.0	<b>Number of pages:</b>	58
<b>Testing laboratory:</b>	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	<b>Client:</b>	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
<b>Responsible test engineer:</b>	Jesper Nielsen	<b>Product contact person:</b>	Ole Sørensen
<b>Measurements made by:</b>	Leif Klysner & Jesper Nielsen		
<b>Tested device:</b>	RM-359		
<b>FCC ID:</b>	QTKRM-359	<b>IC:</b>	661AD-RM359
<b>Supplement reports:</b>	-		
<b>Testing has been carried out in accordance with:</b>	<b>47CFR §2.1093</b> Radiofrequency Radiation Exposure Evaluation: Portable Devices <b>FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)</b> Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields <b>RSS-102</b> Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields <b>IEEE 1528 - 2003</b> IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique		
<b>Documentation:</b>	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
<b>Test results:</b>	<b>The tested device complies with the requirements in respect of all parameters subject to the test.</b> The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		

**Date and signatures:**

For the contents:

**CONTENTS**

**1. SUMMARY OF SAR TEST REPORT..... 3**

1.1 TEST DETAILS..... 3

1.2 MAXIMUM RESULTS..... 3

    1.2.1 *Head Configuration*..... 3

    1.2.2 *Body Worn Configuration* ..... 3

    1.2.3 *Maximum Drift* ..... 4

    1.2.4 *Measurement Uncertainty* ..... 4

**2. DESCRIPTION OF THE DEVICE UNDER TEST..... 4**

2.1 PICTURE OF THE DEVICE..... 5

2.2 DESCRIPTION OF THE ANTENNA ..... 5

**3. TEST CONDITIONS ..... 5**

3.1 TEMPERATURE AND HUMIDITY ..... 5

3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER ..... 6

**4. DESCRIPTION OF THE TEST EQUIPMENT ..... 6**

4.1 MEASUREMENT SYSTEM AND COMPONENTS ..... 6

    4.1.1 *Isotropic E-field Probe Type ES3DV3* ..... 7

4.2 PHANTOMS ..... 8

4.3 TISSUE SIMULANTS ..... 8

    4.3.1 *Tissue Simulant Recipes* ..... 8

    4.3.2 *System Checking* ..... 9

    4.3.3 *Tissue Simulants used in the Measurements*..... 10

**5. DESCRIPTION OF THE TEST PROCEDURE ..... 11**

5.1 DEVICE HOLDER..... 11

5.2 TEST POSITIONS..... 11

    5.2.1 *Against Phantom Head*..... 11

    5.2.2 *Body Worn Configuration* ..... 12

5.3 SCAN PROCEDURES ..... 13

5.4 SAR AVERAGING METHODS..... 13

**6. MEASUREMENT UNCERTAINTY ..... 14**

**7. RESULTS ..... 15**

**APPENDIX A: SYSTEM CHECKING SCANS ..... 18**

**APPENDIX B: MEASUREMENT SCANS..... 24**

**APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S) ..... 57**

**APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S) ..... 58**

## 1. SUMMARY OF SAR TEST REPORT

### 1.1 Test Details

Period of test	2008-01-02 to 2008-01-10
SN, HW and SW numbers of tested device	SN: 004401/01/774455/4, HW: 0119, SW: Vp tkg5.51, DUT: 27381
Batteries used in testing	BP-5M, DUT: 27507, 27568, 27351, 28531, 28506
Headsets used in testing	HS-45 + AD-56, DUT: 27558 + 27559
Other accessories used in testing	-
State of sample	Prototype unit
Notes	-

### 1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

#### 1.2.1 Head Configuration

Mode	Ch / f (MHz)	Radiated power	Position	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
2-slot GPRS 850	251 / 848.8	28.9 dBm ERP	Left, Cheek	0.910 W/kg	<b>1.02 W/kg</b>	1.6 W/kg	<b>PASSED</b>
2-slot GPRS 1900	512 / 1850.2	27.9 dBm EIRP	Right, Cheek	1.01 W/kg	<b>1.13 W/kg</b>	1.6 W/kg	<b>PASSED</b>

#### 1.2.2 Body Worn Configuration

Mode	Ch / f (MHz)	Radiated power	Separation distance	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
2-slot GPRS 850	251 / 848.8	28.9 dBm ERP	1.5 cm	0.722 W/kg	<b>0.81 W/kg</b>	1.6 W/kg	<b>PASSED</b>
2-slot GPRS 1900	512 / 1850.2	27.9 dBm EIRP	1.5 cm	0.529 W/kg	<b>0.59 W/kg</b>	1.6 W/kg	<b>PASSED</b>

\*SAR values are scaled up by 12% to cover measurement drift.

### 1.2.3 Maximum Drift

Maximum drift covered by 12% scaling up of the SAR values	Maximum drift during measurements
0.5dB	0.47 dB

### 1.2.4 Measurement Uncertainty

Expanded Uncertainty (k=2) 95%	± 25.8%
--------------------------------	---------

## 2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population / uncontrolled

Modes of Operation	Bands	Modulation Mode	Duty Cycle	Transmitter Frequency Range (MHz)
GSM	850 1900	GMSK	1/8	824 – 849 1850 – 1910
GPRS	850 1900	GMSK	1/8 to 2/8	824 – 849 1850 – 1910
EGPRS	850 1900	GMSK / 8PSK	1/8 to 2/8	824 – 849 1850 – 1910
BT	2450	GFSK	1	2402 – 2480

Outside of USA and Canada, the transmitter of the device is capable of operating also in GSM/GPRS/EGPRS900 and GSM/GPRS/EGPRS1800 bands which are not part of this filing.

This device has Dual Transfer Mode capability for use at the ear. Therefore, SAR for multi slot GPRS mode was evaluated against the head profile of the phantom.

## 2.1 Picture of the Device



## 2.2 Description of the Antenna

The device has an internal antenna.

## 3. TEST CONDITIONS

### 3.1 Temperature and Humidity

Ambient temperature (°C):	20.5 to 22.5
Ambient humidity (RH %):	35 to 55

### 3.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The radiated output power of the device was measured by a separate test laboratory on the same unit(s) as used for SAR testing.

## 4. DESCRIPTION OF THE TEST EQUIPMENT

### 4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DAS4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE3	339	12 months	2008-06
DAE3	501	12 months	2008-02
DAE4	682	12 months	2008-08
E-field Probe ES3DV3	3116	12 months	2008-08
E-field Probe ES3DV3	3117	12 months	2008-08
E-field Probe ES3DV3	3119	12 months	2008-10
Dipole Validation Kit, D835V2	4d042	24 months	2008-09
Dipole Validation Kit, D1900V2	5d026	24 months	2008-02
DASY4 software	Version 4.7	-	-

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	SME06	848650/011	36 months	2008-07
Amplifier	2100-BBS3Q8CCJ	1003	-	-
Power Meter	NRP	100808	24 months	2008-03
Power Sensor	NRP-Z51	100412	24 months	2008-03
Call Tester	CMU200	105900	-	-
Call Tester	CMU200	110735	-	-
Call Tester	4400M	0411216	-	-
BT Tester	CBT	100263	-	-
Vector Network Analyzer	AT8753ES	MY40001091	12 months	2008-08
Dielectric Probe Kit	HP85070B	US33020403	-	-

4.1.1 Isotropic E-field Probe Type ES3DV3

<b>Construction</b>	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
<b>Calibration</b>	Calibration certificate in Appendix C
<b>Frequency</b>	10 MHz to 4 GHz (dosimetry); Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)
<b>Directivity</b>	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in HSL (rotation normal to probe axis)
<b>Dynamic Range</b>	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB
<b>Dimensions</b>	Overall length: 330 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 3.9 mm
<b>Application</b>	Distance from probe tip to dipole centers: 2.0 mm General dosimetry up to 4 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

## 4.2 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

## 4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within  $\pm 5\%$  of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was  $15.0 \pm 0.5$  cm measured from the ear reference point during system checking and device measurements.

### 4.3.1 Tissue Simulant Recipes

The following recipe(s) were used for Head and Body tissue simulant(s):

#### 800MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	39.74	55.97
HEC	0.25	1.21
Sugar	58.31	41.76
Preservative	0.15	0.27
Salt	1.55	0.79

#### 1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.88	69.02
Butyl Diglycol	44.91	30.76
Salt	0.21	0.22



#### 4.3.2 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

##### System checking, head tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			$\epsilon_r$	$\sigma$ [S/m]	
835	Reference result	2.33	42.2	0.90	
	± 10% window	2.10 - 2.56			
	2008-01-02	2.45	41.9	0.91	20.5
1900	Reference result	9.83	39.4	1.42	
	± 10% window	8.85 - 10.81			
	2008-01-09	10.6	40.1	1.48	21.8
	2008-01-10	10.5	40.2	1.45	21.5

##### System checking, body tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			$\epsilon_r$	$\sigma$ [S/m]	
835	Reference result	2.45	53.8	0.98	
	± 10% window	2.20 - 2.70			
	2008-01-02	2.44	53.1	0.95	20.5
1900	Reference result	10.0	54.8	1.54	
	± 10% window	9.0 - 11.0			
	2008-01-10	10.3	52.8	1.50	21.5

Plots of the system checking scans are given in Appendix A.

### 4.3.3 Tissue Simulants used in the Measurements

#### Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		$\epsilon_r$	$\sigma$ [S/m]	
836	Recommended value	41.5	0.90	
	± 5% window	39.4 – 43.6	0.86 – 0.95	
	2008-01-02	41.9	0.91	20.5
1880	Recommended value	40.0	1.40	
	± 5% window	38.0 – 42.0	1.33 – 1.47	
	2008-01-09	40.2	1.46	21.8
	2008-01-10	40.3	1.43	21.5

#### Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		$\epsilon_r$	$\sigma$ [S/m]	
836	Recommended value	55.2	0.97	
	± 5% window	52.4 – 58.0	0.92 – 1.02	
	2008-01-02	53.1	0.96	20.5
1880	Recommended value	53.3	1.52	
	± 5% window	50.6 – 56.0	1.44 – 1.60	
	2008-01-10	52.9	1.48	21.5

---

## 5. DESCRIPTION OF THE TEST PROCEDURE

### 5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

### 5.2 Test Positions

#### 5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

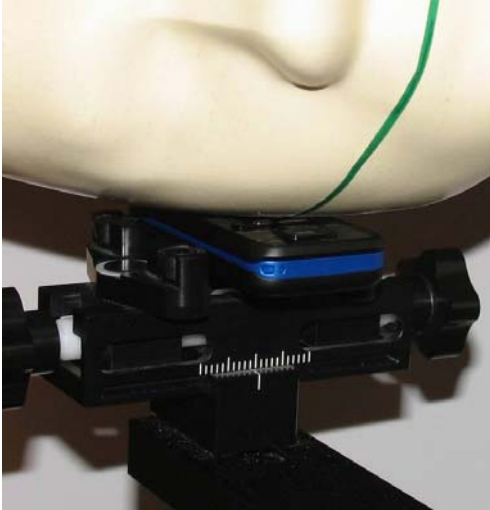


Photo of the device in "cheek" position with slide closed



Photo of the device in "tilt" position with slide closed

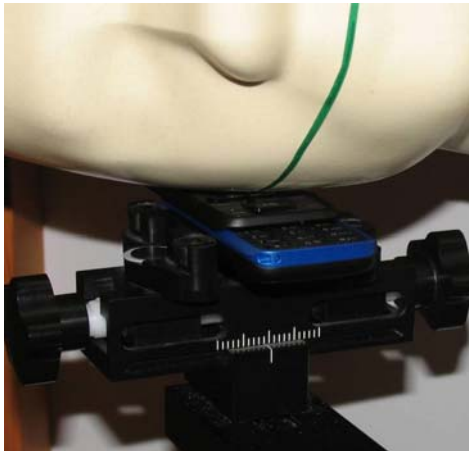


Photo of the device in "cheek" position with slide open



Photo of the device in "tilt" position with slide open

### 5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the photo below using a separate flat spacer that was removed before the start of the measurements. The device was oriented with both sides facing the phantom to find the highest results.



Photo of the device positioned for Body SAR measurement.  
The spacer was removed for the tests.

### 5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

### 5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

## 6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	$G_i$	$G_i \cdot U_i$ (%)	$v_i$
<b>Measurement System</b>							
Probe Calibration	E2.1	±5.9	N	1	1	±5.9	∞
Axial Isotropy	E2.2	±4.7	R	√3	$(1-c_p)^{1/2}$	±1.9	∞
Hemispherical Isotropy	E2.2	±9.6	R	√3	$(c_p)^{1/2}$	±3.9	∞
Boundary Effect	E2.3	±1.0	R	√3	1	±0.6	∞
Linearity	E2.4	±4.7	R	√3	1	±2.7	∞
System Detection Limits	E2.5	±1.0	R	√3	1	±0.6	∞
Readout Electronics	E2.6	±1.0	N	1	1	±1.0	∞
Response Time	E2.7	±0.8	R	√3	1	±0.5	∞
Integration Time	E2.8	±2.6	R	√3	1	±1.5	∞
RF Ambient Conditions - Noise	E6.1	±3.0	R	√3	1	±1.7	∞
RF Ambient Conditions - Reflections	E6.1	±3.0	R	√3	1	±1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	±0.4	R	√3	1	±0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	±2.9	R	√3	1	±1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5	±3.9	R	√3	1	±2.3	∞
<b>Test sample Related</b>							
Test Sample Positioning	E4.2	±6.0	N	1	1	±6.0	11
Device Holder Uncertainty	E4.1	±5.0	N	1	1	±5.0	7
Output Power Variation - SAR drift measurement	6.6.3	±0.0	R	√3	1	±0.0	∞
<b>Phantom and Tissue Parameters</b>							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	±4.0	R	√3	1	±2.3	∞
Conductivity Target - tolerance	E3.2	±5.0	R	√3	0.64	±1.8	∞
Conductivity - measurement uncertainty	E3.3	±5.5	N	1	0.64	±3.5	5
Permittivity Target - tolerance	E3.2	±5.0	R	√3	0.6	±1.7	∞
Permittivity - measurement uncertainty	E3.3	±2.9	N	1	0.6	±1.7	5
<b>Combined Standard Uncertainty</b>			RSS			±12.9	116
<b>Coverage Factor for 95%</b>			k=2				
<b>Expanded Uncertainty</b>						±25.8	

## 7. RESULTS

The measured Head SAR values for the test device are tabulated below:

### 850 MHz Head SAR results

Option used	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 128 824.2 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
<b>GSM</b>	<b>Power</b>		<b>29.4 dBm</b>	<b>29.9 dBm</b>	<b>30.3 dBm</b>
Slide closed	Left	Cheek	-	0.652	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
<b>2-slot GPRS</b>	<b>Power</b>		<b>28.4 dBm</b>	<b>28.6 dBm</b>	<b>28.9 dBm</b>
Slide closed	Left	Cheek	0.818	0.883	<b>0.901</b>
		Tilt	-	0.334	-
	Right	Cheek	0.747	0.806	0.823
		Tilt	-	0.341	-
<b>2-slot GPRS</b>	<b>Power</b>		<b>28.5 dBm</b>	<b>28.9 dBm</b>	<b>28.2 dBm</b>
Slide open	Left	Cheek	-	0.675	-
		Tilt	-	0.317	-
	Right	Cheek	-	0.600	-
		Tilt	-	0.334	-
<b>2-slot 8PSK EGPRS</b>	<b>Power</b>		<b>22.6 dBm</b>	<b>22.5 dBm</b>	<b>22.3 dBm</b>
Slide closed	Left	Cheek	-	-	0.316
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
<b>2-slot GPRS Slide closed</b>	Left Cheek, BT active		-	-	<b>0.910</b>

**1900 MHz Head SAR results**

Option used	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
<b>GSM</b>	<b>Power</b>		<b>29.5 dBm</b>	<b>31.4 dBm</b>	<b>29.9 dBm</b>
Slide closed	Left	Cheek	-	0.746	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
<b>2-slot GPRS</b>	<b>Power</b>		<b>27.9 dBm</b>	<b>29.6 dBm</b>	<b>28.3 dBm</b>
Slide closed	Left	Cheek	0.967	0.896	0.642
		Tilt	-	0.556	-
	Right	Cheek	<b>1.01</b>	0.921	0.782
		Tilt	-	0.464	-
<b>2-slot GPRS</b>	<b>Power</b>		<b>29.3 dBm</b>	<b>30.7 dBm</b>	<b>28.9 dBm</b>
Slide open	Left	Cheek	-	0.673	-
		Tilt	-	0.449	-
	Right	Cheek	0.997	0.854	0.713
		Tilt	-	0.316	-
<b>2-slot 8PSK EGPRS</b>	<b>Power</b>		<b>24.7 dBm</b>	<b>26.4 dBm</b>	<b>25.1 dBm</b>
Slide closed	Left	Cheek	-	-	-
		Tilt	-	-	-
	Right	Cheek	0.414	-	-
		Tilt	-	-	-
<b>2-slot GPRS Slide closed</b>	Right Cheek, BT active		0.994	-	-



The measured Body SAR values for the test device are tabulated below:

**850 MHz Body SAR results**

Option used	Test configuration	SAR, averaged over 1g (W/kg)		
		Ch 128 824.2 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
<b>2-slot GPRS</b>	<b>Power</b>	<b>28.4 dBm</b>	<b>28.6 dBm</b>	<b>28.9 dBm</b>
Slide closed	Without headset	0.672	0.711	<b>0.722</b>
Antenna facing phantom	Headset HS-45 + AD-56	0.465	0.500	0.504
Slide closed	Without headset	-	0.376	-
Display facing phantom	Headset HS-45 + AD-56	-	0.253	-
<b>2-slot GPRS</b> Slide closed Antenna facing phantom	Without headset, BT active	-	-	0.715

**1900 MHz Body SAR results**

Option used	Test configuration	SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
<b>2-slot GPRS</b>	<b>Power</b>	<b>27.9 dBm</b>	<b>29.6 dBm</b>	<b>28.3 dBm</b>
Slide closed	Without headset	<b>0.529</b>	0.464	0.393
Antenna facing phantom	Headset HS-45 + AD-56	0.449	0.385	0.340
Slide closed	Without headset	-	0.282	-
Display facing phantom	Headset HS-45 + AD-56	-	0.245	-
<b>2-slot GPRS</b> Slide closed Antenna facing phantom	Without headset, BT active	0.509	-	-

Plots of the Measurement scans are given in Appendix B.

---

**APPENDIX A: SYSTEM CHECKING SCANS**

See the following pages

Date/Time: 2008-01-02 12:30:09

Test Laboratory: TCC Nokia  
Type: D835V2; Serial: 4d042

**Communication System: CW835**

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.908$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=15mm, Pin=250mW/Area Scan (61x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.66 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.1 V/m


Peak SAR (extrapolated) = 3.63 W/kg

**SAR(1 g) = 2.45 mW/g**

**SAR(10 g) = 1.6 mW/g**

**Power Drift = -0.042 dB**

Maximum value of SAR (measured) = 2.66 mW/g

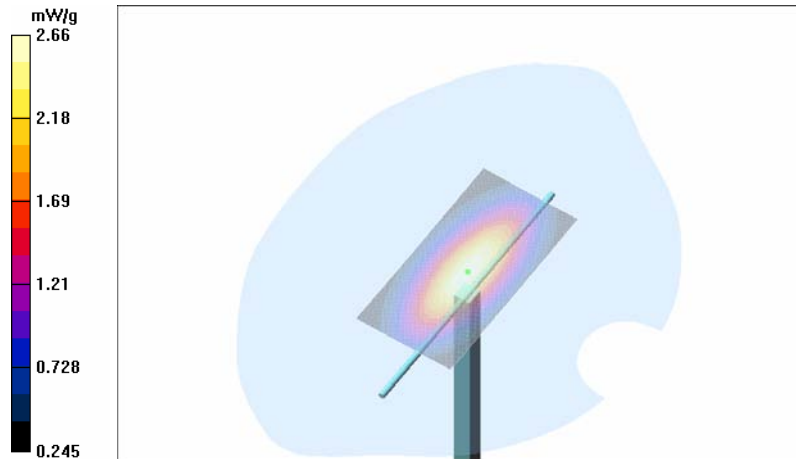

Date/Time: 2008-01-09 14:28:29

Test Laboratory: TCC Nokia  
Type: D1900V2; Serial: 5d026

**Communication System: CW1900**

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.48$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.05, 5.05, 5.05); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=10mm, Pin=250mW/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 12.1 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.5 V/m

Peak SAR (extrapolated) = 19.7 W/kg

**SAR(1 g) = 10.6 mW/g**

**SAR(10 g) = 5.53 mW/g**

**Power Drift = 0.034 dB**

Maximum value of SAR (measured) = 12.1 mW/g



Date/Time: 2008-01-10 12:17:37

Test Laboratory: TCC Nokia  
Type: D1900V2; Serial: 5d026

**Communication System: CW1900**

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900; Medium Notes: Medium Temperature: 21.5 C

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.05, 5.05, 5.05); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=10mm, Pin=250mW/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.7 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.4 V/m


Peak SAR (extrapolated) = 19.7 W/kg

**SAR(1 g) = 10.5 mW/g**

**SAR(10 g) = 5.4 mW/g**

**Power Drift = -0.021 dB**

Maximum value of SAR (measured) = 11.9 mW/g

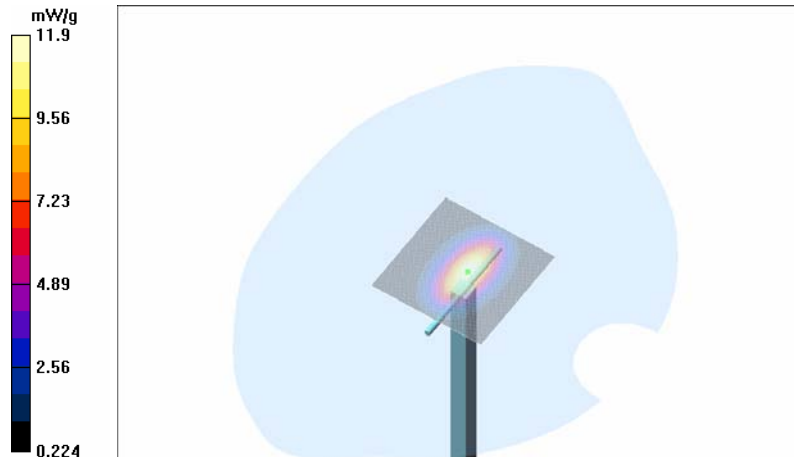

Date/Time: 2008-01-02 17:52:51

Test Laboratory: TCC Nokia  
Type: D835V2; Serial: 4d042

**Communication System: CW835**

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Body 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.955$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.74, 5.74, 5.74); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=15mm, Pin=250mW/Area Scan (61x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.62 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.9 V/m


Peak SAR (extrapolated) = 3.54 W/kg

**SAR(1 g) = 2.44 mW/g**

**SAR(10 g) = 1.62 mW/g**

**Power Drift = -0.104 dB**

Maximum value of SAR (measured) = 2.64 mW/g

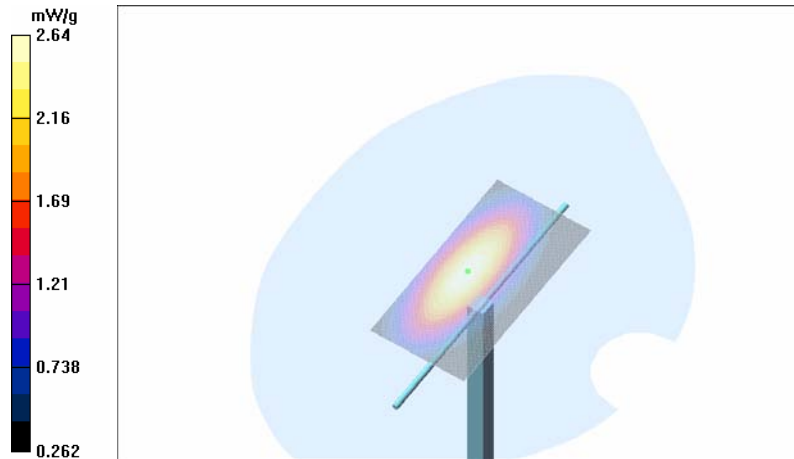

Date/Time: 2008-01-10 14:50:58

Test Laboratory: TCC Nokia  
Type: D1900V2; Serial: 5d026

**Communication System: CW1900**

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Body 1900; Medium Notes: Medium Temperature: 21.5 C

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2007-10-24
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=10mm, Pin=250mW/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 12.0 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 67.4 V/m


Peak SAR (extrapolated) = 18.2 W/kg

**SAR(1 g) = 10.3 mW/g**

**SAR(10 g) = 5.44 mW/g**

**Power Drift = 0.024 dB**

Maximum value of SAR (measured) = 11.6 mW/g

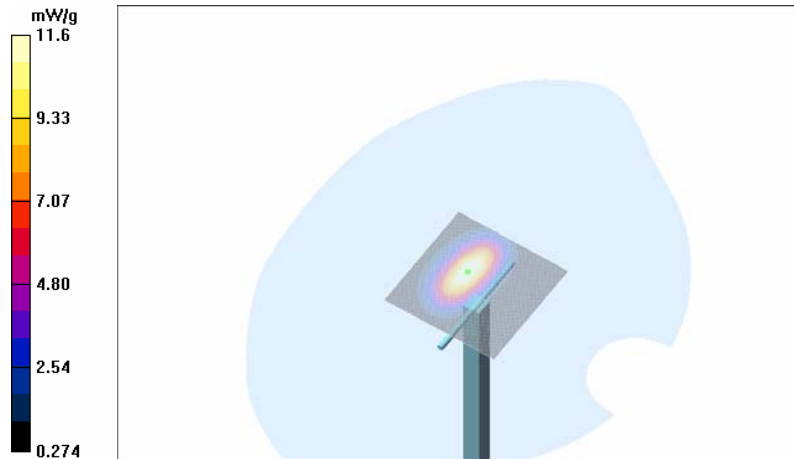

---

**APPENDIX B: MEASUREMENT SCANS**

See the following pages



Date/Time: 2008-01-02 13:15:17

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: GSM850**

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - Middle - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.711 mW/g

**Cheek position - Middle - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.2 V/m


Peak SAR (extrapolated) = 0.930 W/kg

**SAR(1 g) = 0.652 mW/g**

**SAR(10 g) = 0.454 mW/g**

**Power Drift = -0.460 dB**

Maximum value of SAR (measured) = 0.701 mW/g

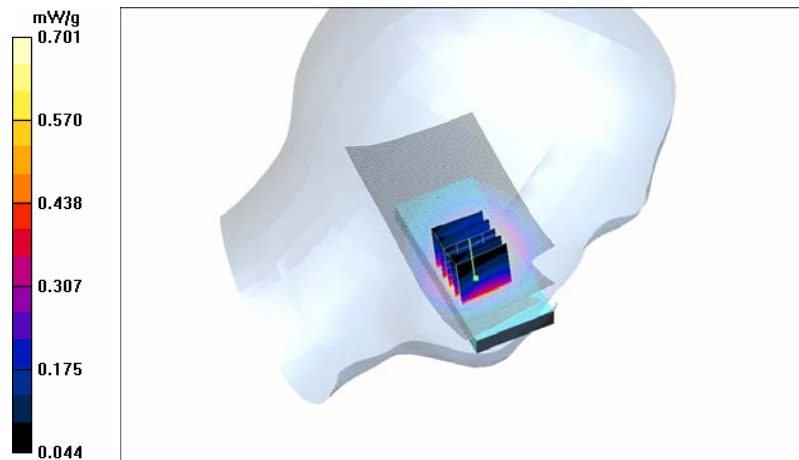

Date/Time: 2008-01-02 14:10:23

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.921$  mho/m;  $\epsilon_r = 41.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - High - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.970 mW/g

**Cheek position - High - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.1 V/m


Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.901 mW/g**

**SAR(10 g) = 0.624 mW/g**

**Power Drift = -0.053 dB**

Maximum value of SAR (measured) = 0.966 mW/g

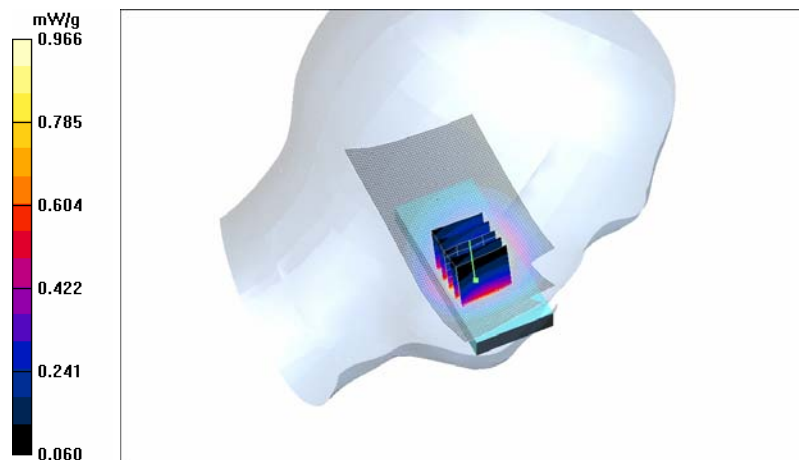

Date/Time: 2008-01-02 14:28:15

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position - Middle - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.352 mW/g

**Tilt position - Middle - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.4 V/m


Peak SAR (extrapolated) = 0.421 W/kg

**SAR(1 g) = 0.334 mW/g**

**SAR(10 g) = 0.246 mW/g**

**Power Drift = 0.030 dB**

Maximum value of SAR (measured) = 0.350 mW/g

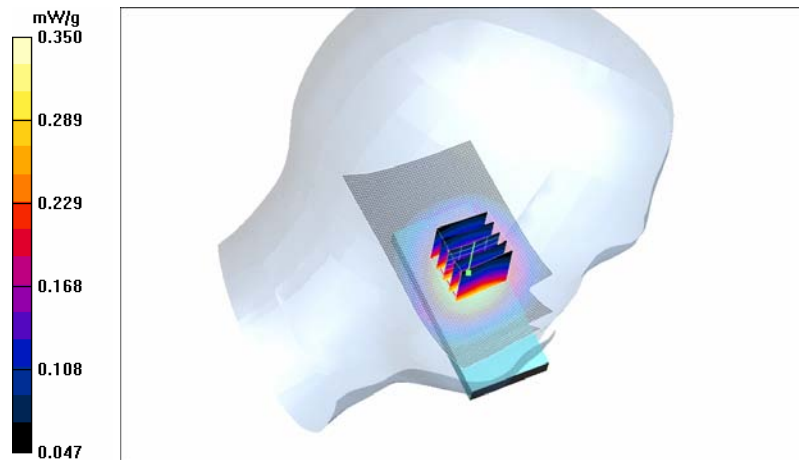

Date/Time: 2008-01-02 17:48:01

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.921$  mho/m;  $\epsilon_r = 41.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - High - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.865 mW/g

**Cheek position - High - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.2 V/m


Peak SAR (extrapolated) = 1.07 W/kg

**SAR(1 g) = 0.823 mW/g**

**SAR(10 g) = 0.594 mW/g**

**Power Drift = -0.063 dB**

Maximum value of SAR (measured) = 0.870 mW/g

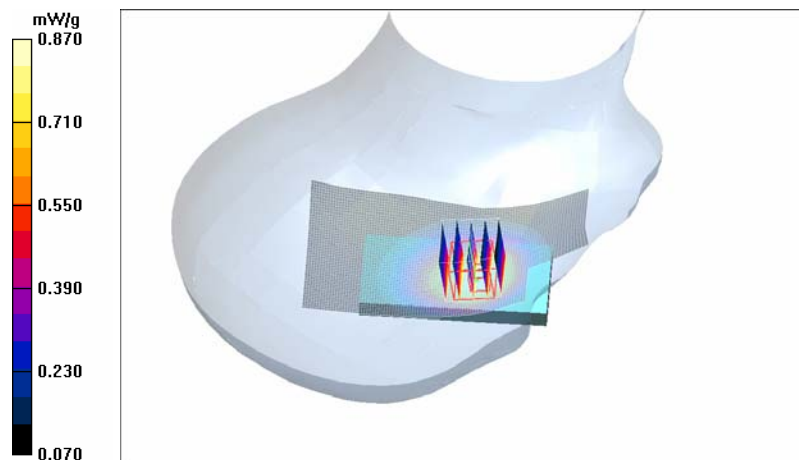

Date/Time: 2008-01-02 18:03:33

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position - Middle - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.355 mW/g

**Tilt position - Middle - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.3 V/m


Peak SAR (extrapolated) = 0.428 W/kg

**SAR(1 g) = 0.341 mW/g**

**SAR(10 g) = 0.255 mW/g**

**Power Drift = 0.046 dB**

Maximum value of SAR (measured) = 0.356 mW/g

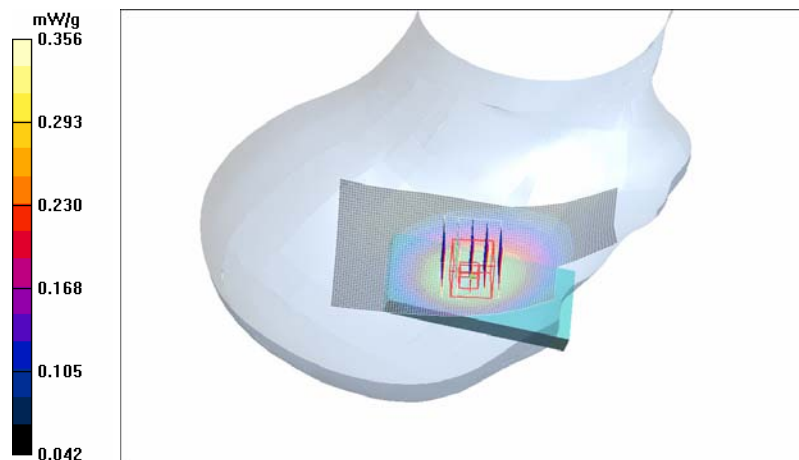

Date/Time: 2008-01-02 16:10:45

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - Middle - Slide open/Area Scan (51x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.740 mW/g

**Cheek position - Middle - Slide open/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.2 V/m


Peak SAR (extrapolated) = 0.853 W/kg

**SAR(1 g) = 0.675 mW/g**

**SAR(10 g) = 0.497 mW/g**

**Power Drift = -0.226 dB**

Maximum value of SAR (measured) = 0.711 mW/g

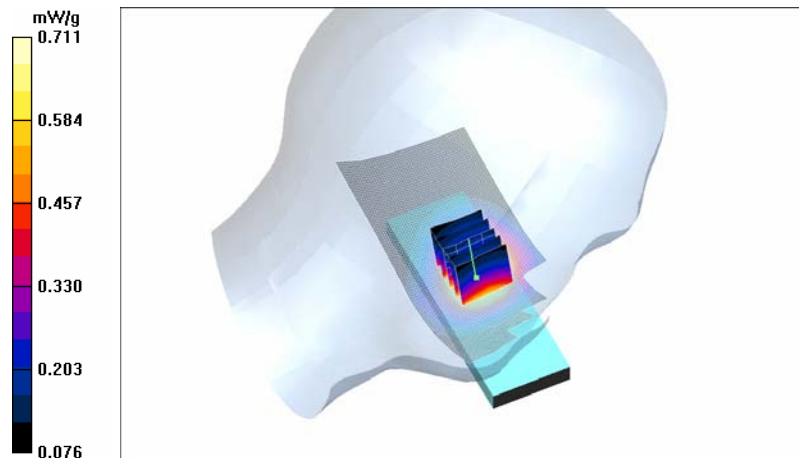

Date/Time: 2008-01-02 16:27:46

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position - Middle - Slide open/Area Scan (51x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.336 mW/g

**Tilt position - Middle - Slide open/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.1 V/m


Peak SAR (extrapolated) = 0.408 W/kg

**SAR(1 g) = 0.317 mW/g**

**SAR(10 g) = 0.232 mW/g**

**Power Drift = -0.078 dB**

Maximum value of SAR (measured) = 0.335 mW/g

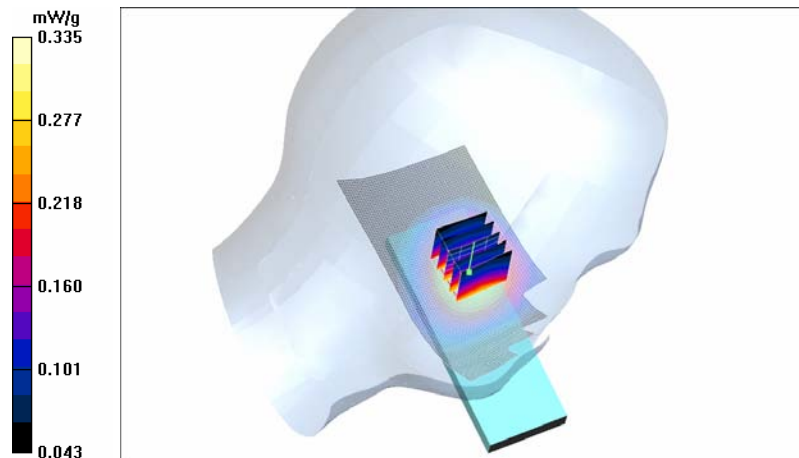

Date/Time: 2008-01-02 16:43:50

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - Middle - Slide open/Area Scan (51x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.655 mW/g

**Cheek position - Middle - Slide open/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.4 V/m


Peak SAR (extrapolated) = 0.743 W/kg

**SAR(1 g) = 0.600 mW/g**

**SAR(10 g) = 0.446 mW/g**

**Power Drift = -0.171 dB**

Maximum value of SAR (measured) = 0.626 mW/g

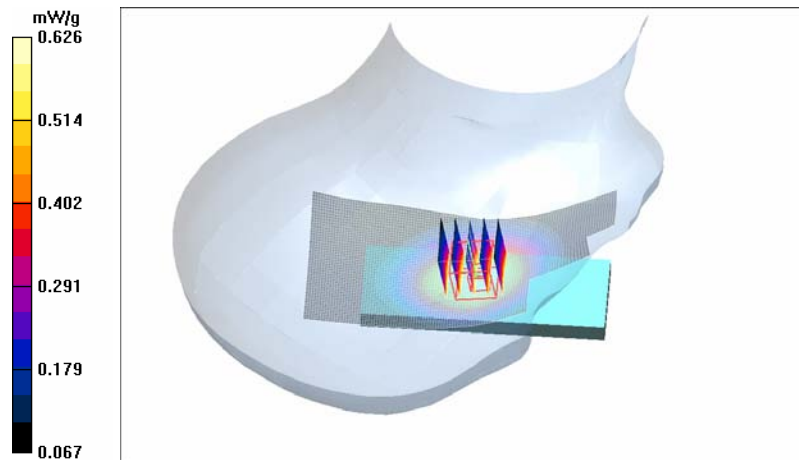



Date/Time: 2008-01-02 16:59:39

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position - Middle - Slide open/Area Scan (51x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.349 mW/g

**Tilt position - Middle - Slide open/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.1 V/m


Peak SAR (extrapolated) = 0.432 W/kg

**SAR(1 g) = 0.334 mW/g**

**SAR(10 g) = 0.245 mW/g**

**Power Drift = -0.004 dB**

Maximum value of SAR (measured) = 0.353 mW/g

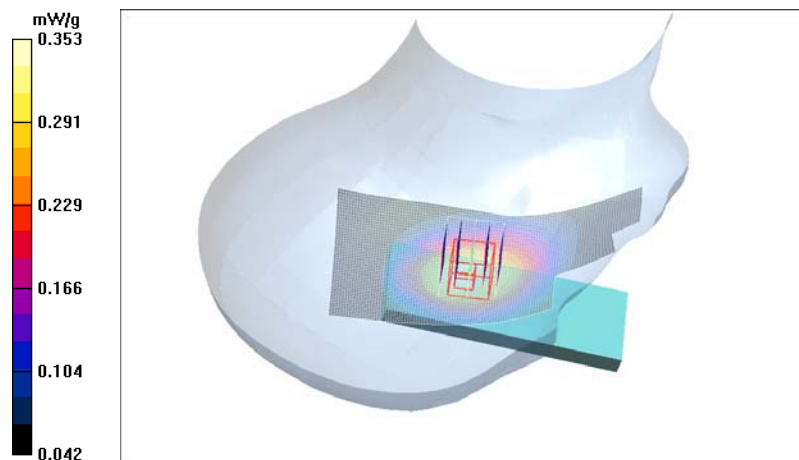

Date/Time: 2008-01-02 18:53:14

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot 8PSK EGPRS850**

Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.921$  mho/m;  $\epsilon_r = 41.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - High - Slide closed/Area Scan (81x151x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.334 mW/g

**Cheek position - High - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.29 V/m


Peak SAR (extrapolated) = 0.512 W/kg

**SAR(1 g) = 0.316 mW/g**

**SAR(10 g) = 0.212 mW/g**

**Power Drift = 0.277 dB**

Maximum value of SAR (measured) = 0.332 mW/g

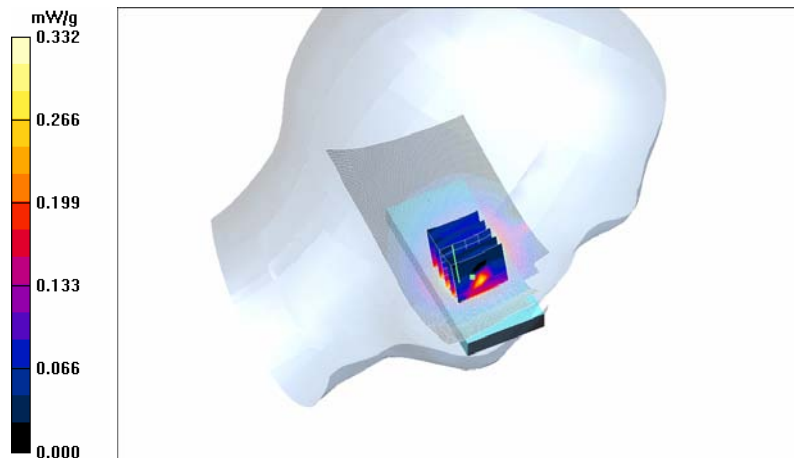

Date/Time: 2008-01-02 18:16:50

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.921$  mho/m;  $\epsilon_r = 41.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - High - Slide closed - BT active/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.971 mW/g

**Cheek position - High - Slide closed - BT active/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.2 V/m


Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.910 mW/g**

**SAR(10 g) = 0.624 mW/g**

**Power Drift = -0.015 dB**

Maximum value of SAR (measured) = 0.973 mW/g

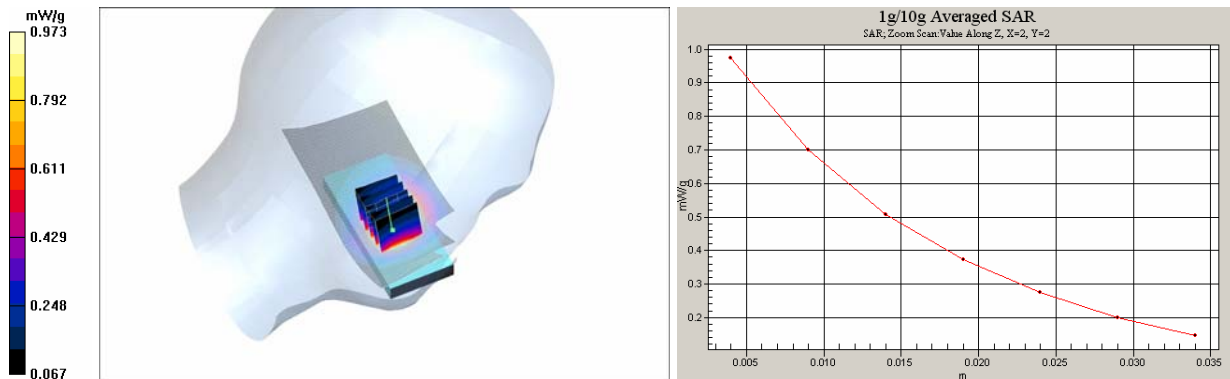

Date/Time: 2008-01-09 18:22:46

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: GSM 1900**

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.05, 5.05, 5.05); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - Middle - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.849 mW/g

**Cheek position - Middle - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.9 V/m


Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.746 mW/g**

**SAR(10 g) = 0.494 mW/g**

**Power Drift = -0.116 dB**

Maximum value of SAR (measured) = 0.797 mW/g

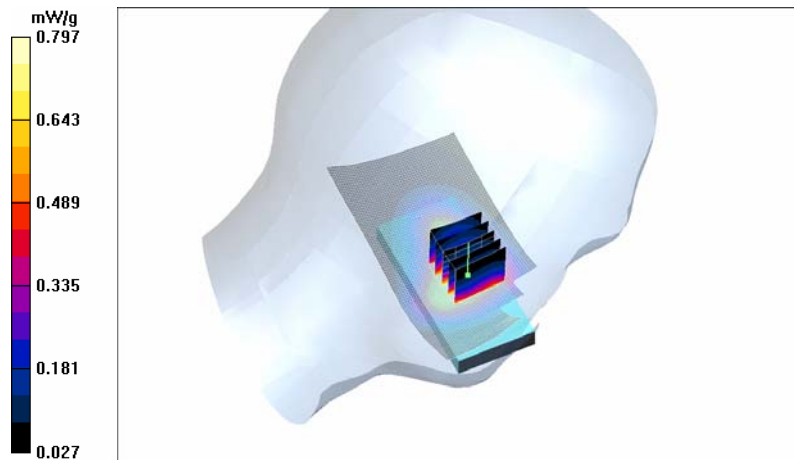

Date/Time: 2008-01-09 19:09:42

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.05, 5.05, 5.05); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - Low - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.06 mW/g

**Cheek position - Low - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.1 V/m


Peak SAR (extrapolated) = 1.35 W/kg

**SAR(1 g) = 0.967 mW/g**

**SAR(10 g) = 0.648 mW/g**

**Power Drift = 0.008 dB**

Maximum value of SAR (measured) = 1.02 mW/g

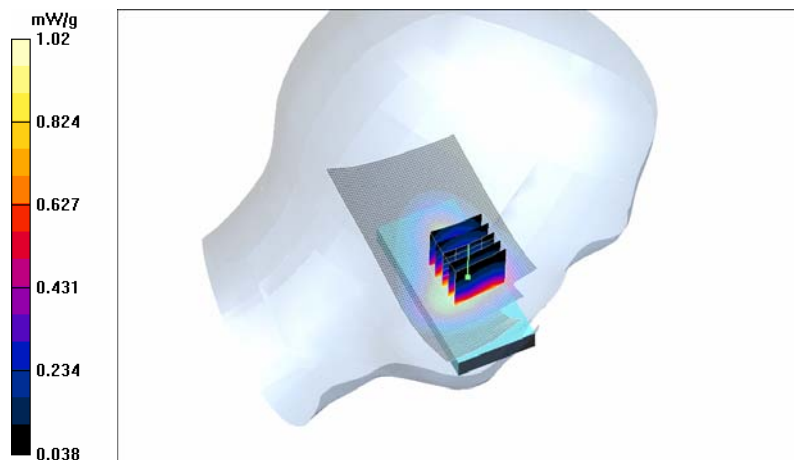

Date/Time: 2008-01-09 18:58:07

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.05, 5.05, 5.05); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position - Middle - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.634 mW/g

**Tilt position - Middle - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.5 V/m


Peak SAR (extrapolated) = 0.825 W/kg

**SAR(1 g) = 0.556 mW/g**

**SAR(10 g) = 0.347 mW/g**

**Power Drift = -0.093 dB**

Maximum value of SAR (measured) = 0.605 mW/g

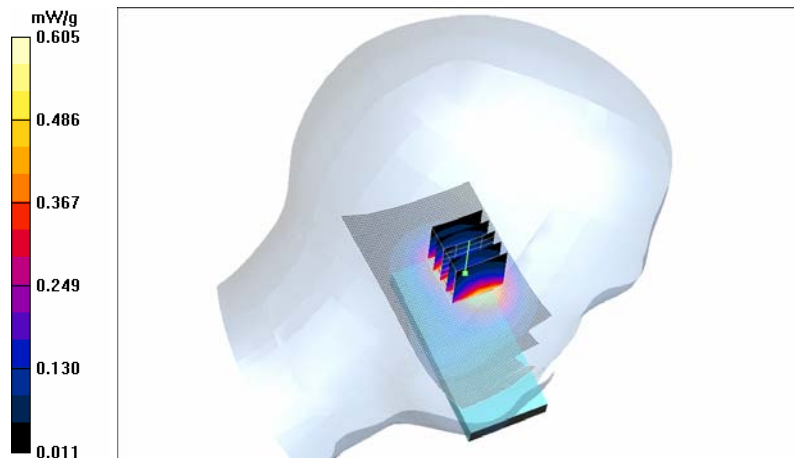

Date/Time: 2008-01-09 20:44:11

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.05, 5.05, 5.05); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - Low - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.13 mW/g

**Cheek position - Low - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.7 V/m

Peak SAR (extrapolated) = 1.55 W/kg


**SAR(1 g) = 1.01 mW/g**

**SAR(10 g) = 0.624 mW/g**

**Power Drift = -0.060 dB**

**Warning:** Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 1.12 mW/g

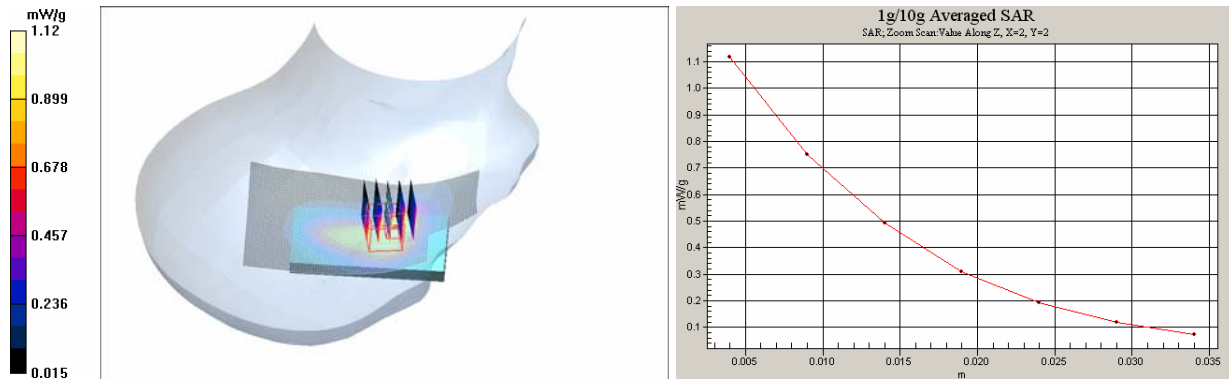

Date/Time: 2008-01-09 21:14:12

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.05, 5.05, 5.05); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position - Middle - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.567 mW/g

**Tilt position - Middle - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.5 V/m


Peak SAR (extrapolated) = 0.673 W/kg

**SAR(1 g) = 0.464 mW/g**

**SAR(10 g) = 0.294 mW/g**

**Power Drift = -0.046 dB**

Maximum value of SAR (measured) = 0.497 mW/g

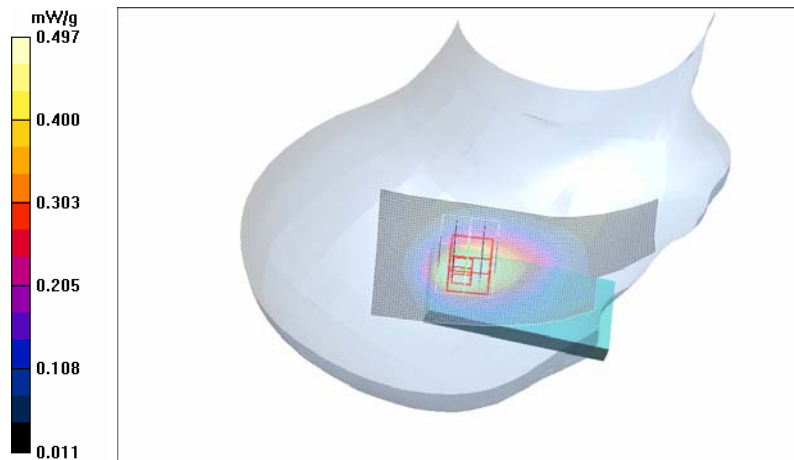



Date/Time: 2008-01-09 19:40:50

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.05, 5.05, 5.05); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - Middle - Slide open/Area Scan (51x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.743 mW/g

**Cheek position - Middle - Slide open/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.4 V/m

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.673 mW/g**

**SAR(10 g) = 0.422 mW/g**

**Power Drift = -0.079 dB**

Maximum value of SAR (measured) = 0.735 mW/g

**Cheek position - Middle - Slide open/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.4 V/m

Peak SAR (extrapolated) = 0.890 W/kg


**SAR(1 g) = 0.541 mW/g**

**SAR(10 g) = 0.328 mW/g**

**Power Drift = -0.079 dB**

**Warning:** Maximum averaged SAR over 1 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement. Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.625 mW/g

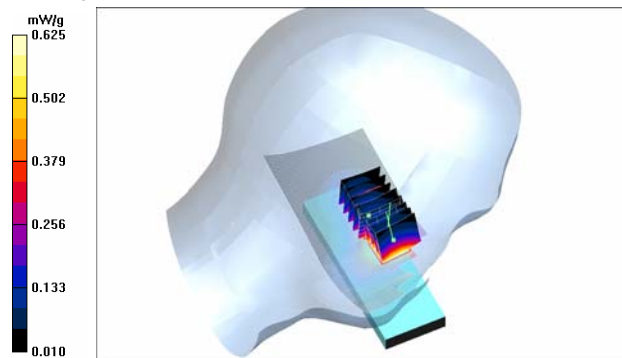

Date/Time: 2008-01-09 20:01:15

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.05, 5.05, 5.05); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position - Middle - Slide open/Area Scan (51x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.510 mW/g

**Tilt position - Middle - Slide open/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.1 V/m


Peak SAR (extrapolated) = 0.687 W/kg

**SAR(1 g) = 0.449 mW/g**

**SAR(10 g) = 0.265 mW/g**

**Power Drift = 0.002 dB**

Maximum value of SAR (measured) = 0.491 mW/g

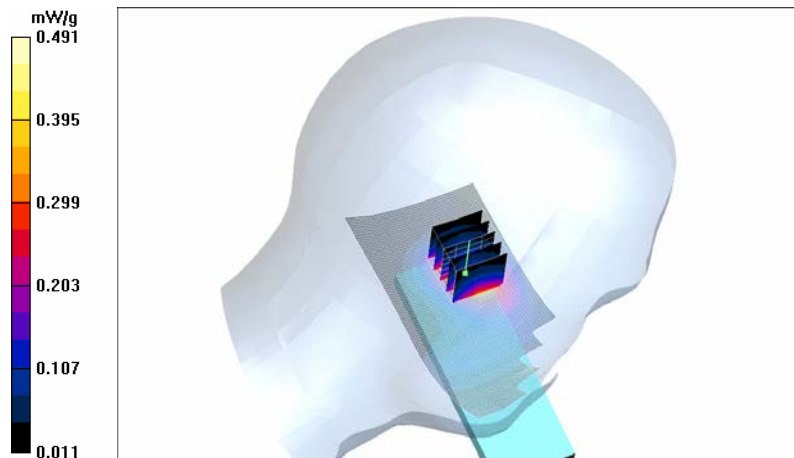

Date/Time: 2008-01-09 22:15:44

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.05, 5.05, 5.05); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - Low - Slide open/Area Scan (51x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.04 mW/g

**Cheek position - Low - Slide open/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.58 V/m


Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.997 mW/g**

**SAR(10 g) = 0.593 mW/g**

**Power Drift = -0.026 dB**

Maximum value of SAR (measured) = 1.09 mW/g

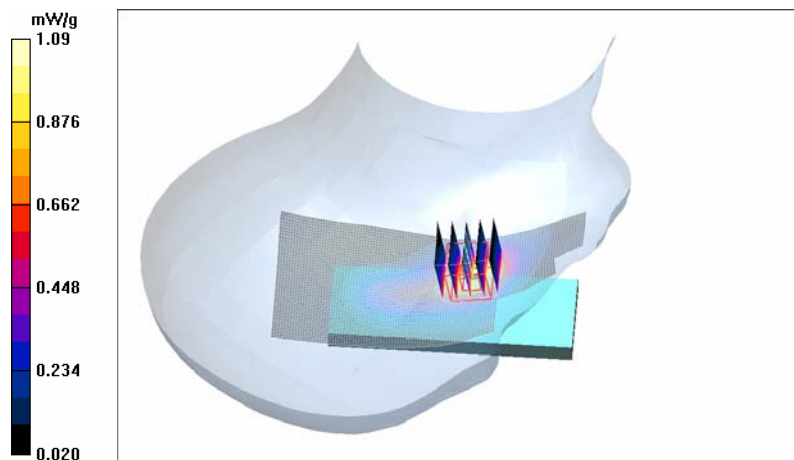

Date/Time: 2008-01-09 22:40:44

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.05, 5.05, 5.05); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position - Middle - Slide open/Area Scan (51x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.395 mW/g

**Tilt position - Middle - Slide open/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.3 V/m


Peak SAR (extrapolated) = 0.455 W/kg

**SAR(1 g) = 0.316 mW/g**

**SAR(10 g) = 0.195 mW/g**

**Power Drift = 0.094 dB**

Maximum value of SAR (measured) = 0.342 mW/g

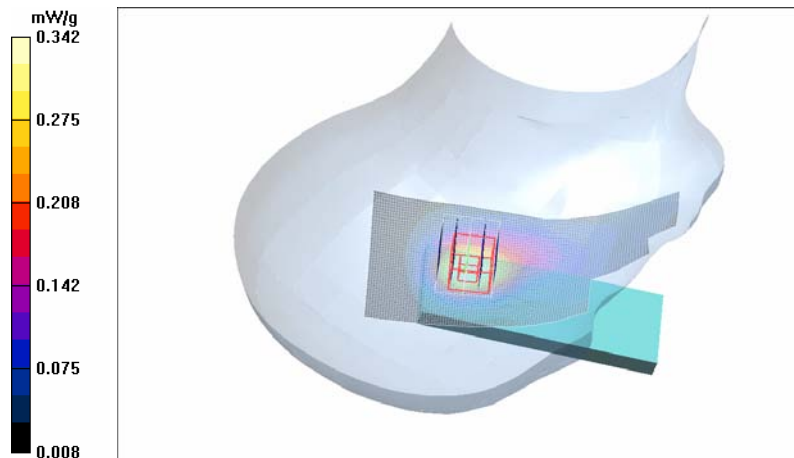

Date/Time: 2008-01-10 13:09:57

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot 8PSK EGPRS1900**

Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: 21.5 C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.05, 5.05, 5.05); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - Low - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.469 mW/g

**Cheek position - Low - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.28 V/m

Peak SAR (extrapolated) = 0.617 W/kg


**SAR(1 g) = 0.414 mW/g**

**SAR(10 g) = 0.259 mW/g**

**Power Drift = -0.100 dB**

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.446 mW/g

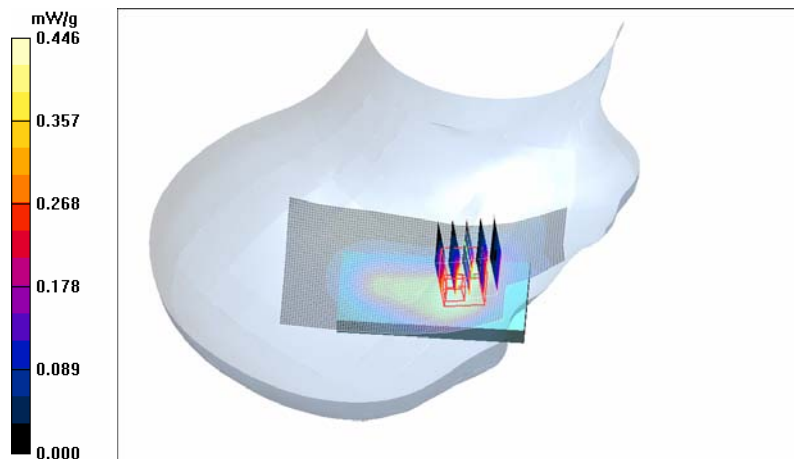

Date/Time: 2008-01-09 21:25:56

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.05, 5.05, 5.05); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position - Low - Slide closed - BT active/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.12 mW/g

**Cheek position - Low - Slide closed - BT active/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.6 V/m

Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 0.994 mW/g**

**SAR(10 g) = 0.614 mW/g**

**Power Drift = -0.003 dB**

Maximum value of SAR (measured) = 1.12 mW/g

**Cheek position - Low - Slide closed - BT active/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.6 V/m

Peak SAR (extrapolated) = 1.09 W/kg


**SAR(1 g) = 0.821 mW/g**

**SAR(10 g) = 0.536 mW/g**

**Power Drift = -0.003 dB**

**Warning: Maximum averaged SAR over 1 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.**

Maximum value of SAR (measured) = 0.940 mW/g

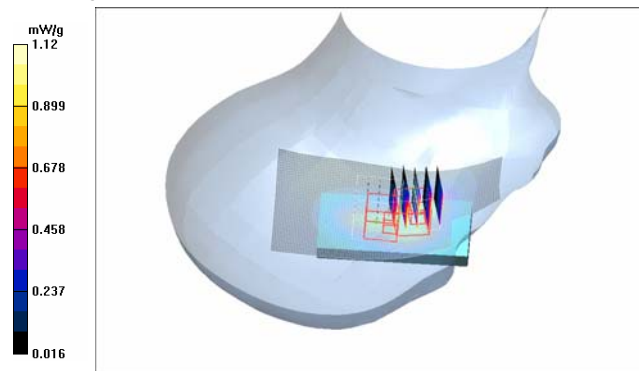

Date/Time: 2008-01-02 20:06:34

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium: Body 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.968$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.74, 5.74, 5.74); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - High - No Accessory - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.773 mW/g

**Body - High - No Accessory - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.0 V/m


Peak SAR (extrapolated) = 1.00 W/kg

**SAR(1 g) = 0.722 mW/g**

**SAR(10 g) = 0.500 mW/g**

**Power Drift = 0.030 dB**

Maximum value of SAR (measured) = 0.773 mW/g

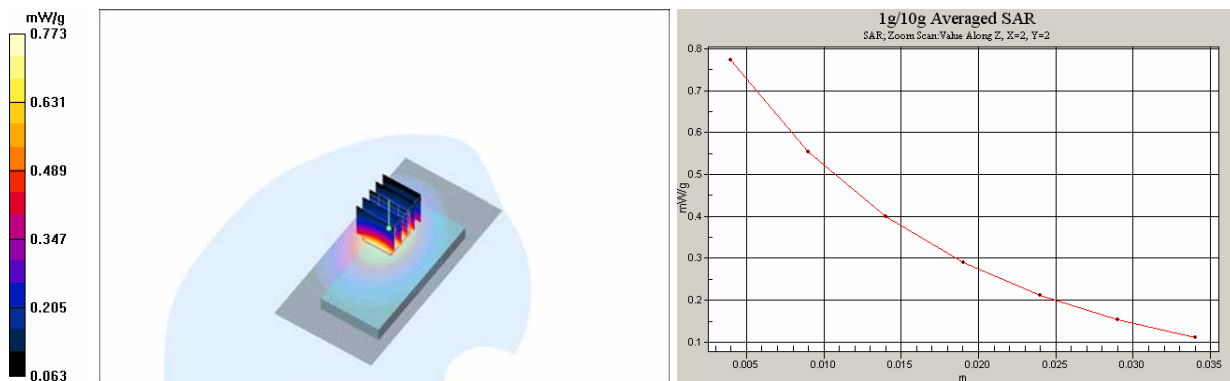

Date/Time: 2008-01-02 20:38:40

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium: Body 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.968$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.74, 5.74, 5.74); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - High - HS-45 + AD-56 - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.541 mW/g

**Body - High - HS-45 + AD-56 - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.3 V/m

Peak SAR (extrapolated) = 0.709 W/kg


**SAR(1 g) = 0.504 mW/g**

**SAR(10 g) = 0.346 mW/g**

**Power Drift = 0.391 dB**

**Warning:** Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.538 mW/g

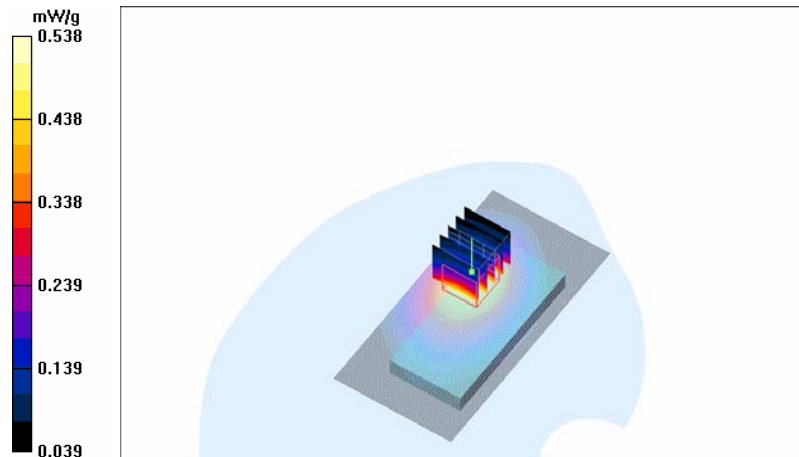



Date/Time: 2008-01-02 20:59:55

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:4.2

Medium: Body 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.956$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.74, 5.74, 5.74); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - Middle - No Accessory - Slide closed - Display facing phantom/Area Scan (51x101x1):** Measurement grid:  
dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.403 mW/g

**Body - Middle - No Accessory - Slide closed - Display facing phantom/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.80 V/m


Peak SAR (extrapolated) = 0.485 W/kg

**SAR(1 g) = 0.376 mW/g**

**SAR(10 g) = 0.273 mW/g**

**Power Drift = 0.014 dB**

Maximum value of SAR (measured) = 0.399 mW/g

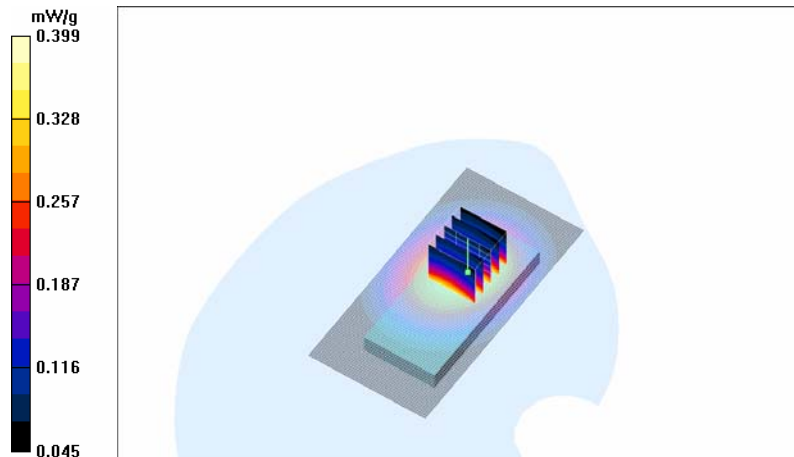

Date/Time: 2008-01-02 21:09:44

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:4.2

Medium: Body 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.956$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.74, 5.74, 5.74); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - Middle – HS-45 + AD-56 - Slide closed - Display facing phantom/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.271 mW/g

**Body - Middle - HS-45 + AD-56 - Slide closed - Display facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.45 V/m


Peak SAR (extrapolated) = 0.334 W/kg

**SAR(1 g) = 0.253 mW/g**

**SAR(10 g) = 0.183 mW/g**

**Power Drift = 0.053 dB**

Maximum value of SAR (measured) = 0.266 mW/g

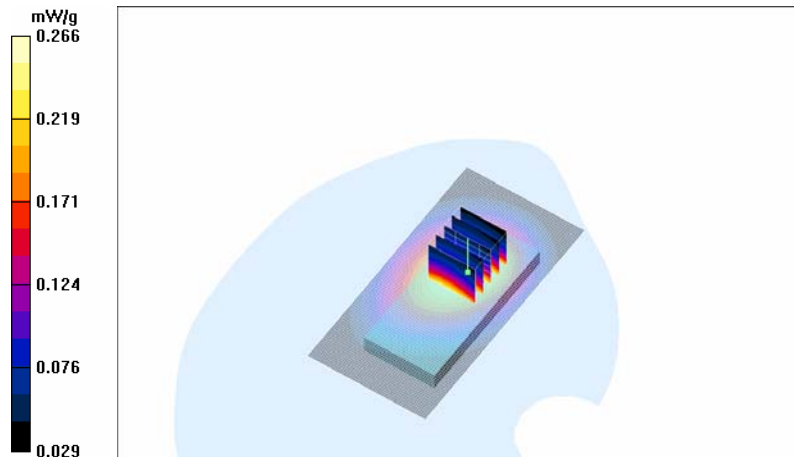

Date/Time: 2008-01-02 20:48:38

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS850**

Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium: Body 850; Medium Notes: Medium Temperature: 20.5 C

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.968$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.74, 5.74, 5.74); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - High - No Accessory - Slide closed - BT active/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.759 mW/g

**Body - High - No Accessory - Slide closed - BT active/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.9 V/m


Peak SAR (extrapolated) = 0.988 W/kg

**SAR(1 g) = 0.715 mW/g**

**SAR(10 g) = 0.494 mW/g**

**Power Drift = 0.058 dB**

Maximum value of SAR (measured) = 0.767 mW/g

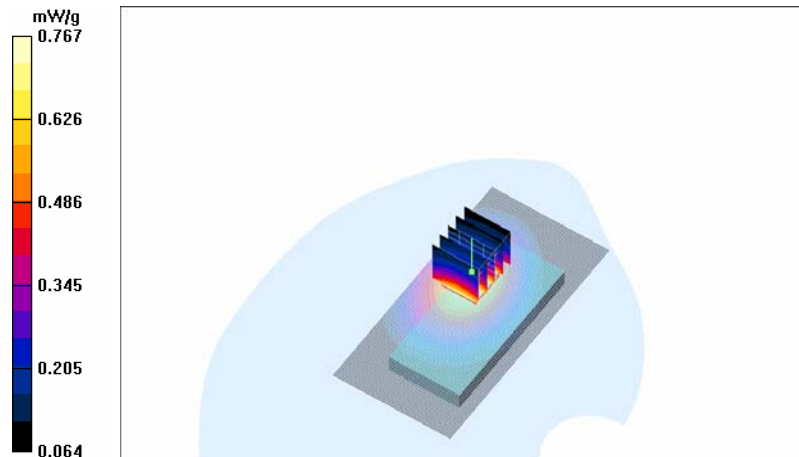

Date/Time: 2008-01-10 15:45:03

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: Body 1900; Medium Notes: Medium Temperature: 21.5 C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2007-10-24
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - Low - No Accessory - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.606 mW/g

**Body - Low - No Accessory - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.31 V/m


Peak SAR (extrapolated) = 0.853 W/kg

**SAR(1 g) = 0.529 mW/g**

**SAR(10 g) = 0.310 mW/g**

**Power Drift = -0.130 dB**

Maximum value of SAR (measured) = 0.587 mW/g

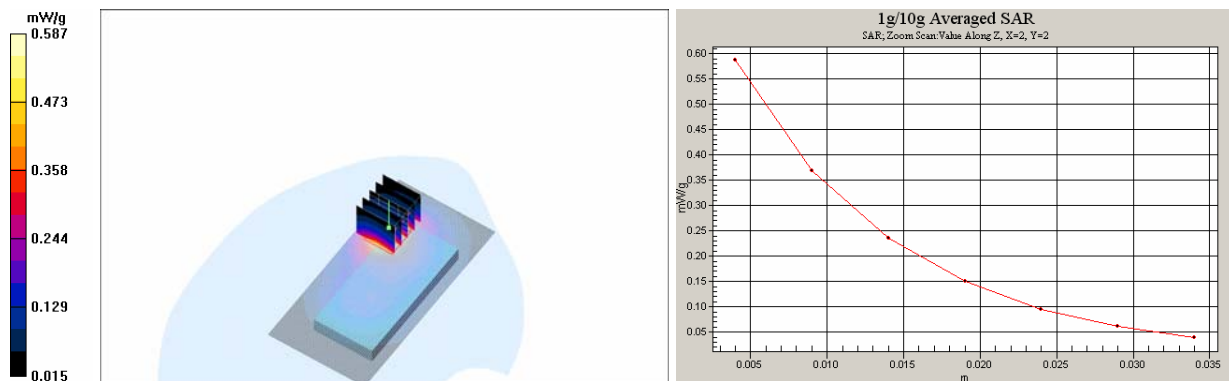

Date/Time: 2008-01-10 16:25:33

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: Body 1900; Medium Notes: Medium Temperature: 21.5 C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2007-10-24
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - Low - HS-45 + AD-56 - Slide closed/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.505 mW/g

**Body - Low - HS-45 + AD-56 - Slide closed/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.80 V/m

Peak SAR (extrapolated) = 0.717 W/kg


**SAR(1 g) = 0.449 mW/g**

**SAR(10 g) = 0.270 mW/g**

**Power Drift = 0.057 dB**

**Warning:** Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.482 mW/g

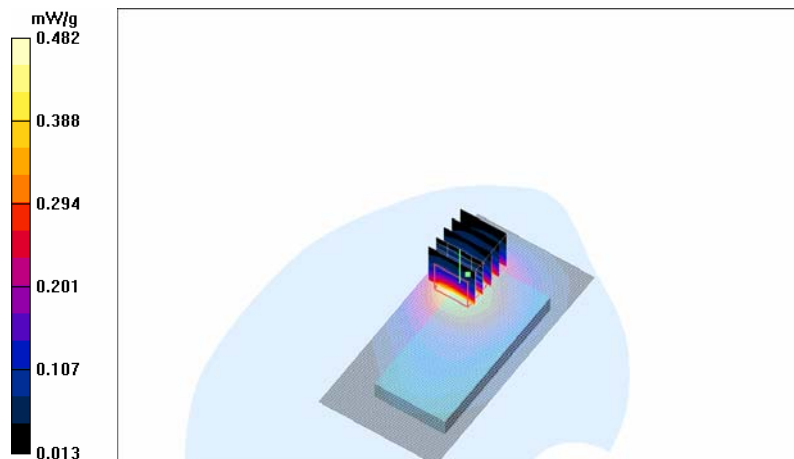

Date/Time: 2008-01-10 17:16:02

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Body 1900; Medium Notes: Medium Temperature: 21.5 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.48$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2007-10-24
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - Middle - No Accessory - Slide closed - Display facing phantom/Area Scan (51x101x1):** Measurement grid:  
dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.308 mW/g

**Body - Middle - No Accessory - Slide closed - Display facing phantom/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.26 V/m


Peak SAR (extrapolated) = 0.399 W/kg

**SAR(1 g) = 0.282 mW/g**

**SAR(10 g) = 0.188 mW/g**

**Power Drift = -0.031 dB**

Maximum value of SAR (measured) = 0.301 mW/g

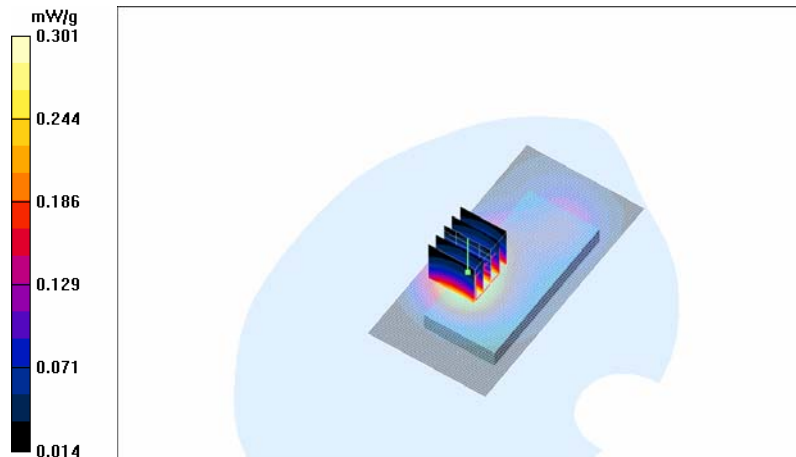

Date/Time: 2008-01-10 17:28:01

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Body 1900; Medium Notes: Medium Temperature: 21.5 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.48$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2007-10-24
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - Middle - HS-45 + AD-56 - Slide closed - Display facing phantom/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.268 mW/g

**Body - Middle - HS-45 + AD-56 - Slide closed - Display facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.04 V/m


Peak SAR (extrapolated) = 0.350 W/kg

**SAR(1 g) = 0.245 mW/g**

**SAR(10 g) = 0.165 mW/g**

**Power Drift = -0.028 dB**

Maximum value of SAR (measured) = 0.262 mW/g

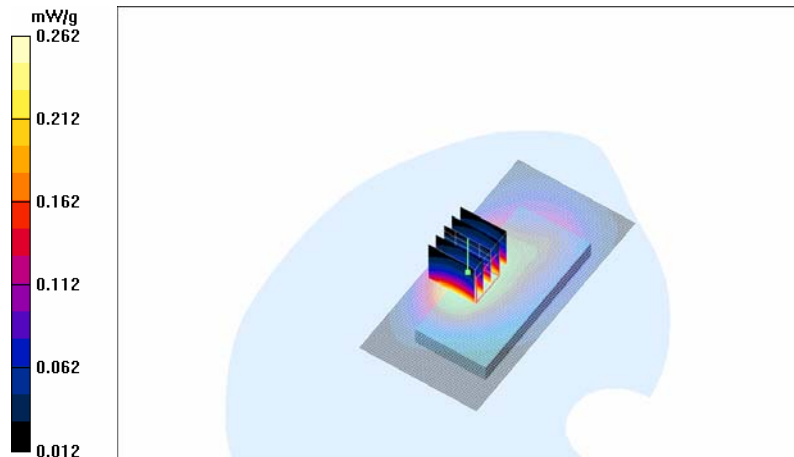

Date/Time: 2008-01-10 17:02:36

Test Laboratory: TCC Nokia  
Type: RM-359; Serial: 004401/01/774455/4

**Communication System: 2-slot GPRS1900**

Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: Body 1900; Medium Notes: Medium Temperature: 21.5 C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2007-10-24
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body - Low - No Accessory - Slide closed - BT active/Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.578 mW/g

**Body - Low - No Accessory - Slide closed - BT active/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.14 V/m


Peak SAR (extrapolated) = 0.816 W/kg

**SAR(1 g) = 0.509 mW/g**

**SAR(10 g) = 0.299 mW/g**

**Power Drift = 0.026 dB**

Maximum value of SAR (measured) = 0.561 mW/g

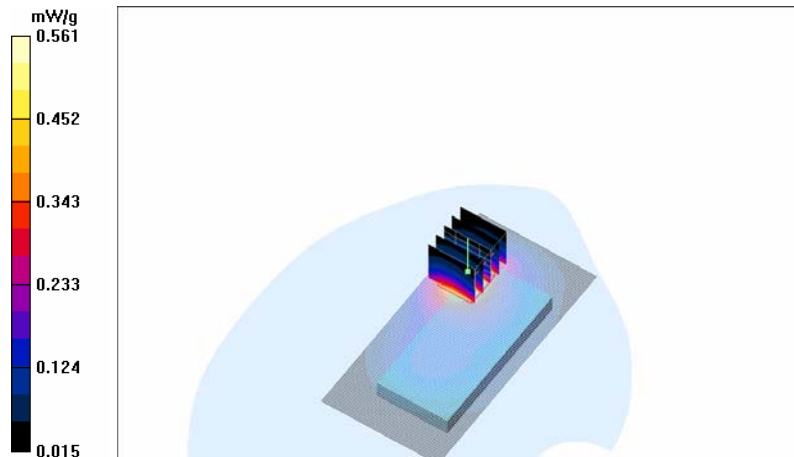



---

**APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)**

See the following pages



Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Denmark A/S**

Certificate No: **ES3-3116\_Aug07**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3116**

Calibration procedure(s) **QA CAL-01.v6  
Calibration procedure for dosimetric E-field probes**

Calibration date: **August 29, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (METAS, No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07



Calibrated by: **Katja Pokovic** **Technical Manager**

Approved by: **Niels Kuster** **Quality Manager**

Issued: August 29, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

### Conversion Factor Assessment

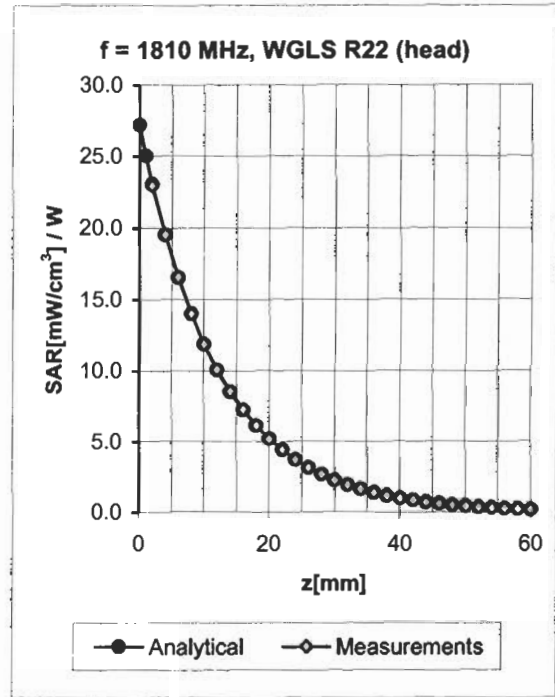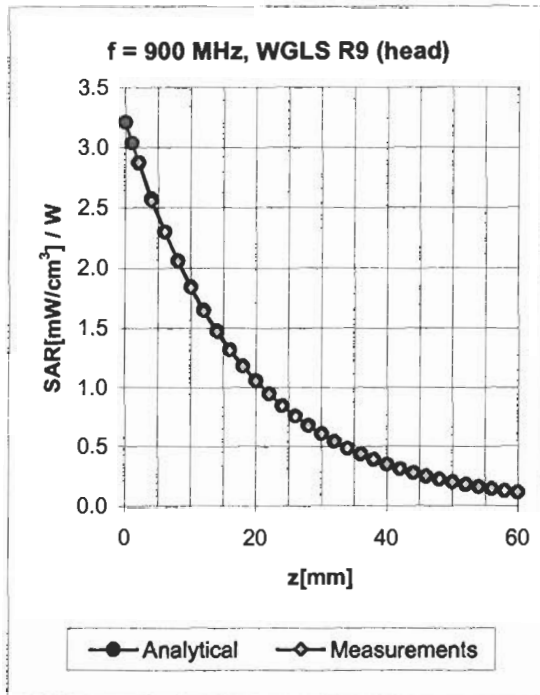

f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	1.00	1.16	5.98 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.91	1.15	4.96 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.83	1.24	4.74 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.84	1.18	4.43 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	1.00	1.22	5.78 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.72	1.42	4.69 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.73	1.39	4.46 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	1.00	1.05	4.13 ± 11.8% (k=2)

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Denmark A/S**

Certificate No: **ES3-3117\_Aug07**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3117**

Calibration procedure(s) **QA CAL-01.v6  
Calibration procedure for dosimetric E-field probes**

Calibration date: **August 29, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)



Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (METAS, No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

	Name	Function	Signature
Calibrated by:	<b>Katja Pokovic</b>	<b>Technical Manager</b>	
Approved by:	<b>Niels Kuster</b>	<b>Quality Manager</b>	

Issued: August 29, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

### Conversion Factor Assessment

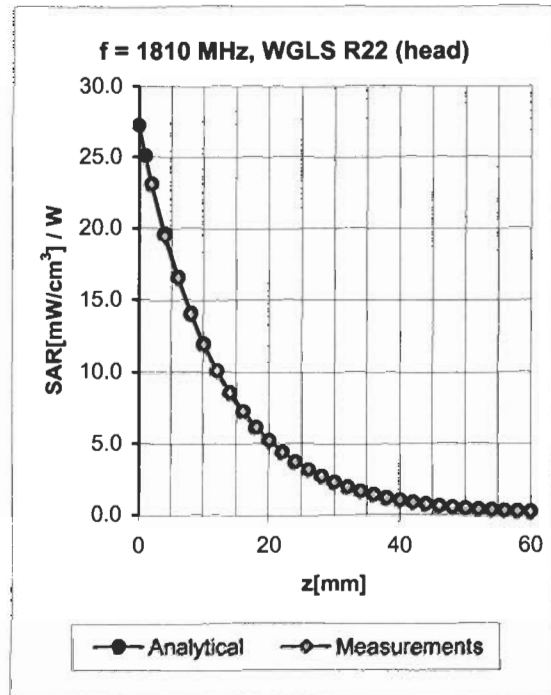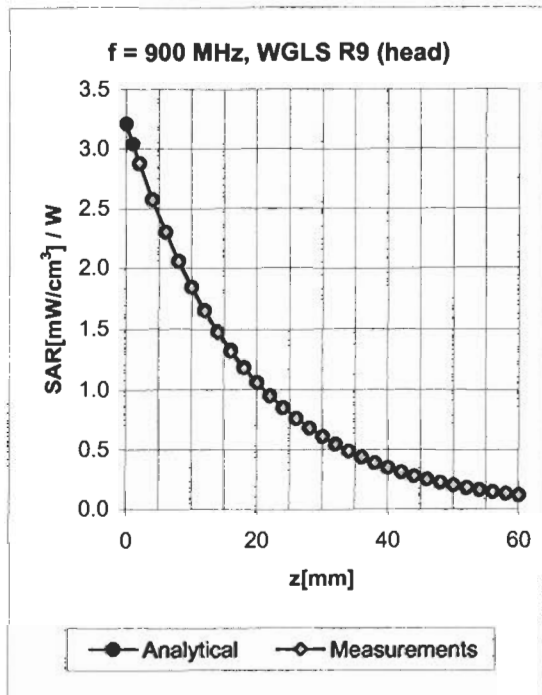

f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	1.00	1.13	6.01 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.75	1.32	5.05 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.79	1.23	4.71 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.68	1.35	4.41 ± 11.8% (k=2)
2600	± 50 / ± 100	Head	39.0 ± 5%	1.96 ± 5%	0.63	1.36	4.28 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.97	1.21	5.74 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.78	1.30	4.62 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.67	1.48	4.41 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.85	1.09	4.12 ± 11.8% (k=2)
2600	± 50 / ± 100	Body	52.5 ± 5%	2.16 ± 5%	0.80	1.17	3.89 ± 11.8% (k=2)

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Denmark A/S**

Certificate No: **ES3-3119\_Oct07**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3119**

Calibration procedure(s) **QA CAL-01.v6  
Calibration procedure for dosimetric E-field probes**

Calibration date: **October 24, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (METAS, No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07



Calibrated by: **Katja Pokovic** Technical Manager

Approved by: **Niels Kuster** Quality Manager

Issued: October 29, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

## Conversion Factor Assessment

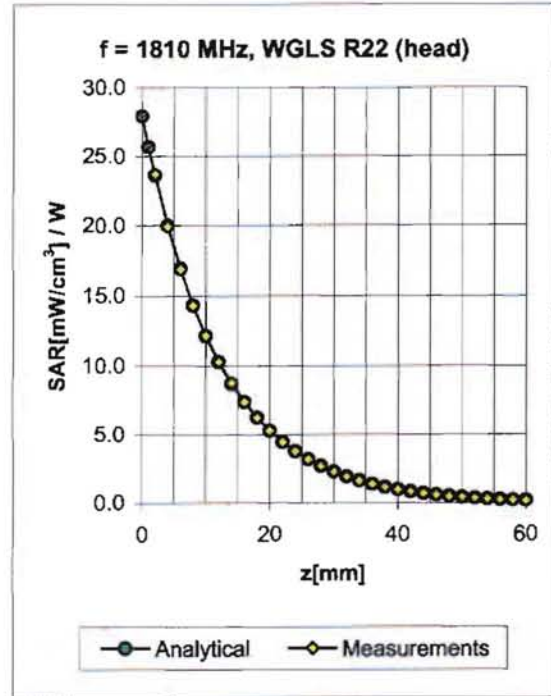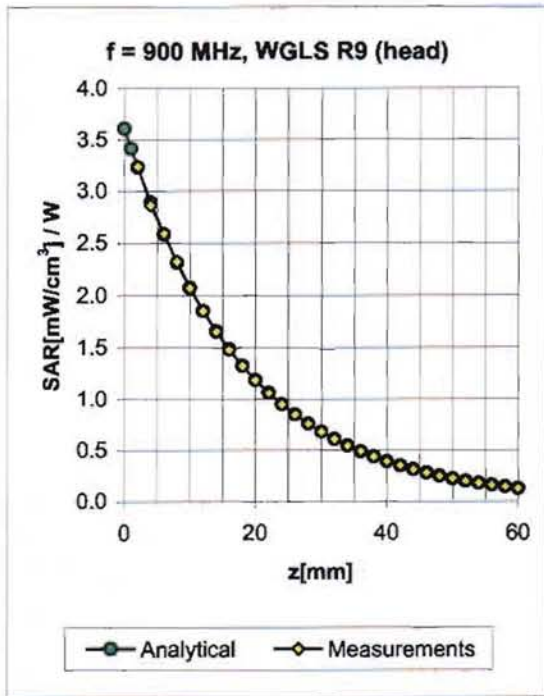

f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.85	1.29	5.99 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.88	1.27	5.08 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.80	1.32	4.91 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.75	1.25	4.55 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.80	1.40	5.60 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.87	1.33	5.02 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.82	1.37	4.75 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.80	1.12	4.34 ± 11.8% (k=2)

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

---

**APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)**

See the following pages





Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia DK R&D**

Certificate No: **D835V2-4d042\_Sep06**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d042**

Calibration procedure(s) **QA CAL-05.v6  
Calibration procedure for dipole validation kits**

Calibration date: **September 19, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Power sensor HP 8481A	US37292783	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference Probe ET3DV6	SN 1507	28-Oct-05 (SPEAG, No. ET3-1507_Oct05)	Oct-06
DAE4	SN 601	15-Dec-05 (SPEAG, No. DAE4-601_Dec05)	Dec-06
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000675	11-May-05 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov-06

	Name	Function	Signature
Calibrated by:	Mike Meili	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: September 19, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

## DASY4 Validation Report for Head TSL

Date/Time: 14.08.2006 14:29:57

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d042**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900;

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.9$  mho/m;  $\epsilon_r = 42.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(6.09, 6.09, 6.09); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.3 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 3.46 W/kg

**SAR(1 g) = 2.33 mW/g; SAR(10 g) = 1.53 mW/g**

Maximum value of SAR (measured) = 2.52 mW/g

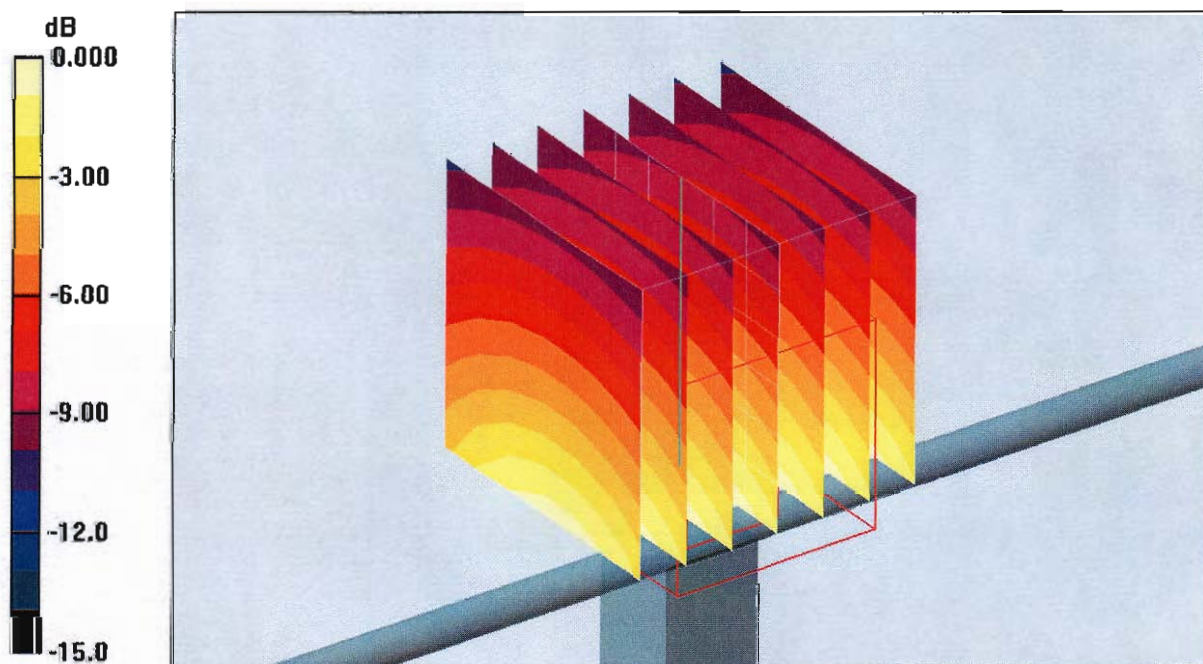

## DASY4 Validation Report for Body TSL

Date/Time: 19.09.2006 15:10:39

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d042**

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL 900;

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(5.84, 5.84, 5.84); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.8 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 3.54 W/kg

**SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.62 mW/g**

Maximum value of SAR (measured) = 2.61 mW/g

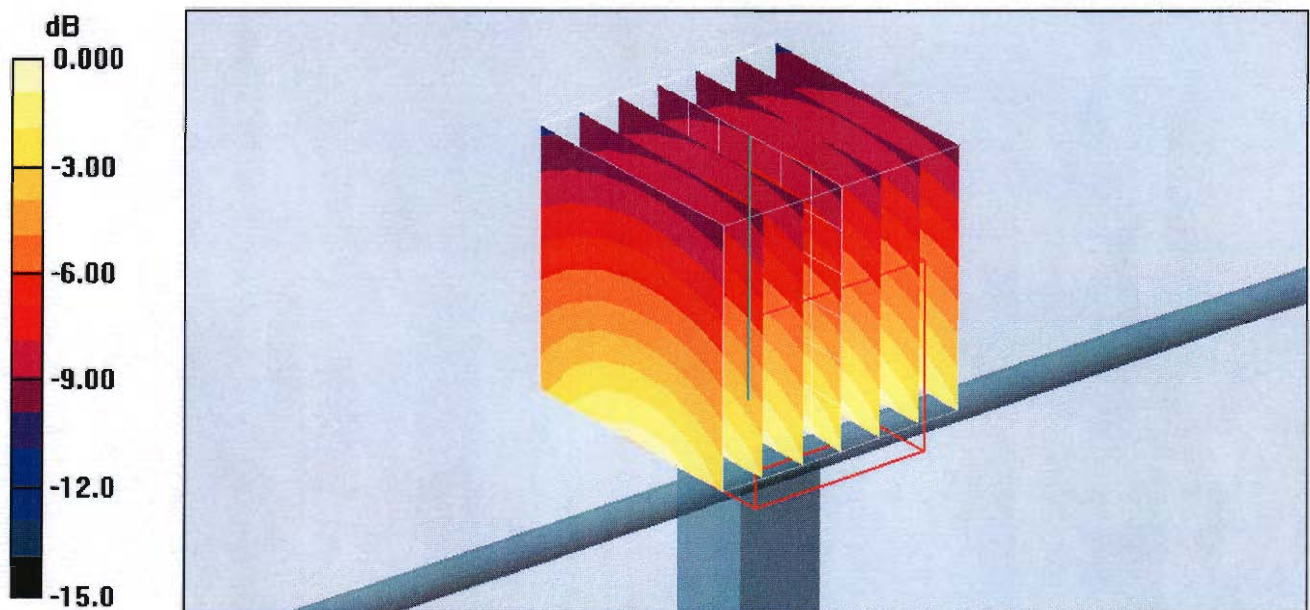

0 dB = 2.61mW/g



Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Denmark A/S**

Certificate No: **D1900V2-5d026\_Feb06/2**

**CALIBRATION CERTIFICATE (Replacement of No: D1900V2-5d026\_Feb06)**

Object: **D1900V2 - SN: 5d026**

Calibration procedure(s): **QA CAL-05.v6  
Calibration procedure for dipole validation kits**

Calibration date: **February 21, 2006**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Power sensor HP 8481A	US37292783	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Reference 20 dB Attenuator	SN: 5086 (20g)	11-Aug-05 (METAS, No 251-00498)	Aug-06
Reference 10 dB Attenuator	SN: 5047.2 (10r)	11-Aug-05 (METAS, No 251-00498)	Aug-06
Reference Probe ET3DV6	SN 1507	28-Oct-05 (SPEAG, No. ET3-1507_Oct05)	Oct-06
DAE4	SN 601	15-Dec-05 (SPEAG, No. DAE4-601_Dec05)	Dec-06
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000675	11-May-05 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov-06

Calibrated by:	<b>Name</b> Mike Meili	<b>Function</b> Laboratory Technician	<b>Signature</b> 
Approved by:	<b>Name</b> Katja Pokovic	<b>Function</b> Technical Manager	<b>Signature</b> 

Issued: March 9, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

## DASY4 Validation Report for Head TSL

Date/Time: 21.02.2006 13:52:34

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d026**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB;

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon_r = 39.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.74, 4.74, 4.74); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA
- Measurement SW: DASY4, V4.6 Build 57; Postprocessing SW: SEMCAD, V1.8 Build 160

**Pin = 250 mW; d = 10 mm/Area Scan (71x71x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.1 mW/g

**Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.2 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 16.6 W/kg

**SAR(1 g) = 9.83 mW/g; SAR(10 g) = 5.2 mW/g**

Maximum value of SAR (measured) = 11.0 mW/g

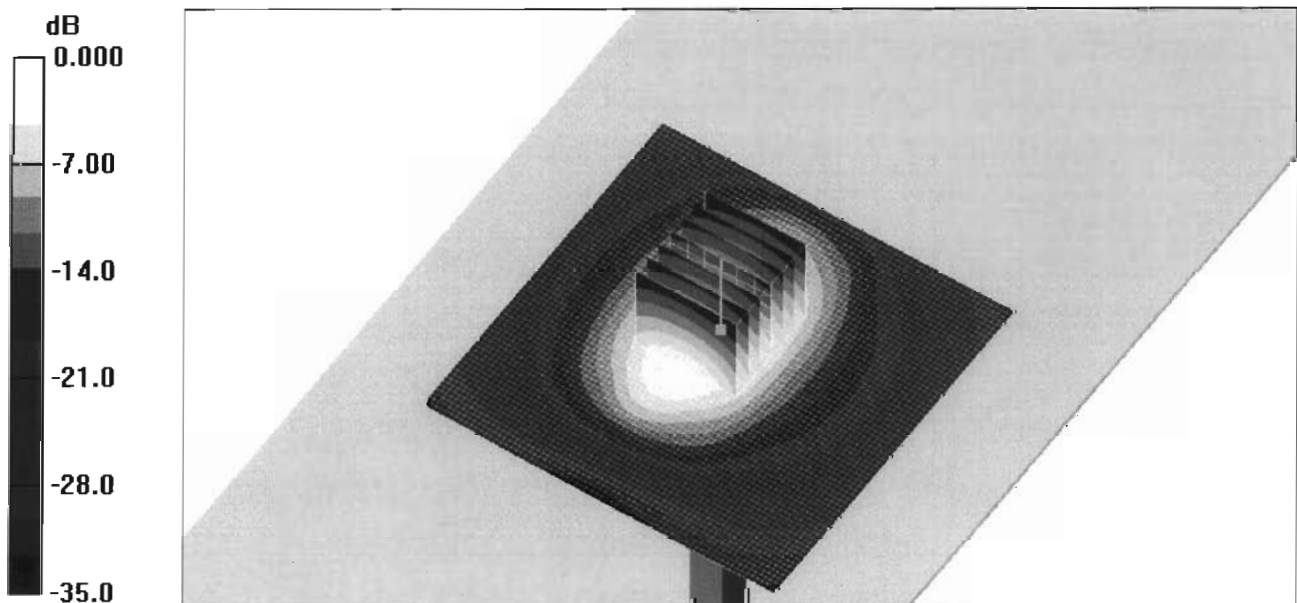

0 dB = 11.0mW/g

## DASY4 Validation Report for Body TSL

Date/Time: 21.02.2006 15:46:28

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d026**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U10;

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.3, 4.3, 4.3); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA
- Measurement SW: DASY4, V4.6 Build 57; Postprocessing SW: SEMCAD, V1.8 Build 160

**Pin = 250 mW; d = 10 mm/Area Scan (71x71x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.1 mW/g

**Pin = 250 mW; d = 10 mm/Zoom Scan 2 (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.1 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 17.3 W/kg

**SAR(1 g) = 10 mW/g; SAR(10 g) = 5.38 mW/g**

Maximum value of SAR (measured) = 11.5 mW/g

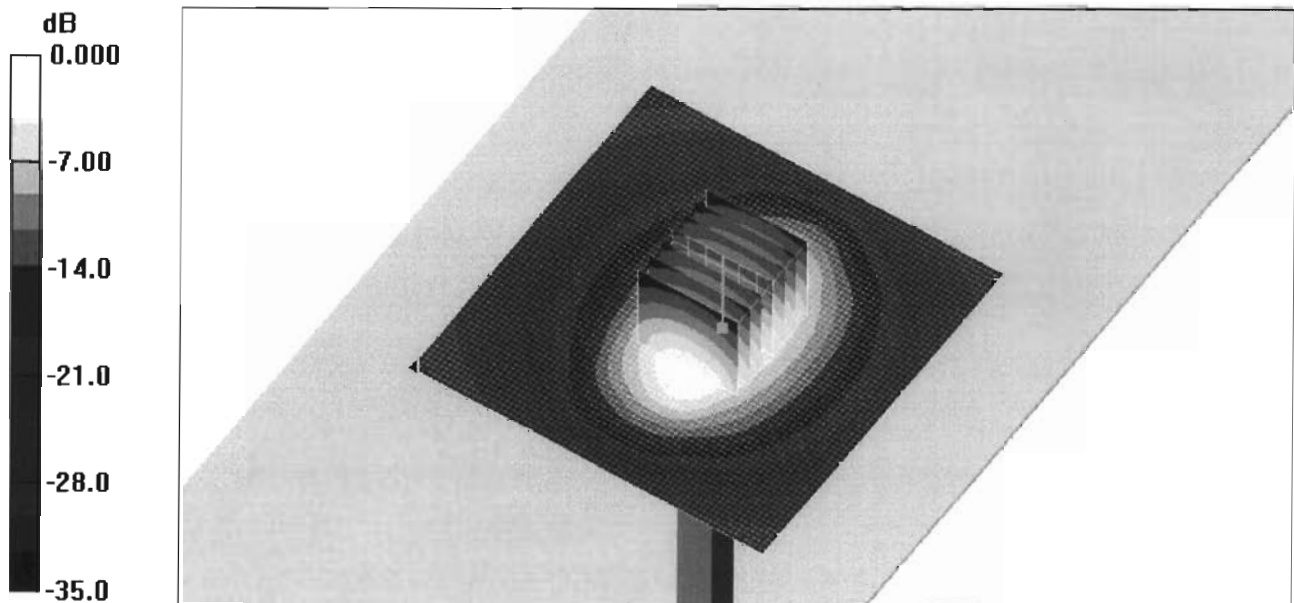

0 dB = 11.5mW/g