

Test Laboratory: Advance Data Technology

Left Head-Tilt-BT-Ch0-Mode 61

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 2402 MHz


Communication System: Bluetooth ; Frequency: 2402 MHz; Duty Cycle: 1:1
 Medium: HSL2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ ;
 Liquid level: 151 mm
 Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: GFSK
 Antenna type : Internal Antenna ; Air temp. : 22.4 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.76, 4.76, 4.76) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - Low Channel 0/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.016 mW/g

Tilt position - Low Channel 0/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
 dx=5mm, dy=5mm, dz=5mm
 Reference Value = 1.72 V/m
 Peak SAR (extrapolated) = 0.068 W/kg
SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.00819 mW/g
 Maximum value of SAR (measured) = 0.024 mW/g

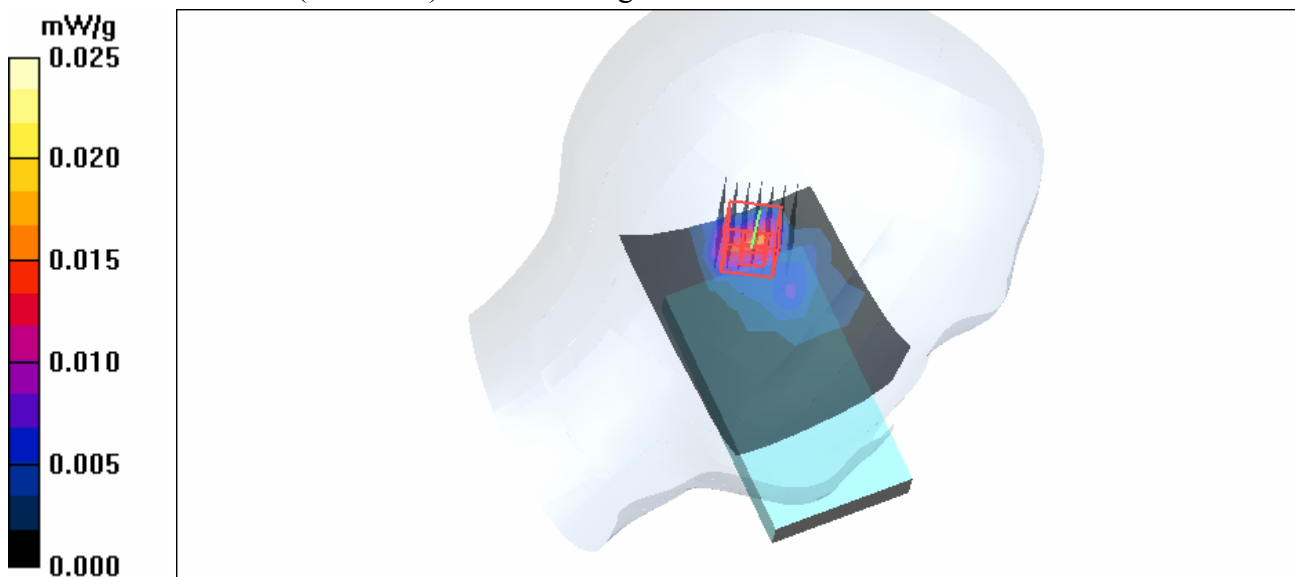

Test Laboratory: Advance Data Technology

Left Head-Tilt-BT-Ch39-Mode 61

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 2441 MHz

Communication System: Bluetooth ; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³ ;

Liquid level: 151 mm

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: GFSK

Antenna type : Internal Antenna ; Air temp. : 22.4 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.76, 4.76, 4.76) ; Calibrated: 2006/11/23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn510; Calibrated: 2006/9/7

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - Mid Channel 39/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.017 mW/g

Tilt position - Mid Channel 39/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.78 V/m

Peak SAR (extrapolated) = 0.068 W/kg

SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.00786 mW/g

Maximum value of SAR (measured) = 0.025 mW/g

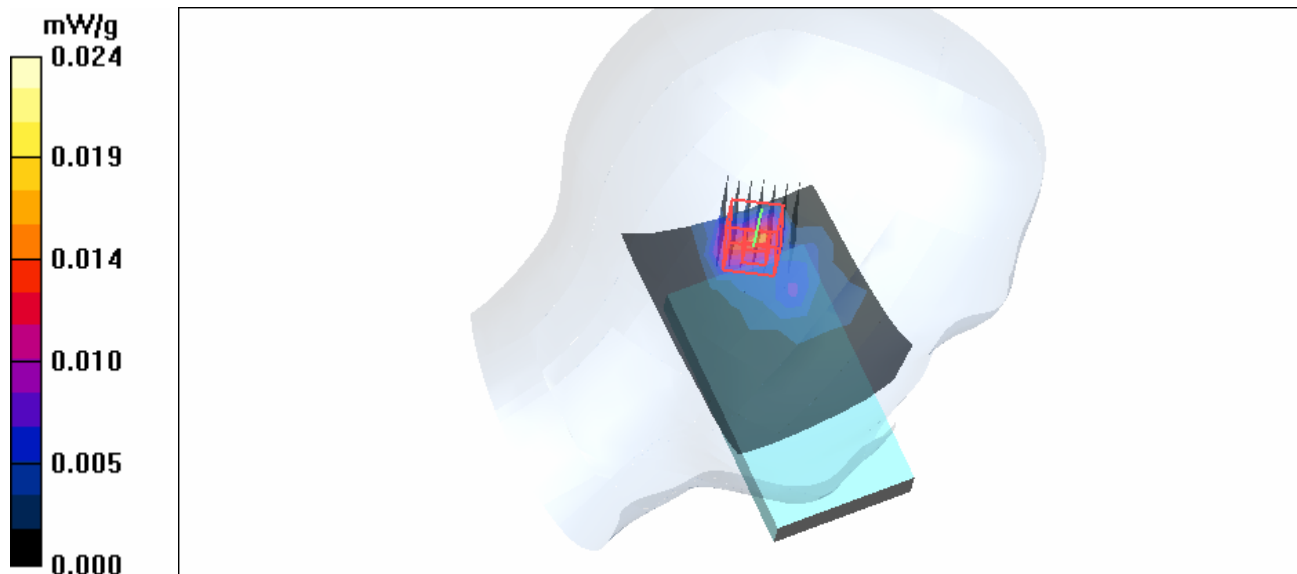

Test Laboratory: Advance Data Technology

Left Head-Tilt-BT-Ch78-Mode 61

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 2480 MHz


Communication System: Bluetooth ; Frequency: 2480 MHz ; Duty Cycle: 1:1
 Medium: HSL2450 Medium parameters used: $f = 2480 \text{ MHz}$; $\sigma = 1.87 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$;
 Liquid level: 151 mm
 Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: GFSK
 Antenna type : Internal Antenna ; Air temp. : 22.4 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.76, 4.76, 4.76) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - High Channel 78/Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.015 mW/g

Tilt position - High Channel 78/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
 $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 1.74 V/m
 Peak SAR (extrapolated) = 0.065 W/kg
SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.00743 mW/g
 Maximum value of SAR (measured) = 0.023 mW/g

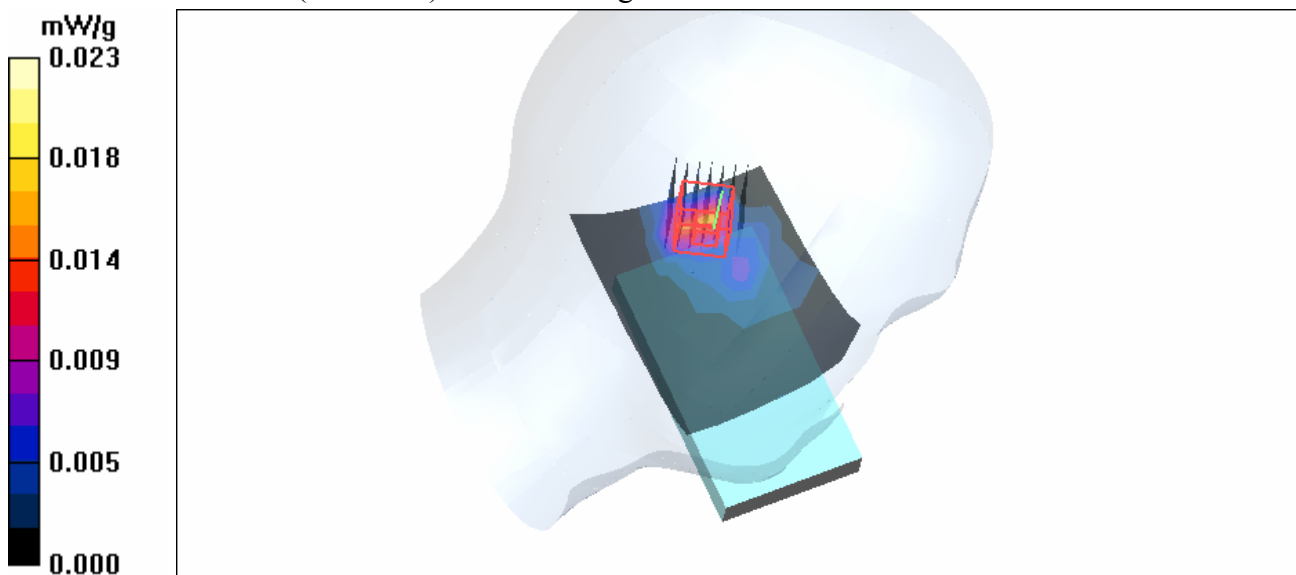

Test Laboratory: Advance Data Technology

Body Worn-LCD Down-BT-Ch0-Mode 62

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 2402 MHz

Communication System: Bluetooth ; Frequency: 2402 MHz ; Duty Cycle: 1:1 ; Modulation type: GFSK
 Medium: MSL2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³ ; Liquid level : 155 mm
 Phantom section: Flat Section ; Separation distance : 15 mm (The bottom side of the EUT to the Phantom)
 Antenna type : Internal Antenna ; Air temp. : 23.1 degrees ; Liquid temp. : 22.0 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2006/9/7
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53 ; Postprocessing SW: SEMCAD, V1.8 Build 172

Low Channel 0/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.002 mW/g


Low Channel 0/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.730 V/m

Peak SAR (extrapolated) = 0.011 W/kg

SAR(1 g) = 0.00195 mW/g; SAR(10 g) = 0.000538 mW/g

Maximum value of SAR (measured) = 0.003 mW/g

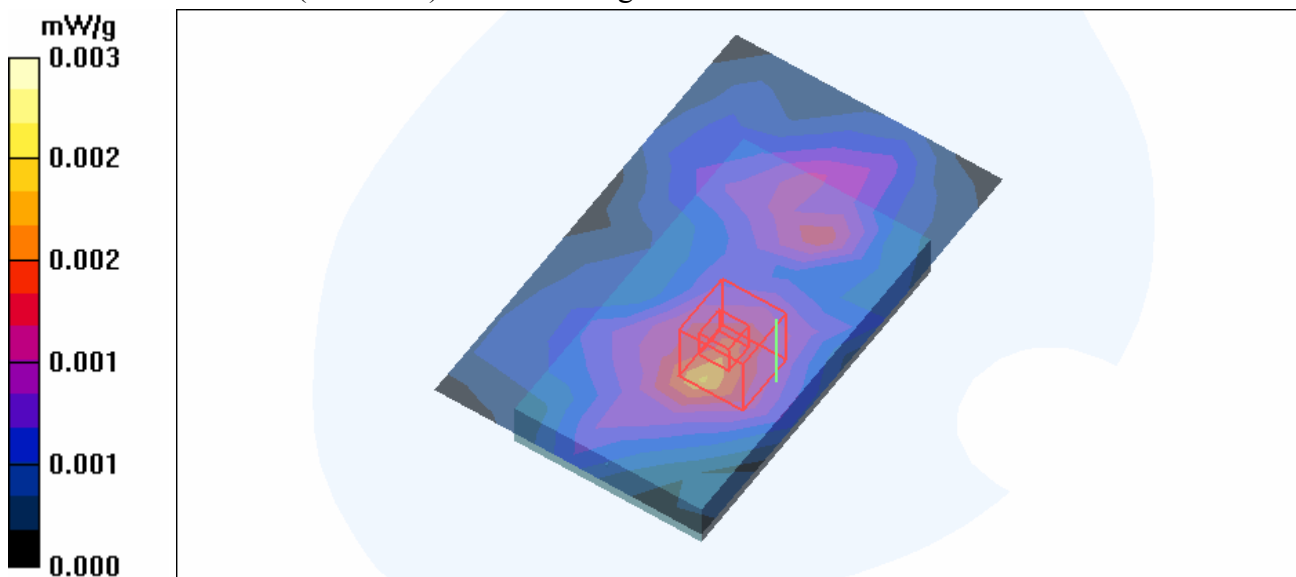

Test Laboratory: Advance Data Technology

Body Worn-LCD Down-BT-Ch39-Mode 62

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 2441 MHz

Communication System: Bluetooth ; Frequency: 2441 MHz ; Duty Cycle: 1:1 ; Modulation type: GFSK
 Medium: MSL2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³ ; Liquid level : 155 mm
 Phantom section: Flat Section ; Separation distance : 15 mm (The bottom side of the EUT to the Phantom)
 Antenna type : Internal Antenna ; Air temp. : 23.1 degrees ; Liquid temp. : 22.0 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2006/9/7
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53 ; Postprocessing SW: SEMCAD, V1.8 Build 172

Mid Channel 39/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.001 mW/g


Mid Channel 39/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.765 V/m

Peak SAR (extrapolated) = 0.011 W/kg

SAR(1 g) = 0.00144 mW/g; SAR(10 g) = 0.00029 mW/g

Maximum value of SAR (measured) = 0.002 mW/g

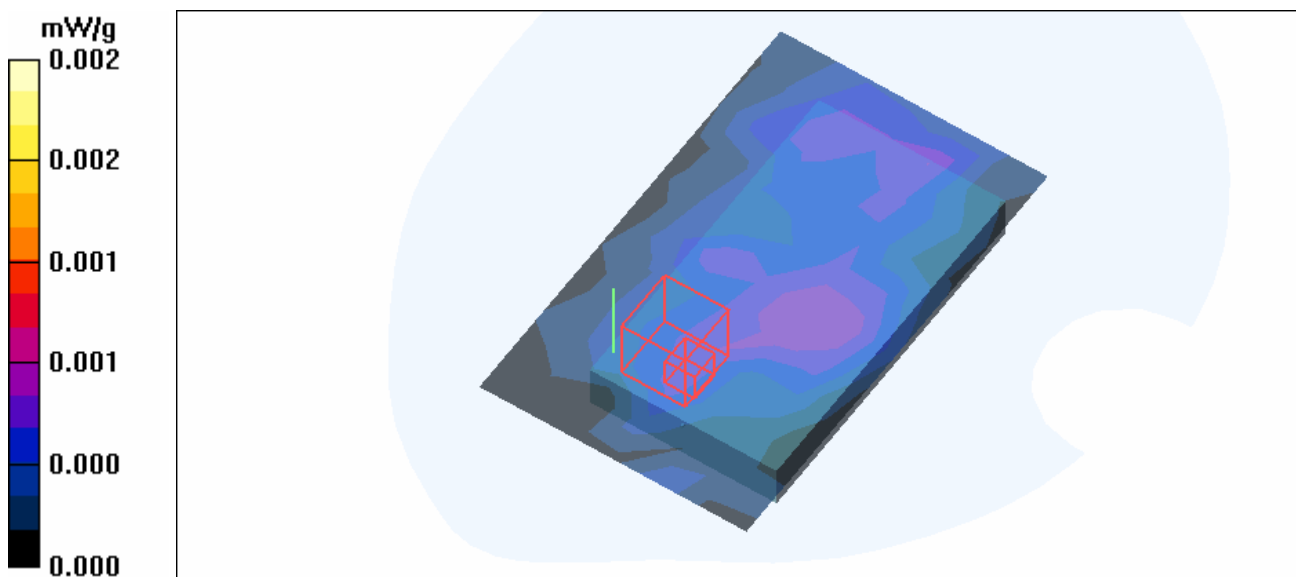

Test Laboratory: Advance Data Technology

Body Worn-LCD Down-BT-Ch78-Mode 62

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 2480 MHz

Communication System: Bluetooth ; Frequency: 2480 MHz ; Duty Cycle: 1:1 ; Modulation type: GFSK

Medium: MSL2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$

kg/m^3 ; Liquid level : 155 mm

Phantom section: Flat Section ; Separation distance : 15 mm (The bottom side of the EUT to the Phantom)

Antenna type : Internal Antenna ; Air temp. : 23.1 degrees ; Liquid temp. : 22.0 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2006/11/23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn510 ; Calibrated: 2006/9/7

- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 53 ; Postprocessing SW: SEMCAD, V1.8 Build 172

High Channel 78/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.001 mW/g

High Channel 78/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.573 V/m

Peak SAR (extrapolated) = 0.010 W/kg

SAR(1 g) = 0.00126 mW/g; SAR(10 g) = 0.000227 mW/g

Maximum value of SAR (measured) = 0.002 mW/g


High Channel 78/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.573 V/m

Peak SAR (extrapolated) = 0.009 W/kg

SAR(1 g) = 0.000972 mW/g; SAR(10 g) = 0.000214 mW/g

Maximum value of SAR (measured) = 0.001 mW/g

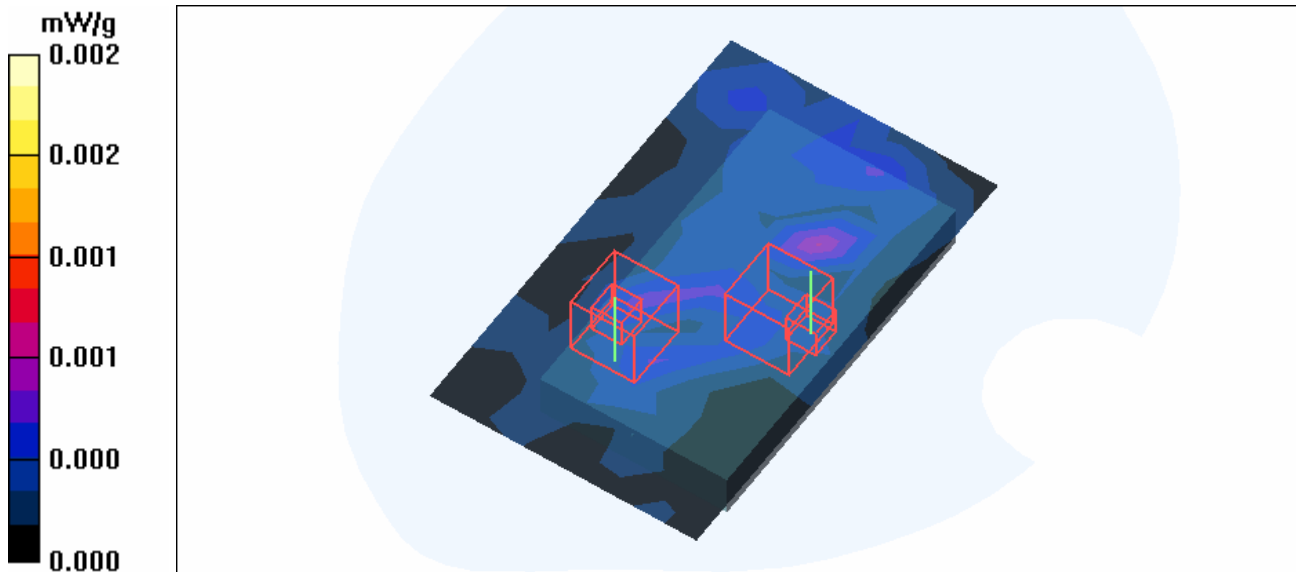

Test Laboratory: Advance Data Technology

Body Worn-LCD Up-BT-Ch0-Mode 63

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 2402 MHz

Communication System: Bluetooth ; Frequency: 2402 MHz ; Duty Cycle: 1:1 ; Modulation type: GFSK
 Medium: MSL2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³ ; Liquid level : 155 mm
 Phantom section: Flat Section ; Separation distance : 15 mm (The front side of the EUT to the Phantom)
 Antenna type : Internal Antenna ; Air temp. : 23.1 degrees ; Liquid temp. : 22.0 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2006/9/7
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53 ; Postprocessing SW: SEMCAD, V1.8 Build 172

Low Channel 0 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.002 mW/g


Low Channel 0 /Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.407 V/m

Peak SAR (extrapolated) = 0.003 W/kg

SAR(1 g) = 4.52e-005 mW/g; SAR(10 g) = 1.67e-005 mW/g

Maximum value of SAR (measured) = 0.001 mW/g

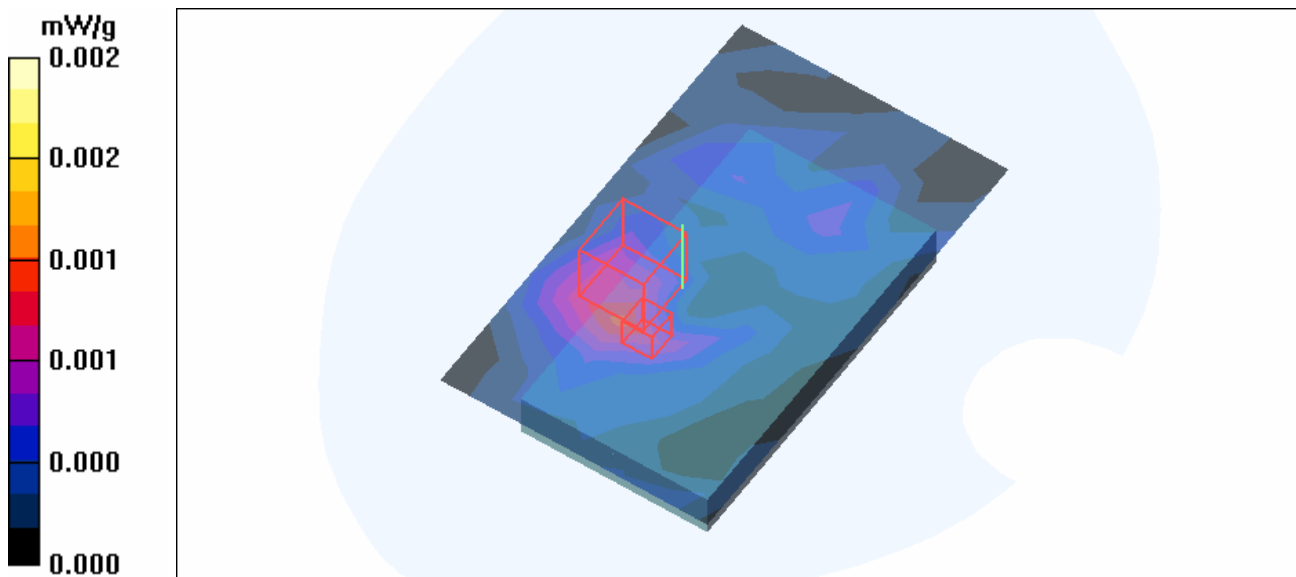

Test Laboratory: Advance Data Technology

Left Head-Cheek-GSM850-Ch251+11b-Ch6-Mode 64

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 848.8 MHz Frequency: 2437 MHz

Communication System: PCS 850 Communication System: 802.11b ; Frequency: 848.8 MHz Frequency: 2437 MHz ; Duty Cycle: 1:8.3 Duty Cycle: 1:1

Medium: HSL835 Medium: HSL2450 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 2437$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³ ; Liquid level: 150 mm

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: GMSK

Antenna type : Internal Antenna ; Air temp. : 23.2 degrees ; Liquid temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(6.71, 6.71, 6.71) ConvF(4.76, 4.76, 4.76) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - High Channel 251/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.06 mW/g

Touch position - High Channel 251/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.33 V/m

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.681 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

Touch position - Mid Channel 6/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.396 mW/g

Touch position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.8 V/m

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.485 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.532 mW/g

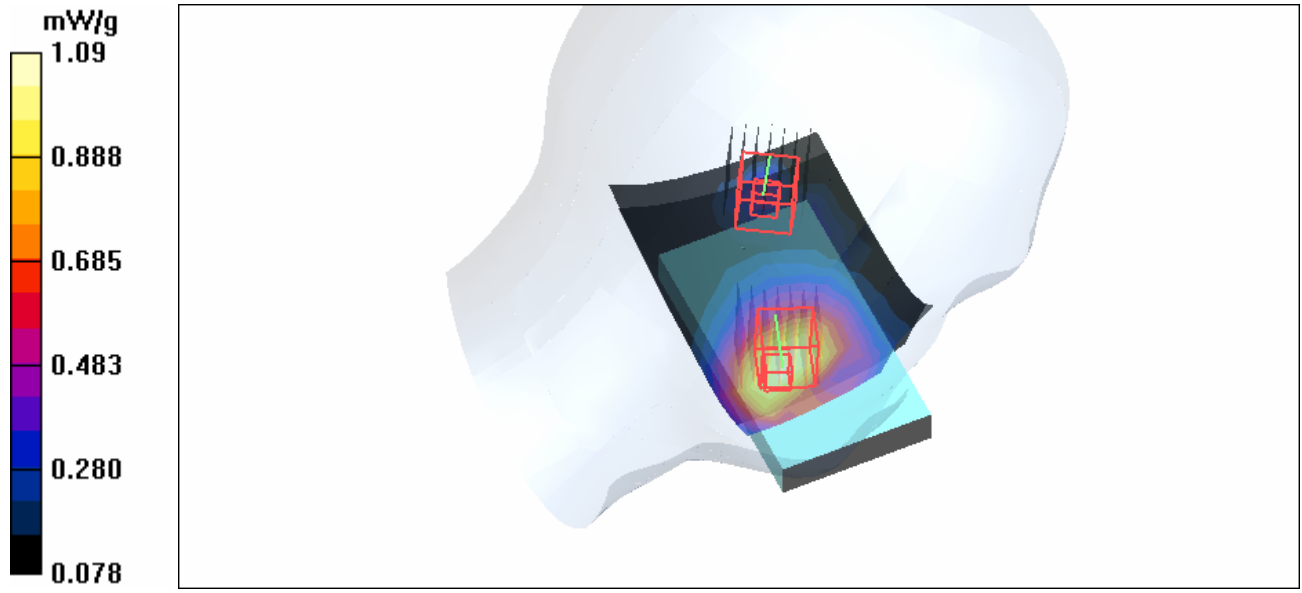

Test Laboratory: Advance Data Technology

Left Head-Cheek-PCS1900-Ch661+11b-Ch6-Mode 65

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 1880 MHz Frequency: 2437 MHz

Communication System: PCS 1900 Communication System: 802.11b ; Frequency: 1880 MHz Frequency: 2437 MHz ; Duty Cycle: 1:8.3 Duty Cycle: 1:1

Medium: HSL1900 Medium: HSL2450 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 2437$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³ ; Liquid level: 152 mm

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: GMSK

Antenna type : Internal Antenna ; Air temp. : 22.6 degrees ; Liquid temp. : 21.6 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(5.27, 5.27, 5.27)ConvF(4.76, 4.76, 4.76) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - Mid Channel 661/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.805 mW/g

Touch position - Mid Channel 661/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.6 V/m

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.737 mW/g; SAR(10 g) = 0.418 mW/g

Maximum value of SAR (measured) = 0.825 mW/g

Touch position - Mid Channel 661/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.6 V/m

Peak SAR (extrapolated) = 0.798 W/kg

SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.609 mW/g


Touch position - Mid Channel 6/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.396 mW/g

Touch position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.8 V/m

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = **0.485** mW/g; SAR(10 g) = **0.184** mW/g
Maximum value of SAR (measured) = 0.532 mW/g

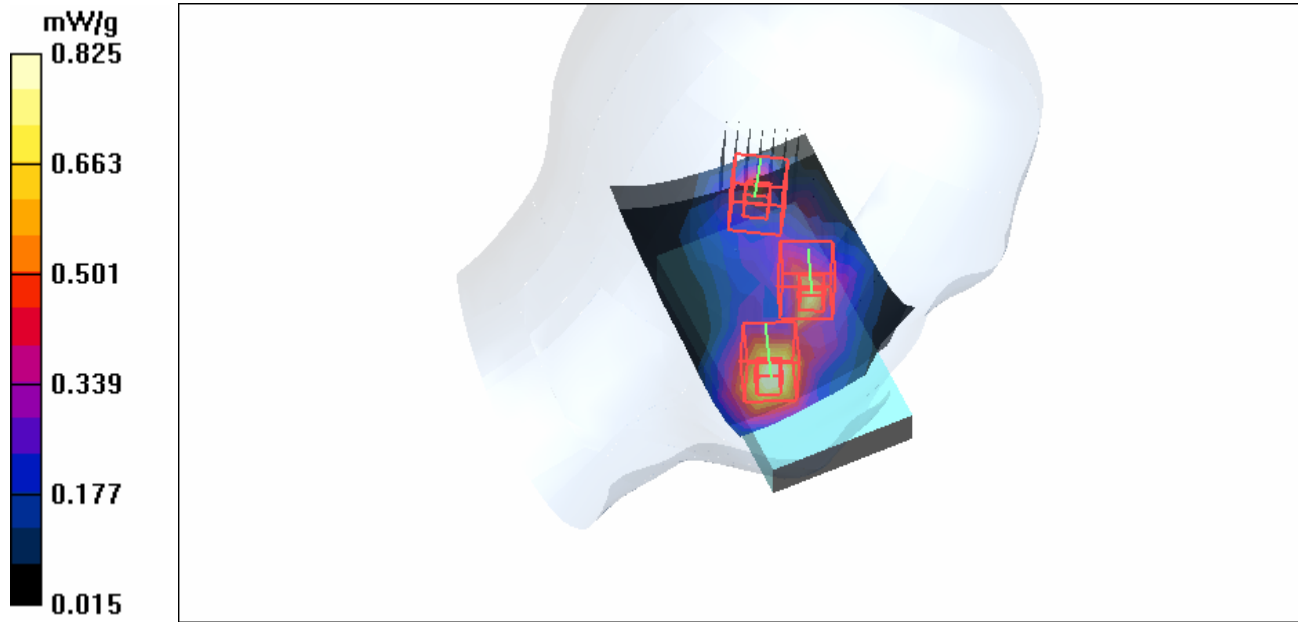

Date/Time: 2007/3/31 18:40:44

Test Laboratory: Advance Data Technology

Left Head-Cheek-WCDMA850-Ch4132+11b-Ch6-Mode 66

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 826.4 MHz Frequency: 2437 MHz

Communication System: WCDMA Communication System: 802.11b ; Frequency: 826.4 MHz Frequency: 2437 MHz ; Duty Cycle: 1:1

Medium: HSL835 Medium: HSL2450 Medium parameters used : $f = 826.4 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.83 \text{ mho/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$; Liquid level: 150 mm

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK

Antenna type : Internal Antenna ; Air temp. : 23.2 degrees ; Liquid temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(6.71, 6.71, 6.71)ConvF(4.76, 4.76, 4.76) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - Low Channel 4132/Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.800 mW/g

Touch position - Low Channel 4132/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.93 V/m

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.738 mW/g; SAR(10 g) = 0.484 mW/g

Touch position - Mid Channel 6/Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.396 mW/g


Touch position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.8 V/m

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.485 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.532 mW/g

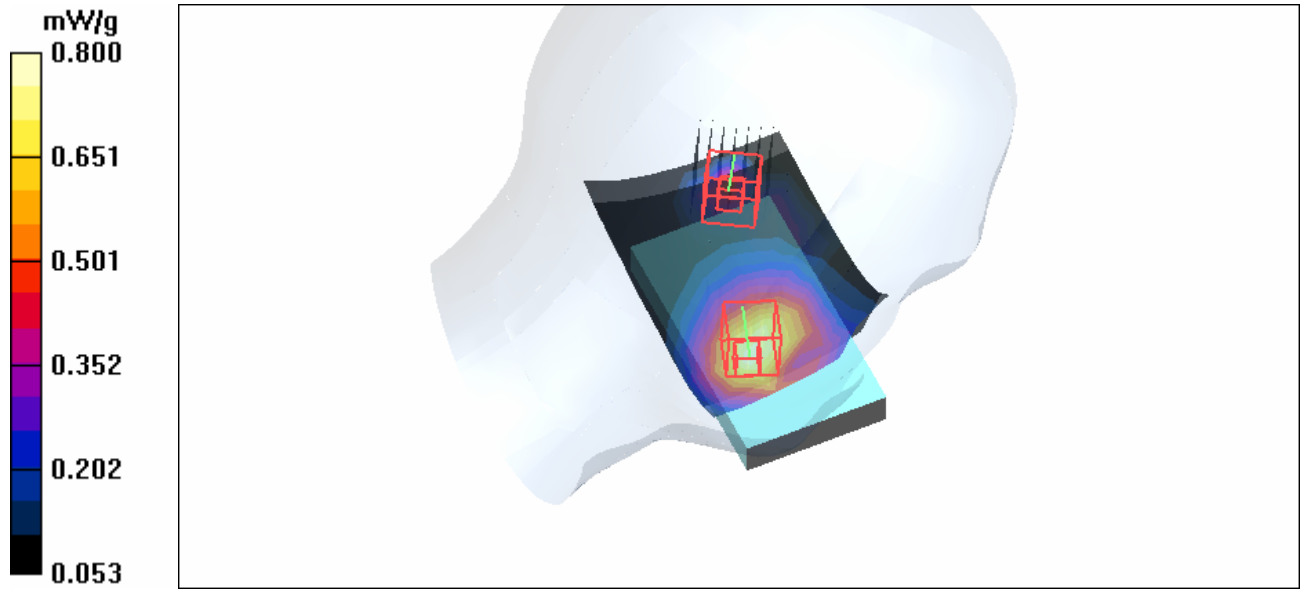

Test Laboratory: Advance Data Technology

Left Head-Cheek-WCDMA1900-Ch9400+11b-Ch6-Mode 67

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 1880 MHz Frequency: 2437 MHz

Communication System: WCDMA1900 Communication System: 802.11b ; Frequency: 1880 MHz Frequency: 2437 MHz ; Duty Cycle: 1:1

Medium: HSL1900 Medium: HSL2450 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 2437$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³ ; Liquid level: 152 mm

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK

Antenna type : Internal Antenna ; Air temp. : 22.6 degrees ; Liquid temp. : 21.6 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(5.27, 5.27, 5.27)ConvF(4.76, 4.76, 4.76) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - Mid Channel 9400/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.26 mW/g

Touch position - Mid Channel 9400/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.3 V/m

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 1.3 mW/g; SAR(10 g) = 0.704 mW/g

Maximum value of SAR (measured) = 1.48 mW/g

Touch position - Mid Channel 6/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.396 mW/g

Touch position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.8 V/m

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.485 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.532 mW/g

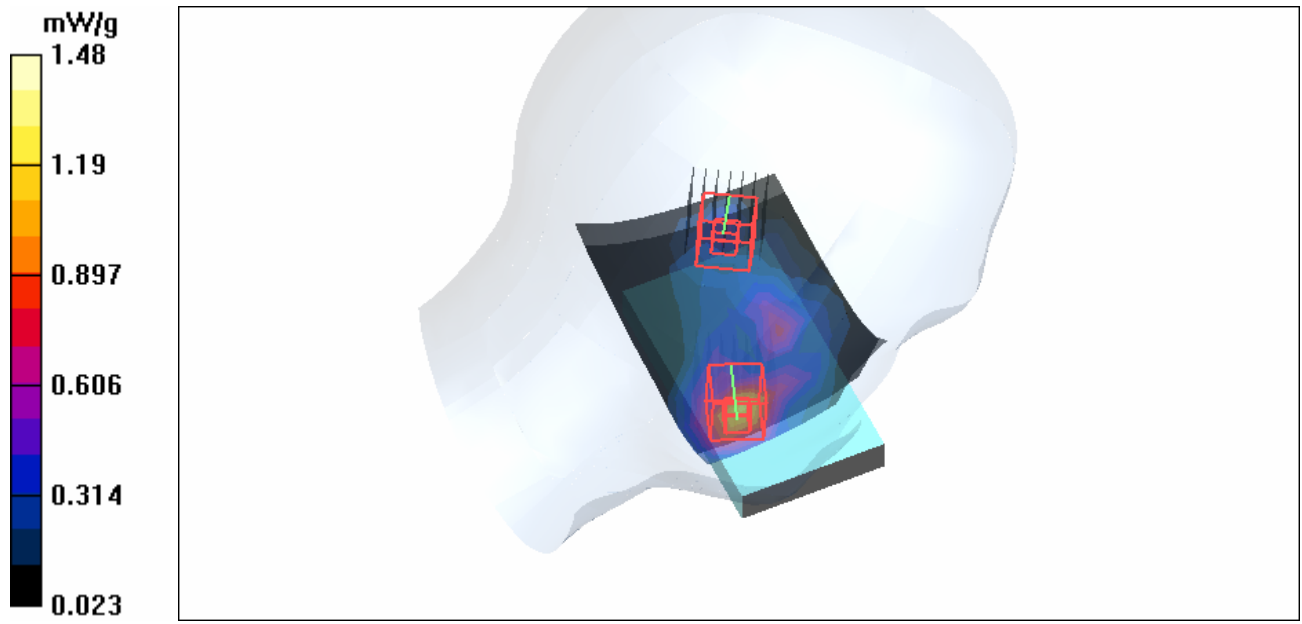

Test Laboratory: Advance Data Technology

Body Worn-LCD Down-GPRS850 TS2-Ch251+11b-Ch6-Mode 68

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 848.8 MHz Frequency: 2437 MHz

Communication System: PCS 850 Communication System: 802.11b ; Frequency: 848.8 MHz Frequency: 2412 MHz ; Duty Cycle: 1:4 Duty Cycle: 1:1
Medium: MSL835 Medium: MSL2450 Medium parameters used: $f = 848.8$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 2437$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³ ; Liquid Level : 155 mm
Phantom section: Flat Section ; DUT test position : Body ; Modulation Type: GMSK / UL 2 time slots
Separation Distance : 15 mm (The bottom side of the EUT to the Phantom)
Antenna Type : Internal Antenna ; Air Temp. : 23.3 degrees ; Liquid Temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(6.35, 6.35, 6.35) ConvF(4.35, 4.35, 4.35) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2006/9/7
- Phantom: SAM 12 ; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53 ; Postprocessing SW: SEMCAD, V1.8 Build 172

High Channel 251/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.05 mW/g


High Channel 251/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 32.6 V/m
Peak SAR (extrapolated) = 2.07 W/kg
SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.720 mW/g
Maximum value of SAR (measured) = 1.11 mW/g

Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.088 mW/g

Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.62 V/m
Peak SAR (extrapolated) = 0.183 W/kg
SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.052 mW/g
Maximum value of SAR (measured) = 0.097 mW/g

Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.62 V/m
Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.034 mW/g
Maximum value of SAR (measured) = 0.060 mW/g

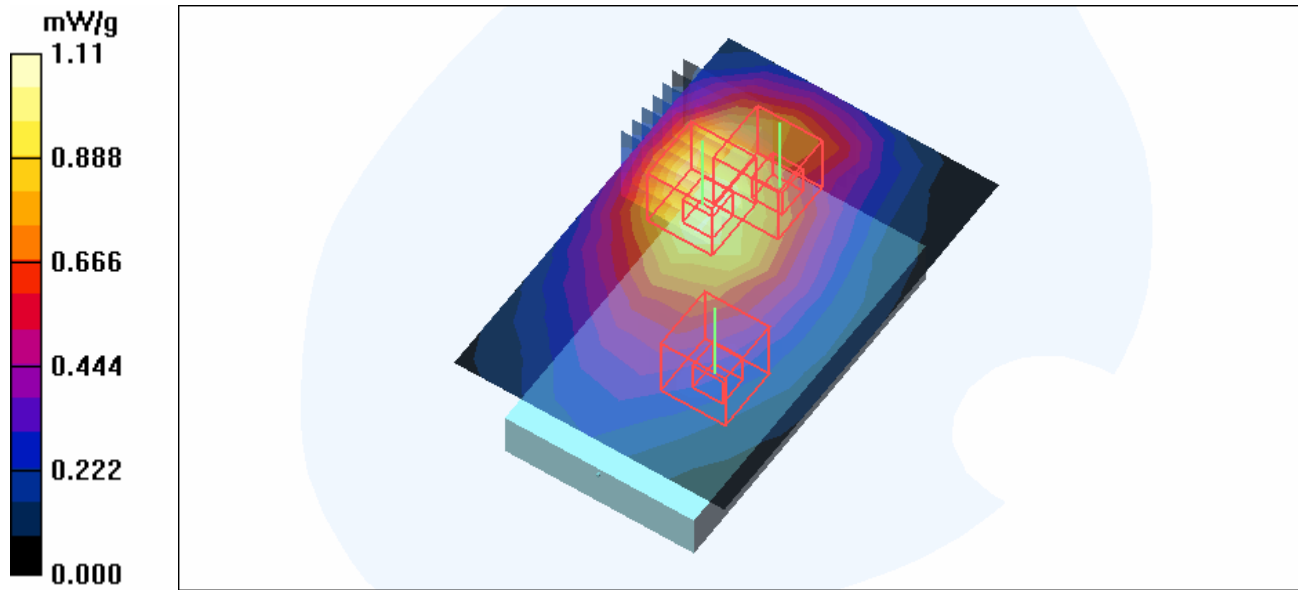

Test Laboratory: Advance Data Technology

Body Worn-LCD Down-GPRS1900 TS2-Ch512+11b-Ch6-Mode 69

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 1850.2 MHz Frequency: 2437 MHz

Communication System: PCS 1900 Communication System: 802.11b ; Frequency: 1850.2 MHz Frequency: 2412 MHz ; Duty Cycle: 1:4 Duty Cycle: 1:1

Medium: MSL1900 Medium: MSL2450 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 2437$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³ ; Liquid Level : 151 mm

Phantom section: Flat Section ; DUT test position : Body ; Modulation Type: GMSK / UL 2 time slots Separation Distance : 15 mm (The bottom side of the EUT to the Phantom)

Antenna Type : Internal Antenna ; Air Temp. : 23.0 degrees ; Liquid Temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.59, 4.59, 4.59) ConvF(4.35, 4.35, 4.35) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2006/9/7
- Phantom: SAM 12 ; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53 ; Postprocessing SW: SEMCAD, V1.8 Build 172

Low Channel 512/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.790 mW/g

Low Channel 512/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.1 V/m

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.821 mW/g; SAR(10 g) = 0.501 mW/g

Maximum value of SAR (measured) = 0.831 mW/g

Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.088 mW/g

Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.62 V/m

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.052 mW/g


Maximum value of SAR (measured) = 0.097 mW/g

Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.62 V/m

Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.034 mW/g
Maximum value of SAR (measured) = 0.060 mW/g

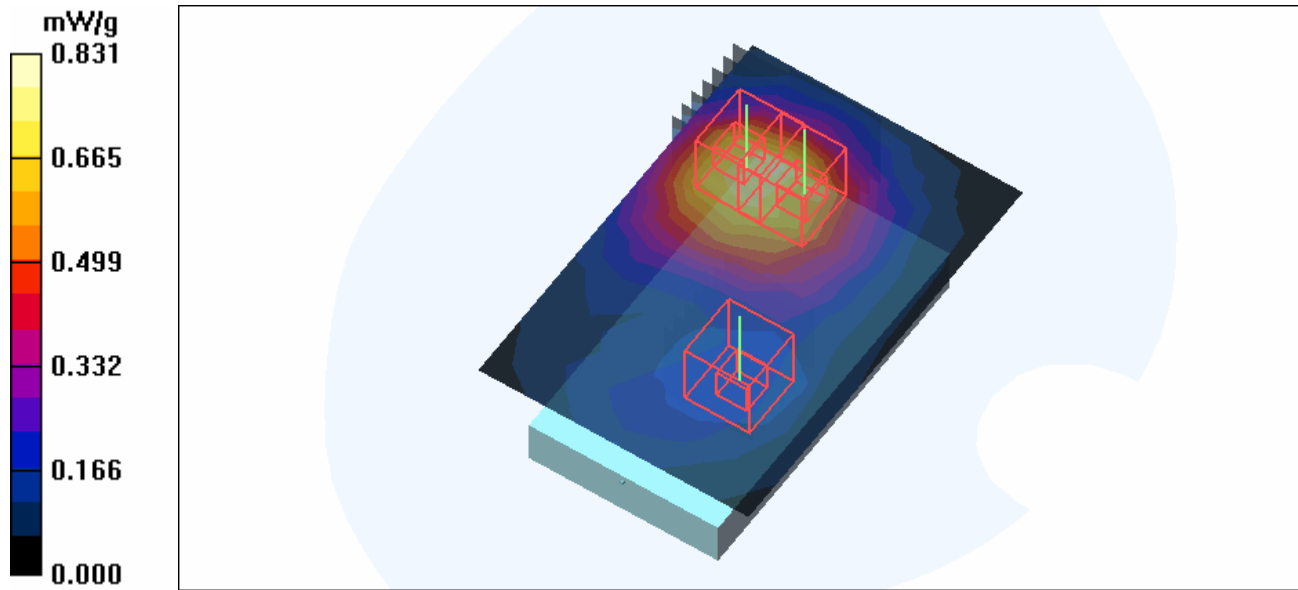

Test Laboratory: Advance Data Technology

Body Worn-LCD Down-WCDMA 850-Ch4132+11b-Ch6-Mode 70

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 826.4 MHz Frequency: 2437 MHz

Communication System: WCDMA Communication System: 802.11b ; Frequency: 826.4 MHz Frequency: 2412 MHz ; Duty Cycle: 1:1

Medium: MSL835 Medium: MSL2450 Medium parameters used : $f = 826.4 \text{ MHz}$; $\sigma = 0.98 \text{ mho/m}$; $\epsilon_r = 56.5$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.96 \text{ mho/m}$; $\epsilon_r = 54.2$; $\rho = 1000 \text{ kg/m}^3$; Liquid Level : 155 mm

Phantom section: Flat Section ; DUT test position : Body ; Modulation Type: BPSK

Separation Distance : 15 mm (The bottom side of the EUT to the Phantom)

Antenna Type : Internal Antenna ; Air Temp. : 23.3 degrees ; Liquid Temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(6.35, 6.35, 6.35)ConvF(4.35, 4.35, 4.35) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2006/9/7
- Phantom: SAM 12 ; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53 ; Postprocessing SW: SEMCAD, V1.8 Build 172

Low Channel 4132/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.385 mW/g

Low Channel 4132/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.7 V/m

Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.419 mW/g

Mid Channel 6/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.088 mW/g

Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.62 V/m

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.052 mW/g


Maximum value of SAR (measured) = 0.097 mW/g

Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.62 V/m

Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.034 mW/g
Maximum value of SAR (measured) = 0.060 mW/g

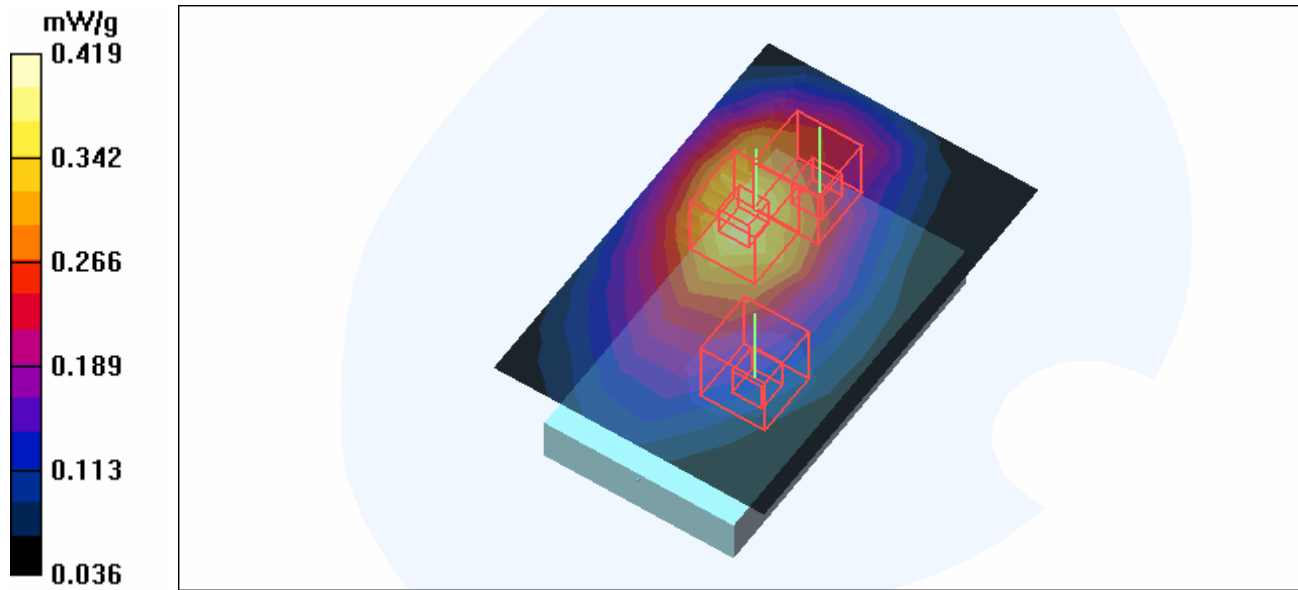

Test Laboratory: Advance Data Technology

Body Worn-LCD Down-WCDMA 1900-Ch9400+11b-Ch6-Mode 71

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 1880 MHz Frequency: 2437 MHz

Communication System: WCDMA1900 Communication System: 802.11b ; Frequency: 1880

MHz Frequency: 2412 MHz ; Duty Cycle: 1:1

Medium: MSL1900 Medium: MSL2450 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 2437$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³ ; Liquid Level : 151 mm

Phantom section: Flat Section ; DUT test position : Body ; Modulation Type: BPSK

Separation Distance : 15 mm (The bottom side of the EUT to the Phantom)

Antenna Type : Internal Antenna ; Air Temp. : 23.0 degrees ; Liquid Temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.59, 4.59, 4.59)ConvF(4.35, 4.35, 4.35) ; Calibrated: 2006/11/23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn510 ; Calibrated: 2006/9/7

- Phantom: SAM 12 ; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 53 ; Postprocessing SW: SEMCAD, V1.8 Build 172

Mid Channel 9400/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.07 mW/g

Mid Channel 9400/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.9 V/m

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.629 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.088 mW/g

Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.62 V/m

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.052 mW/g


Maximum value of SAR (measured) = 0.097 mW/g

Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.62 V/m

Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.034 mW/g
Maximum value of SAR (measured) = 0.060 mW/g

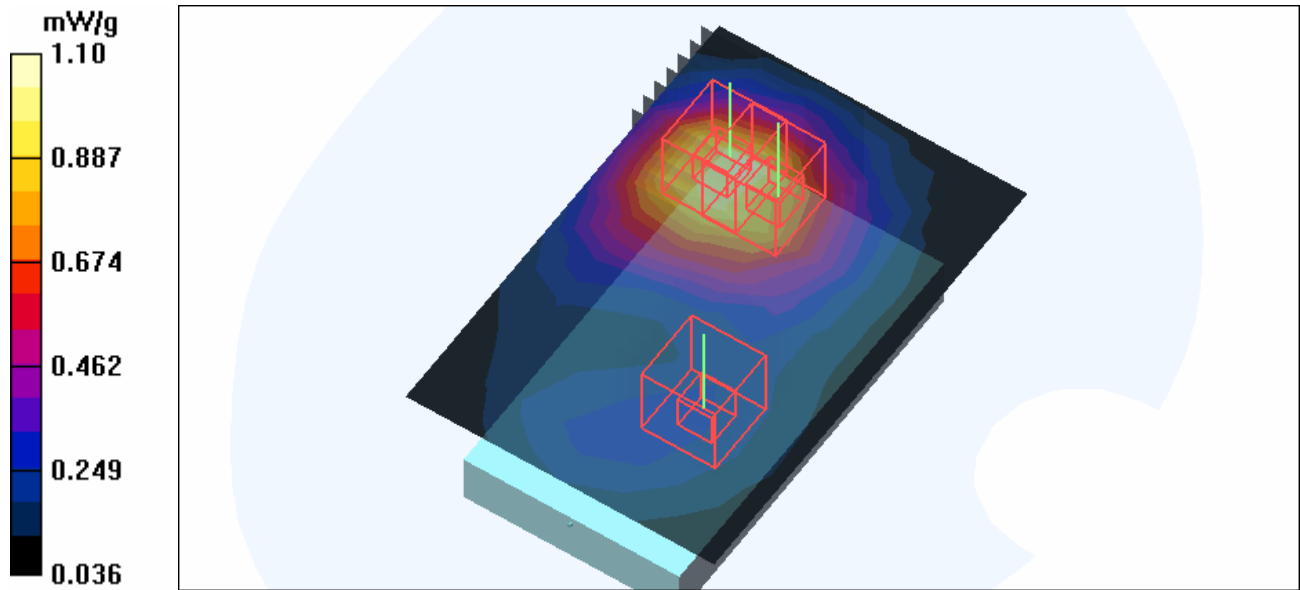

Test Laboratory: Advance Data Technology

Left Head-Cheek-GSM850-Ch251+BT-Ch0-Mode 72**DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 848.8 MHz Frequency: 2402 MHz**

Communication System: PCS 850 Communication System: 802.11b ; Frequency: 848.8 MHz Frequency: 2437 MHz ; Duty Cycle: 1:8.3 Duty Cycle: 1:1
Medium: HSL835 Medium: HSL2450 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $f = 2402 \text{ MHz}$; $\sigma = 1.79 \text{ mho/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$;
Liquid level: 150 mm
Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: GMSK
Antenna type : Internal Antenna ; Air temp. : 23.2 degrees ; Liquid temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(6.71, 6.71, 6.71) ConvF(4.76, 4.76, 4.76) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - High Channel 251/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.06 mW/g

Touch position - High Channel 251/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.33 V/m

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.681 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

Touch position - Low Channel 0/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.010 mW/g

Touch position - Low Channel 0/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.90 V/m

Peak SAR (extrapolated) = 0.032 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00593 mW/g

Maximum value of SAR (measured) = 0.019 mW/g

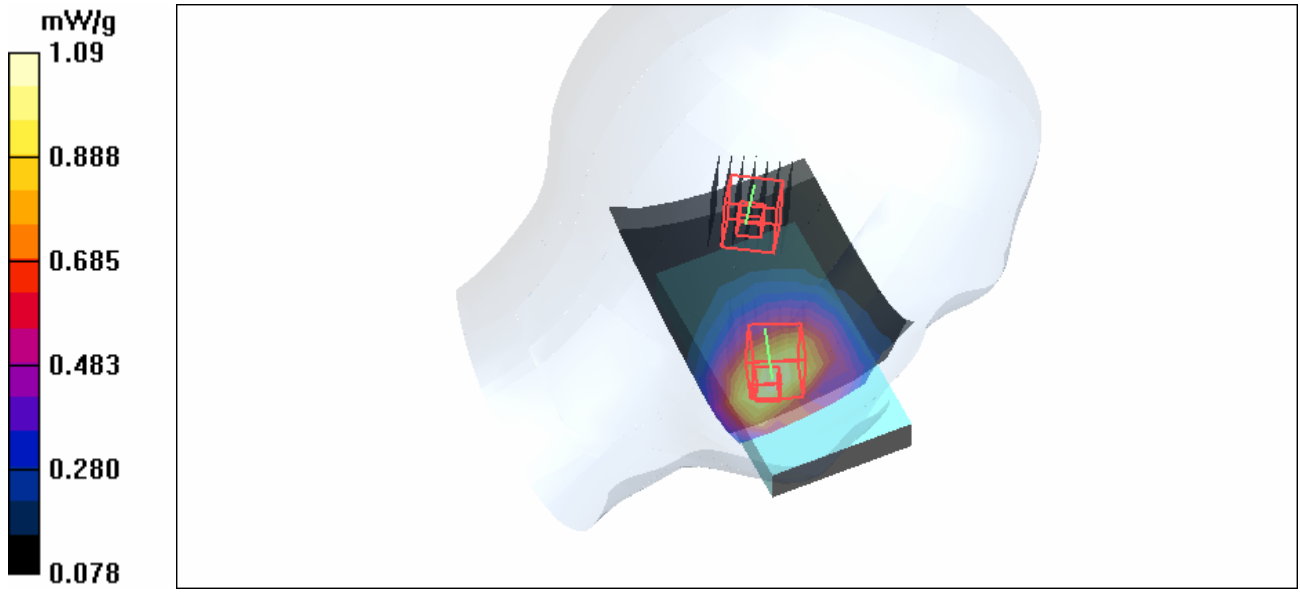

Test Laboratory: Advance Data Technology

Left Head-Cheek-PCS1900-Ch661+BT-Ch0-Mode 73

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 1880 MHz Frequency: 2402 MHz

Communication System: PCS 1900 Communication System: 802.11b ; Frequency: 1880 MHz Frequency: 2437 MHz ; Duty Cycle: 1:8.3 Duty Cycle: 1:1
Medium: HSL1900 Medium: HSL2450 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 2402$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ ;
Liquid level: 152 mm
Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: GMSK
Antenna type : Internal Antenna ; Air temp. : 22.6 degrees ; Liquid temp. : 21.6 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(5.27, 5.27, 5.27)ConvF(4.76, 4.76, 4.76) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - Mid Channel 661/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.805 mW/g


Touch position - Mid Channel 661/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.6 V/m
Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.737 mW/g; SAR(10 g) = 0.418 mW/g
Maximum value of SAR (measured) = 0.825 mW/g

Touch position - Mid Channel 661/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.6 V/m
Peak SAR (extrapolated) = 0.798 W/kg
SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.271 mW/g
Maximum value of SAR (measured) = 0.609 mW/g

Touch position - Low Channel 0/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.010 mW/g

Touch position - Low Channel 0/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.90 V/m
Peak SAR (extrapolated) = 0.032 W/kg

SAR(1 g) = **0.015** mW/g; SAR(10 g) = 0.00593 mW/g
Maximum value of SAR (measured) = 0.019 mW/g

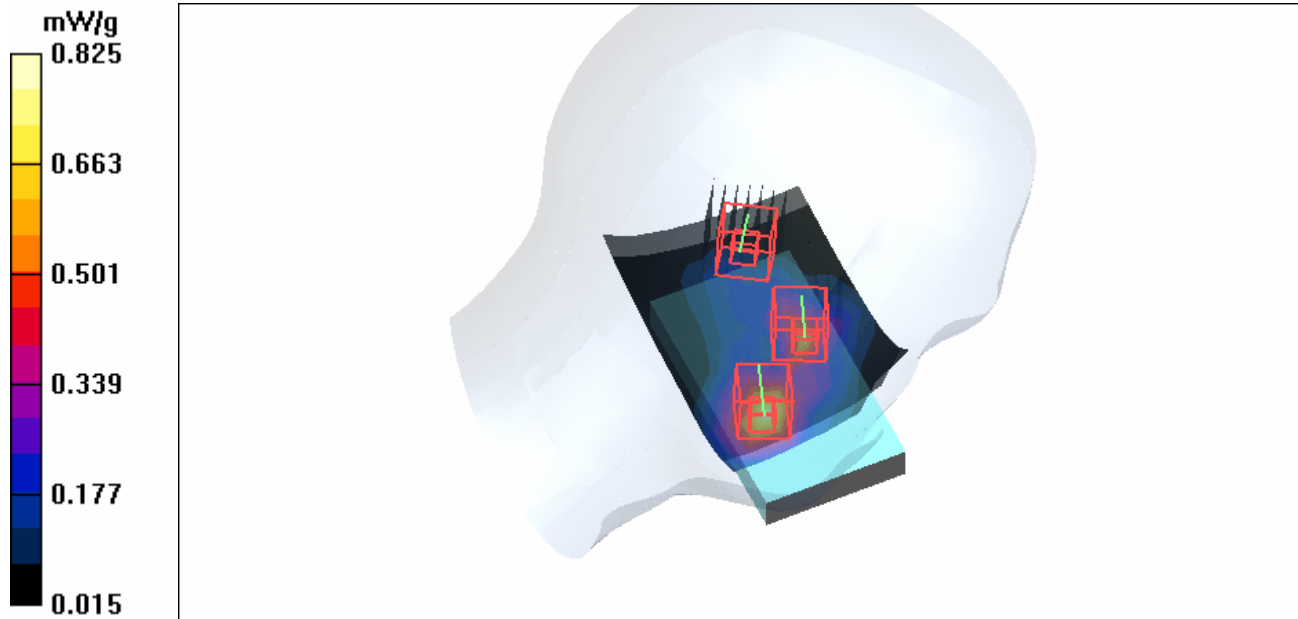

Test Laboratory: Advance Data Technology

Left Head-Cheek-WCDMA850-Ch4132+BT-Ch0-Mode 74**DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 826.4 MHz Frequency: 2402 MHz**

Communication System: WCDMA Communication System: 802.11b ; Frequency: 826.4 MHz Frequency: 2437 MHz ; Duty Cycle: 1:1

Medium: HSL835 Medium: HSL2450 Medium parameters used : $f = 826.4 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $f = 2402 \text{ MHz}$; $\sigma = 1.79 \text{ mho/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$; Liquid level: 150 mm

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK

Antenna type : Internal Antenna ; Air temp. : 23.2 degrees ; Liquid temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(6.71, 6.71, 6.71)ConvF(4.76, 4.76, 4.76) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - Low Channel 4132/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.800 mW/g

Touch position - Low Channel 4132/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.93 V/m

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.738 mW/g; SAR(10 g) = 0.484 mW/g**Touch position - Low Channel 0/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.010 mW/g


Touch position - Low Channel 0/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.90 V/m

Peak SAR (extrapolated) = 0.032 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00593 mW/g

Maximum value of SAR (measured) = 0.019 mW/g

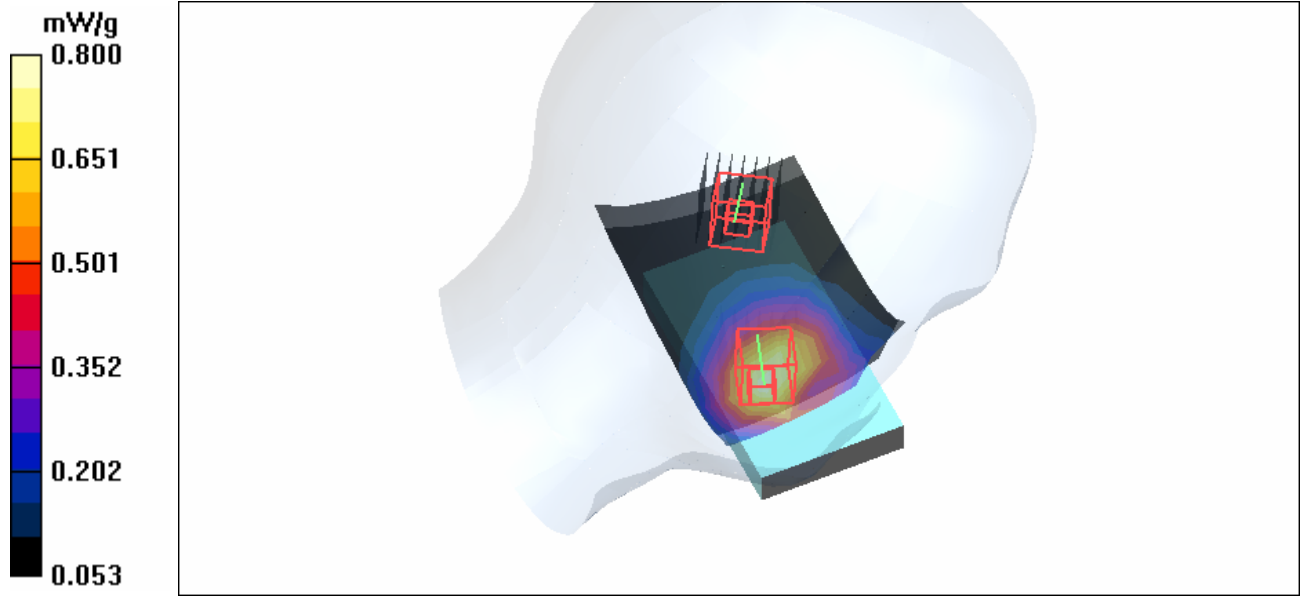

Test Laboratory: Advance Data Technology

Left Head-Cheek-WCDMA1900-Ch9400+BT-Ch0-Mode 75

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 1880 MHz Frequency: 2402 MHz

Communication System: WCDMA1900 Communication System: 802.11b ; Frequency: 1880

MHz Frequency: 2437 MHz ; Duty Cycle: 1:1

Medium: HSL1900 Medium: HSL2450 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 2402$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ ;

Liquid level: 152 mm

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK

Antenna type : Internal Antenna ; Air temp. : 22.6 degrees ; Liquid temp. : 21.6 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(5.27, 5.27, 5.27)ConvF(4.76, 4.76, 4.76) ; Calibrated: 2006/11/23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn510; Calibrated: 2006/9/7

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - Mid Channel 9400/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.26 mW/g

Touch position - Mid Channel 9400/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.3 V/m

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 1.3 mW/g; SAR(10 g) = 0.704 mW/g

Maximum value of SAR (measured) = 1.48 mW/g

Touch position - Low Channel 0/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.010 mW/g

Touch position - Low Channel 0/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.90 V/m

Peak SAR (extrapolated) = 0.032 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00593 mW/g

Maximum value of SAR (measured) = 0.019 mW/g

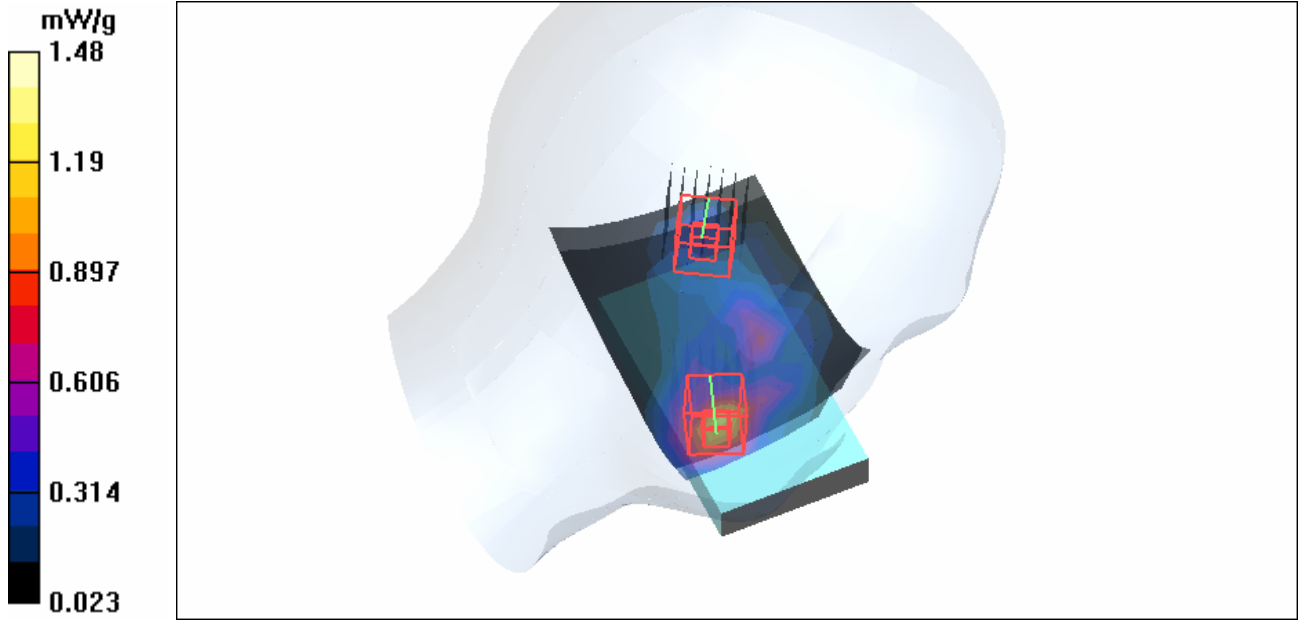

Test Laboratory: Advance Data Technology

Body Worn-LCD Down-GPRS850 TS2-Ch251+BT-Ch0-Mode 76

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 848.8 MHz Frequency: 2402 MHz

Communication System: PCS 850 Communication System: 802.11b ; Frequency: 848.8 MHz Frequency: 2412 MHz ; Duty Cycle: 1:4 Duty Cycle: 1:1
Medium: MSL835 Medium: MSL2450 Medium parameters used: $f = 848.8$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 2402$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³ ; Liquid Level : 155 mm
Phantom section: Flat Section ; DUT test position : Body ; Modulation Type: GMSK / UL 2 time slots
Separation Distance : 15 mm (The bottom side of the EUT to the Phantom)
Antenna Type : Internal Antenna ; Air Temp. : 23.3 degrees ; Liquid Temp. : 22.1 degrees

DASY4 Configuration:


- Probe: ET3DV6 - SN1790 ; ConvF(6.35, 6.35, 6.35) ConvF(4.35, 4.35, 4.35) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2006/9/7
- Phantom: SAM 12 ; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53 ; Postprocessing SW: SEMCAD, V1.8 Build 172

High Channel 251/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.05 mW/g

High Channel 251/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 32.6 V/m
Peak SAR (extrapolated) = 2.07 W/kg
SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.720 mW/g
Maximum value of SAR (measured) = 1.11 mW/g

Low Channel 0/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.002 mW/g

Low Channel 0/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.730 V/m
Peak SAR (extrapolated) = 0.011 W/kg
SAR(1 g) = 0.00195 mW/g; SAR(10 g) = 0.000538 mW/g
Maximum value of SAR (measured) = 0.003 mW/g

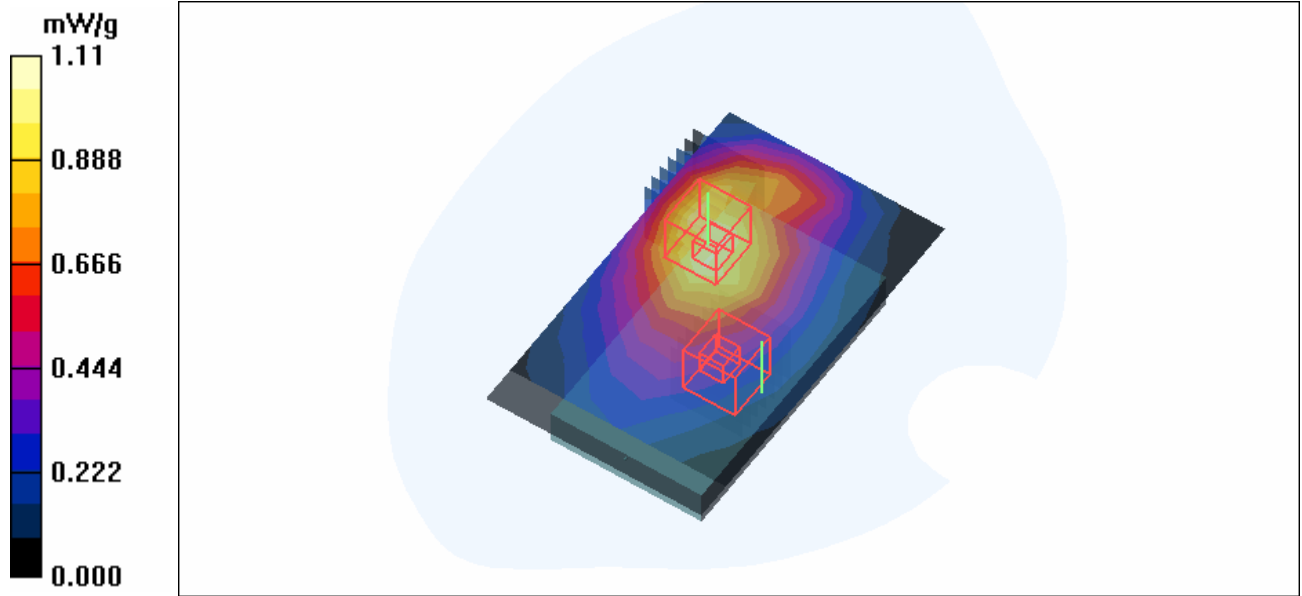

Test Laboratory: Advance Data Technology

Body Worn-LCD Down-GPRS1900 TS2-Ch512+BT-Ch0-Mode 77**DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 1850.2 MHz Frequency: 2402 MHz**

Communication System: PCS 1900 Communication System: 802.11b ; Frequency: 1850.2 MHz Frequency: 2412 MHz ; Duty Cycle: 1:4 Duty Cycle: 1:1

Medium: MSL1900 Medium: MSL2450 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 2402$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³ ; Liquid Level : 151 mm

Phantom section: Flat Section ; DUT test position : Body ; Modulation Type: GMSK / UL 2 time slots Separation Distance : 15 mm (The bottom side of the EUT to the Phantom)

Antenna Type : Internal Antenna ; Air Temp. : 23.0 degrees ; Liquid Temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.59, 4.59, 4.59) ConvF(4.35, 4.35, 4.35) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2006/9/7
- Phantom: SAM 12 ; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53 ; Postprocessing SW: SEMCAD, V1.8 Build 172

Low Channel 512/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.790 mW/g

Low Channel 512/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.1 V/m

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.821 mW/g; SAR(10 g) = 0.501 mW/g

Maximum value of SAR (measured) = 0.831 mW/g

Low Channel 0/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.002 mW/g


Low Channel 0/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.730 V/m

Peak SAR (extrapolated) = 0.011 W/kg

SAR(1 g) = 0.00195 mW/g; SAR(10 g) = 0.000538 mW/g

Maximum value of SAR (measured) = 0.003 mW/g

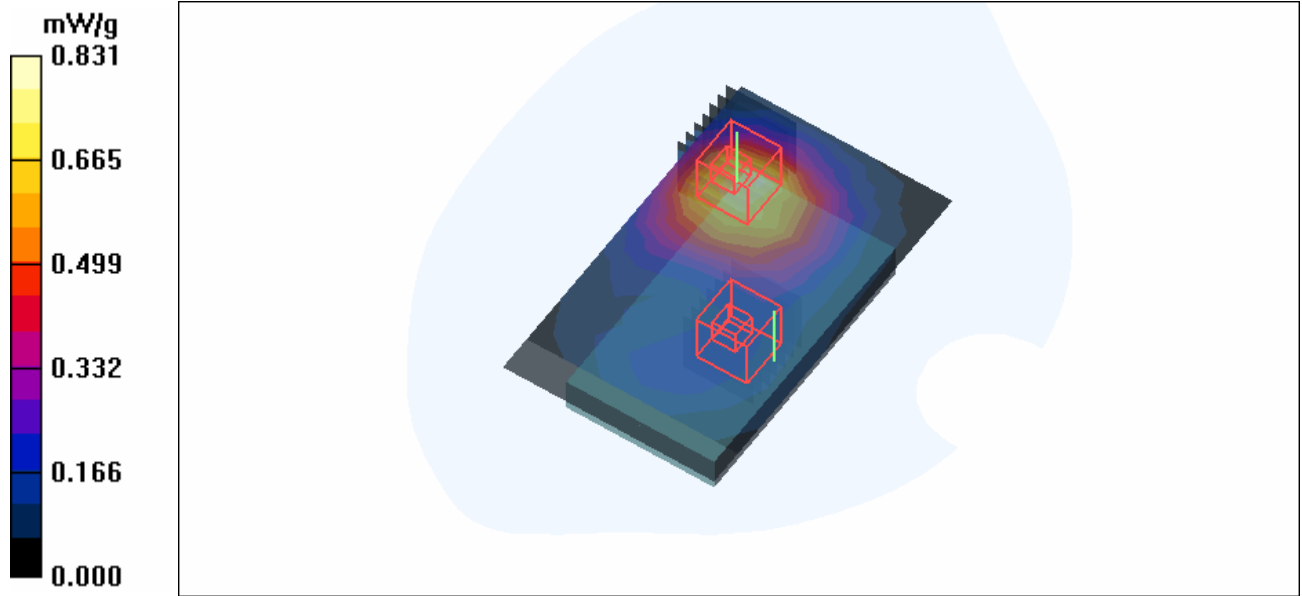

Test Laboratory: Advance Data Technology

Body Worn-LCD Down-WCDMA 850-Ch4132+BT-Ch0-Mode 78

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 826.4 MHz Frequency: 2402 MHz

Communication System: WCDMA Communication System: 802.11b ; Frequency: 826.4 MHz Frequency: 2412 MHz ; Duty Cycle: 1:1

Medium: MSL835 Medium: MSL2450 Medium parameters used : $f = 826.4 \text{ MHz}$; $\sigma = 0.98 \text{ mho/m}$; $\epsilon_r = 56.5$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $f = 2402 \text{ MHz}$; $\sigma = 1.91 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$; Liquid Level : 155 mm

Phantom section: Flat Section ; DUT test position : Body ; Modulation Type: BPSK

Separation Distance : 15 mm (The bottom side of the EUT to the Phantom)

Antenna Type : Internal Antenna ; Air Temp. : 23.3 degrees ; Liquid Temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(6.35, 6.35, 6.35)ConvF(4.35, 4.35, 4.35) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2006/9/7
- Phantom: SAM 12 ; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53 ; Postprocessing SW: SEMCAD, V1.8 Build 172

Low Channel 4132/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.385 mW/g

Low Channel 4132/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.7 V/m

Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.419 mW/g

Low Channel 0/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.002 mW/g


Low Channel 0/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.730 V/m

Peak SAR (extrapolated) = 0.011 W/kg

SAR(1 g) = 0.00195 mW/g; SAR(10 g) = 0.000538 mW/g

Maximum value of SAR (measured) = 0.003 mW/g

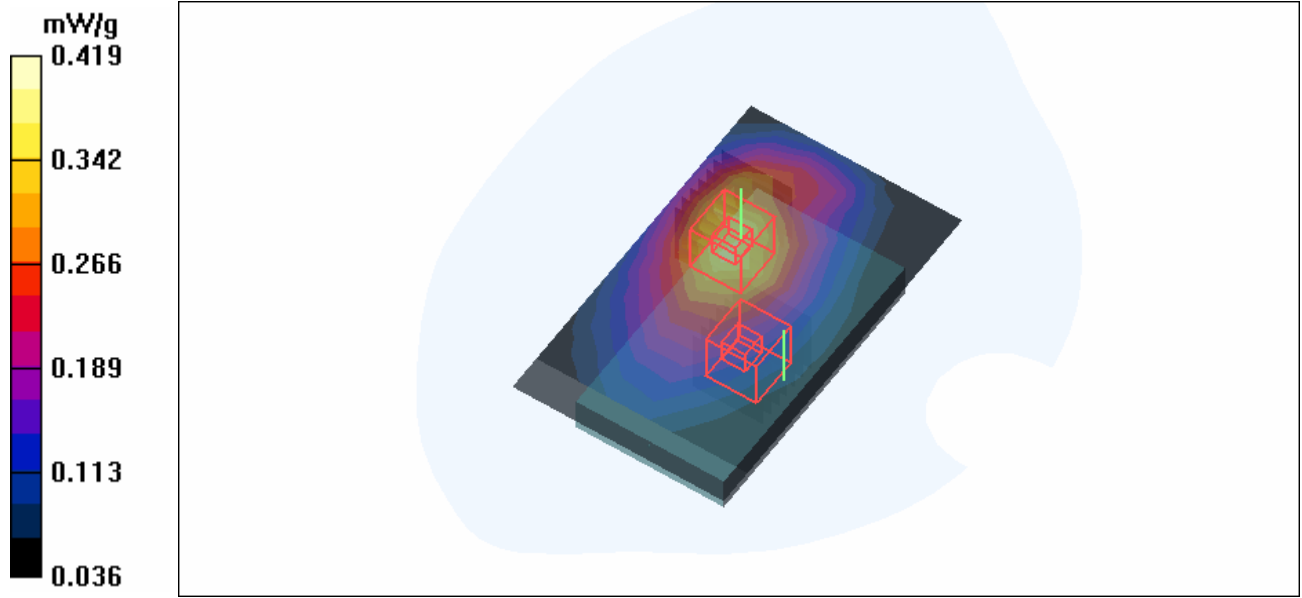

Test Laboratory: Advance Data Technology

Body Worn-LCD Down-WCDMA 1900-Ch9400+BT-Ch0-Mode 79

DUT: Pocket PC Phone ; Type: CAVA100 ; Test Frequency: 1880 MHz Frequency: 2402 MHz

Communication System: WCDMA1900 Communication System: 802.11b ; Frequency: 1880 MHz Frequency: 2412 MHz ; Duty Cycle: 1:1

Medium: MSL1900 Medium: MSL2450 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 2402$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³ ; Liquid Level : 151 mm

Phantom section: Flat Section ; DUT test position : Body ; Modulation Type: BPSK

Separation Distance : 15 mm (The bottom side of the EUT to the Phantom)

Antenna Type : Internal Antenna ; Air Temp. : 23.0 degrees ; Liquid Temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.59, 4.59, 4.59)ConvF(4.35, 4.35, 4.35) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2006/9/7
- Phantom: SAM 12 ; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53 ; Postprocessing SW: SEMCAD, V1.8 Build 172

Mid Channel 9400/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.07 mW/g

Mid Channel 9400/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.9 V/m

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.629 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

Low Channel 0/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.002 mW/g


Low Channel 0/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.730 V/m

Peak SAR (extrapolated) = 0.011 W/kg

SAR(1 g) = 0.00195 mW/g; SAR(10 g) = 0.000538 mW/g

Maximum value of SAR (measured) = 0.003 mW/g

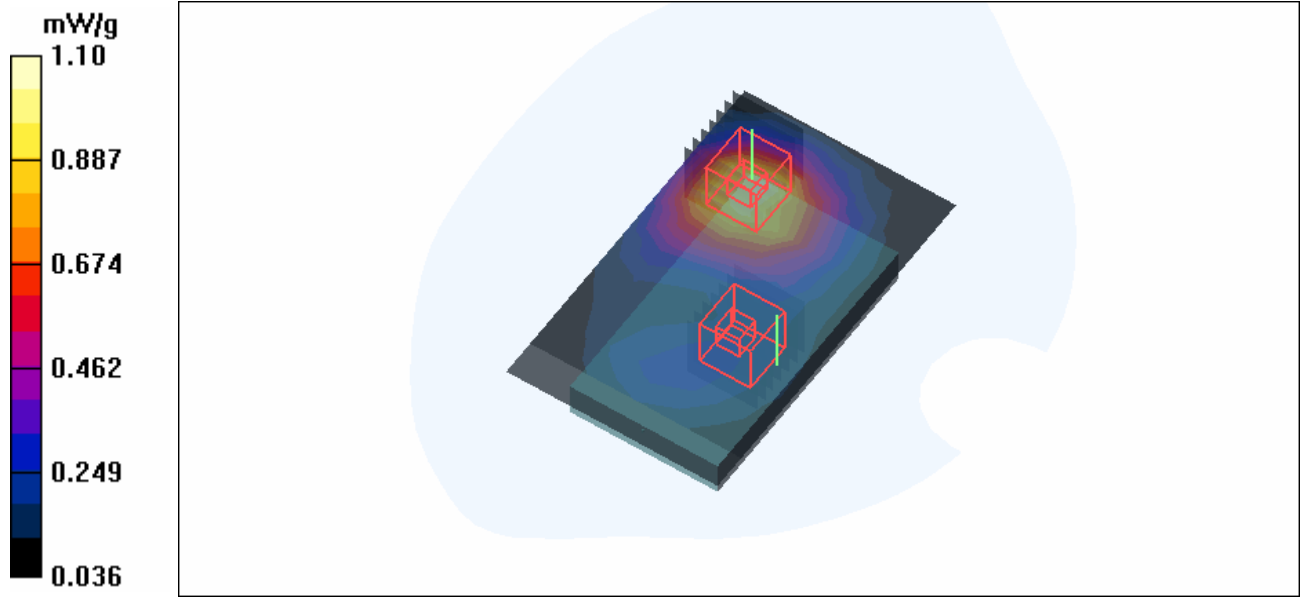

Test Laboratory: Advance Data Technology

System Validation Check-HSL 835MHz

DUT: Dipole 850 MHz ; Type: D835V2 ; Serial: 4d021 ; Test Frequency: 835 MHz

Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: HSL835;Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$;
 Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 15 mm (The feetpoint of the dipole to the Phantom)
 Air temp. : 23.2 degrees ; Liquid temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(6.71, 6.71, 6.71) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=15mm, Pin=250mW/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 2.16 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.7 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 3.42 W/kg

SAR(1 g) = 2.25 mW/g; SAR(10 g) = 1.45 mW/g

Maximum value of SAR (measured) = 2.44 mW/g

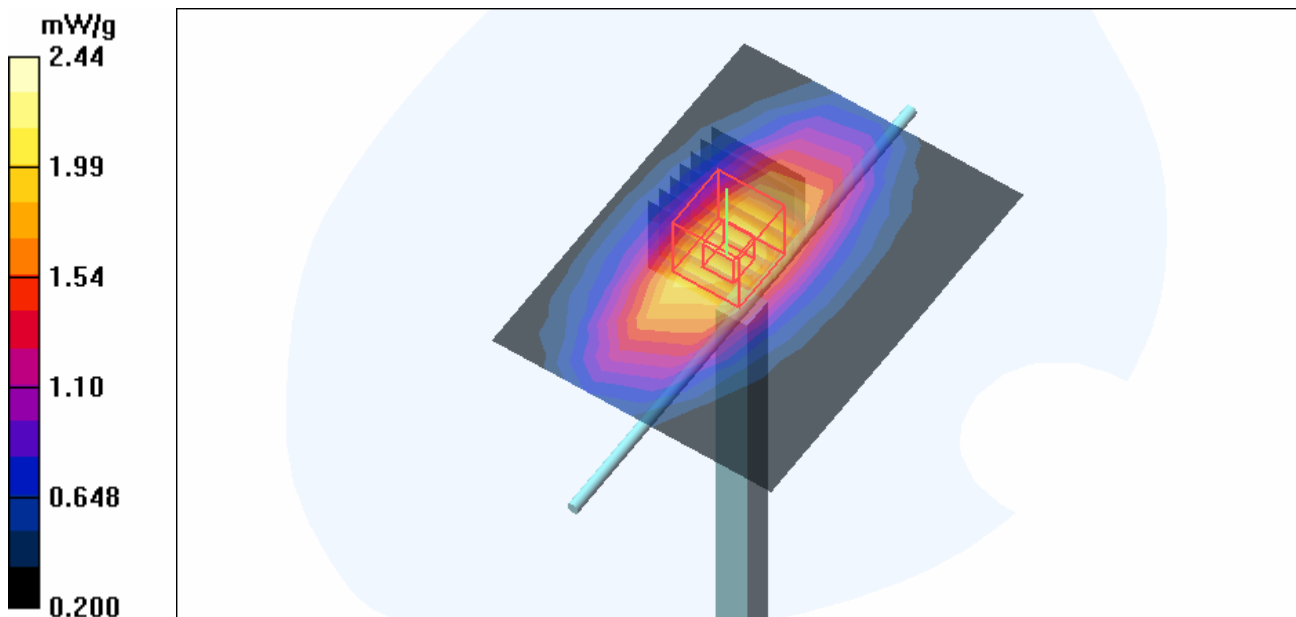

Test Laboratory: Advance Data Technology

System Validation Check-MSL 835MHz

DUT: Dipole 850 MHz ; Type: D835V2 ; Serial: 4d021 ; Test Frequency: 835 MHz

Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: MSL835; Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 56.3$; $\rho = 1000$ kg/m³ ;
 Liquid level : 155 mm
 Phantom section: Flat Section ; Separation distance : 15 mm (The feetpoint of the dipole to the Phantom)
 Air temp. : 23.3 degrees ; Liquid temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(6.35, 6.35, 6.35) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=15mm, Pin=250mW/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 2.29 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.1 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 2.41 mW/g; SAR(10 g) = 1.57 mW/g

Maximum value of SAR (measured) = 2.62 mW/g

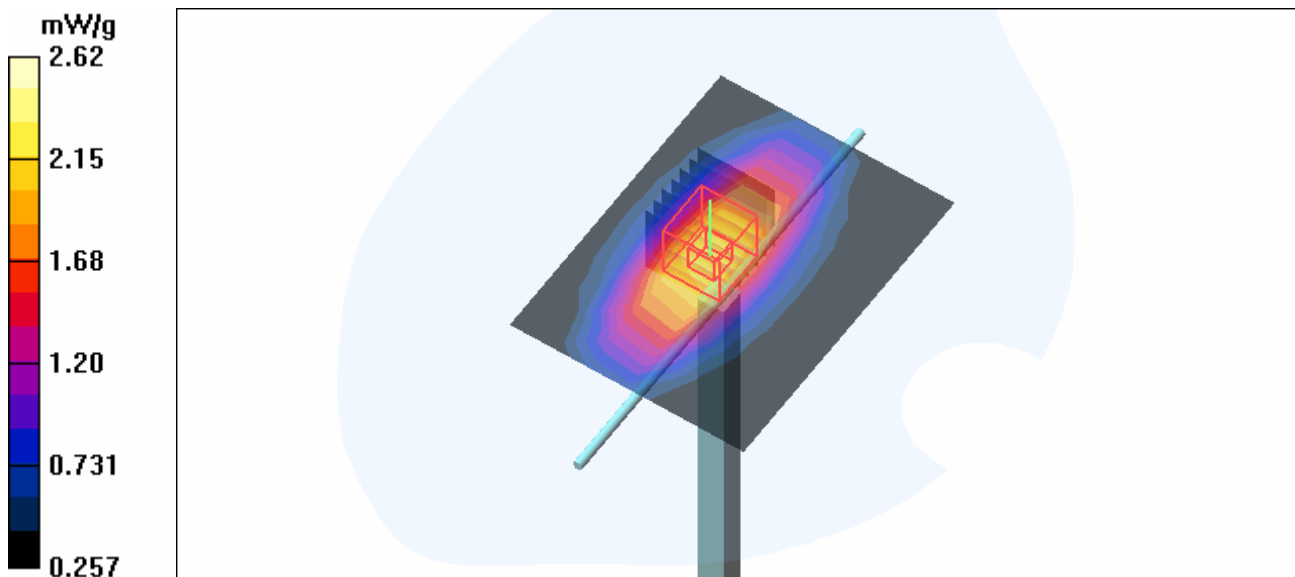

Test Laboratory: Advance Data Technology

System Validation Check-HSL 1900MHz

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: 5d036 ; Test Frequency: 1900 MHz

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: HSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³ ;
 Liquid level : 152 mm
 Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom)
 Air temp. : 22.6 degrees ; Liquid temp. : 21.6 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(5.27, 5.27, 5.27) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 10.5 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.9 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.35 mW/g; SAR(10 g) = 4.91 mW/g

Maximum value of SAR (measured) = 10.6 mW/g

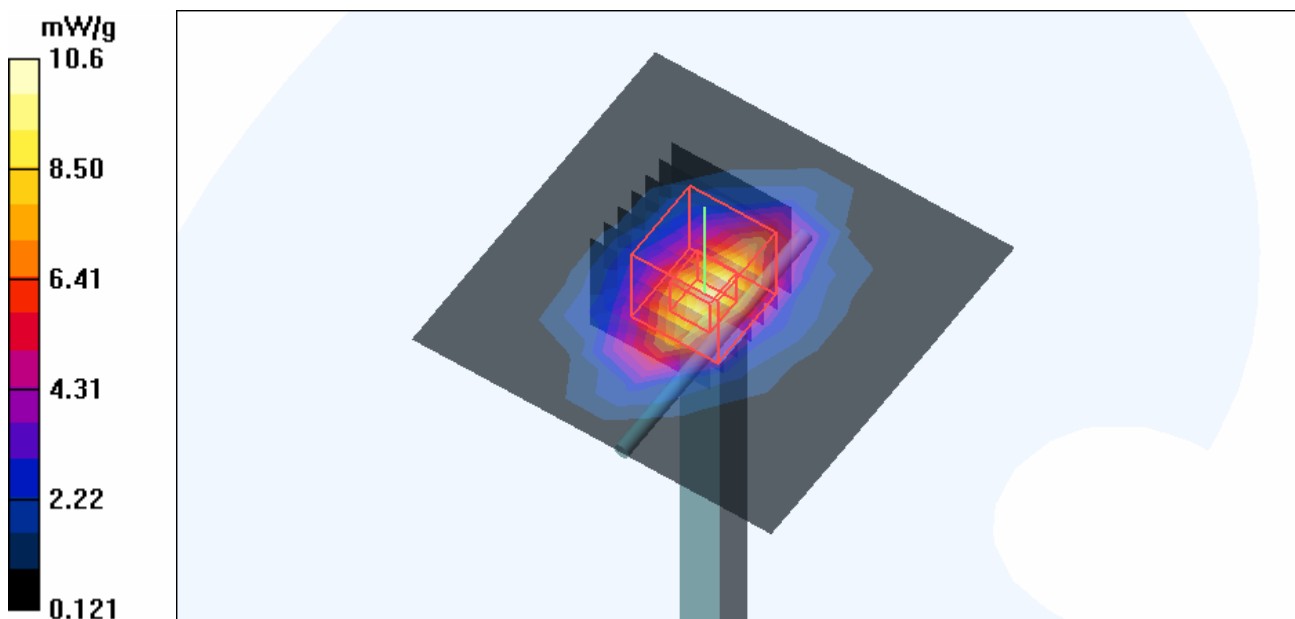

Test Laboratory: Advance Data Technology

System Validation Check-MSL 1900MHz

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: 5d022 ; Test Frequency: 1900 MHz

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³ ; Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom) Air temp. : 23.0 degrees ; Liquid temp. : 22.1 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.59, 4.59, 4.59) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 10.6 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.5 V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.59 mW/g; SAR(10 g) = 5.06 mW/g

Maximum value of SAR (measured) = 10.8 mW/g

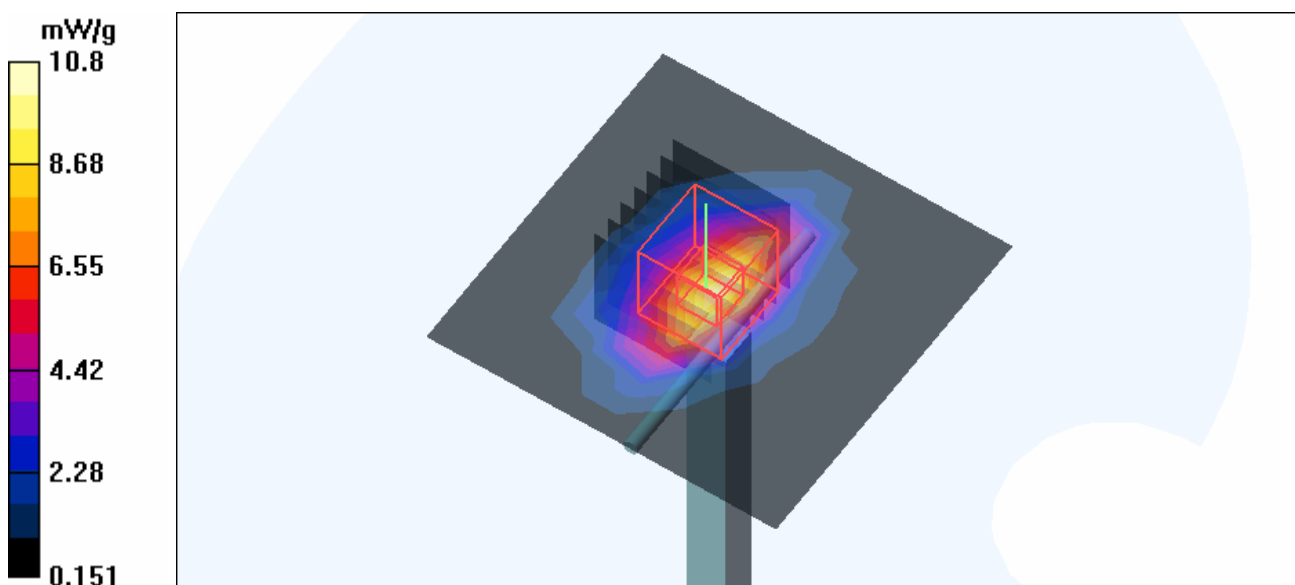

Test Laboratory: Advance Data Technology

System Validation Check-HSL 2450MHz

DUT: Dipole 2450 MHz ; Type: D2450V2 ; Serial: 716 ; Test Frequency: 2450 MHz

Communication System: CW ; Frequency: 2450 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: HSL2450; Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.84 \text{ mho/m}$; $\epsilon_r = 39.7$; $\rho = 1000 \text{ kg/m}^3$;
 Liquid level : 151 mm
 Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom)
 Air temp. : 22.4 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.76, 4.76, 4.76) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin=250mW/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 15.2 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.4 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 30.5 W/kg

SAR(1 g) = 13.5 mW/g; SAR(10 g) = 6.25 mW/g

Maximum value of SAR (measured) = 15.1 mW/g

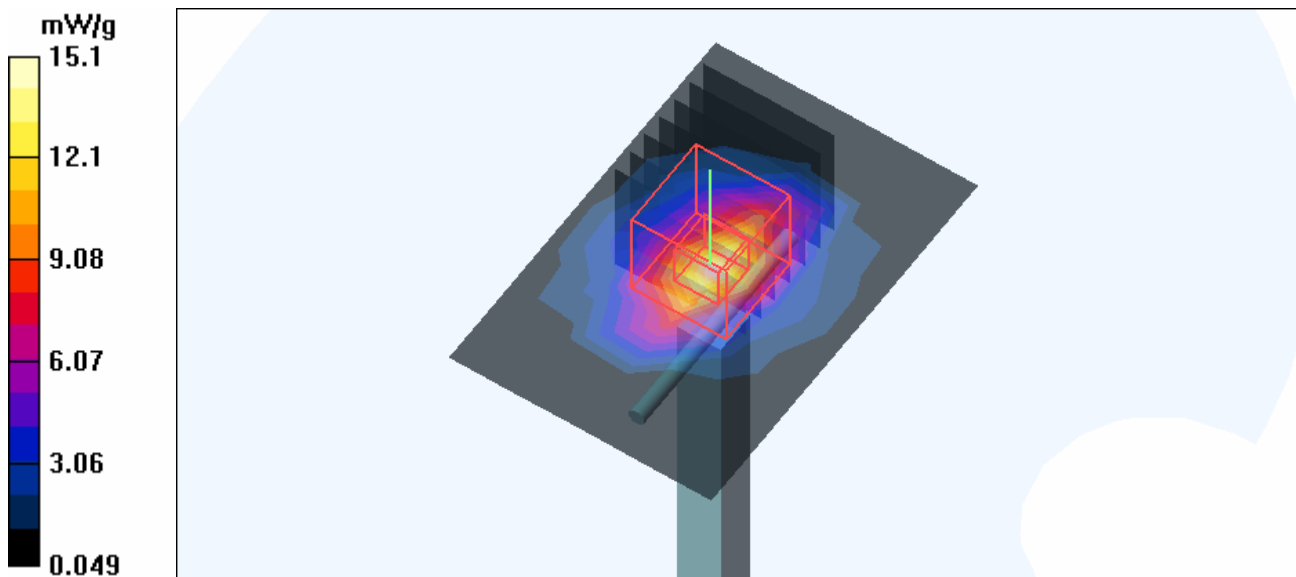

Test Laboratory: Advance Data Technology

System Validation Check-MSL 2450MHz

DUT: Dipole 2450 MHz ; Type: D2450V2 ; Serial: 716 ; Test Frequency: 2450 MHz

Communication System: CW ; Frequency: 2450 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: MSL2450; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³ ; Liquid level : 155 mm
 Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom) Air temp. : 23.1 degrees ; Liquid temp. : 22.0 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2006/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2006/9/7
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin=250mW/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 14.8 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.1 V/m; Power Drift = -0.092 dB

Peak SAR (extrapolated) = 32.7 W/kg

SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.28 mW/g

Maximum value of SAR (measured) = 15.3 mW/g

