


platform: android Q

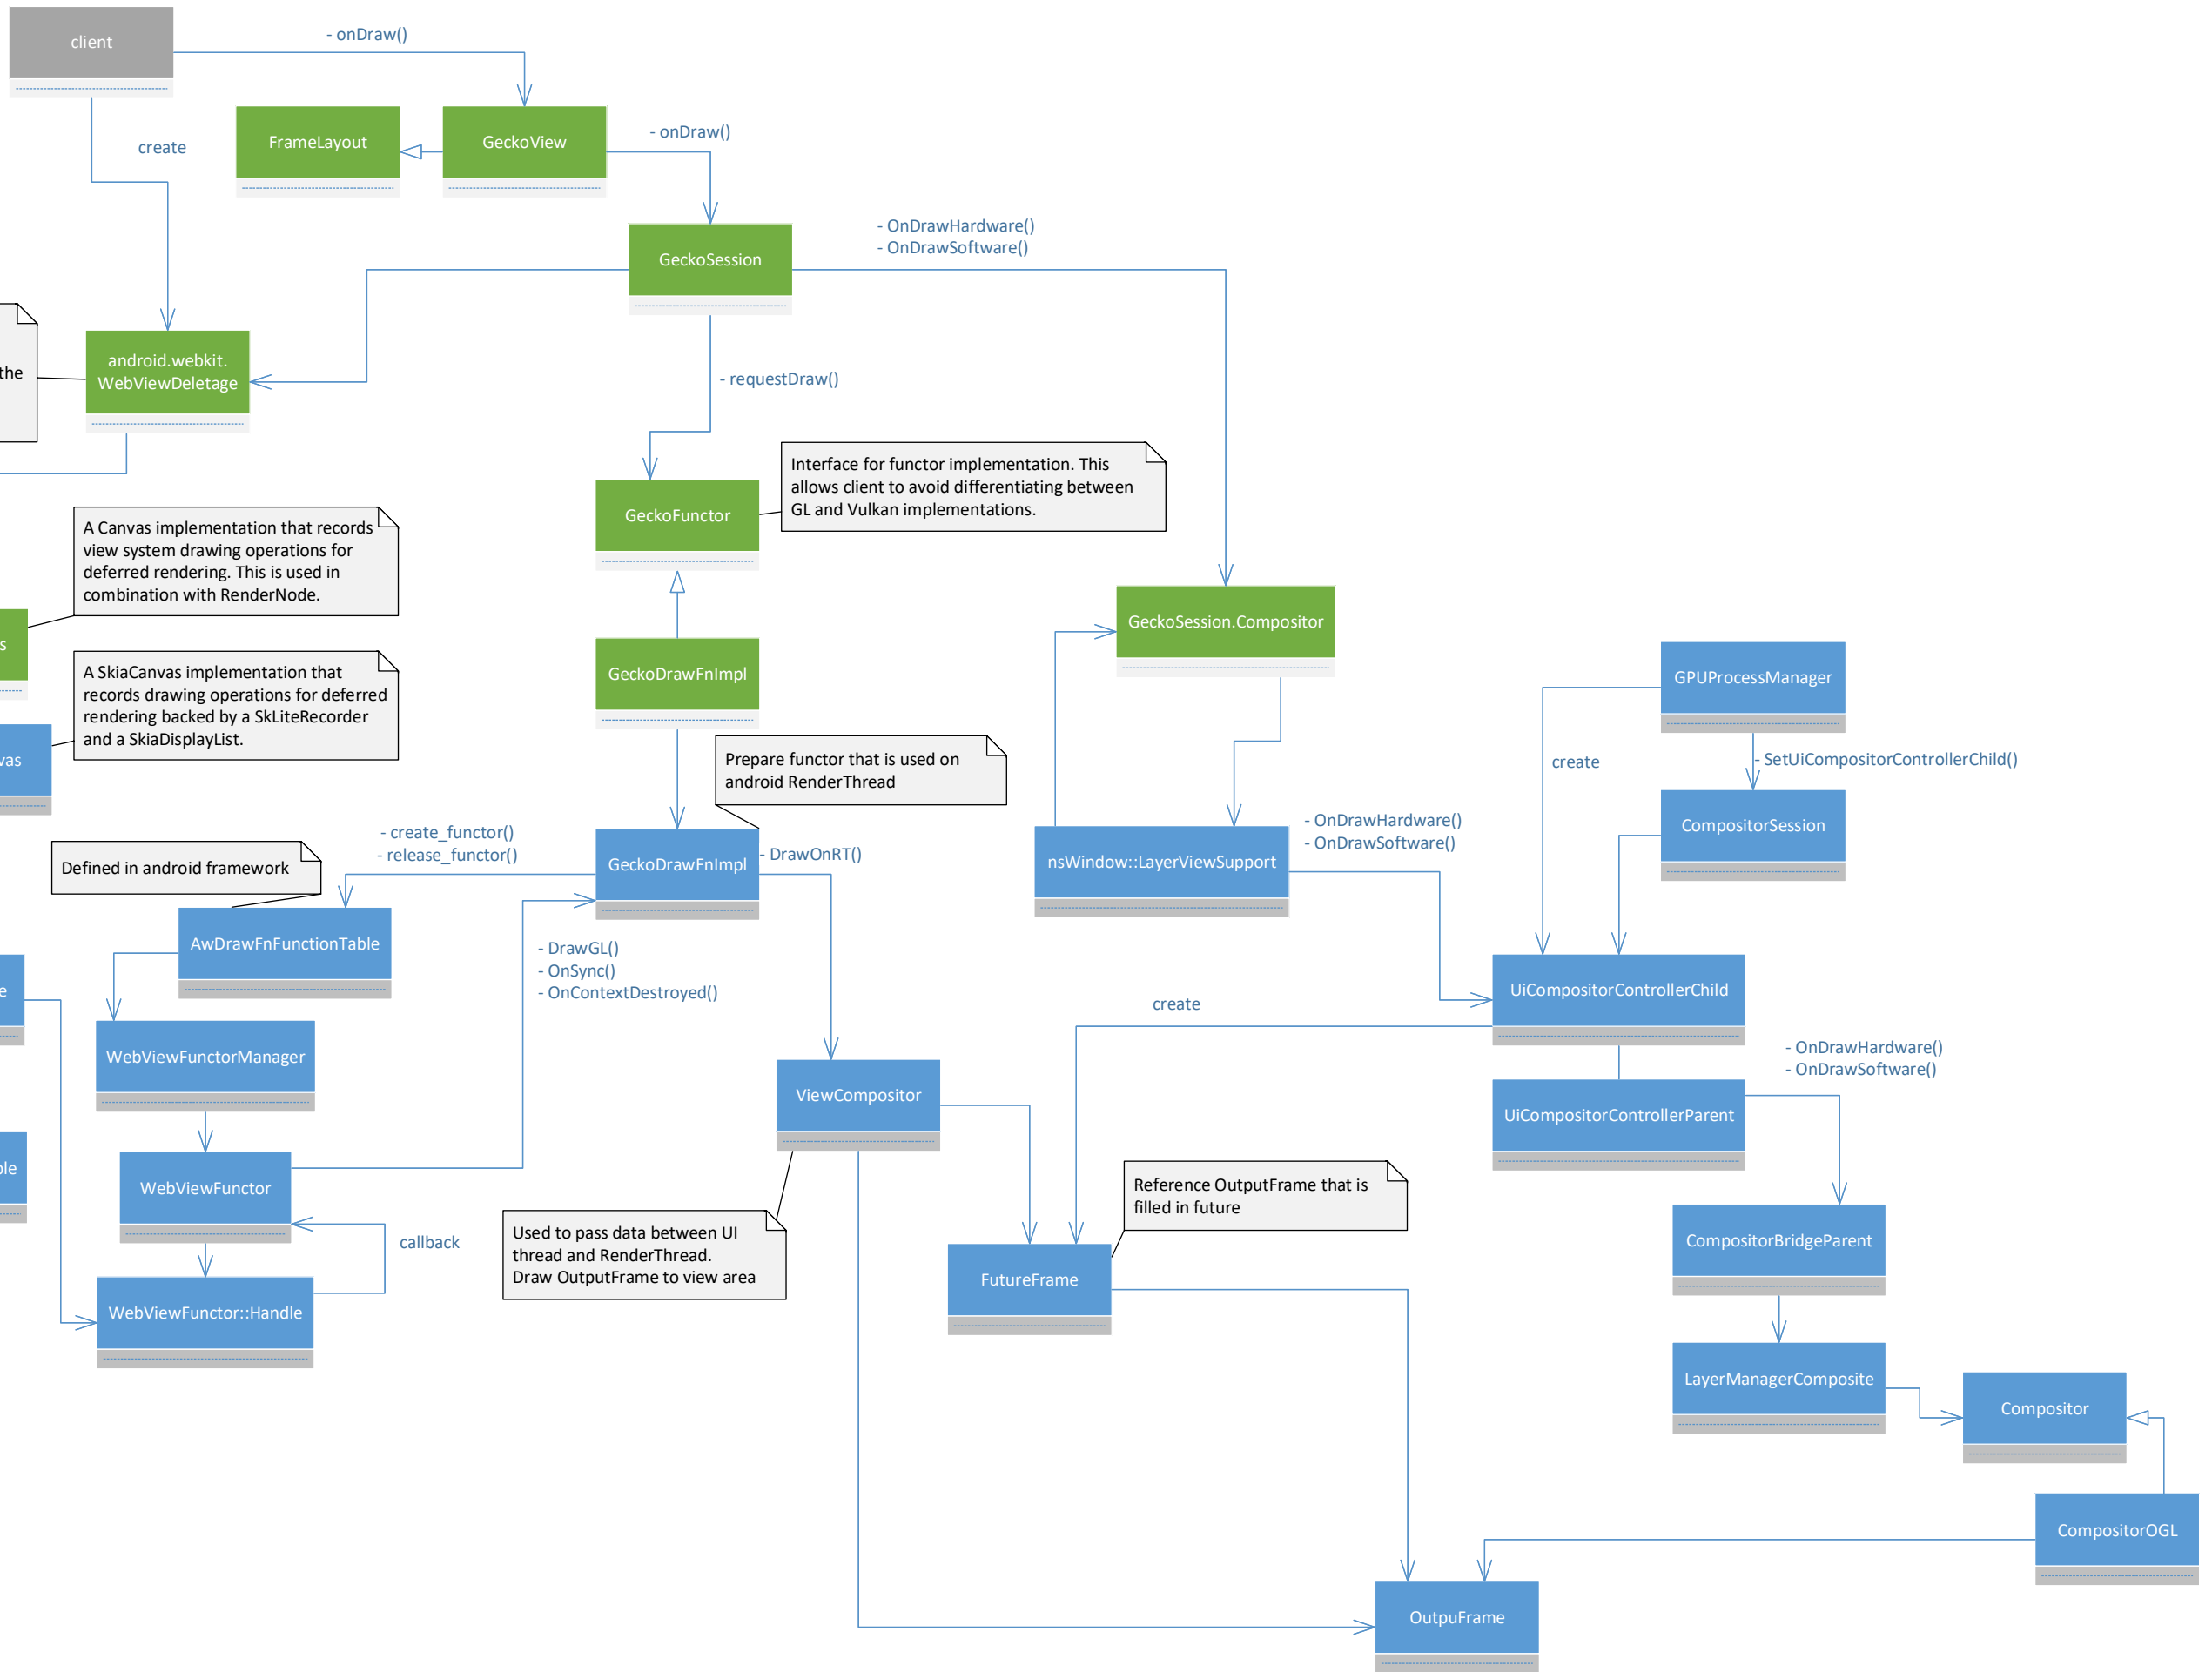

System api. Delegate used by the WebView provider implementation to access the required framework functionality needed to implement a WebView

A Canvas implementation that records view system drawing operations for deferred rendering. This is used in combination with RenderNode.

A SkiaCanvas implementation that records drawing operations for deferred rendering backed by a SkLiteRecorder and a SkiaDisplayList.

wraps a functor enabling it to be recorded into a list of Skia drawing commands.

Defined in android framework

Prepare functor that is used on android RenderThread

Used to pass data between UI thread and RenderThread. Draw OutputFrame to view area

Interface for functor implementation. This allows client to avoid differentiating between GL and Vulkan implementations.

Reference OutputFrame that is filled in future

wraps a OpenGL functor enabling it to be recorded into a list of Skia drawing commands.