Weave Registration Subsystem Security Model

Three Modes of Accessing the Registration System

Read-Only	User-Bound	Admin-Bound
check_username get_node	change_email change_password delete_account	create_user get_reset_key reset_password

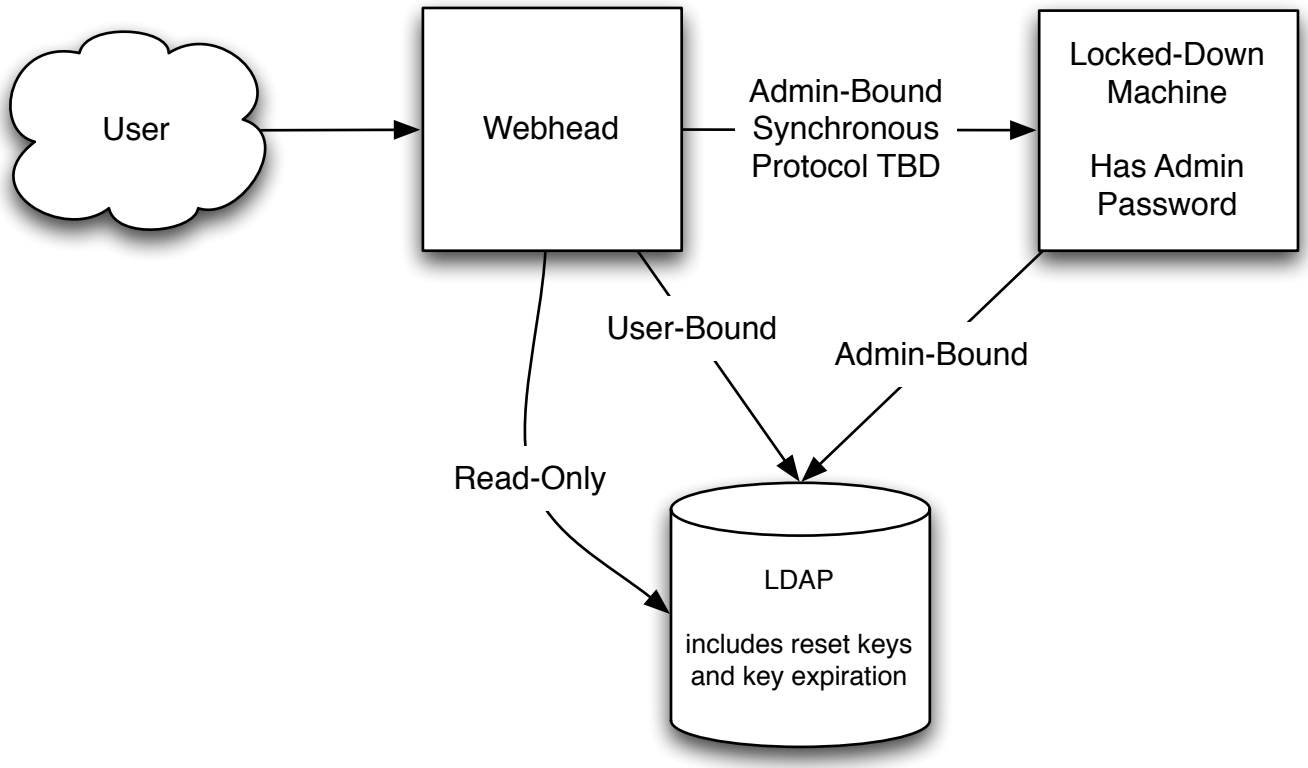

Remaining Vulnerabilities Assuming Root Access on the Webhead

* Password for User-Bound operations is easy to steal and/or replay.
* Password for change_password and create_user can be read.