


Experiment 3: change WAIT_FOR_BP_VALUE

RSA_BLINDING_PARAMS_MAX_CACHE_SIZE = 1


WAIT_FOR_BP_VALUE in ms!

Sleep_time	Score	CPU utilization ~, %
0	5445	79
1	4647	51
2	4269	46
3	4109	58
5	3647	38
10	2969	30
20	2410	24
30	2087	20
40	1858	18

Score dependency on WAIT_FOR_BP_VALUE (ms)

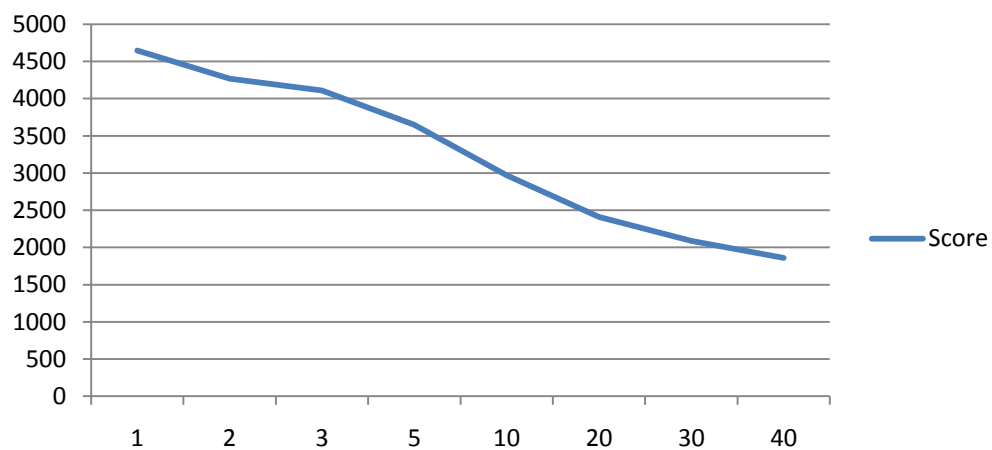

CPU utilization ~, % dependency on WAIT_FOR_BP_VALUE (ms)


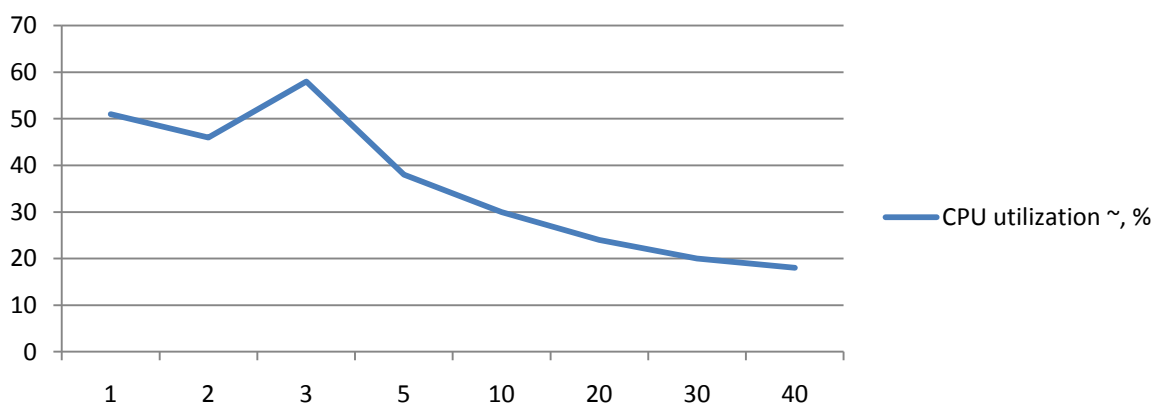


Experiment 4: change WAIT_FOR_BP_VALUE

RSA_BLINDING_PARAMS_MAX_CACHE_SIZE = 1

WAIT_FOR_BP_VALUE in mks!

Sleep_time	Score	CPU utilization ~, %
20	5281	76
40	5432	77
80	5492	77
160	5481	78
240	5495	78
320	5519	78
400	5421	77
500	4644	53
700	4619	52
1000	4636	52
2000	4295	46
5000	3658	38

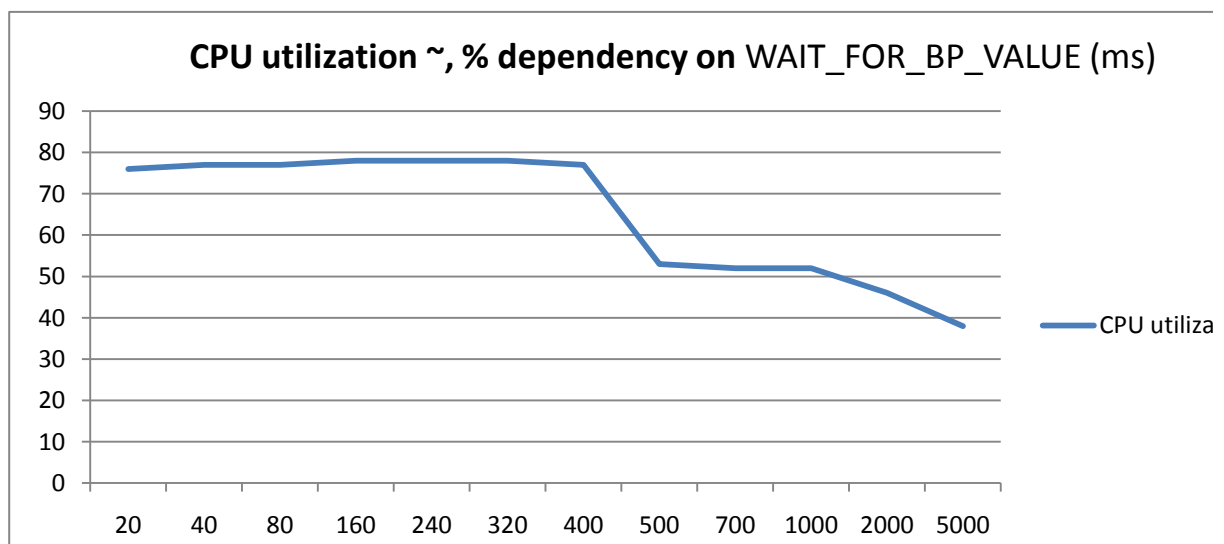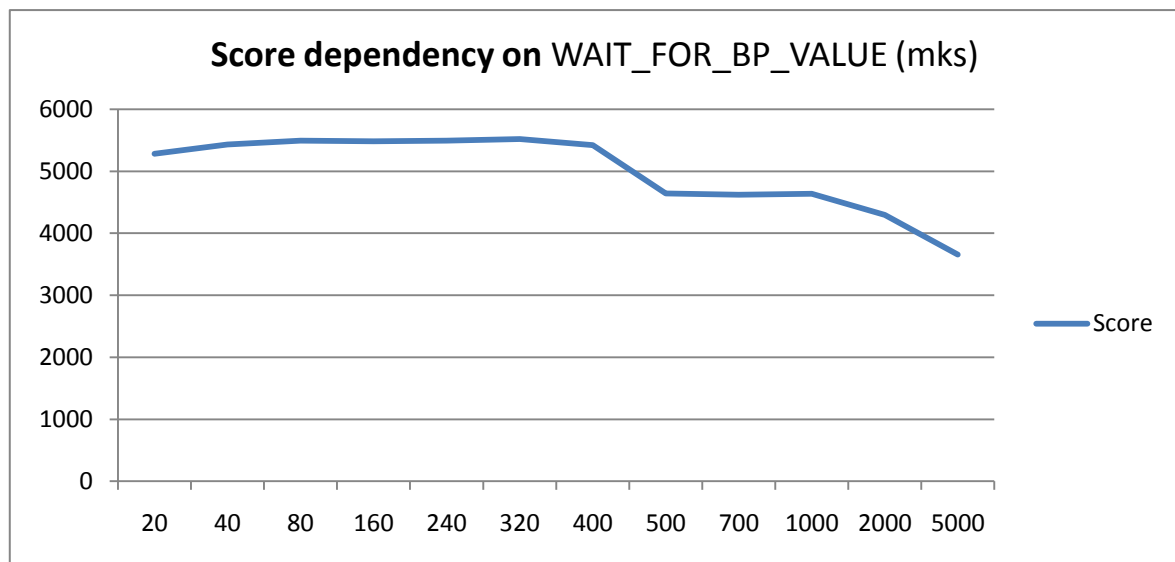

ation \sim , %

