MJO Simulation Diagnostics

US CLIVAR Madden-Julian Oscillation Working Group:

L. Donner, J. Gottschalck, H. Hendon, W. Higgins, I. Kang, D. Kim, D. Legler, E. Maloney, M. Moncrieff, S. Schubert, K. Sperber, W. Stern, F. Vitart, D. Waliser, B. Wang, W. Wang, K. Weickmann, M. Wheeler, S. Woolnough, C. Zhang

Submitted to the Journal of Climate

June 2008

CORRESPONDING AUTHOR: Duane Waliser, Jet Propulsion Laboratory, MS 183-505, California Institute of Technology, 4800 Oak Grove Drive, Pasadena, CA 91109.

E-MAIL: duane.waliser@jpl.nasa.gov

Abstract

The Madden-Julian Oscillation (MJO) interacts with, and influences, a wide range of weather and climate phenomena (e.g., monsoons, ENSO, tropical storms, mid-latitude weather), and represents an important, and as yet unexploited, source of predictability at the subseasonal time scale. Despite the important role of the MJO in our climate and weather systems, current global circulation models (GCMs) exhibit considerable shortcomings in representing it. shortcomings have been documented in a number of multi-model comparison studies over the last decade. However, diagnosis of model performance has been challenging, and model progress has been difficult to track, due to the lack of a coherent and standardized set of MJO diagnostics. A chief objective of the US CLIVAR MJO Working Group is the development of diagnostics for objectively evaluating global model simulations of the MJO. Motivation for this activity is reviewed, and the intent and justification for a set of diagnostics is provided, along with specification for their calculation, and illustrations of their application. The diagnostics range from relatively simple analyses of variance and correlation diagnostics, to more sophisticated space-time spectral analyses and computation of empirical orthogonal functions. These diagnostic techniques are used to construct composite life-cycles, to identify associations of MJO activity with the mean state, and to describe interannual variability of the MJO.

1. Introduction

The Madden-Julian Oscillation [Madden and Julian, 1971; Madden and Julian, 2005] is the dominant component of intraseasonal variability in the tropical atmosphere. It is characterized by eastward-propagating, equatorially-trapped, baroclinic oscillations in the tropical wind field. During a typical MJO event, a positive convection/rainfall anomaly develops over the western Indian Ocean, while convection tends to be suppressed further east over the western Pacific. Over the course of the following 40-50 days, the enhanced convective anomaly in thie Indian Ocean intensifies and propagates slowly eastward (3-5 ms⁻¹) to the central Pacific The convection anomalies associated with the MJO are most intense over the central/eastern Indian Ocean and western Pacific Ocean, and they often diminish over the maritime continent. Over the warmer tropical waters in the eastern hemisphere, the MJO exhibits large-scale convection anomalies that interact strongly with the tropospheric circulation and surface fluxes of mass, heat, and momentum. Once the disturbances reach the Dateline, and thus cooler equatorial waters, convection subsides and the disturbance is largely confined to dynamical fields [Rui and Wang, 1990; Hendon and Salby, 1994; Matthews, 2000; Sperber, 2003; Kiladis et al., 2005]. These characteristics, especially the eastward propagation along the equator, tend to be most strongly exhibited during boreal winter (November-April), when the Indo-Pacific warm pool is centered near the equator. During boreal summer (May-October), the asymmetry of the mean state associated with the Asian summer monsoon tends to result in northeastward propagation of the convection/circulation anomalies from the equatorial Indian Ocean into Southeast Asia, while at the same time exhibiting some eastward propagation along the equator [Yasunari, 1981; Wang and Rui, 1990; Annamalai and Sperber, 2005; Waliser, 20061. This eastward propagation of the boreal summer MJO is associated with significant impacts in the east Pacific warm pool and North American monsoon system [Maloney and Esbensen, 2003; Barlow and Salstein, 2006; Lorenz and Hartmann, 2006], and in sub-Saharan Africa [Matthews, 2004; Maloney and Shaman, 2007]. More comprehensive reviews of the MJO can be found in Madden and Julian [1994]. Lau and Waliser [2005] and Zhang [2005].

Interest in the MJO has intensified in recent years [Zhang et al., 2001; Schubert et al., 2002; Waliser et al., 2003d; ECMWF, 2004; ICTP, 2006] due to its extensive interactions with other components of the climate system and because it represents a connection between the weather and seasonal-to-interannual climate variations. For example, the distinctive onsets and breaks of the Asian-Australian monsoon are closely related to MJO activity [e.g., Yasunari, 1980: Hendon and Liebmann. 1990: Goswami. 2005: Wheeler and McBride. 2005]. Thus it is implied that our understanding and ability to predict the MJO and the Asian-Australian monsoon are critically linked [e.g., Webster et al., 1998; Waliser et al., 1999a; Sperber et al., 2001; Waliser et al., 2003e; Webster and Hoyos, 2004]. Eastward-propagating MJO convective activity can at times modulate the timing and evolution of El Niño due to its close connection with near-surface zonal wind activity in the Pacific [Lau and Chan, 1988; Lau and Shen, 1988; Weickmann, 1991; Takayabu et al., 1999; Kessler and Kleeman, 2000; Bergman et al., 2001; Kessler, 2005; Lau, 2005]. Many studies have shown an influence of the MJO on the character and strength of higher frequency tropical variability, including the diurnal cycle [Chen et al., 1996; Tian et al., 2006], tropical cyclones [Nakazawa, 1986; Liebmann et al., 1994; Higgins et al., 2000; Maloney and Hartmann, 2000a; Bessafi and Wheeler, 2006; Frank and Roundy, 2006], and extreme precipitation events [Mo and Higgins, 1998; Jones, 2000; Jones et al., 2004a]. The MJO's influences extends, via teleconnection mechanisms, to the extra-tropical circulation and

its weather patterns [Weickmann, 1983; Liebmann and Hartmann, 1984; Higgins and Mo, 1997; Vecchi and Bond, 2004; Weickmann and Berry, 2006]. This suggests that medium- and long-range mid-latitude weather forecasts by global models would benefit from accurate prediction of the MJO [Ferranti et al., 1990; Hendon et al., 2000; Whitaker and Weickmann, 2001; Jones et al., 2004b]. Finally, recent studies have also shown strong MJO influences on biological and chemical components of our climate system [Waliser et al., 2005; Tian et al., 2007a; Tian et al., 2007b; Wong and Dessler, 2007]. While this list of interactions associated with the MJO is continuing to grow, the brief itemization above indicates the MJO to be neither a benign weather pattern nor just a semi-coherent form of climate "noise" but rather a phenomenon we must understand and correctly represent in our global weather/climate models.

As important as the MJO is in our weather/climate system, we still struggle to represent it correctly in our global climate simulations [Slingo et al., 2005] and we have yet to exploit it in our numerical weather or subseasonal-climate forecasts [Schubert et al., 2002; Newman et al., 2003; Seo et al., 2005; Waliser, 2005; Woolnough et al., 2007]. A survey of the multi-model assessments that have been made over the last decade of the capabilities of GCMs to represent the MJO shows progress to be slow [Slingo et al., 1996; Sperber et al., 2000; Waliser et al., 2003a; Lin et al., 2006a; Zhang et al., 2006a], and that we have yet to develop a single GCM that our community would agree has a "good" MJO when scrutinized in some detail and that has been maintained through GCM revisions/updates. The inability of models to simulate the MJO has long been thought to relate to deficiencies in the treatment of cumulus convection. This is because typically the greatest sensitivity that the MJO simulation exhibits to various model "tunings" is associated with that of the convective parameterization – or closely related processes such as cloud-radiative feedbacks [e.g., Slingo et al., 1996; Wang and Schlesinger, 1999; Lee et al., 2001; Maloney and Hartmann, 2001; Maloney, 2002; Lee et al., 2003]. Related to the issues of convective parameterization are the confounding issues concerning the representation of the basic state, including a preference for overdoing the double ITCZ, a poor mean rainfall structure in the Indian Ocean [Sperber and Annamalai, 2007], equatorial surface westerly winds that are too weak or too limited in their zonal extent [Inness and Slingo, 2003], uncertainty in the importance of ocean-atmospheric coupling [e.g., Gualdi et al., 1999a; Waliser et al., 1999b; Hendon, 2000; Kemball-Cook et al., 2002; Inness et al., 2003; Zheng et al., 2004; Sperber et al., 2005; Zhang et al., 2006a], the importance of achieving a proper phasing and representation of surface fluxes [e.g., Shinoda et al., 1998; Woolnough et al., 2000; Maloney and Sobel, 2004], and the importance of ocean mixed-layer processes [Shinoda and Hendon, 1998; e.g., Waliser et al., 2003c; Bernie et al., 2005].

One of the chief difficulties in evaluating success and tracking improvement in our GCM simulations of the MJO is the lack of a consistent set of diagnostics. Somewhat remarkable is the fact that of the five multi-model MJO evaluations mentioned above, with the exception of seasonal mean precipitation maps, not a single diagnostic is applied in the same manner in even two of the studies. The diagnostics most similar among these studies are simple measures of intraseasonal precipitation variance. Even in this case, the filtering and/or plotting (e.g., map versus latitude average) are performed differently. A robust set of model diagnostics is needed to better gauge our progress in simulating the MJO, make comparisons among models, and make inroads at diagnosing the shortcomings in physical parameterization underlying our inadequate MJO simulations.

To help address this need, US CLIVAR established an MJO Working Group (MJOWG) in the spring of 2006 (http://www.usclivar.org/Organization/MJO_WG.html). Chief among this working group's objectives was the development of observation-based diagnostics that allow a more consistent, and hopefully insightful, assessment of model performance regarding the MJO. Over the course of the following year, this working group developed these diagnostics via teleconferences and during the US CLIVAR Summit in July 2006, as well as informally at a number of scientific meetings and workshops. The group considered issues such as ease of use versus level of physical insight, potential pitfalls/ambiguity in the interpretation of the model-data comparisons, observation quality, availability, and sensitivity, etc. In the development process, observations were used to assess the sensitivity to stratifying the analysis by season, the size of analysis domain, the need (or lack thereof) for using tapering or de-trending during spectral analysis, the method for assessing statistical significance etc.

This paper describes the outcome of the above effort; specifically it describes the diagnostics developed by the US CLIVAR MJOWG for assessing the ability of climate models to simulate the boreal winter Madden-Julian Oscillation and its boreal summer counterpart. For brevity, the term MJO is used throughout this article, and it includes the broader category of eastward and northward tropical intraseasonal oscillations that occur on time scales of 30-70 days. The diagnostics have been categorized into two levels of increasing complexity. Level 1 diagnostics are meant to provide a basic indication of model spatial and temporal intraseasonal variability that can be easily understood and calculated by the non-MJO expert. Ease of use dictated that the analytic procedures be as simple and uniform as possible for summer and winter calculations. Level 2 diagnostics provide a more comprehensive diagnosis of the MJO through multivariate analysis, wave-number-frequency spectral decomposition, and composite analysis of the MJO life-cycle. In addition to the Level 1 and Level 2 diagnostics, additional diagnostics include aspects of the mean state found to be relevant to MJO simulation fidelity. Also included is a characterization of MJO interannual variability. The primary variables used for Level 1 and 2 diagnostics are: outgoing longwave radiation (OLR), precipitation, and zonal wind at 850 and 200 hPa. However, a number of other variables are included in life cycle composites and mean field descriptions.

With the publication of these diagnostics, we encourage the modeling and diagnostic communities to make use of them in studies of the MJO in their models, particularly in terms of presentations at workshops, conferences, and in journal articles. As of the publication date of this article, a link to plots of the diagnostics, as well as the code and input data used to generate them, can be found at the MJOWG web site (http://www.usclivar.org/Organization/MJO_WG.html). It is hoped that this more common set of measures will facilitate model assessment and improve the ability to gauge model successes and failures. Together, we hope that these diagnostics will enhance the ability to focus on the underlying physical shortcomings of models by removing some of the burden on individual researchers to decide on, compute, and apply model MJO diagnostics. Section 2 discusses the observations utilized for the diagnostics. Section 3 then provides a description of a subset of the selected diagnostics and how they are calculated, and some motivation for these choices. Finally, Section 4 provides a summary, including recommendations for future activities and areas of focus.

2. Observations

We employ observational data that covers all aspects of the MJO. Where possible, we use multiple datasets from at least two sources in order to account for observational uncertainties. Outgoing longwave radiation (OLR), which is a primary source of information on the convective behavior of the MJO, is from the Advanced Very High Resolution Radiometer (AVHRR) estimates of Liebmann and Smith [1996].

Three precipitation products are used for this study that are all based, at least in part, on infrared (IR)-based satellite retrievals, and are blended with or adjusted by other gauge, satellite estimates and model prediction data; this provides plenty of spatial/temporal samples but with significant biases. The CPC Merged Analysis of Precipitation (CMAP) dataset [*Xie and Arkin*, 1997] first merges IR-based Geostationary Operational Environmental Satellite (GOES) Precipitation Index [GPI, *Arkin and Meisner*, 1987] with two kinds of microwave (MW) satellite estimates and model predictions. This output is further blended with gauge-based analysis. To extend the length of the dataset, OLR-based Precipitation Index [*Xie and Arkin*, 1997] and Microwave Sounding Unit (MSU)-based [*Spencer*, 1993] estimates are used in the period when GPI is not available i.e. before year 1986. As a result, pentad CMAP dataset is available from 1979 to present, of which we used 27 years (1979-2005).

Unlike CMAP, the second and third precipitation products are daily-sampled datasets with shorter length. The Global Precipitation Climatology Project (GPCP; 1997-2005) dataset [Huffman et al., 2001] calibrates GPI data using Special Sensor Microwave Imager (SSM/I) microwave estimates. Our third rainfall product is the 3B42 dataset from the Tropical Rainfall Measuring Mission (TRMM). The algorithm for 3B42 adjusts objectively the rain rates inferred from IR satellite estimates using other TRMM products [Kummerow et al., 2000]. The TRMM product used here is not combined with gauge analyses, unlike the first two datasets.

Upper (200hPa) and lower (850hPa) tropospheric winds are obtained from three global reanalysis products. Two of them are different versions of the National Centers for Environmental Prediction/National Center for Atmospheric Research (NCEP/NCAR) reanalysis - NCEP/NCAR reanalysis [Kalnay et al., 1996] and NCEP-DOE AMIP-II reanalysis [Kanamitsu et al., 2002]. The latter uses improved model physics and has several corrections to the known errors in the former. European Centre for Medium-Range Weather Forecasts (ECMWF) 40-Year Re-Analysis (ERA40) [Uppala et al., 2005] is also used. The data period for two NCEP/NCAR reanalyses is 1979-2005 while that for ERA40 is 1979-2001.

For SST two datasets are used, the Optimal Interpolation SST (OISST; Reynolds et al., 2007) and the TRMM microwave imager (TMI) SST [Wentz et al., 2000]. OISST is an optimally interpolated SST using AVHRR infrared satellite data with large-scale adjustment of satellite biases with respect to the in situ data [Reynolds et al., 2007]. TMI SST uses microwave channels which are less affected by cloud and aerosols (but significantly affected by raindrops) [Wentz et al., 2000]. Both the products provide relatively higher spatial resolution $(0.25^{\circ} \times 0.25^{\circ})$ and they are gridded into $1.0^{\circ} \times 1.0^{\circ}$ (OISST) and $2.5^{\circ} \times 2.5^{\circ}$ (TMI) grid resolution, respectively. We use the coarser resolution version of TMI to minimize the impact of missing values in daily maps.

Latent heat flux is obtained from the two reanalyses - NCEP/NCAR reanalysis and ERA40 and from the Objectively Analyzed Air-Sea Fluxes (OAFlux) for the global ice-free oceans [Yu and Weller, 2007]. Net surface shortwave radiation data are obtained from the Global Energy and Water-Cycle Experiment (GEWEX) Surface Radiation Budget (SRB) products [Gupta et al.,

2001] and the International Satellite Cloud Climatology Project (ISCCP) datasets [Zhang et al., 2004]. Independent variables in bulk aerodynamic formula for surface latent heat flux (e.g. surface wind speed, specific humidity) are obtained through synthesizing several satellite retrievals and two reanalyses in OAFlux [Yu and Weller, 2007]. The error properties of both input data in OA procedure are obtained using Comprehensive Ocean—Atmosphere Data Set (COADS) [Woodruff et al., 1998] ship observations as the base data. To derive surface shortwave radiative flux, different algorithms are used in GEWEX-SRB (Langley Parameterized Shortwave Algorithm, LPSA) and ISCCP-FD (GISS GCM radiative transfer model) but they share input sources of cloud properties (ISCCP-DX), surface albedo (ERBE) and column ozone (TOMS).

Tables 1, 3 and 4 indicate the specific application of the observations discussed above, and the right columns list the abbreviations that will be used in this paper to represent the datasets. Daily averages, except for CMAP that is pentad based, are used for level 1 and level 2 diagnostics while mean state diagnostics are calculated using monthly means.

3. Diagnostics

This section presents select examples of the diagnostics developed by the MJOWG. Given space limitations, the diagnostics presented here are by no means exhaustive, though they might be considered to be the most basic and informative and thus are a good starting point for an analysis of the MJO. The complete set of diagnostics is provided at the MJOWG website (http://www.usclivar.org/Organization/MJO_WG.html), and is also summarized in the tables that follow. As described in Section 2, multiple sources of validation for a given variable were used where possible for the diagnostic calculations, and diagnostics using all of these sources are displayed on the website. In the discussion below, the source of the variable displayed (e.g., NCEP1 versus ECMWF, or CMAP versus TRMM) was arbitrary, unless otherwise noted.

a) Diagnostic Strategy

The diagnostics are partitioned into two levels of complexity, referred to as "Level 1" and "Level 2", and they also include a number of supplementary diagnostics. Level 1 diagnostics, summarized in Table 1, are meant to provide a general indication of the spatial and temporal intraseasonal variability that can be easily understood and/or calculated by the non-MJO expert. Ease of use dictates that the analytic procedures be as simple and similar as possible for boreal summer and winter calculations. The Level 1 diagnostics include an assessment of intraseasonal and total variance, time series spectral analysis over key spatial domains (Table 2), and univariate empirical orthogonal function (EOF) analysis of bandpass filtered data. Lag-correlation analysis of bandpass filtered wind and convective variables is also used to assess both eastward equatorial propagation during both boreal summer and winter, and northward propagation in the eastern Hemisphere during boreal summer. Variables used in Level 1 diagnostics include OLR, precipitation and zonal wind at 850 and 200 hPa.

Level 2 diagnostics, summarized in Table 3, provide a more comprehensive diagnosis of the MJO through multivariate EOF analysis and wavenumber-frequency decomposition. The multivariate EOF analysis is based on OLR and zonal wind at 850 and 200 hPa [Wheeler and Hendon, 2004]. The dominant intraseasonal PCs from multivariate EOF analysis are used to generate MJO lifecycle composites, and coherence-squared and phase between the PC's are calculated to determine the fidelity of the eastward propagation. However, a number of other

variables are included in life cycle composites. Multi-scale interactions are also assessed using cross spectral analysis (coherence squared and phase) between variables.

In addition to the Level 1 and Level 2 diagnostics, supplementary analyses are presented of some relevant mean state variables, noted in Table 4. As described in past studies [e.g., Slingo et al., 1996; Hendon, 2000; Inness et al., 2003; Waliser et al., 2003b; Sperber et al., 2005; Zhang et al., 2006b], the ability of a model to simulate the MJO is intimately related to its ability to simulate the mean climate, especially associated with the spatial distribution of mean convection and surface westerly winds that tend to occur over the warmest SST. The occurrence of the MJO is highly episodic [e.g., Salby and Hendon, 1994] with the relationship to interannual variation in SST being rather complex, albeit weak [e.g., Slingo et al., 1996; Hendon et al., 1999; Kessler, 2001; Lau, 2005; Hendon et al., 2007]. Efforts at simulating the character of this relationship have had mixed success [e.g., Slingo et al., 1996; Gualdi et al., 1999b; Waliser et al., 2001], and thus an analysis of interannual variability of MJO activity is also included as a supplementary diagnostic.

For both Level 1 and Level 2 diagnostics, unfiltered anomalies are computed by subtracting the climatological daily (or pentad where appropriate) mean calculated over all years of the data. Intraseasonal (20-100 day) bandpass filtered anomalies are constructed using a 201-point Lanczos filter, which has half power points at 20 day and 100 day period. In addition, the statistical significance of the EOFs that are computed with band pass filtered data is assessed by projecting the EOFs back onto the unfiltered anomalies (with only the seasonal cycle removed). Spectral analysis is then conducted on the resulting unfiltered PCs to test the significance of spectral power at intraseasonal time scales against a red noise background using 10% and 5% significance levels [e.g., *Maloney and Hartmann*, 1998]. No windowing/tapering or de-trending was applied in calculation of these spectra, since sensitivity tests indicated their application had a negligible impact on the results.

We note that in addition to conducting EOF analysis directly on model fields, it also useful to project the model's bandpass filtered anomalies onto the EOFs of observed variability to assess how well the model simulates the observed MJO. This technique allows direct comparison among all models and the observations and is especially suitable for diagnosis of forecasts of the MJO since the data are projected onto the same observed basis functions. This technique was demonstrated by Duffy et al. [2003] for the NCAR CCM3.6, and in Sperber [2004] for the NCAR CAM2.0 and CCSM2.0, and Sperber et al. [2005] for numerous ECHAM4 based models, in which the ability to simulate the observed lead-lag relationships between the leading PCs was assessed. The time lag at which the two PC's have a maximum correlation gives the transition time for the MJO convection and/or winds to shift from the Indian Ocean and the western Pacific, with the value of the maximum correlation being a measure of how coherent the convection and/or wind anomalies are between these two regions.

The observed MJO exhibits distinctly different behavior in northern summer and southern summer. Hence, we perform many of our diagnostics for two broadly defined seasons: boreal summer (May through October), and boreal winter (November through April). For some diagnostics, computations are performed for specific domains of interest. These domains are given in the Table 2 and were determined from examination of observed variance maps to isolate regions where observed variance is large.

b. Mean State

Mean fields for 850 hPa zonal wind, rainfall and SST are presented for boreal summer (Fig. 1) and boreal winter (Fig. 2). As highlighted in Section 3a, an analysis of a number of relevant mean fields is a crucial starting point for assessment of both coupled and uncoupled simulation of the MJO. For example, aspects of the convective mean state that are relevant to the MJO include proper latitudinal and zonal locations of the ITCZ, and a realistic simulation of mean lower tropospheric westerly winds, especially their zonal extent across the warm pool of the Indian and west Pacific Oceans. Capturing seasonal variations of the background state is also critical. In uncoupled simulations, convective and westerly wind regions generally coincide with warmest SST. In coupled simulations, reproducing the observed mean SST distribution is often problematic [e.g., *Mechoso et al.*, 1995], and errors in the SST distribution tend to exaggerate any uncoupled errors in lower tropospheric zonal winds and precipitation

c. Level 1 Diagnostics

Figures 3 and 4 show maps of intraseasonal variance of 850 hPa zonal wind and CMAP precipitation for boreal summer and boreal winter, respectively. The prominence of the MJO is emphasized by shading of the percent variance explained by the 20-100 day band relative to unfiltered variance¹. For the CMAP precipitation, which is available as pentads, this percentage is relative to unfiltered variance in the 10-180 day band whereas for the zonal wind, which is available daily, this percentage is relative to unfiltered variance in the 2-180 day band. Hence, the shaded maxima tend to be higher for precipitation than for zonal wind because the variance in the 20-100 day band is being compared to a smaller total. Aspects of these plots that provide important benchmarks for climate model simulations include the spatial distribution of intraseasonal variance (especially the relative magnitudes of the maxima in the Indian Ocean versus the west Pacific Ocean), the relative minimum in variance in the Maritime Continent, the percent variance explained by the intraseasonal band, and the coincidence of 850 hPa wind and precipitation variance centers. A comparison of Figures 3 and 4 illustrates that tropical intraseasonal variance tends to be concentrated in the summer hemisphere in lower tropospheric winds and precipitation, with the percentage variance in the intraseasonal (20-100 d) band tending to peak at about 30-40% for zonal wind and greater than 50% for precipitation (noting the inflated value for precipitation relative to zonal wind due to use of pentad data). We also see that during boreal summer, the intraseasonal variance of precipitation exhibits a number of maxima associated with the land-sea structure around southern Asia [e.g., Waliser et al., 2003a] and another prominent maximum in the east Pacific warm pool [e.g., Maloney et al., 2008]. The details associated with these seasonal variations provide an important test for climate model representations of the MJO.

To isolate the fundamental propagating and time-varying nature of the MJO, Level-1 diagnostics also include lag-longitude correlation analyses for regions of maximum intraseasonal variance from Figs 3 and 4 (the areas are defined Table 2). Figure 5 shows lag-longitude diagrams of intraseasonal precipitation (contours) and 850 hPa zonal winds (colors) correlated against precipitation at an Indian Ocean reference point for boreal winter. They also provide diagnosis of other important characteristics of the MJO, including an estimate of the eastward phase speed across the eastern hemisphere of about 4 ms⁻¹, the lag of the zonal wind anomaly

¹ The large variance near the domain boundary in the winter hemisphere is associated with extra-tropical intraseasonal variability.

behind the precipitation anomaly by about 5-7 days, the confinement of the precipitation anomaly to the eastern hemisphere, and the faster eastward propagation of 850 hPa wind in the western hemisphere after the decay of precipitation anomaly near the Dateline. A boreal summer lag-longitude analysis produces qualitatively similar behavior (not shown).

The dominant mode of boreal summer intraseasonal variability is also characterized by distinct northward propagation of intraseasonal anomalies [e.g., Yasunari, 1979; Wang and Xie, 1997] that occurs in conjunction with the eastward equatorial propagation, thus giving rise to a northwest to southeast tilted rain band [e.g., Annamalai and Sperber, 2005]. Similar to the laglongitude diagrams described above to diagnose eastward propagation, lag-latitude plots diagnose northward propagation in the Indian and west Pacific Oceans. In this case, fields are averaged over defined longitude bands in the Indian and west Pacific Oceans, and then regressed against a base point consisting of bandpassed filtered fields averaged over boreal summer fieldspecific Indian and west Pacific Ocean reference domains defined in Table 2. Figure 6 shows a boreal summer lag-latitude correlation plot for 850 hPa zonal wind and precipitation averaged 80°E-100°E regressed onto a reference time series of Indian Ocean precipitation. Similar plots are generated for the west Pacific (not shown here). Northward propagation is apparent from the equator into the northern hemisphere for both precipitation and zonal wind, with precipitation leading zonal wind by 5-7 days. Interestingly, some evidence of southward propagation from the equator into the southern hemisphere is also apparent, which has been reported by Lawrence and Webster [2002].

An additional benefit to a diagnosis such as Figure 6 is that it implies a propagation speed for intraseasonal anomalies, in this case northward at about 1.2 m s⁻¹. For models it is essential to ascertain if the northward propagation is intimately linked to the near-equatorial eastward propagation [*Sperber and Annamalai*, 2008].

d. Level 2 Diagnostics

Level 2 diagnostics are designed to explore in more detail features of the MJO. They include wavenumber-frequency spectra of individual fields, cross spectral quantities between different fields, and a multivariate empirical orthogonal function (EOF) analysis. Wavenumberfrequency spectra for equatorial precipitation and 850 hPa zonal wind are shown in Figure 7 for boreal summer, and in Figure 8 for boreal winter. The spectra were computed by Fourier transforming 180 day segments centered on boreal summer and boreal winter, forming power, and then averaging over all years of data (1979-2005). The resulting bandwidth is (180 d) ⁻¹. Only the climatological season cycle was removed before calculation of the spectra. The results indicate a concentration of power at 30-90 day periods and zonal wavenumber 1 for 850 hPa zonal wind, and zonal wavenumbers 1-3 for precipitation and OLR [e.g., Salby and Hendon, 1994]. The eastward power is about 4 times that of westward power at intraseasonal frequencies and spatial scales characteristic of the MJO. A comparison between boreal winter and boreal summer spectra indicates that both seasons exhibit qualitatively similar spectral characteristics, although spectral power is reduced slightly at wavenumbers characteristic of the MJO during boreal summer relative to boreal winter. Hence, distinct eastward propagation does occur during boreal summer in both precipitation and winds [e.g., Maloney and Hartmann, 2000b; Lawrence and Webster, 2002; Wheeler and Hendon, 2004]. The qualitatively similar spectral behavior during boreal summer and winter also provides justification for the all-season multivariate EOF analysis that is described below and which is used to form the basis of MJO lifecycle composites.

In addition to single variable spectral calculations in wavenumber-frequency space, cross spectral calculations are useful for quantifying the coherence and phase relationships between different variables. Figure 9 shows the coherence squared and phase between equatorial OLR and 850 hPa zonal winds for both symmetric and antisymmetric components of the two fields (e.g., [Hendon and Wheeler, 2008]. The symmetric component of a variable F is defined as $F_s(\phi) = [F(\phi) + F(-\phi)] / 2$, and the antisymmetric component is defined as $F_a(\phi) = [F(\phi) - F(-\phi)] / 2$, where ϕ is latitude [Wheeler and Kiladis, 1999]. Cross spectra are calculated using data during all seasons on 256-day long segments, with consecutive segments overlapping by 206 days. Prior to forming coherence squared, the symmetric and antisymmetric powers and cross powers are computed at each symmetric and antisymmetric latitude $0^{\circ}-15^{\circ}$ and then averaged. Colors in Figure 9 represent coherence squared between OLR and 850 hPa wind, and vectors represent the phase by which wind anomalies lag OLR anomalies, increasing in the clockwise direction. A phase of 0° is represented by a vector directed upward.

Figure 9 indicates a high coherence squared (peaking at greater than 0.45) between convection and 850 hPa zonal winds at wavenumbers and frequencies characteristic of the MJO, with westerly (easterly) anomalies lagging suppressed (enhanced) convection by about 235 degrees of phase. Another interpretation of Figure 9 is that westerly (easterly) MJO wind anomalies lag enhanced (suppressed) convection by about an eighth of a cycle, or roughly 5 days at 40 day period. As has been described in the literature [e.g., Zhang et al., 2006a], climate models have trouble simulating this high degree of coherence and ~5 day phase lag between convection and winds that is observed. Another notable feature of the cross spectra is that they directly capture and quantify convectively-coupled equatorial Kelvin (peak coherence squared exceeding 0.3 for eastward wavenumbers 2-5 with periods 5-10 days) and n=1 Rossby (peak coherence exceeding 0.2 for westward wavenumbers 2-4 with periods 25-50 days) wave modes in the symmetric spectrum, and mixed Rossby-gravity wave modes in the antisymmetric spectrum without the need to compute a background spectrum [Hendon and Wheeler, 2008].

An efficient way to extract the salient features of the MJO is by multivariate EOF analysis using equatorial averaged (15°N-15°S) 850 hPa zonal winds, 200 hPa zonal winds, and OLR anomalies [Wheeler and Hendon, 2004]. The wind and OLR fields were individually normalized by the square-root of the zonal mean of their temporal variance before input into the covariance matrix used to conduct the EOF analysis. This diagnostic provides a test of whether the correct phase relationship between equatorial convection and wind anomalies is produced; a relationship that is sometimes misrepresented in models [e.g., Maloney and Hartmann, 2001].. Figure 10 shows combined EOF1 and EOF2 derived for intraseasonal filtered NOAA OLR, and NCEP1 850 hPa and 200 hPa zonal wind anomalies using all seasons of data during 1979-2005. Here we note the key features of the MJO, including the out-of-phase relationship between lower and upper tropospheric wind anomalies, the predominance of lower tropospheric westerly anomalies near and to the west of enhanced convection, the concentrated amplitude of convection anomalies in the Eastern Hemisphere, and the strong amplitude of wind anomalies across both the Eastern and Western Hemispheres, particularly at upper levels. Importantly, as described in Wheeler and Hendon [2004], these equatorial EOF structures are virtually independent of season. Thus, these all-season EOFs can be used to develop MJO composites during both boreal summer and winter.

The overall variance explained by each EOF is indicated in Figure 10. Calculation of the variance of individual fields (i.e. OLR, U850, U200) explained by each EOF is also

recommended (not shown). Many climate simulations produce leading EOFs for convective fields that explain relatively small amounts of the variance compared to observations [e.g., *Waliser et al.*, 2003b; *Zhang et al.*, 2006b], and so this later diagnostic provides a quantifiable measure of a model's ability to faithfully simulate the level of organization of the convective component of the MJO. In observations the leading pair of EOFs account for 13-16% of the variance of the intraseasonally-filtered OLR data.

Figure 10c shows the lag correlation between the PCs of the first two multivariate EOFs. The PCs are correlated at greater (less) than 0.7 (-0.7) when PC1 leads (lags) PC2 by about 10 days (-10 days). This phase relationship indicates that the leading multivariate EOFs are a quadrature pair, representing coherent eastward-propagating intraseasonal variability in precipitation and winds along the equator with period near 40 days, a fundamental criterion that a simulated MJO must meet. However, such behavior is not always exhibited by models [e.g., *Lin et al.*, 2006b].

Another crucial test of a climate model is whether its leading multivariate EOFs derived from bandpass filtered data represent a physically meaningful mode of variability. For example, red noise or white noise that is bandpass filtered to intraseasonal periods might produce plausible looking large-scale structures in the leading EOFs that could be misinterpreted to represent a physically distinct intraseasonal oscillation. Thus, a diagnostic to avoid such pitfalls is to project the leading EOFs derived from filtered data onto unfiltered data (with only the seasonal cycle removed), and then compute the frequency spectrum of the resulting unfiltered PCs [e.g., see *Maloney and Hartmann*, 1998]. If the power spectrum exhibits a significant spectral peak at intraseasonal periods, confidence is increased that the leading EOF(s) represent a meaningful intraseasonal mode of variability. Such an analysis is displayed in Figure 10d for multivariate EOF 1. It is noted that the observed power spectrum clearly shows a prominent 30-90 day peak.

Level 2 diagnostics include a test of a model's ability to simulate the (horizontal and vertical) spatial-temporal structure of intraseasonal variability. The two leading multivariate EOFs shown in Figure 10 are used to derive a composite MJO lifecycle for boreal winter or boreal summer, as described in Wheeler and Hendon [2004]. The MJO is defined to be strong during periods when PC1² + PC2² exceeds one, (where PC1 and PC2 have unit standard deviation) and these periods of high amplitude are retained in the composite analysis. The phase of the MJO can be related to the inverse tangent of the ratio of PC2 to PC1. For each phase, composites are generated by averaging across all days that exceed the specified amplitude threshold. The number of days meeting the amplitude criterion for each phase will be displayed to the right of each panel in the composite plots.

A composite MJO lifecycle featuring intraseasonal precipitation and surface wind anomalies for boreal summer is displayed in Figure 11, and a corresponding boreal winter composite is displayed in Figures 12. Each panel in the composite lifecycle is approximately 6 days apart. Features of these composites that serve as benchmark comparisons to simulations include: 1) The pronounced seasonality in off-equatorial winds and precipitation (e.g. defined northward propagation in the eastern Hemisphere and strong east Pacific warm pool variability during boreal summer), consistent with the variance and % variance given in Figs. 3 and 4. Many models exhibit weak seasonality in the nature of their intraseasonal variability [e.g., Slingo et al., 1996; Zhang et al., 2006b]; 2) The phase relationship between the spatial structures of precipitation and wind, including surface winds. When also considering the mean state, such a phase relationship is important to the MJO surface energy budget, with implications for air-sea

interactions and wind-induced flux forcing of convection [e.g. *Hendon*, 2000; *Inness et al.*, 2003; *Bellon et al.*, 2008]; 3) The longitudinal extent of propagation in convection anomalies. Many climate models split intraseasonal convective anomalies into two centers straddling the equator [e.g., *Waliser et al.*, 2003a; *Maloney and Sobel*, 2004; *Zhang et al.*, 2006b]. It is noted however that the equatorial-averaged behavior in the composite lifecycles of Figure 11 and 12 is approximately independent of season, consistent with our ability to use an all-season multivariate EOF index to define MJO behavior during both boreal winter and summer.

Another example of composite lifecycle evolution detailed in the diagnostics package is the co-evolution of SST and precipitation for boreal summer and boreal winter (Figures 13 and 14). A motivation for such an analysis is to illustrate the phase relationship of SST anomalies relative to anomalous convection, particularly the anomalously warm SST before the onset of MJO convection. The amplitude of SST anomalies, and the different SST evolution in boreal summer versus boreal winter (e.g. northward propagation of SST anomalies in the Eastern Hemisphere during boreal summer) may be compared to models to infer whether air-sea coupling may regulate the amplitude of simulated intraseasonal variability. While many studies suggest that ocean coupling may help increase the amplitude of intraseasonal variability in climate models [e.g., *Waliser et al.*, 1999b; *Fu and Wang*, 2004; *Sperber et al.*, 2005], other simulations suggest that if a model cannot reproduce the correct phase relationships among surface fluxes, convection, and SST anomalies, ocean coupling may have a deleterious effect on simulated intraseasonal variability [e.g., *Hendon*, 2000].

4. Summary

Accurate forecasts and simulations of the MJO are of great interest to weather and climate prediction. Yet, most current global models fail to reproduce even the gross features of the MJO in spite of tremendous efforts made to improve model physics and the use of higher model resolution. The lack of standard diagnostic of the MJO has made difficult the comparison of model simulations of the MJO, the exploration of common deficiencies that contribute to their failure, and the evaluation and tracking of the improvement in MJO simulations. The purpose of this article is to recommend a set of such diagnostics.

The recommended MJO diagnostics adapt the following strategies.

- (a) The diagnostics have been chosen to concentrate on and quantify what we feel are the most important and essential features of the MJO and its dynamics, yet simple enough for relatively easy understanding and calculation.
- (b) The MJO is defined such that it consists of both eastward propagation across the Indian and Pacific Oceans in summer and winter, and northward propagation during boreal summer. Because of its distinct northward propagation, the MJO diagnostics are calculated separately for boreal summer and winter, where appropriate.
- (c) All validation data (e.g., precipitation, OLR, and zonal wind) are based on either satellite remote sensing or global reanalyses. To account for measurement, retrieval and assimilation uncertainties, more than one data source are selected for each variable where possible (section 2). Current discrepancies between different model simulations of the MJO and any of these validation data are much greater than between any two validation data sets.

- (d) Supplemental diagnostics are recommended to include mean states of certain variables (SST, zonal wind, precipitation) and interannual variability of the MJO (Table 4). They may help understand the causes of erroneous behaviors of a simulated MJO and/or illustrate shortcomings in the multi-scale interactions of the model (section 3a)
- (e) The main part of the recommended diagnostics includes two levels:

The Level-1 Diagnostics (section 3c, Table 1) provide an initial assessment of intraseasonal variability in general and the most basic features of the MJO that can be easily calculated using standard tools without expertise in the MJO. The maps of intraseasonal variance (Figs. 3 and 4) and time spectra for key regions (Table 2) help reveal whether a model produces robust intraseasonal variability and its correct seasonality. The lag-longitude and lag-latitude correlations (Figs. 5 and 6) examine whether the simulated intraseasonal variability possesses eastward and northward propagations at the observed phase speeds, which are the most basic for the MJO. The single variable EOF analysis tests whether MJO signals in a given field can be objectively isolated from the remainder of the intraseasonal variability.

If the Level-1 Diagnostics indicate that the model is indeed able to reproduce the basic features of the MJO, the Level-2 Diagnostics (section 3d, Table 3) would further detail the quantitative properties of the MJO using more sophisticated tools. The wavenumber-frequency spectra (Figs. 7 and 8) identify the intraseasonal spectral peak and quantify its eastward-westward power ratio, a measure of the robustness in the eastward propagation of the MJO. The coherence and phase relation between the zonal wind and convection components of the MJO are quantified by the cross spectrum analysis (Fig. 9), which also demonstrates the distinctions between the MJO and other equatorial waves. The ultimate test for a model's ability of reproducing the totality of the MJO, including its timescale, phase speed, coherent spatial-temporal structures in zonal wind and convection, is to see whether its MJO signals can be extracted by a multivariate EOF analysis (Fig. 10). This multivariate EOF analysis also sets the stage for composite analyses of the MJO to examine structural and evolutionary details at different phases of its life cycle (Figs. 11 and 12). For coupled models, similar composites can be made to include SST (Figs. 13 and 14).

The diagnostics recommended here are based on the availability of reliable validation data and confidence in our knowledge of the MJO. MJO diagnostics for other variables (e.g., cloud and boundary-layer structure, latent and radiative heating) will be recommended in the future when reliable observations are available for a sufficiently long period. At present, the MJOWG is working to define and implement a diagnostic/metric for MJO predictions; this activity will be reported on in a forthcoming paper.

In conclusion, we recommend the Level-1 Diagnostics be applied to all model validation exercises and the Level-2 Diagnostics only to models with capability of producing the basic features of the MJO as demonstrated by the Level-1 Diagnostics. It is our hope that when all model validations adapt the set of diagnostics recommended here, we will be in a much better position to compare models, identify common model deficiencies, and track model improvement in regard to MJO simulations. For further recommendations by this working group and the MJO community, the reader is referred to Sperber and Waliser [2008].

Acknowledgements

The MJOWG wishes to acknowledge and thank US CLIVAR and International CLIVAR for supporting this working group and its activities. We would like to specifically acknowledge the administrative support on behalf of the MJOWG by Cathy Stevens of the US CLIVAR Office. KRS was supported under the auspices of the U.S. Department of Energy Office of Science, Climate Change Prediction Program by Lawrence Livermore National Laboratory under contract DE-AC52-07NA27344. DEW's contributions to this study was carried out on behalf of the Jet Propulsion Laboratory, California Institute of Technology, under a contract with the National Aeronautics and Space Administration (NASA). EDM was supported by the NSF Climate and Large-Scale Dynamics Program under Grant ATM-063234, and by NOAA CPPA Award# NA05OAR4310006. CZ was support by NSF Grant ATM0739402 and by the NOAA office of Global Programs through the Cooperative Institute for Marine and Atmospheric Studies (CIMAS)

References

- Annamalai, H., and K. R. Sperber (2005), Regional Heat Sources and the Active and Break Phases of Boreal Summer Intraseasonal (30-50 Day) Variability, *Journal of the Atmospheric Sciences*, 62(8), 2726-2748.
- Arkin, P. A., and B. N. Meisner (1987), The Relationship between Large-Scale Convective Rainfall and Cold Cloud over the Western Hemisphere During 1982 1984. , *Monthly Weather Review*, 115, 51-74.
- Barlow, M., and D. Salstein (2006), Summertime Influence of the Madden-Julian Oscillation on Daily Rainfall over Mexico and Central America, *Geophys. Res. Lett.*(33, L21708, doi:10.1029/2006GL027738.).
- Bellon, B., A. Sobel, and J. P. Vialard (2008), Ocean-Atmosphere Coupling in the Monsoon Intraseasonal Oscillation: A Simple Model Study., *J. Clim.*, *In Press*.
- Bergman, J. W., H. H. Hendon, and K. M. Weickmann (2001), Intraseasonal Air-Sea Interactions at the Onset of El Nino, *J. Clim.*, *14*(8), 1702-1719.
- Bernie, D. J., S. J. Woolnough, J. M. Slingo, and E. Guilyardi (2005), Modeling Diurnal and Intraseasonal Variability of the Ocean Mixed Layer, *J. Clim.*, 18(8), 1190-1202.
- Bessafi, M., and M. C. Wheeler (2006), Modulation of South Indian Ocean Tropical Cyclones by the Madden-Julian Oscillation and Convectively-Coupled Equatorial Waves, *Monthly Weather Review*, 134, 638-656.
- Chen, S. S., R. A. Houze, and B. E. Mapes (1996), Multiscale Variability of Deep Convection in Relation to Large- Scale Circulation in Toga Coare, *Journal of the Atmospheric Sciences*, 53(10), 1380-1409.
- Duffy, P. B., B. Govindasamy, J. P. Iorio, J. Milovich, K. R. Sperber, K. E. Taylor, M. F. Wehner, and S. L. Thompson (2003), High-Resolution Simulations of Global Climate, Part 1: Present Climate, *Clim. Dyn.*, *21*(5-6), 371-390.
- ECMWF (2004), Ecmwf/Clivar Workshop on Simulation and Prediction of Intra-Seasonal Variability with Emphasis on the Mjo, 3-6 November 2003. ECMWF, Reading, UK.
- Ferranti, L., T. N. Palmer, F. Molteni, and K. Klinker (1990), Tropical-Extratropical Interaction Associated with the 30-60-Day Oscillation and Its Impact on Medium and Extended Range Prediction, *J. Atmos. Sci.*, 47, 2177-2199.
- Frank, W. M., and P. E. Roundy (2006), The Role of Tropical Waves in Tropical Cyclogenesis, *Monthly Weather Review*, 113, 647-658.
- Fu, X., and B. Wang (2004), Differences of Boreal-Summer Intraseasonal Oscillations Simulated in an Atmosphere-Ocean Coupled Model and an Atmosphere-Only Model., *J. Clim.*, *In Press*.
- Goswami, B. N. (2005), South Asian Summer Monsoon, in *Intraseasonal Variability of the Atmosphere-Ocean Climate System*, edited by W. K. M. Lau and D. E. Waliser, Springer, Heidelberg, Germany.

- Gualdi, S., A. Navarra, and M. Fischer (1999a), The Tropical Intraseasonal Oscillation in a Coupled Ocean- Atmosphere General Circulation Model, *Geophys. Res. Lett.*, 26(19), 2973-2976.
- Gualdi, S., A. Navarra, and G. Tinarelli (1999b), The Interannual Variability of the Madden-Julian Oscillation in an Ensemble of Gcm Simulations, *Clim. Dyn.*, *15*(9), 643-658.
- Gupta, S. K., D. P. Kratz, P. W. S. Jr., and A. C. Wilber (2001), The Langley Parameterized Shortwave Algorithm (Lpsa) for Surfaceradiation Budget Studies (Version1.0). Nasa/Tp-2001-211272, 31 pp.
- Hendon, H. H., and B. Liebmann (1990), The Intraseasonal (30-50 Day) Oscillation of the Australian Summer Monsoon, *Journal of the Atmospheric Sciences*, 47(24), 2909-2923.
- Hendon, H. H., and M. L. Salby (1994), The Life-Cycle of the Madden-Julian Oscillation, Journal of the Atmospheric Sciences, 51(15), 2225-2237.
- Hendon, H. H., C. D. Zhang, and J. D. Glick (1999), Interannual Variation of the Madden-Julian Oscillation During Austral Summer, *J. Clim.*, *12*(8), 2538-2550.
- Hendon, H. H. (2000), Impact of Air-Sea Coupling on the Madden-Julian Oscillation in a General Circulation Model, *Journal of the Atmospheric Sciences*, *57*(24), 3939-3952.
- Hendon, H. H., B. Liebmann, M. Newman, J. D. Glick, and J. E. Schemm (2000), Medium-Range Forecast Errors Associated with Active Episodes of the Madden-Julian Oscillation, *Monthly Weather Review*, 128(1), 69-86.
- Hendon, H. H., M. C. Wheeler, and C. D. Zhang (2007), Seasonal Dependence of the Mjo-Enso Relationship, *J. Clim.*, 20(3), 531-543.
- Hendon, H. H., and M. C. Wheeler (2008), Some Space-Time Spectral Analyses of Tropical Convection and Planetary-Scale Waves, *Journal of the Atmospheric Sciences*, *In Press*.
- Higgins, R. W., and K. C. Mo (1997), Persistent North Pacific Circulation Anomalies and the Tropical Intraseasonal Oscillation, *J. Clim.*, 10(2), 223-244.
- Higgins, R. W., J. K. E. Schemm, W. Shi, and A. Leetmaa (2000), Extreme Precipitation Events in the Western United States Related to Tropical Forcing, *J. Clim.*, 13(4), 793-820.
- Huffman, G. J., R. F. Adler, M. M. Morrissey, D. T. Bolvin, S. Curtis, R. Joyce, B. McGavock, and J. Susskind (2001), Global Precipitation at One-Degree Daily Resolution from Multisatellite Observations, *J. HydroMet.*, *2*(1), 36-50.
- ICTP (2006), Workshop on the Organization and Maintenance of Tropical Convection and the Madden Julian Oscillation: Sponsors: Itcp, Wcrp, Thorpex. Organizers: J. Slingo, F. Molteni, M. Moncrieff, M. Shapiro, http://www.wmo.int/thorpex/doc/MJO_Workshop_Report_final.doc, International Centre for Theoretical Physics, Tieste, Italy, March 13-17, 2006.
- Inness, P. M., and J. M. Slingo (2003), Simulation of the Madden-Julian Oscillation in a Coupled General Circulation Model. Part I: Comparison with Observations and an Atmosphere-Only Gcm, *J. Clim.*, 16(3), 345-364.

- Inness, P. M., J. M. Slingo, E. Guilyardi, and J. Cole (2003), Simulation of the Madden-Julian Oscillation in a Coupled General Circulation Model. Part Ii: The Role of the Basic State, *J. Clim.*, 16(3), 365-382.
- Jones, C. (2000), Occurrence of Extreme Precipitation Events in California and Relationships with the Madden-Julian Oscillation, *J. Clim.*, 13(20), 3576-3587.
- Jones, C., D. Waliser, K.-M. Lau, and W. Stern (2004a), Global Occurrences of Extreme Precipitation and the Madden-Julian Oscillation: Observations and Predictability, *J. Climate*, 17, 4575-4589.
- Jones, C., D. E. Waliser, K. M. Lau, and W. Stern (2004b), The Madden-Julian Oscillation and Its Impact on Northern Hemisphere Weather Predictability, *Mon. Wea. Rev.*, *132*, 1462-1471.
- Kalnay, E., M. Kanamitsu, R. Kistler, W. Collins, D. Deaven, L. Gandin, M. Iredell, S. Saha, G. White, J. Woollen, Y. Zhu, M. Chelliah, W. Ebisuzaki, W. Higgins, J. Janowiak, K. C. Mo, C. Ropelewski, J. Wang, A. Leetmaa, R. Reynolds, R. Jenne, and D. Joseph (1996), The Ncep/Ncar 40-Year Reanalysis Project, *Bull. Amer. Meteor. Soc.*, 77(3), 437-471.
- Kanamitsu, M., W. Ebisuzaki, J. Woollen, S.-K. Yang, J. J. Hnilo, M. Fiorino, and G. L. Potter (2002), Ncep-Doe Amip-Ii Reanalysis (R-2), *Bull. Amer. Meteor. Soc.*, 83, 1631-1643.
- Kemball-Cook, S., B. Wang, and X. Fu (2002), Simulation of the Iso in the Echam4 Model: The Impact of Coupling with an Ocean Model, *Journal of the atmospheric Sciences*, *59*(9), 1433–1453.
- Kessler, W. (2005), The Oceans, in *Intraseasonal Variability of the Atmosphere-Ocean Climate System*, edited by W. K. M. Lau and D. E. Waliser, Springer, Heidelberg, Germany.
- Kessler, W. S., and R. Kleeman (2000), Rectification of the Madden-Julian Oscillation into the Enso Cycle, *J. Clim.*, *13*(20), 3560-3575.
- Kessler, W. S. (2001), Eof Representations of the Madden-Julian Oscillation and Its Connection with Enso, *J. Clim.*, 14(13), 3055-3061.
- Kiladis, G. N., K. H. Straub, and P. T. Haertel (2005), Zonal and Vertical Structure of the Madden-Julian Oscillation, *Journal of the Atmospheric Sciences*, 62(8), 2790-2809.
- Kummerow, C., J. Simpson, O. Thiele, W. Barnes, A. T. C. Chang, E. Stocker, R. F. Adler, A. Hou, R. Kakar, F. Wentz, P. Ashcroft, T. Kozu, Y. Hong, K. Okamoto, T. Iguchi, H. Kuroiwa, E. Im, Z. Haddad, G. Huffman, B. Ferrier, W. S. Olson, E. Zipser, E. A. Smith, T. T. Wilheit, G. North, T. Krishnamurti, and K. Nakamura (2000), The Status of the Tropical Rainfall Measuring Mission (Trmm) after Two Years in Orbit, *Journal of Applied Meteorology*, 39(12), 1965-1982.
- Lau, K. M., and P. H. Chan (1988), Intraseasonal and Interannual Variations of Tropical Convection a Possible Link between the 40-50 Day Oscillation and Enso, *Journal of the Atmospheric Sciences*, 45(3), 506-521.
- Lau, K. M., and S. H. Shen (1988), On the Dynamics of Intraseasonal Oscillations and Enso, *Journal of the Atmospheric Sciences*, 45(12), 1781-1797.

- Lau, W. K. M. (2005), Enso Connections, in *Intraseasonal Variability of the Atmosphere-Ocean Climate System*, edited by W. K. M. Lau and D. E. Waliser, Springer, Heidelberg, Germany.
- Lau, W. K. M., and D. E. Waliser (Eds.) (2005), *Intraseasonal Variability of the Atmosphere-Ocean Climate System*, 474 pp., Springer, Heidelberg, Germany.
- Lawrence, D. M., and P. J. Webster (2002), The Boreal Summer Intraseasonal Oscillation: Relationship between Northward and Eastward Movement of Convection, *Journal of the Atmospheric Sciences*, *59*(9), 1593-1606.
- Lee, M. I., I. S. Kang, J. K. Kim, and B. E. Mapes (2001), Influence of Cloud-Radiation Interaction on Simulating Tropical Intraseasonal Oscillation with an Atmospheric General Circulation Model, *J. Geoph. Res. Atmos.*, 106(D13), 14219-14233.
- Lee, M. I., I. S. Kang, and B. E. Mapes (2003), Impacts of Cumulus Convection Parameterization on Aqua-Planet Agem Simulations of Tropical Intraseasonal Variability, *Journal of the Meteorological Society of Japan*, 81(5), 963-992.
- Liebmann, B., and D. L. Hartmann (1984), An Observational Study of Tropical Midlatitude Interaction on Intraseasonal Time Scales During Winter, *Journal of the Atmospheric Sciences*, 41(23), 3333-3350.
- Liebmann, B., H. H. Hendon, and J. D. Glick (1994), The Relationship between Tropical Cyclones of the Western Pacific and Indian Oceans and the Madden-Julian Oscillation, *Journal of the Meteorological Society of Japan*, 72(3), 401-412.
- Liebmann, B., and C. A. Smith (1996), Description of a Complete (Interpolated) Outgoing Longwave Radiation Dataset, *Bull. Amer. Meteor. Soc.*, 77(6), 1275-1277.
- Lin, J. L., G.N. Kiladis, B.E. Mapes, K.M. Weickmann, K.R. Sperber, W.Y. Lin, M. Wheeler, S.D. Schubert, A. Del Genio, L.J. Donner, S. Emori, J.-F. Gueremy, F. Hourdin, P.J. Rasch, E. Roeckner, and J. F. Scinocca (2006a), Tropical Intraseasonal Variability in 14 Ipcc Ar4 Climate Models. Part I: Convective Signals., *J. Clim.*, 19, 2665–2690.
- Lin, J. L., G. N. Kiladis, B. E. Mapes, K. M. Weickmann, K. R. Sperber, W. Lin, M. C. Wheeler,
 S. D. Schubert, A. Del Genio, L. J. Donner, S. Emori, J. F. Gueremy, F. Hourdin, P. J.
 Rasch, E. Roeckner, and J. F. Scinocca (2006b), Tropical Intraseasonal Variability in 14
 Ipcc Ar4 Climate Models. Part I: Convective Signals, *J. Clim.*, 19(12), 2665-2690.
- Lorenz, D. J., and D. L. Hartmann (2006), The Effect of the Mjo on the North American Monsoon., *J. Clim.*, 19, 333-343.
- Madden, R., and P. Julian (2005), Historical Perspective, in *Intraseasonal Variability of the Atmosphere-Ocean Climate System*, edited by W. K. M. Lau and D. E. Waliser, p. 474, Springer, Heidelberg, Germany.
- Madden, R. A., and P. R. Julian (1971), Detection of a 40-50 Day Oscillation in the Zonal Wind in the Tropical Pacific, *J. Atmos. Sci.*, 28, 702-708.
- Madden, R. A., and P. R. Julian (1994), Observations of the 40-50-Day Tropical Oscillation a Review, *Monthly Weather Review*, *122*(5), 814-837.

- Maloney, E. D., and D. L. Hartmann (1998), Frictional Moisture Convergence in a Composite Life Cycle of the Madden-Julian Oscillation, *J. Clim.*, 11(9), 2387-2403.
- Maloney, E. D., and D. L. Hartmann (2000a), Modulation of Eastern North Pacific Hurricanes by the Madden-Julian Oscillation, *J. Clim.*, *13*(9), 1451-1460.
- Maloney, E. D., and D. L. Hartmann (2000b), Modulation of Hurricane Activity in the Gulf of Mexico by the Madden-Julian Oscillation, *Science*, 287(5460), 2002-2004.
- Maloney, E. D., and D. L. Hartmann (2001), The Sensitivity of Intraseasonal Variability in the Near Cem3 to Changes in Convective Parameterization, *J. Clim.*, *14*(9), 2015-2034.
- Maloney, E. D. (2002), An Intraseasonal Oscillation Composite Life Cycle in the Ncar Ccm3.6 with Modified Convection, *J. Clim.*, 15(9), 964-982.
- Maloney, E. D., and S. K. Esbensen (2003), The Amplification of East Pacific Madden-Julian Oscillation Convection and Wind Anomalies During June-November, *J. Clim.*, 16(21), 3482-3497.
- Maloney, E. D., and A. H. Sobel (2004), Surface Fluxes and Ocean Coupling in the Tropical Intraseasonal Oscillation, *J. Clim.*, *17*, 4368-4386.
- Maloney, E. D., and J. Shaman (2007), Intraseasonal Variability of the West African Monsoon and Atlantic Itez., *J. Climate*, Pending Revision.
- Maloney, E. D., D. B. Chelton, and S. K. Esbensen (2008), Subseasonal Sst Variability in the Tropical Eastern North Pacific During Boreal Summer., *J. Clim.*, *In press*.
- Matthews, A. J. (2000), Propagation Mechanisms for the Madden-Julian Oscillation, *Quarterly Journal of the Royal Meteorological Society*, 126, 2637-2651.
- Matthews, A. J. (2004), Intraseasonal Variability over Tropical Africa During Northern Summer, *J. Clim.*, 17(12), 2427-2440.
- Mechoso, C. R., A. W. Robertson, N. Barth, M. K. Davey, P. Delecluse, P. R. Gent, S. Ineson, B. Kirtman, M. Latif, H. Letreut, T. Nagai, J. D. Neelin, S. G. H. Philander, J. Polcher, P. S. Schopf, T. Stockdale, M. J. Suarez, L. Terray, O. Thual, and J. J. Tribbia (1995), The Seasonal Cycle over the Tropical Pacific in Coupled Ocean- Atmosphere General-Circulation Models, *Monthly Weather Review*, *123*(9), 2825-2838.
- Mo, K. C., and R. W. Higgins (1998), Tropical Influences on California Precipitation, *J. Clim.*, 11(3), 412-430.
- Nakazawa, T. (1986), Intraseasonal Variations of Olr in the Tropics During the Fgge Year., *J. Meteor. Soc. Japan*, 70(597-611.).
- Newman, M., P. D. Sardeshmukh, C. R. Winkler, and J. S. Whitaker (2003), A Study of Subseasonal Predictability, *Monthly Weather Review*, *131*, 1715-1732.
- Reynolds, R. W., T. M. Smith, C. Liu, D. B. Chelton, K. S. Casey, and M. G. Schlax (2007), Daily High-Resolution Blended Analyses for Sea Surface Temperature, *J. Clim.*, 20, 5473-5496.
- Rui, H., and B. Wang (1990), Development Characteristics and Dynamic Structure of Tropical Intraseasonal Convection Anomalies, *Journal of the Atmospheric Sciences*, 47(3), 357-379.

- Salby, M. L., and H. H. Hendon (1994), Intraseasonal Behavior of Clouds, Temperature, and Motion in the Tropics, *Journal of the Atmospheric Sciences*, 51(15), 2207-2224.
- Schubert, S., R. Dole, H. v. d. Dool, M. Suarez, and D. Waliser (2002), Proceedings from a Workshop On "Prospects for Improved Forecasts of Weather and Short-Term Climate Variability on Subseasonal (2 Week to 2 Month) Time Scales", *16-18 April 2002, Mitchellville, MD, NASA/TM 2002-104606, vol. 23*(XX), 171.
- Seo, K. H., J. K. E. Schemm, C. Jones, and S. Moorthi (2005), Forecast Skill of the Tropical Intraseasonal Oscillation in the Ncep Gfs Dynamical Extended Range Forecasts, *Clim. Dyn.*, 25(2-3), 265-284.
- Shinoda, T., and H. H. Hendon (1998), Mixed Layer Modeling of Intraseasonal Variability in the Tropical Western Pacific and Indian Oceans, *J. Clim.*, 11(10), 2668-2685.
- Shinoda, T., H. H. Hendon, and J. Glick (1998), Intraseasonal Variability of Surface Fluxes and Sea Surface Temperature in the Tropical Western Pacific and Indian Oceans, *J. Clim.*, 11(7), 1685-1702.
- Slingo, J., P. Inness, and K. Sperber (2005), Modeling, in *Intraseasonal Variability of the Atmosphere-Ocean Climate System*, edited by W. K. M. Lau and D. E. Waliser, Springer, Heidelberg, Germany.
- Slingo, J. M., K. R. Sperber, J. S. Boyle, J. P. Ceron, M. Dix, B. Dugas, W. Ebisuzaki, J. Fyfe, D. Gregory, J. F. Gueremy, J. Hack, A. Harzallah, P. Inness, A. Kitoh, W. K. M. Lau, B. McAvaney, R. Madden, A. Matthews, T. N. Palmer, C. K. Park, D. Randall, and N. Renno (1996), Intraseasonal Oscillations in 15 Atmospheric General Circulation Models: Results from an Amip Diagnostic Subproject, *Clim. Dyn.*, 12(5), 325-357.
- Spencer, R. W. (1993), Global Oceanic Precipitation from the Msu During 1979-91 and Comparisons to Other Climatologies, *J. Clim.*, 6, 1301-1326.
- Sperber, K. R., J. M. Slingo, and H. Annamalai (2000), Predictability and the Relationship between Subseasonal and Interannual Variability During the Asian Summer Monsoon, *Quarterly Journal of the Royal Meteorological Society*, 126(568), 2545-2574.
- Sperber, K. R., C. Brankovic, M. Deque, C. S. Frederiksen, R. Graham, A. Kitoh, C. Kobayashi, T. Palmer, K. Puri, W. Tennant, and E. Volodin (2001), Dynamical Seasonal Predictability of the Asian Summer Monsoon, *Monthly Weather Review*, *129*(9), 2226-2248.
- Sperber, K. R. (2003), Propagation and the Vertical Structure of the Madden-Julian Oscillation, *Monthly Weather Review*, *131*(12), 3018-3037.
- Sperber, K. R. (2004), Madden-Julian Variability in Near Cam2.0 and Cesm2.0, *Clim. Dyn.*, 23, 259-278.
- Sperber, K. R., S. Gualdi, S. Legutke, and V. Gayler (2005), The Madden-Julian Oscillation in Echam4 Coupled and Uncoupled General Circulation Models, *Clim. Dyn.*, *25*(2-3), 117-140.
- Sperber, K. R., and H. Annamalai (2007), Coupled Model Simulations of Boreal Summer Intraseasonal (30-50 Day) Variability, Part 1: Systematic Errors and Caution on Use of Metrics., *Clim. Dyn.*, *Submitted In revision*.

- Sperber, K. R., and H. Annamalai (2008), Coupled Model Simulations of Boreal Summer Intraseasonal (30-50 Day) Variability, Part 1: Systematic Errors and Caution on Use of Metrics., *Clim. Dyn.*, 10.1007/s00382-008-0367-9.
- Sperber, K. R., and D. Waliser (2008), New Approaches to Understanding, Simulating, and Forecasting the Madden-Julian Oscillation, *Bull. Amer. Meteor. Soc.*, *In Press.*
- Takayabu, Y. N., T. Iguchi, M. Kachi, A. Shibata, and H. Kanzawa (1999), Abrupt Termination of the 1997-98 El Nino in Response to a Madden-Julian Oscillation, *Nature*, 402(6759), 279-282.
- Tian, B., D. Waliser, R. Kahn, Q. Li, Y. L. Yung, T. Tyranowski, I. Geogdzhayev, M. I. Mischenko, and O. Torres (2007a), Does the Madden-Julian Oscillation Influence Aerosol Variability?, *J. Geoph. Res.*, doi:10.1029/2007JD009372.
- Tian, B. J., D. E. Waliser, and E. J. Fetzer (2006), Modulation of the Diurnal Cycle of Tropical Deep Convective Clouds by the Mjo, *Geophys. Res. Lett.*, 33(20).
- Tian, B. J., Y. L. Yung, D. E. Waliser, T. Tyranowski, L. Kuai, E. J. Fetzer, and F. W. Irion (2007b), Intraseasonal Variations of the Tropical Total Ozone and Their Connection to the Madden-Julian Oscillation, *Geophys. Res. Lett.*, *34*(8).
- Uppala, S. M., P. W. Kallberg, A. J. Simmons, U. Andrae, V. D. Bechtold, M. Fiorino, J. K. Gibson, J. Haseler, A. Hernandez, G. A. Kelly, X. Li, K. Onogi, S. Saarinen, N. Sokka, R. P. Allan, E. Andersson, K. Arpe, M. A. Balmaseda, A. C. M. Beljaars, L. Van De Berg, J. Bidlot, N. Bormann, S. Caires, F. Chevallier, A. Dethof, M. Dragosavac, M. Fisher, M. Fuentes, S. Hagemann, E. Holm, B. J. Hoskins, L. Isaksen, P. Janssen, R. Jenne, A. P. McNally, J. F. Mahfouf, J. J. Morcrette, N. A. Rayner, R. W. Saunders, P. Simon, A. Sterl, K. E. Trenberth, A. Untch, D. Vasiljevic, P. Viterbo, and J. Woollen (2005), The Era-40 Re-Analysis, *Quarterly Journal of the Royal Meteorological Society*, 131(612), 2961-3012.
- Vecchi, G. A., and N. A. Bond (2004), The Madden-Julian Oscillation (Mjo) and Northern High Latitude Wintertime Surface Air Temperatures, *Geophys. Res. Lett.*, 31(4).
- Waliser, D., Z. Zhang, K. M. Lau, and J. H. Kim (2001), Interannual Sea Surface Temperature Variability and the Predictability of Tropical Intraseasonal Variability., *Journal of the Atmospheric Sciences*, 58, 2595-2614.
- Waliser, D. E., C. Jones, J. K. E. Schemm, and N. E. Graham (1999a), A Statistical Extended-Range Tropical Forecast Model Based on the Slow Evolution of the Madden-Julian Oscillation, *J. Clim.*, 12(7), 1918-1939.
- Waliser, D. E., K. M. Lau, and J. H. Kim (1999b), The Influence of Coupled Sea Surface Temperatures on the Madden-Julian Oscillation: A Model Perturbation Experiment, *Journal of the Atmospheric Sciences*, 56(3), 333-358.
- Waliser, D. E., K. Jin, I. S. Kang, W. F. Stern, S. D. Schubert, M. L. Wu, K. M. Lau, M. I. Lee, J. Shukla, V. Krishnamurthy, V. Satyan, A. Kitoh, G. A. Meehl, V. Y. Galin, G. Wu, Y. Liu, and C. K. Park (2003a), Agcm Simulations of Intraseasonal Variability Associated with the Asian Summer Monsoon, *Clim. Dyn.*, 21, 423-446.

- Waliser, D. E., K. Jin, I. S. Kang, W. F. Stern, S. D. Schubert, M. L. C. Wu, K. M. Lau, M. I. Lee, V. Krishnamurthy, A. Kitoh, G. A. Meehl, V. Y. Galin, V. Satyan, S. K. Mandke, G. Wu, Y. Liu, and C. K. Park (2003b), Agcm Simulations of Intraseasonal Variability Associated with the Asian Summer Monsoon, *Clim. Dyn.*, *21*(5-6), 423-446.
- Waliser, D. E., R. Murtugudde, and L. Lucas (2003c), Indo-Pacific Ocean Response to Atmospheric Intraseasonal Variability. Part I: Austral Summer and the Madden-Julian Oscillation, *J. Geoph. Res. Oceans*, 108(C5), 10.1029/2002JC001620.
- Waliser, D. E., S. Schubert, A. Kumar, K. Weickmann, and R. Dole (2003d), Proceedings from a Workshop On "Modeling, Simulation and Forecasting of Subseasonal Variability", 4-5 June 2003, College Park, MD, NASA/TM 2003-104606,vol. 25., 67.
- Waliser, D. E., W. Stern, S. Schubert, and K. M. Lau (2003e), Dynamic Predictability of Intraseasonal Variability Associated with the Asian Summer Monsoon, *Quart. J. Royal Meteor. Soc.*, 129, 2897-2925.
- Waliser, D. E. (2005), Predictability and Forecasting, in "Intraseasonal Variability of the Atmosphere-Ocean Climate System" edited by W. K. M. Lau and D. E. Waliser, p. 474, Springer, Heidelberg, Germany.
- Waliser, D. E., R. Murtugudde, P. Strutton, and J.-L. Li (2005), Subseasonal Organization of Ocean Chlorophyll: Prospects for Prediction Based on the Madden-Julian Oscillation, *Geophys. Res. Lett.*, Vol. 32, No. 23, L23602, 10.1029/2005GL024300.
- Waliser, D. E. (2006), Intraseasonal Variability, in *The Asian Monsoon*, edited by B. Wang, p. 844 Springer, Heidelberg, Germany.
- Wang, B., and H. Rui (1990), Synoptic Climatology of Transient Tropical Intraseasonal Convection Anomalies 1975-1985, *Meteorology and Atmospheric Physics*, 44(1-4), 43-61.
- Wang, B., and X. S. Xie (1997), A Model for the Boreal Summer Intraseasonal Oscillation, *Journal of the Atmospheric Sciences*, 54(1), 72-86.
- Wang, W. Q., and M. E. Schlesinger (1999), The Dependence on Convection Parameterization of the Tropical Intraseasonal Oscillation Simulated by the Uiuc 11-Layer Atmospheric Gcm, *J. Clim.*, *12*(5), 1423-1457.
- Webster, P. J., V. O. Magana, T. N. Palmer, J. Shukla, R. A. Tomas, M. Yanai, and T. Yasunari (1998), Monsoons: Processes, Predictability, and the Prospects for Prediction, *J. Geoph. Res. Oceans*, 103(C7), 14451-14510.
- Webster, P. J., and C. Hoyos (2004), Forecasting Monsoon Rainfall and River Discharge Variability on 20-25 Day Time Scales, *Bull. Amer. Meteor. Soc.*, 85(11), 1745–1765.
- Weickmann, K. M. (1983), Intraseasonal Circulation and Outgoing Longwave Radiation Modes During Northern Hemisphere Winter, *Monthly Weather Review*, 111(9), 1838-1858.
- Weickmann, K. M. (1991), El-Nino Southern Oscillation and Madden-Julian (30-60 Day) Oscillations During 1981-1982, *J. Geoph. Res. Oceans*, *96*, 3187-3195.
- Weickmann, K. M., and E. B. Berry (2006), A Synoptic Model of Subseasonal Variability, *Monthly Weather Review, In Press*.

- Wentz, F. J., C. Gentemann, D. Smith, and D. Chelton (2000), Satellite Measurements of Sea Surface Temperature through Clouds, *Science*, 288(5467), 847-850.
- Wheeler, M., and G. N. Kiladis (1999), Convectively Coupled Equatorial Waves: Analysis of Clouds and Temperature in the Wavenumber-Frequency Domain, *Journal of the Atmospheric Sciences*, 56(3), 374-399.
- Wheeler, M. C., and H. H. Hendon (2004), An All-Season Real-Time Multivariate Mjo Index: Development of an Index for Monitoring and Prediction, *Monthly Weather Review*, 132(8), 1917-1932.
- Wheeler, M. C., and J. L. McBride (2005), Australian-Indonesian Monsoon, in *Intraseasonal Variability of the Atmosphere-Ocean Climate System*, edited by W. K. M. Lau and D. E. Waliser, pp. 125-174, Springer, Heidelberg, Germany.
- Whitaker, J. S., and K. M. Weickmann (2001), Subseasonal Variations of Tropical Convection and Week-2 Prediction of Wintertime Western North American Rainfall, *J. Clim.*, 14(15), 3279-3288.
- Wong, S., and A. E. Dessler (2007), Regulation of H2o and Co in Tropical Tropopause Layer by the Madden-Julian Oscillation., *J. Geoph. Res. Atmos.*, 112, D14305, DOI: 14310.11029/12006JD007940.
- Woodruff, S. D., H. F. Diaz, J. D. Elms, and S.J. Worley (1998), Coads Release 2 Data and Metadata Enhancements for Improvements of Marine Surface Flux Fields, *Phys. Chem. Earth*, 23(517-526).
- Woolnough, S. J., J. M. Slingo, and B. J. Hoskins (2000), The Relationship between Convection and Sea Surface Temperature on Intraseasonal Timescales, *J. Clim.*, *13*(12), 2086-2104.
- Woolnough, S. J., F. Vitart, and M. A. Balmaseda (2007), The Role of the Ocean in the Madden-Julian Oscillation: Implications for Mjo Prediction, *Quarterly Journal of the Royal Meteorological Society*, 133(622), 117-128.
- Xie, P. P., and P. A. Arkin (1997), Global Precipitation: A 17-Year Monthly Analysis Based on Gauge Observations, Satellite Estimates, and Numerical Model Outputs, *Bull. Amer. Meteor. Soc.*, 78(11), 2539-2558.
- Yasunari, T. (1979), Cloudiness Fluctuations Associated with the Northern Hemisphere Summer Monsoon., *J. Met. Soc. Japan*, *57*, 227-242.
- Yasunari, T. (1980), A Quasi-Stationary Appearance of the 30-40 Day Period in the Cloudiness Fluctuations During the Summer Monsoon over India., *J. Met. Soc. Japan*, *59*, 336-354.
- Yasunari, T. (1981), Structure of an Indian Summer Monsoon System with around 40-Day Period, *J. Meteorol. Soc. Jpn.*, *59*, 336–354.
- Yu, L., and R. A. Weller (2007), Objectively Analyzed Air-Sea Heat Fluxes (Oaflux) for the Global Oceans., 88, 527-539.
- Zhang, C., H. H. Hendon, W. S. Kessler, and A. Rosati (2001), A Workshop on the Mjo and Enso, *Bull. Ameri. Metero. Soc.*, 82, 971-976.
- Zhang, C. (2005), The Madden Julian Oscillation, Rev. Geophys., 43, RG2003, doi:10.1029/2004RG000158.

- Zhang, C., M. Dong, H. H. Hendon, E. D. Maloney, A. Marshall, K. R. Sperber, and W. Wang (2006a), Simulations of the Madden-Julian Oscillation in Four Pairs of Coupled and Uncoupled Global Models, *Clim. Dyn.*, *DOI:* 10.1007/s00382-006-0148-2.
- Zhang, C. D., M. Dong, S. Gualdi, H. H. Hendon, E. D. Maloney, A. Marshall, K. R. Sperber, and W. Q. Wang (2006b), Simulations of the Madden-Julian Oscillation in Four Pairs of Coupled and Uncoupled Global Models, *Climate Dynamics*, 27(6), 573-592.
- Zhang, Y.-C., W. B. Rossow, A. A. Lacis, V. Oinas, and M. I. Mishchenko (2004), Calculation of Radiative Fluxes from the Surface to Top of Atmosphere Based on Isccp and Other Global Data Sets: Refinements of the Radiative Transfer Model and the Input Data., *J. Geoph. Res.*, 109(D19105, doi:10.1029/2003JD004457.).
- Zheng, Y., D. E. Waliser, W. F. Stern, and C. Jones (2004), The Role of Coupled Sea Surface Temperatures in the Simulation of the Tropical Intraseasonal Oscillation, *J. Clim.*, 17, 4109-4134.

Table 1: Level 1 Diagnostics

Diagnostic	Season	Regions	Fields
Variance (unfiltered,	Boreal	30°N-30°S,	OLR, precip, U200,
intraseasonal, % of	summer,	0°-360°E	U850
unfiltered)	winter, all		
	seasons		
Time spectra	Boreal	West Pacific, Indian	OLR, precip, U200,
	summer,	Ocean, East Pacific,	U850
	winter, all-	Maritime Continent (see	
	seasons	Table 2)	
Lag-longitude correlation	Boreal	Equatorial (10°N-10°S	OLR, precip, U200,
analysis (Indian Ocean	summer,	averaged), 0°E-360°E	U850
reference point using same	winter		
season and variable-			
dependent locations as			
defined in Table 2)			
Lag-latitude correlation	Boreal	Indian: 80°E-100°E	OLR, precip, U200,
analysis (Indian and W.	summer	averaged, 40°N-40°S.	U850
Pacific reference points		W. Pacific: 115°E-135°E	
using same summertime		averaged, 40°N-40°S	
and variable-dependent			
locations as defined in			
Table 2)			
Single Variable EOF	Boreal	30°N-30°S,	OLR, precip, U200,
Analysis (inc. lag-	summer,	0°-360°E	U850
correlation between	winter		
leading PCs, time spectra			
of unfiltered PCs)			

Table 2: Averaging Regions for Time Series Spectra

Region OLR Precip U850 U200	
-----------------------------	--

Boreal Winter (November-April)

Indian	10°S-5°N	10°S-5°N	1.25°S-16.25°S	3.75°N-21.25°N
	75°E-100°E	75°E-100°E	68.75°E-96.25°E	56.25°E-78.75°E
West	20°S-5°S	20°S-5°S	1.25°N-13.75°S	3.75°N-21.25°N
Pacific	160°E-185°E	160°E-185°E	163.75°E-191.25°E	123.75°E-151.25°E
Maritime	2.5°S-17.5°S	2.5°S-17.5°S		
Continent	115°E-145°E	115°E-145°E		
East				1.25°N-16.25°S
Pacific				256.25°E-278.75°E

Boreal Summer (May-October)

Indian	10°S-5°N	10°S-5°N	21.25°N-3.75°N	1.25°N-16.25°S
	75°E-100°E	75°E-100°E	68.75°E-96.25°E	43.75°E-71.25°E
Bay of	10°N-20°N	10°N-20°N		
Bengal	80°E-100°E	80°E-100°E		
West	10°N-25°N	10°N-25°N	3.75°N-21.25°N	3.75°N-21.25°N
Pacific	115°E-140°E	115°E-140°E	118.75°E-146.25°E	123.75°E-151.25°E
East			6.25°N-16.25°N	1.25°N-16.25°S
Pacific			241.25°E-266.25°E	238.75°E-266.25°E

Table 3: Level 2 Diagnostics

Diagnostic	Season	Regions	Fields
Single Variable	Boreal summer,	Equatorial (10°N-	OLR, precip, U200,
Wavenumber-	winter, all-	10°S averaged),	U850, Usfc
Frequency Spectra	season	0°E-360°E	
Wheeler and Kiladis	All-season	Equatorial (15°N-	OLR, precip, U200,
(1999) Single Variable		15°S averaged),	U850, Usfc
Wavenumber-		0°E-360°E	
Frequency Diagrams			
Cross spectra in the	All-season	Equatorial (15°N-	OLR vs. U200,
Wavenumber-		15°S averaged),	U850, Usfc
Frequency Domain (e.g.		0°E-360°E	
Hendon and Wheeler,			
2008)			
Mutivariate EOF	Boreal summer,	Equatorial (15°N-	OLR, U850, U200
analysis (inc. lag-	winter, all-	15°S averaged),	
correlation between	season	0°E-360°E	
leading PCs, coherence			
squared and phase			
between leading PCs,			
time spectra of			
unfiltered PCs)			
MJO Lifecycle	Boreal summer,	20°N-20°S,	OLR, precip,
Composites: Horizontal	winter	0°-360°E	U,V200, U,V850,
			U,Vsfc, SLP, Ψ200,
			SST, Surface LH
			and SW Flux
MJO Lifecycle	Boreal summer,	0°-360°E, 0 hPa-sfc.	U, T, q, Ω,
Composites: Vertical	winter		
	1		

Table 4: Supplemental Diagnostics

Diagnostic	Season	Regions	Fields
Mean state analysis: Horizontal	Boreal summer,	40°N-40°S, 0°-360°E	Precip, SST, U200, U850, Usfc, U200-
			U850 Shear
Mean state analysis: Vertical	Boreal summer, winter	Surface to 0 hPa.	U, T, q, Ω
Interannual Variability: $PC1^{2} + PC2^{2} \text{ from}$ multivariate EOF analysis	All-season	Equatorial (15°N-15°S averaged), 0°E-360°E	OLR, U850, U200
Interannual Variability: 91-day running mean of variance averaged over horizontal domain	All-season	10°N-10°S, 0°E- 360°E 10°N-10°S, 40°E- 180°E	OLR, U850

Figure Captions

- Figure 1. May-October mean a) NOAA Extended Reconstructed SST Version SST Version 2, b) CMAP precipitation, and c) NCEP1 850 hPa zonal wind. Contours of mean SST, plotted every 2K, are also included in each plot.
- Figure 2. Same as Figure 1, except for November-April.
- Figure 3. May-October 20-100 day a) CMAP precipitation variance and b) NCEP1 850 hPa zonal wind variance (contours). The percent variance explained by the intraseasonal band is shown in color. Contours show intraseasonal variance. Precipitation variance contours are plotted every 6 mm² day⁻², starting at 3 mm² day⁻². Zonal wind variance contours are plotted every 3 m² s⁻², starting at 6 m² s⁻².
- Figure 4. As in Figure 3, except for November-April.
- Figure 5. November-April lag-longitude diagram of 10°N-10°S averaged intraseasonal precipitation anomalies (colors) and intraseasonal 850 hPa zonal wind anomalies (contours) correlated against intraseasonal precipitation at the Indian Ocean reference point. Contours and colors are plotted every 0.1. The zero line is not shown.
- Figure 6. May-October lag-latitude diagram of 80°E-100°E averaged intraseasonal precipitation anomalies (colors) and intraseasonal 850 hPa zonal wind anomalies (contours) correlated against intraseasonal precipitation at the Indian Ocean reference point. Contours and colors are plotted every 0.1. The zero line is not shown.
- Figure 7. May-October wavenumber-frequency spectra of 10°N-10°S averaged a) CMAP precipitation and b) NCEP1 850 hPa zonal wind. Individual May-October spectra were calculated for each year, and then averaged over all years of data. Only the climatological seasonal cycle and time mean for each May-October segment were removed before

calculation of the spectra. Units for the precipitation (zonal wind) spectrum are mm² day⁻² (m² s⁻²) per frequency interval per wavenumber interval. The bandwidth is (180 d)⁻¹

Figure 8. As in Figure 7, except for November-April.

Figure 9. Coherence squared (colors) and phase lag (vectors) between NOAA AVHRR OLR and NCEP1 850 hPa zonal wind. The symmetric spectrum is shown in a), and the antisymmetric spectrum is shown in b). Spectra were computed for individual latitudes, and then averaged over 0°N-15°N. Computations are conducted using data in all seasons on 256-day segments, overlapping by 206 days. Vectors represent the phase by which wind anomalies lag OLR anomalies, increasing in the clockwise direction. A phase of 0° is represented by a vector directed upward. Dispersion curves for the (n=-1) Kelvin, n=1 equatorial Rossby (ER), n=0 eastward intertio-gravity (EIG) and mixed Rossby-gravity (MRG) modes corresponding to three equivalent depths (h=12, 25, and 50 m) in the shallow water equations are overlaid (red contours). MJO is defined as the spectral components within zonal wavenumbers 1 to 3 and having periods 30 to 80 days.

Figure 10. All-season multivariate a) first and b) second combined EOF (CEOF) modes of 20-100 day 15°S-15°N averaged NCEP1 850 hPa and 200 hPa zonal wind and AVHRR OLR. The total variance explained by each mode is shown (in parentheses at top), as is the variance of each individual field that is accounted for (at bottom). The lag correlation of the leading CEOFs is shown in c). The time series spectrum of the unfiltered PC derived by projecting CEOF1 onto the unfiltered data matrix is shown in d). Red lines in d) show the red noise spectrum and upper 90% and 95% confidence limits on this red noise spectrum.

Figure 11. Composite May-October 20-100 day CMAP precipitation (color) and NCEP1 surface wind anomalies (vectors) as a function of MJO phase. Zonal wind anomalies statistically significant at 99% based on Student's *t* test are drawn. The reference vector

in units of m s⁻¹ is shown at the bottom right. The number of days used to generate the composite for each phase is shown to the right of each panel.

Figure 12. Same as Figure 11, except for November-April.

Figure 13. Composite May-October 20-100 day OISST (color) and CMAP precipitation anomalies (contours) as a function of MJO phase. SST anomalies statistically significant at 99% based on Student's *t* test are drawn. Precipitation anomalies are plotted every 2 mm day⁻¹, starting at 1 mm day⁻¹. The number of days used to generate the composite for each phase is shown to the right of each panel.

Figure 14. Same as Figure 13, except for November-April.

Figure 1

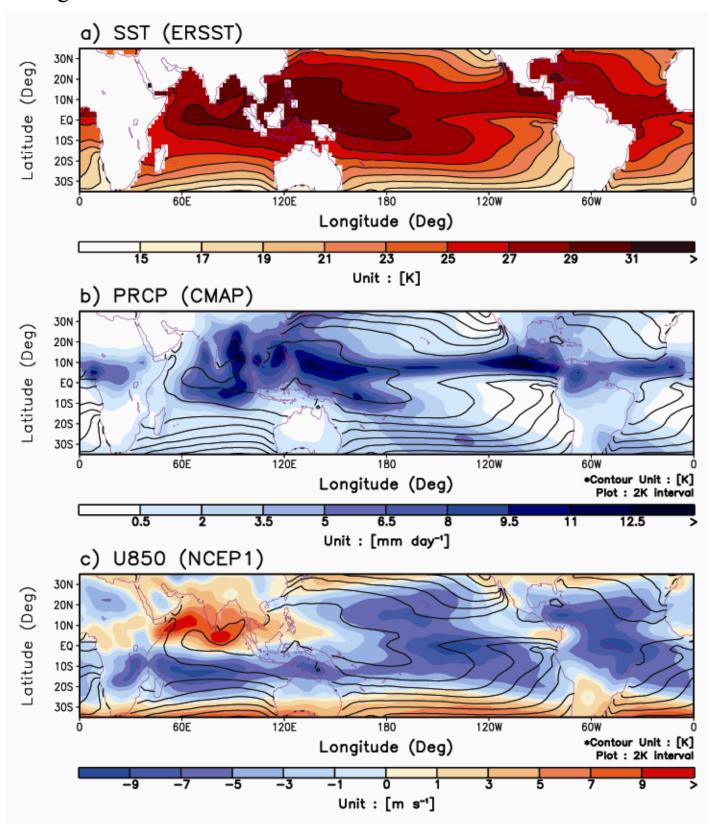


Figure 2

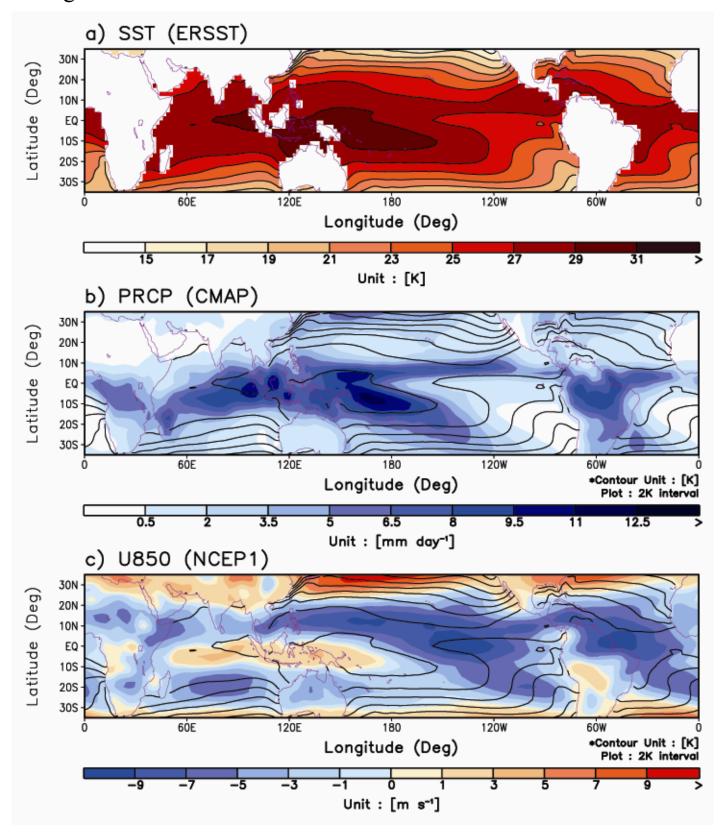


Figure3

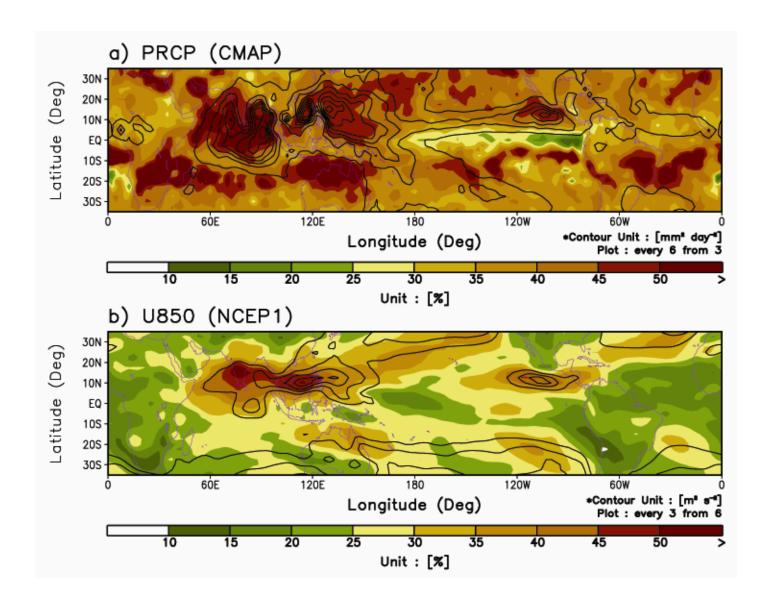


Figure 4

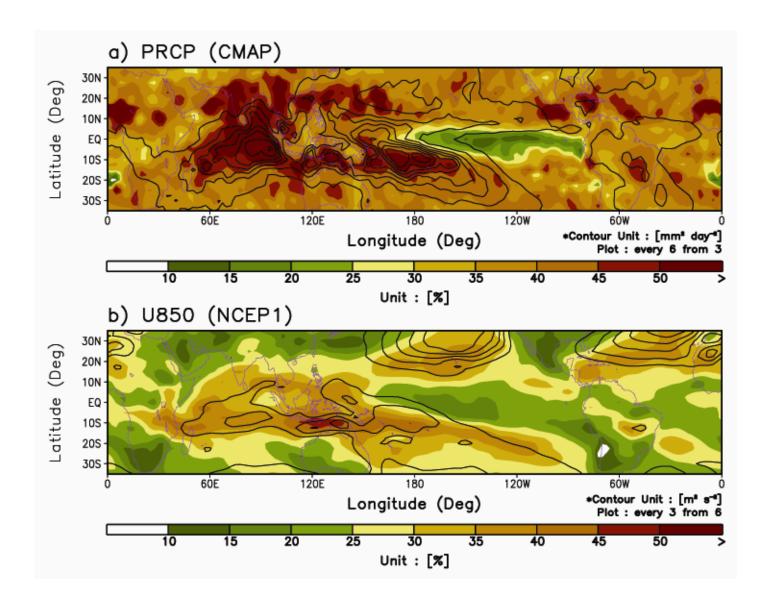


Figure 5

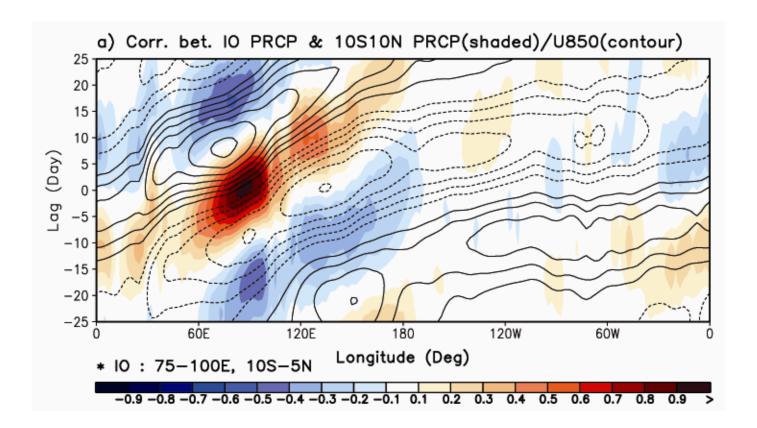


Figure 6

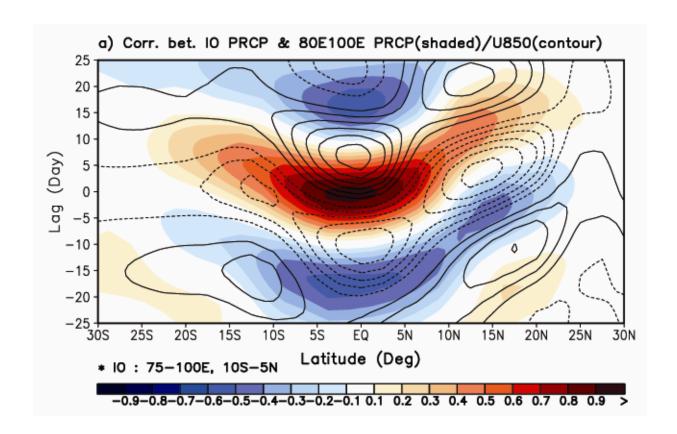


Figure 7

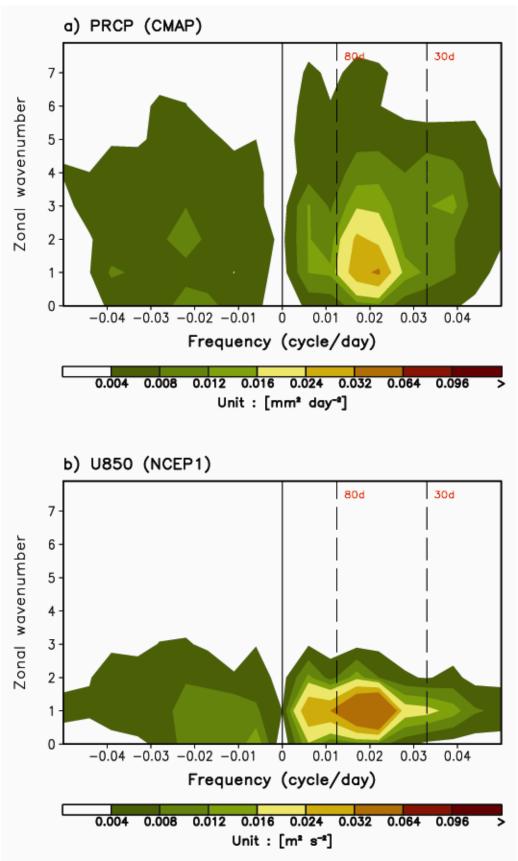


Figure 8

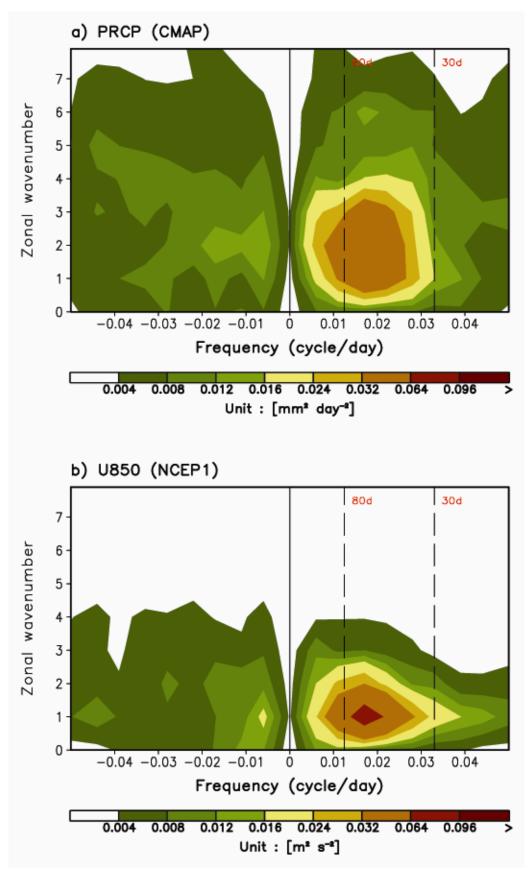


Figure 9

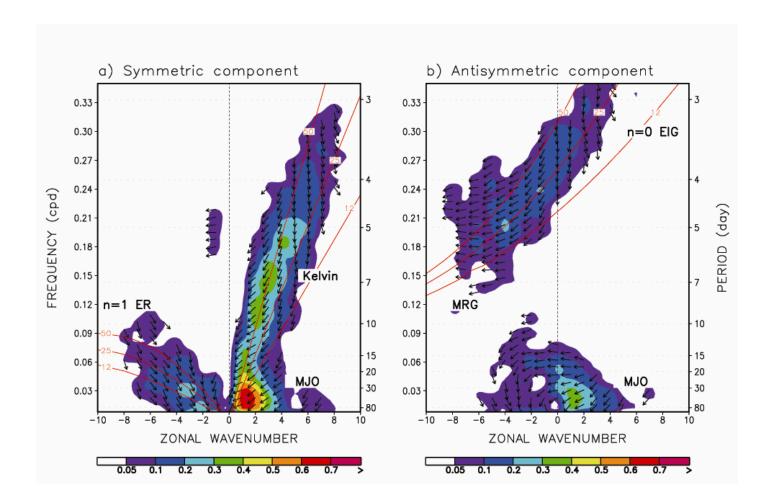


Figure 10

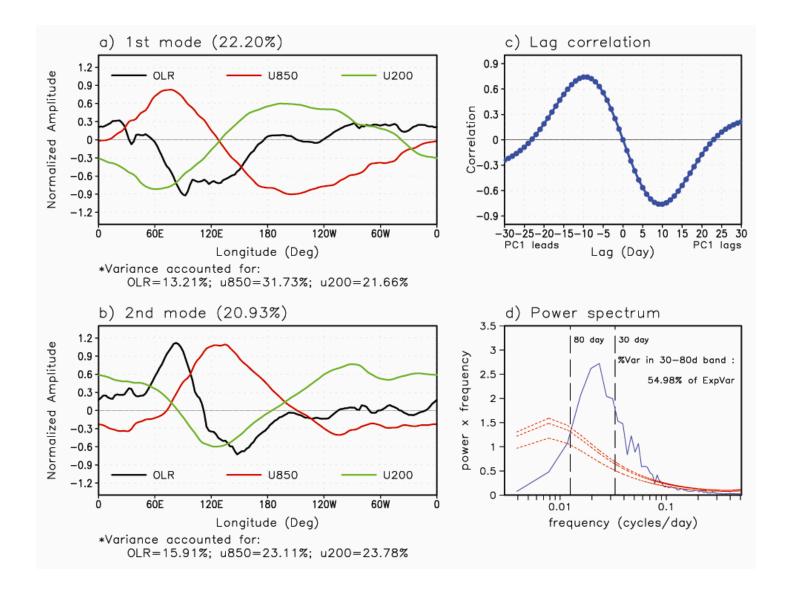


Figure 11

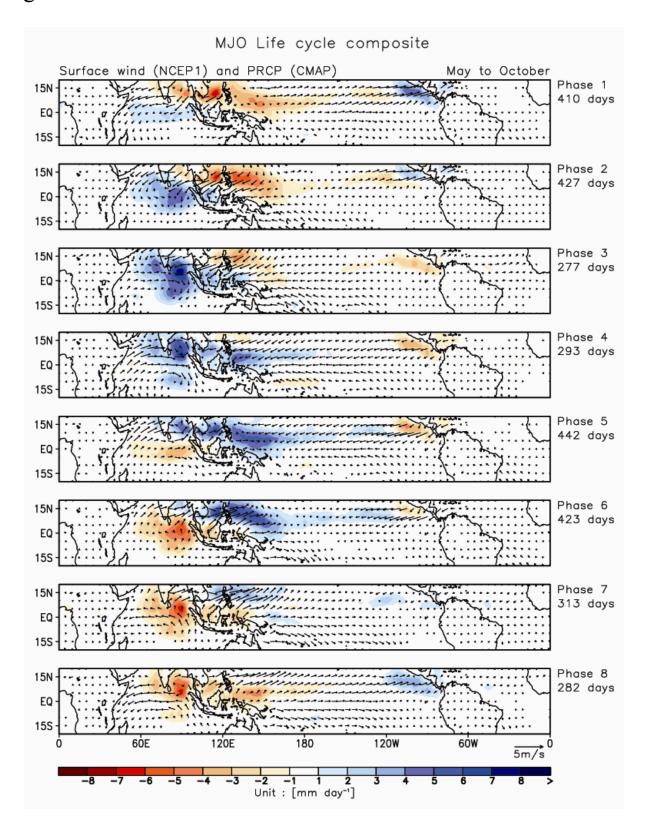


Figure 11 (option)

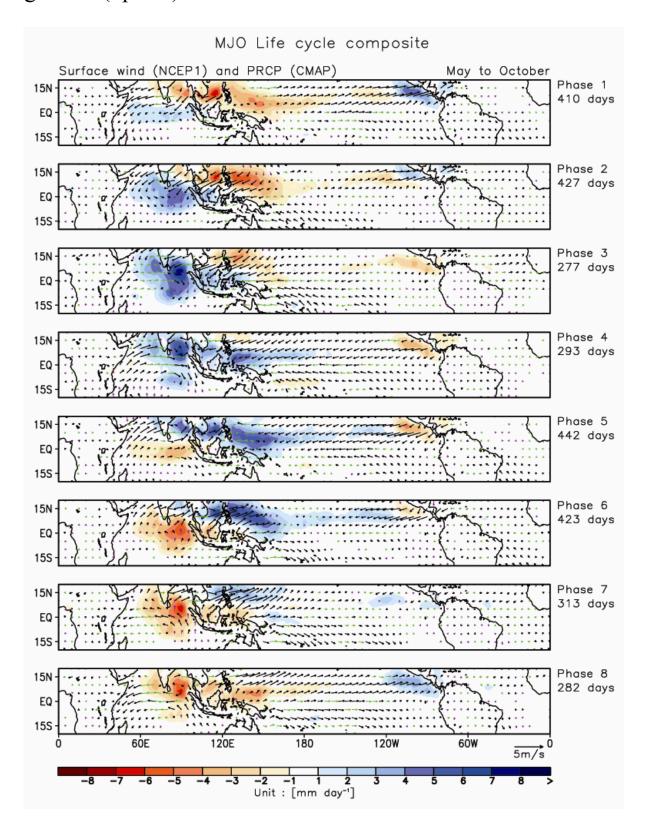


Figure 12

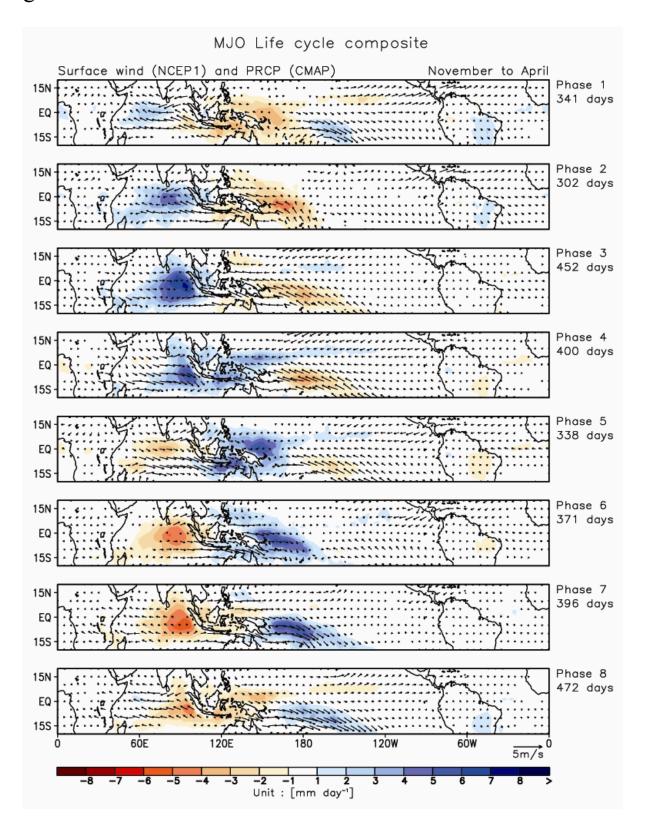


Figure 12 (option)

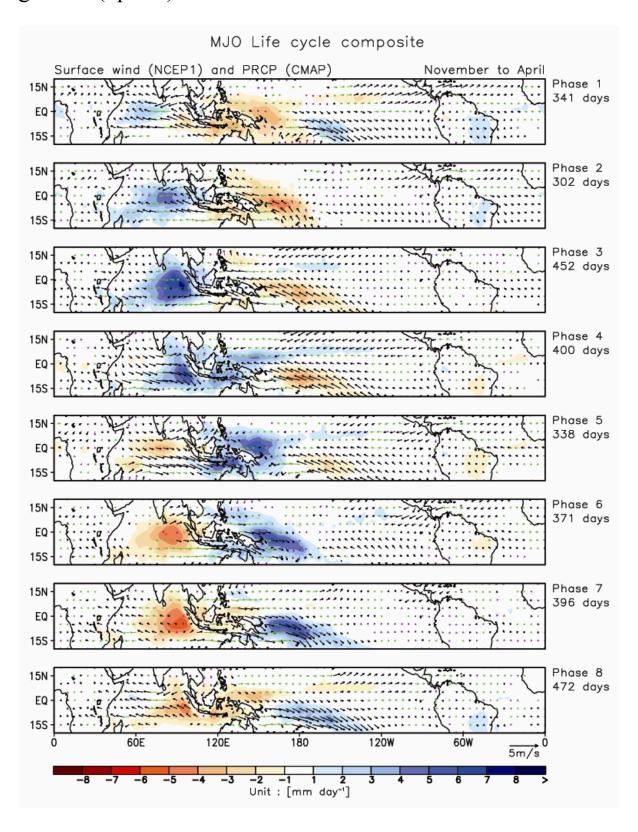


Figure 13

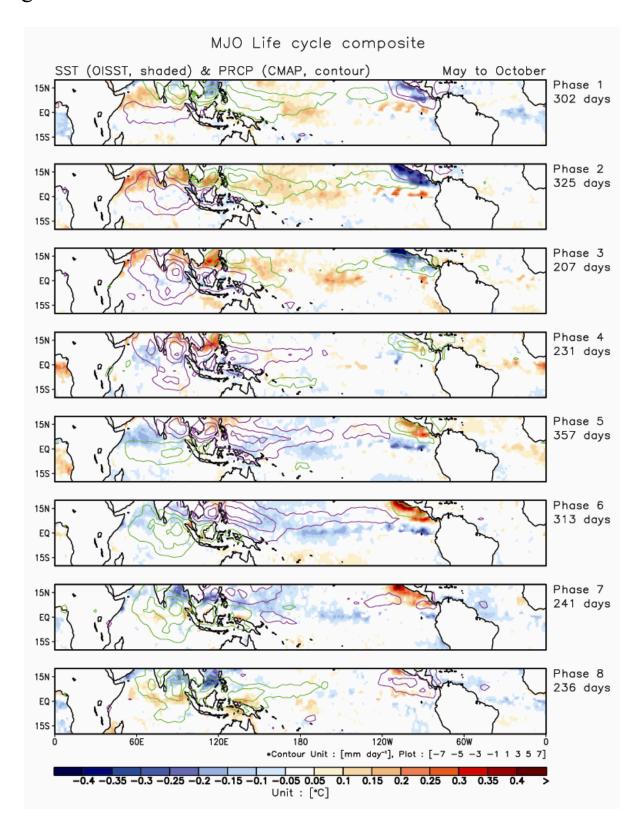


Figure 14

