



M. Flom Associates, Inc. - Global Compliance Center
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

T R A N S M I T T E R C E R T I F I C A T I O N

of

FCC ID: LJPNSM-9

S/N of unit tested: 001004/10/053154/1

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part(s) 22, 24, Confidentiality

DATE OF REPORT: March 28, 2002

ON THE BEHALF OF THE APPLICANT:

Nokia Corporation

AT THE REQUEST OF:

P.O. Kare Oksanen, March 25th, 2002

Nokia Corporation
Elektroniikkatie 10
Fin-90570
Oulu, Finland

Attention of:

Kare Oksanen, R&D Type Approvals
kare.oksanen@nokia.com
011 358 7180 08000; FAX: 011 358 7180 47222

SUPERVISED BY:

A handwritten signature in black ink that reads 'Morton Flom P. Eng.' The signature is written in a cursive, flowing style.

Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.


Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

RULE	DESCRIPTION	PAGE
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	General Information	6
	Standard Test Conditions and Engineering Practices	7
2.1046(a)	Carrier Output Power (Conducted)	8
2.1046(a)	ERP Carrier Power (Radiated)	10
2.1049(c)(1), 22		
	Emission Masks (Occupied Bandwidth)	11
2.1051, 2.1049(c), 24, 24.238(b)		
	Transmitter Conducted Measurements	20
2.1051, 22.917	Spurious Emissions at Antenna Terminals	27
2.1053(a)	Field Strength of Spurious Radiation	30
2.1055(a)(1)	Frequency Stability (Temperature Variation)	34
2.1055(b)(1)	Frequency Stability (Voltage Variation)	37
2.202(g)	Necessary Bandwidth and Emission Bandwidth	38

PAGE NO. 1 of 38.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

- a) TEST REPORT
- b) Laboratory: M. Flom Associates, Inc.
 (FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
 (Canada: IC 2044) Chandler, AZ 85225
- c) Report Number: d0230054
- d) Client: Nokia Corporation
 Elekroniikkatie 10
 Fin-90570
 Oulu, Finland
- e) Identification: FCC ID: LJPNSM-9
 Description: Dual Band, Dual Mode Cellular Telephone
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: March 28, 2002
 EUT Received: March 25, 2002
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised by:
- 
 Morton Flom, P. Eng.
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

ACCESSORIES USED DURING TESTING:

Type	Model	s/n	Specimen ID
EUT	6590	001004/10/053154/1	s00335
EUT	6590	001004/10/053150/9	s00344
RAPID CHARGER	ACP-12U	N/A	s01275
STANDARD CHARGER	ACP-7U	N/A	s01248
RAPID CHARGER	ACP-8U	N/A	s01250
RAPID CHARGER	ACP-9U	N/A	s01249
HEADSET	HDD-1	N/A	s00338
HEADSET	HDE-2	N/A	s00339
HEADSET	HDB-5	N/A	s00340
HEADSET	HDB-5	N/A	s00341
DESKTOP STAND	DCD-1	N/A	S00337
Li-ion BATTERY	BLB-2	N/A	s00336

PAGE NO. 2 of 38.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION

IN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

22, 24, Confidentiality

Sub-part 2.1033

(c)(1): NAME AND ADDRESS OF APPLICANT:

Nokia Corporation
Elektroniikkatie 10
Fin-90570
Oulu, Finland

MANUFACTURER:

Nokia TMC., Ltd.
Yangduck-Dong 973-6
Hwe won-Ku, Masan. Korea

(c)(2): FCC ID: LJPNSM-9

(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 256KGXW

(c)(5): FREQUENCY RANGE, MHz: 824.2 to 848.8 GSM 850
1850.2 to 1909.8 GSM 1900

(c)(6): POWER RATING, Watts: 2 GSM 850
1 GSM 1900
 Switchable x Variable N/A

FCC GRANT NOTE: BC - The output power is continuously variable from the value listed in this entry to 5%-10% of the value listed.

(c)(7): MAXIMUM POWER RATING, Watts: 1, 2

PAGE NO. 3 of 38.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE, INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
 COLLECTOR VOLTAGE, Vdc = per manual
 SUPPLY VOLTAGE, Vdc = 3.9

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS


(c)(13): DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
 x N/A

(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Association (A2LA) as shown in the scope below.



THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION

ACCREDITED LABORATORY

A2LA has accredited


M. FLOM ASSOCIATES, INC.
Chandler, AZ

for technical competence in the field of

Electrical (EMC) Testing


The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 - 1999 "General Requirements for the Competence of Testing and Calibration Laboratories" and any additional program requirements in the identified field of testing. Testing and calibration laboratories that comply with this International Standard also operate in accordance with ISO 9001 or ISO 9002.

Presented this 2nd day of March, 2001.



Peter Abney
President
For the Accreditation Council
Certificate Number 1008.01
Valid to December 31, 2002

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025-1999


M. FLOM ASSOCIATES, INC.
Electronic Testing Laboratory
3356 North San Marcos Place, Suite 107
Chandler, AZ 85223
Morton Flom Phone: 480 926 3100

ELECTRICAL (EMC)

Valid to: December 31, 2002 Certificate Number: 1008-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electromagnetic compatibility tests:

Tests	Standard(s)
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1; CNS 13438
Harmonic Currents	EN 61000-3-2
Fluctuation and Flicker	EN 61000-3-3
RF Immunity	EN: 50082-1, 50082-2 (both excluding "Power Frequency Magnetic Field Immunity" and "Voltage Dips, Short Interruptions, and Line Voltage Variations"); AS/NZS 4251.1
Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3
EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4
Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5
47 CFR (FCC)	2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97



5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8373 • Phone: 301-644 3248 • Fax: 301-662 2974

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

PAGE NO.

5 of 38.

Sub-part
2.1033(c)(14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- 21 - Domestic Public Fixed Radio Services
- 22 - Public Mobile Services
- 22 Subpart H - Cellular Radiotelephone Service
- 22.901(d) - Alternative technologies and auxiliary services
- 23 - International Fixed Public Radiocommunication services
- 24 - Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- 80 - Stations in the Maritime Services
- 80 Subpart E - General Technical Standards
- 80 Subpart F - Equipment Authorization for Compulsory Ships
- 80 Subpart K - Private Coast Stations and Marine Utility Stations
- 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- 80 Subpart X - Voluntary Radio Installations
- 87 - Aviation Services
- 90 - Private Land Mobile Radio Services
- 94 - Private Operational-Fixed Microwave Service
- 95 Subpart A - General Mobile Radio Service (GMRS)
- 95 Subpart C - Radio Control (R/C) Radio Service
- 95 Subpart D - Citizens Band (CB) Radio Service
- 95 Subpart E - Family Radio Service
- 95 Subpart F - Interactive Video and Data Service (IVDS)
- 97 - Amateur Radio Service
- 101 - Fixed Microwave Services

GENERAL INFORMATION

1. Prior to testing, the deviation for audio modulation and each of the respective SAT + ST tones were set as close as possible to the required limit.
2. Except for audio modulation, which was applied externally, Wideband Data SAT, ST and all other tones and operational modes were provided by a test control unit incorporating appropriate software. Worst case repetition rate for Wideband Data was 10 kb/s.
3. Spurious radiation was measured at three (3) meters.
4. The two cellular frequency bands are available to the user automatically. Please refer to the manual contained in the documentation.
5. The normal modes of modulation are:
 - (a) VOICE
 - (b) WIDEBAND DATA
 - (c) SAT
 - (d) ST
 - (e) SAT + VOICE
 - (f) SAT + DTMF
 - (g) CDMA
 - (h) TDMA
 - (i) NAMPS VOICE
 - (j) NAMPS DSAT
 - (k) NAMPS ST
 - (l) NAMPS VOICE + DSAT
 - (m) GSM

PAGE NO.

7 of 38.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 8 of 38.
NAME OF TEST: Carrier Output Power (Conducted)
SPECIFICATION: 47 CFR 2.1046(a)
TEST EQUIPMENT: As per attached page


MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS


NOMINAL, MHz	CHANNEL	dBm		R. F. POWER, WATTS	
		Lo	Hi	Lo	Hi
GSM 850 MODE:					
824.2	128	3.6	32.7	2.28 mW	1.85
836.0	187	4.6	32.6	2.66 mW	1.81
848.8	251	3.8	32.4	2.39 mW	1.73
GSM 1900:					
1850.20	512	0.3	29.9	1.07 mW	0.968
1880.00	661	0.6	29.7	1.14 mW	0.941
1909.80	810	0.9	29.6	1.22 mW	0.903

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
 TEST 2: FREQUENCY STABILITY

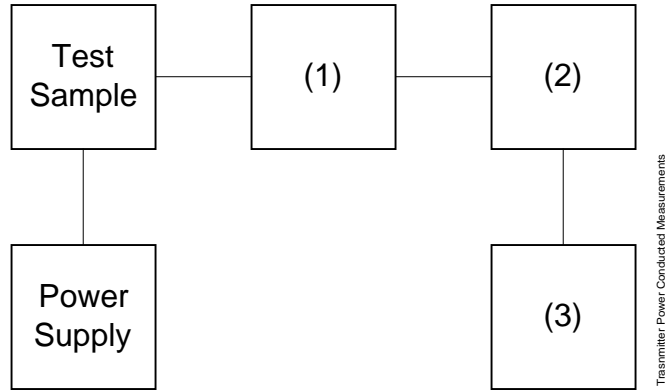

Asset	Description (as applicable)	s/n
(1)	<u>COAXIAL ATTENUATOR</u>	
i00122	Narda 766-10	7802
i00123	Narda 766-10	7802A
i00069	Bird 8329 (30 dB)	1006
i00113	Sierra 661A-3D	1059
(2)	<u>POWER METERS</u>	
i00014	HP 435A	1733A05836
i00039	HP 436A	2709A26776
i00020	HP 8901A POWER MODE	2105A01087
(3)	<u>FREQUENCY COUNTER</u>	
i00042	HP 5383A	1628A00959
i00019	HP 5334B	2704A00347
i00020	HP 8901A FREQUENCY MODE	2105A01087


PAGE NO. 10 of 38.

NAME OF TEST: Radiated Power Output (Substitution Method)

Definition: The average radiated power of device is the equivalent power required, when delivered to a substitution antenna, to produce at a distant point the same average received power as produced by the licensed device.

Method of Measurement:

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

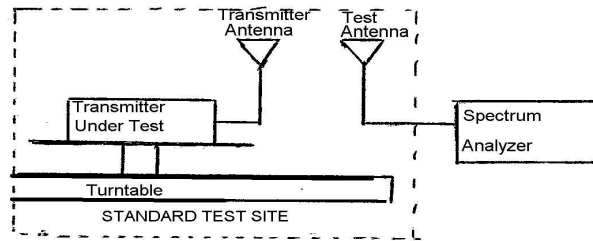

b) Raise and lower the test antenna from 1m to 4m and rotate turntable from 0° to 360°. Record the highest received signal in dB as E_T.

c) Replace the transmitter under test with a substitution antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power level using the same modulation as with the transmitter. Raise and lower the test antenna like in step b) and record the highest received signal in dB as E_S.

d) Calculate radiated power as following:

$$\text{Radiated power} = \text{Level} + E_T - E_S + \text{Gain}_{\text{Ant}}$$

E_T Signal level received from transmitter
 E_S Signal level received from substitution antenna

	Freq MHz	Level dBm	Gain _{Ant}	E _T - E _S dB	Power dBm	Power Watts
GSM-850	824.2	4.4	0dBd	21.0	25.4 ERP	0.347 ERP
	836.4	4.3	0dBd	23.9	28.2 ERP	0.661 ERP
	848.8	4.1	0dBd	25.0	29.1 ERP	0.813 ERP
GSM-1900	1850.2	0.4	-3.25dBi	34.3	31.5 EIRP	1.396 EIRP
	1880.0	0.0	-3.31dBi	32.8	29.5 EIRP	0.889 EIRP
	1909.8	-0.2	-3.27dBi	34.2	30.7 EIRP	1.183 EIRP

Description	s/n
<u>TRANSDUCER</u>	
I00142 Ailtech DM-105A-T3	82450-2
Seibersdorf PBA10200 precision biconical	327/00

PAGE NO. 11 of 38.
NAME OF TEST: Emission Masks (Occupied Bandwidth)
SPECIFICATION: 47 CFR 2.1049(c)(1), 22
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for ± 2.5 kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 12 of 38.

MEASUREMENT SUMMARY: Emission Masks (Occupied Bandwidth)


MODULATION	MEASURED DEVIATION ±kHz (HP 8901A)	LIMIT ±kHz	B/W @-26 dB PLOTS, kHz
GSM 850	N/A	N/A	243
GSM 1900	N/A	N/A	243

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 13 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0230256: 2002-Mar-26 Tue 14:01:00
STATE: 1:Low Power

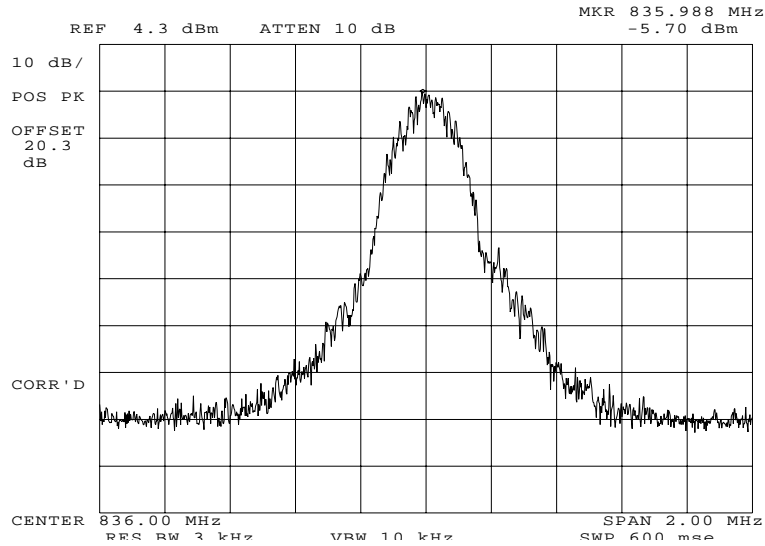


POWER: LOW
MODULATION: GSM CELLULAR BAND

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 14 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0230255: 2002-Mar-26 Tue 13:59:00
STATE: 2:High Power

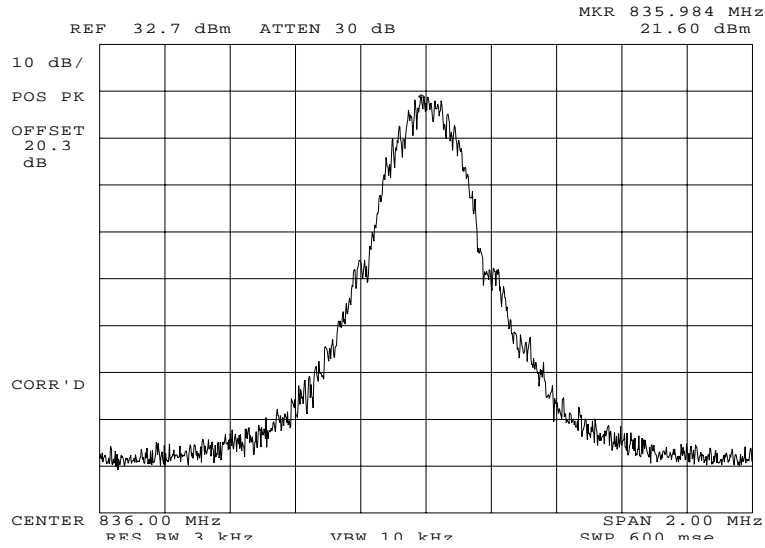


POWER: HIGH
MODULATION: GSM CELLULAR BAND

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 15 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0230257: 2002-Mar-26 Tue 14:22:00
STATE: 2:High Power

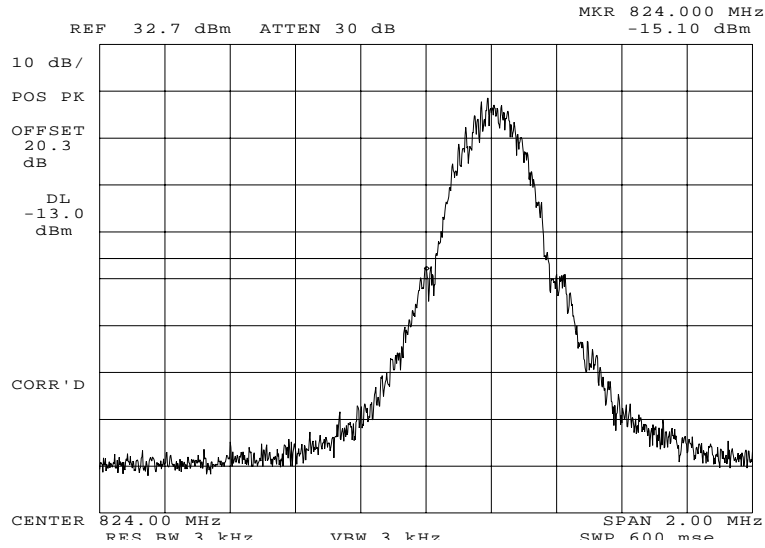


POWER: HIGH
 MODULATION: GSM CELLULAR BAND
 LOWER BANDEDGE CH. 128

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 16 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0230258: 2002-Mar-26 Tue 14:25:00
STATE: 2:High Power

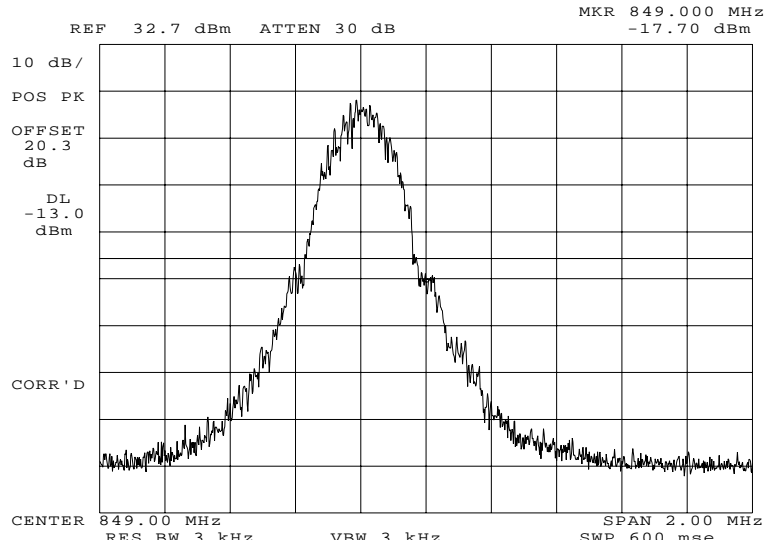


POWER:	HIGH
MODULATION:	GSM CELLULAR BAND UPPER BANDEDGE CH. 251

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 17 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0230259: 2002-Mar-26 Tue 14:26:00
STATE: 2:High Power

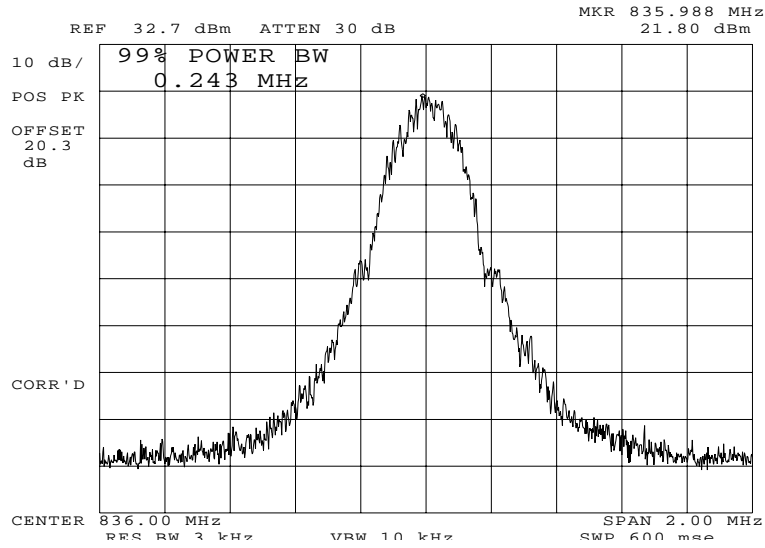


POWER:	HIGH
MODULATION:	GSM CELLULAR BAND
	99 % POWER BANDWIDTH

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 18 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0230291: 2002-Mar-26 Tue 16:00:00
STATE: 1:Low Power

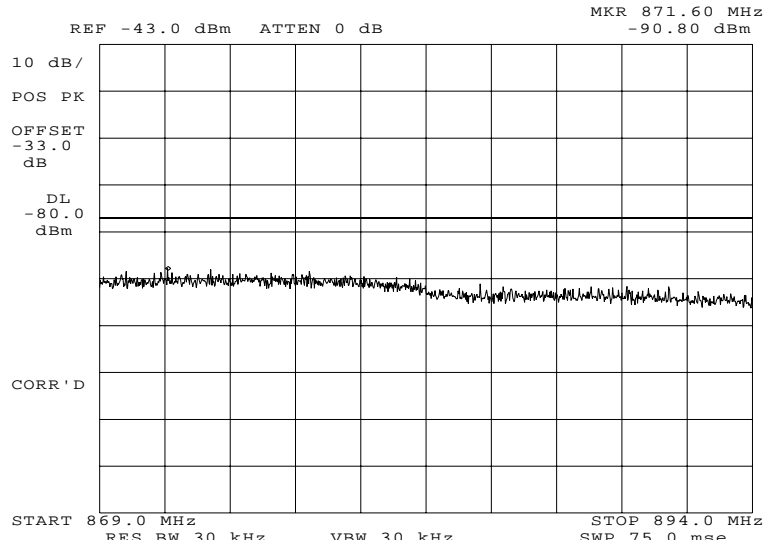


POWER:	LOW
MODULATION:	GSM CELLULAR BAND TX SPURS IN RX CRITICAL BAND

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 19 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0230290: 2002-Mar-26 Tue 15:54:00
STATE: 2:High Power

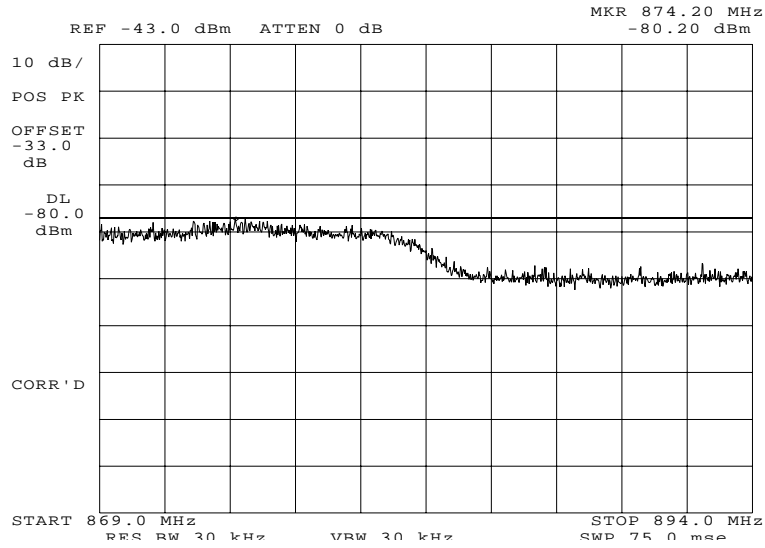

POWER:	HIGH
MODULATION:	GSM CELLULAR BAND TX SPURS IN RX CRITICAL BAND

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 20 of 38.
NAME OF TEST: Transmitter Conducted Measurements
SPECIFICATION: 47 CFR 2.1051: Unwanted (spurious) Emissions
2.1049(c), 24.238(b): Occupied Bandwidth
24: Emissions at Band Edges
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page with the Spectrum Analyzer connected.
2. The low and high channels for all RF powers within the designated frequency block(s) were measured.
3. MEASUREMENT RESULTS: ATTACHED

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
 TEST B. OUT-OF-BAND SPURIOUS

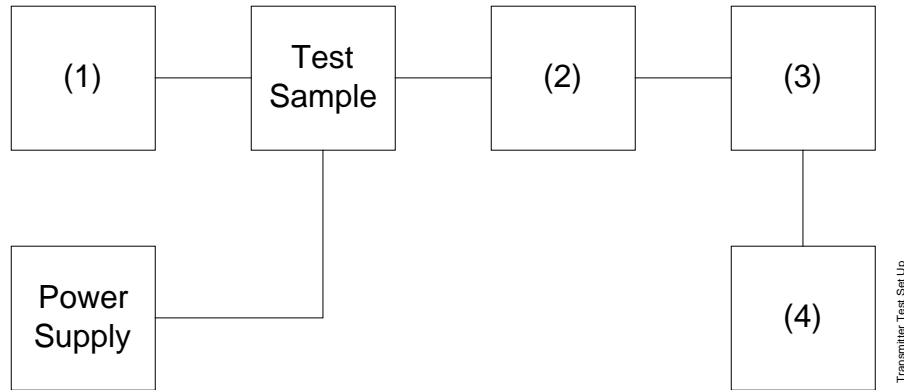

Asset Description
 (as applicable)

s/n

(1) AUDIO OSCILLATOR/GENERATOR

i00010	HP 204D	1105A04683
i00017	HP 8903A	2216A01753
i00012	HP 3312A	1432A11250

(2) COAXIAL ATTENUATOR

i00122	Narda 766-10	7802
i00123	Narda 766-10	7802A
i00069	Bird 8329 (30 dB)	1006
i00113	Sierra 661A-3D	1059

(3) FILTERS; NOTCH, HP, LP, BP


i00126	Eagle TNF-1	100-250
i00125	Eagle TNF-1	50-60
i00124	Eagle TNF-1	250-850

(4) SPECTRUM ANALYZER

i00048	HP 8566B	2511A01467
i00029	HP 8563E	3213A00104

PAGE NO. 22 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0230272: 2002-Mar-26 Tue 15:21:00
STATE: 1:Low Power

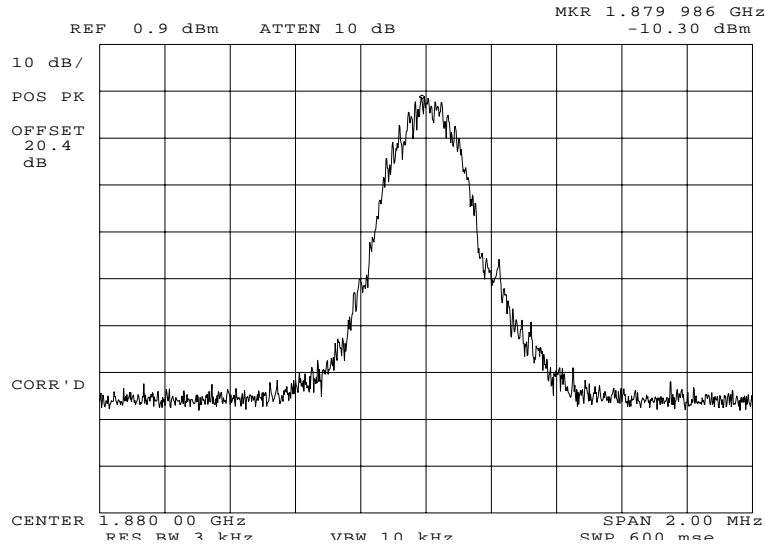


POWER: LOW
MODULATION: GSM PCS BAND

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.


PAGE NO. 23 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0230271: 2002-Mar-26 Tue 15:18:00
STATE: 2:High Power

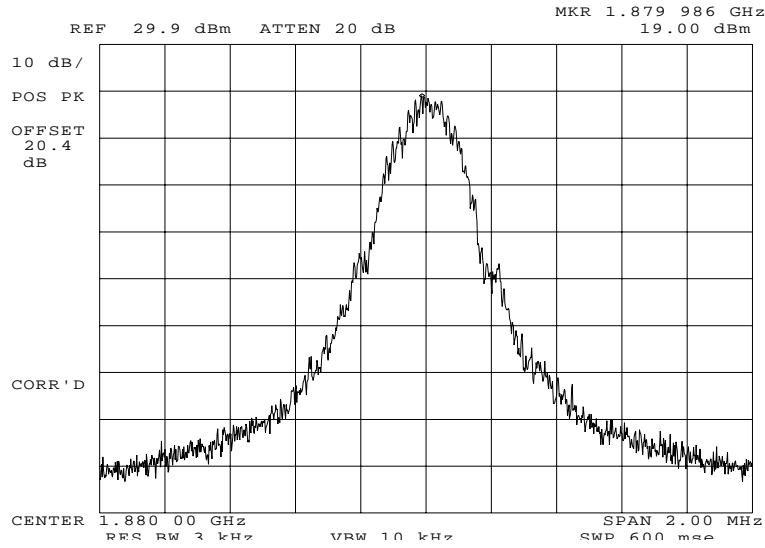


POWER: HIGH
MODULATION: GSM PCS BAND

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 24 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0230273: 2002-Mar-26 Tue 15:24:00
STATE: 2:High Power

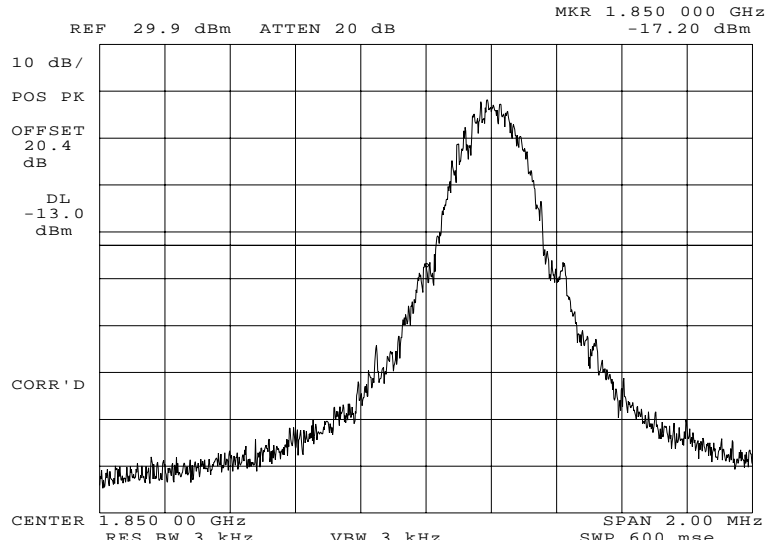


POWER: HIGH
MODULATION: GSM PCS BAND
LOWER BANDEDGE CH. 512

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 25 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0230274: 2002-Mar-26 Tue 15:27:00
STATE: 2:High Power

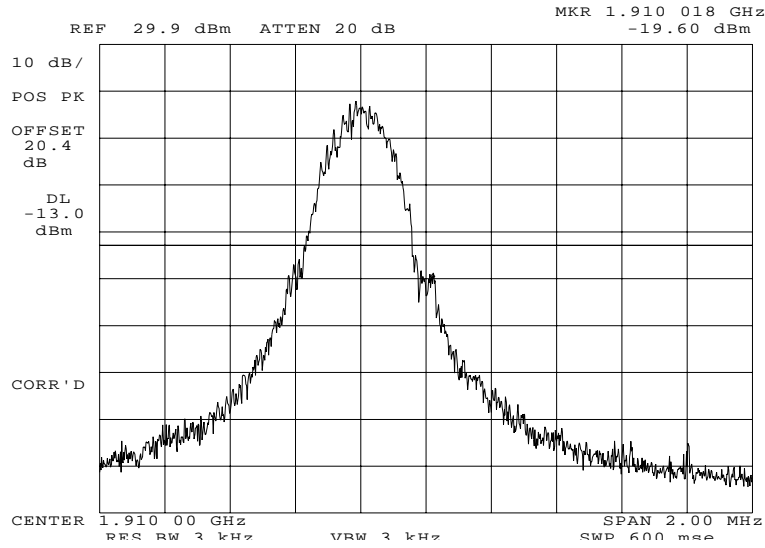


POWER: HIGH
 MODULATION: GSM PCS BAND
 UPPER BANDEDGE CH. 810

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 26 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0230275: 2002-Mar-26 Tue 15:28:00
STATE: 2:High Power

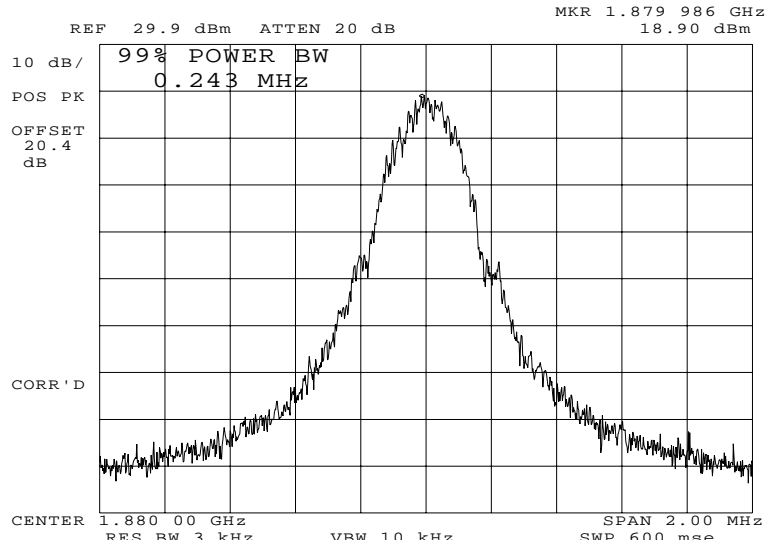

POWER: HIGH
 MODULATION: GSM PCS BAND
 99 % POWER BANDWIDTH

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 27 of 38.
NAME OF TEST: Spurious Emissions at Antenna Terminals
SPECIFICATION: 47 CFR 2.1051, 22.917
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT was connected to a coaxial attenuator and then to a Spectrum Analyzer.
2. A notch filter was introduced to reduce or eliminate spurious emission which could be generated internally in the spectrum analyzer.
3. Measurements were made over the range from 45 kHz to 10 GHz for the worst case modulation so both the highest and lowest R.F. power settings.
4. All other emissions were 20 dB or more below the limit.
5. Spectrum analyzer bandwidth was set to section 22.917(h) as applicable.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

28 of 38.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g0230264: 2002-Mar-26 Tue 14:57:00
 STATE: 1:Low Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
824.200000	1648.385000	-52.2	-56.5	-39.2
836.000000	1672.134900	-54.4	-58.7	-41.4
848.800000	1697.593500	-55.1	-59.4	-42.1
824.200000	2472.833300	-60.5	-64.8	-47.5
836.000000	2508.219800	-65.2	-69.5	-52.2
848.800000	2546.272100	-65.8	-70.1	-52.8
824.200000	3296.879400	-66.2	-70.5	-53.2
836.000000	3343.894600	-66	-70.3	-53
848.800000	3395.344900	-66.5	-70.8	-53.5
824.200000	4120.820600	-65.4	-69.7	-52.4
836.000000	4179.761700	-65.7	-70	-52.7
848.800000	4244.002500	-65.3	-69.6	-52.3
824.200000	4945.441300	-64	-68.3	-51
836.000000	5015.778700	-66.3	-70.6	-53.3
848.800000	5092.957400	-66	-70.3	-53
824.200000	5769.303600	-66.3	-70.6	-53.3
836.000000	5852.218400	-60.2	-64.5	-47.2
848.800000	5941.837900	-61	-65.3	-48
824.200000	6593.364100	-60.3	-64.6	-47.3
836.000000	6687.954700	-59.5	-63.8	-46.5
848.800000	6790.614000	-59.8	-64.1	-46.8
824.200000	7417.901500	-60.3	-64.6	-47.3
836.000000	7523.974600	-59.8	-64.1	-46.8
848.800000	7639.446800	-60.7	-65	-47.7
824.200000	8241.777600	-60.3	-64.6	-47.3
836.000000	8359.767100	-60.6	-64.9	-47.6
848.800000	8487.888500	-61.1	-65.4	-48.1
824.200000	9066.408000	-59.5	-63.8	-46.5
836.000000	9195.943300	-59.8	-64.1	-46.8
848.800000	9336.719400	-60.3	-64.6	-47.3
824.200000	9890.531400	-61	-65.3	-48
836.000000	10032.019900	-60.4	-64.7	-47.4
848.800000	10185.448700	-60.2	-64.5	-47.2
824.200000	10714.577100	-60	-64.3	-47
836.000000	10868.121900	-59.8	-64.1	-46.8
848.800000	11034.206400	-59.7	-64	-46.7
824.200000	11538.775600	-59.3	-63.6	-46.3
836.000000	11703.829300	-60.3	-64.6	-47.3
848.800000	11883.013400	-60.2	-64.5	-47.2
824.200000	12363.167700	-59.4	-63.7	-46.4
836.000000	12539.761200	-55.8	-60.1	-42.8
848.800000	12731.872600	-54.8	-59.1	-41.8



PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO.

29 of 38.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g0230263: 2002-Mar-26 Tue 14:50:00
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
824.200000	1648.395500	-34.1	-66.8	-21.1
836.000000	1671.872600	-38.9	-71.6	-25.9
848.800000	1697.630500	-39.5	-72.2	-26.5
824.200000	2472.775400	-39	-71.7	-26
836.000000	2507.933100	-44.8	-77.5	-31.8
848.800000	2546.390500	-44.6	-77.3	-31.6
824.200000	3296.705100	-44.8	-77.5	-31.8
836.000000	3344.188300	-45.4	-78.1	-32.4
848.800000	3395.323400	-45.8	-78.5	-32.8
824.200000	4120.874600	-46	-78.7	-33
836.000000	4180.129900	-44.9	-77.6	-31.9
848.800000	4244.080400	-45.6	-78.3	-32.6
824.200000	4945.266400	-45.5	-78.2	-32.5
836.000000	5016.213800	-45.5	-78.2	-32.5
848.800000	5092.688600	-44.6	-77.3	-31.6
824.200000	5769.420500	-44.6	-77.3	-31.6
836.000000	5851.899500	-40.8	-73.5	-27.8
848.800000	5941.583100	-38.8	-71.5	-25.8
824.200000	6593.664200	-39.8	-72.5	-26.8
836.000000	6687.953200	-40.3	-73	-27.3
848.800000	6790.638800	-40.5	-73.2	-27.5
824.200000	7417.555700	-39.5	-72.2	-26.5
836.000000	7524.050800	-40.2	-72.9	-27.2
848.800000	7639.082600	-39.6	-72.3	-26.6
824.200000	8242.090100	-40.3	-73	-27.3
836.000000	8360.248800	-40.7	-73.4	-27.7
848.800000	8487.895500	-39.6	-72.3	-26.6
824.200000	9066.373200	-40.2	-72.9	-27.2
836.000000	9196.219400	-39.9	-72.6	-26.9
848.800000	9336.829900	-40.1	-72.8	-27.1
824.200000	9890.640800	-39.6	-72.3	-26.6
836.000000	10032.191600	-39.9	-72.6	-26.9
848.800000	10185.774200	-39.8	-72.5	-26.8
824.200000	10714.567200	-40.2	-72.9	-27.2
836.000000	10867.777100	-39.7	-72.4	-26.7
848.800000	11034.163100	-40.6	-73.3	-27.6
824.200000	11538.659700	-40.1	-72.8	-27.1
836.000000	11703.825800	-40.1	-72.8	-27.1
848.800000	11883.364200	-38.7	-71.4	-25.7
824.200000	12362.896000	-39.8	-72.5	-26.8
836.000000	12540.220300	-35	-67.7	-22
848.800000	12732.110400	-33.4	-66.1	-20.4



PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 30 of 38.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement


- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
- 1) Resolution Bandwidth 10 kHz (<1 GHz), 1 MHz (> 1GHz).
 - 2) Video Bandwidth ≥ 3 times Resolution Bandwidth, or 30 kHz (22.917)
 - 3) Sweep Speed ≤ 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

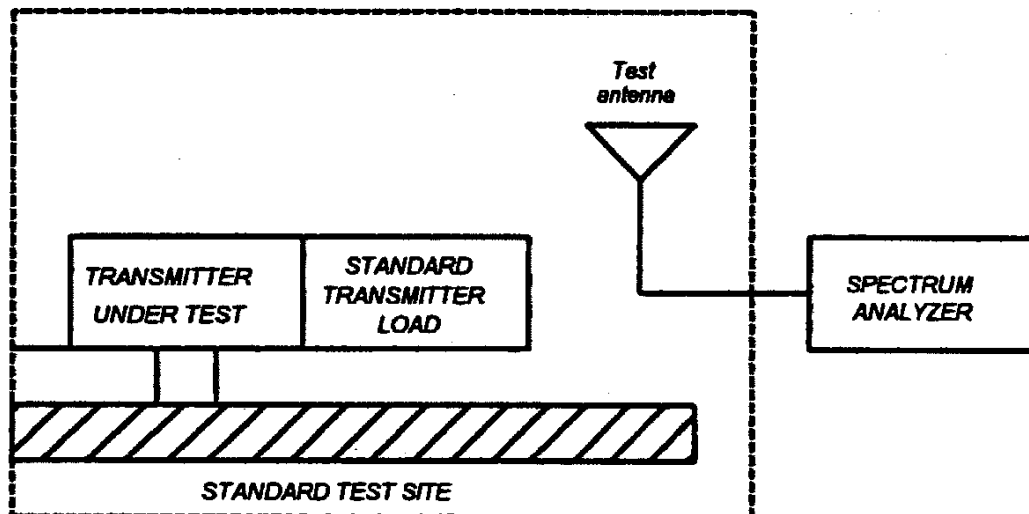

PAGE NO. 31 of 38.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

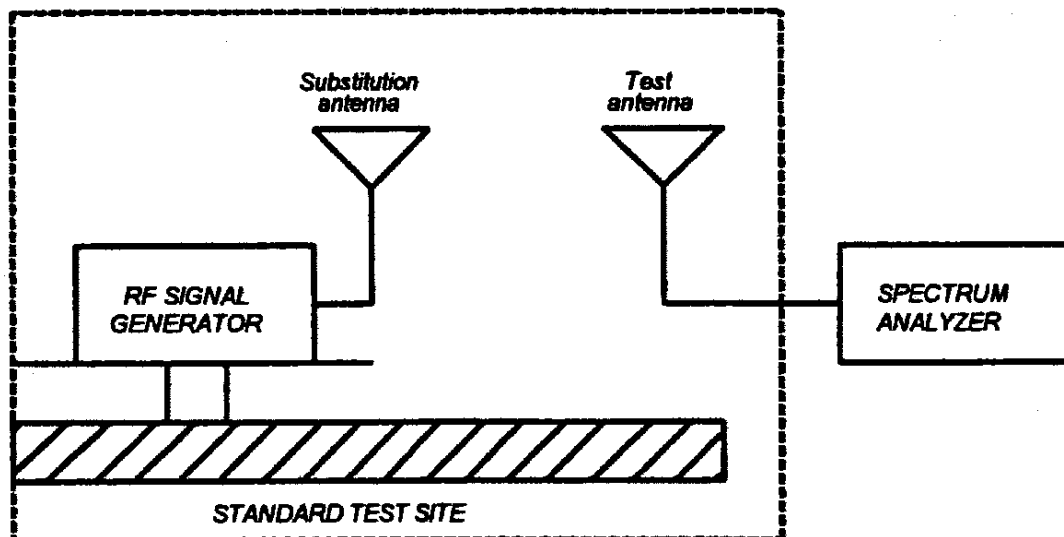

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO. 32 of 38.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =
 $10 \log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step l)}$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset	Description	s/n	Cycle	Last Cal
(as applicable)				
<u>TRANSDUCER</u>				
i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-01
i00065	EMCO 3301-B Active Monopole	2635	12 mo.	Sep-01
i00089	Apral 2001 200MHz-1GHz	001500	12 mo.	Sep-01
i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-01
<u>AMPLIFIER</u>				
i00028	HP 8449A	2749A00121	12 mo.	Mar-02
<u>SPECTRUM ANALYZER</u>				
i00029	HP 8563E	3213A00104	12 mo.	Jan-02
i00033	HP 85462A	3625A00357	12 mo.	Jan-02
i00048	HP 8566B	2511AD1467	6 mo.	Jan-02

Per ANSI C63.4-1992/2000 Draft, 10.1.4

PAGE NO. 33 of 38.

NAME OF TEST: Field Strength of Spurious Radiation

GSM 850 g0230252: 2002-Mar-25 Mon 13:24:00

STATE: 2:High Power


FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	ERP, dBm	MARGIN, dB
836.400000	1672.675000	47.37	-0.97	-51	-35.8
836.400000	2509.186667	33.7	2.36	-61.3	-46.1
836.400000	3345.593184	35.53	4.82	-57	-41.9
836.400000	4181.993184	32.37	6.83	-58.2	-43
836.400000	5018.393184	30.2	8.56	-58.6	-43.4
836.400000	5854.793184	29.7	10.25	-57.4	-42.3
836.400000	6691.164100	34.87	12.9	-49.6	-34.4
836.400000	7527.589100	29.53	13.72	-54.1	-39
836.400000	8363.989100	29.03	13.68	-54.7	-39.5

GSM 1900 g0230251: 2002-Mar-25 Mon 11:48:00

STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	EIRP, dBm	MARGIN, dB
1880.000000	3759.960751	46.67	5.85	-42.7	-29.7
1880.000000	5639.928418	41.03	9.83	-44.4	-31.3
1880.000000	7520.303418	43.87	13.72	-37.6	-24.6
1880.000000	9399.978418	40.37	16.23	-38.6	-25.6
1880.000000	11279.978418	39.7	16.76	-38.8	-25.7
1880.000000	13159.978418	40.03	20.06	-35.1	-22.1
1880.000000	15039.978418	41.7	17.09	-36.4	-23.4
1880.000000	16919.978418	41.03	22.88	-31.3	-18.3

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.


PAGE NO. 34 of 38.
NAME OF TEST: Frequency Stability (Temperature Variation)
SPECIFICATION: 47 CFR 2.1055(a)(1)
TEST CONDITIONS: As Indicated
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

- TEST A. OPERATIONAL STABILITY
- TEST B. CARRIER FREQUENCY STABILITY
- TEST C. OPERATIONAL PERFORMANCE STABILITY
- TEST D. HUMIDITY
- TEST E. VIBRATION
- TEST F. ENVIRONMENTAL TEMPERATURE
- TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
- TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

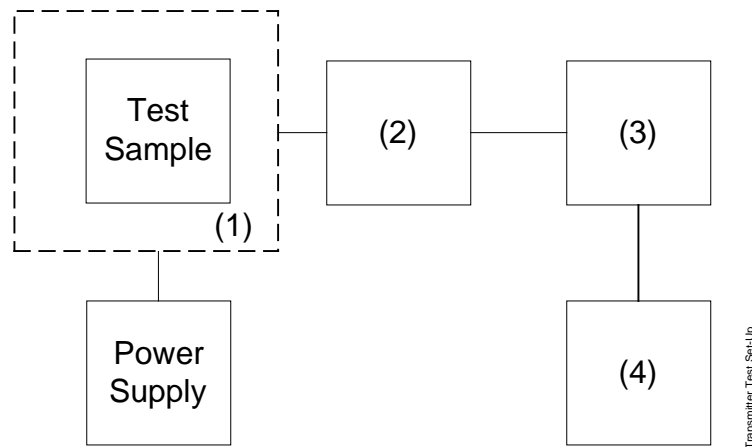

Asset Description (as applicable)	s/n
<u>(1) TEMPERATURE, HUMIDITY, VIBRATION</u>	
i00027 Tenney Temp. Chamber	9083-765-234
i00 Weber Humidity Chamber	
i00 L.A.B. RVH 18-100	
<u>(2) COAXIAL ATTENUATOR</u>	
i00122 NARDA 766-10	7802
i00123 NARDA 766-10	7802A
i00113 SIERRA 661A-3D	1059
i00069 BIRD 8329 (30 dB)	10066
<u>(3) R.F. POWER</u>	
i00014 HP 435A POWER METER	1733A05839
i00039 HP 436A POWER METER	2709A26776
i00020 HP 8901A POWER MODE	2105A01087
<u>(4) FREQUENCY COUNTER</u>	
i00042 HP 5383A	1628A00959
i00019 HP 5334B	2704A00347
i00020 HP 8901A	2105A01087

PAGE NO. 36 of 38.

NAME OF TEST: Frequency Stability (Temperature Variation)

GSM 850		
°C	Change, Hz	Change, ppm
-30	4.6	0.0
-20	12.2	0.0
-10	10.8	0.0
0	-6.9	0.0
10	11.3	0.0
20	-0.5	0.0
30	-1.6	0.0
40	9.0	0.0
50	8.3	0.0

GSM 1900		
°C	Change, Hz	Change, ppm
-30	-9.5	0.0
-20	1.4	0.0
-10	-23.1	0.0
0	-19.5	0.0
10	-30.4	0.0
20	-9.9	0.0
30	-45.5	0.0
40	-4.0	0.0
50	-10.2	0.0

PAGE NO. 37 of 38.
NAME OF TEST: Frequency Stability (Voltage Variation)
SPECIFICATION: 47 CFR 2.1055 (b)(1)
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at 25±5°C and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

GSM 850

BATTERY END POINT (Voltage) = 3.3

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	3.3	836.3999952	-4.8	0.0
100	3.9	836.3999995	-0.5	0.0
115	4.5	836.4000119	11.9	0.0
B.E.P.	3.3	836.3999952	-4.8	0.0

GSM 1900

BATTERY END POINT (Voltage) = 3.3

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	3.3	1880.0000066	6.6	0.0
100	3.9	1879.9999911	-9.9	0.0
115	4.5	1880.0000028	2.8	0.0
B.E.P.	3.3	1880.0000066	6.6	0.0

LIMIT: Must remain within authorized frequency block.

PAGE NO. 38 of 38.


NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 256KGXW

NECESSARY BANDWIDTH:

NECESSARY BANDWIDTH (B_N), kHz = 256
(measured at the 99.75% power bandwidth)



PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

END OF TEST REPORT

TESTIMONIAL AND STATEMENT OF CERTIFICATION
--

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.